# MX25LM25645G

## 3V 256M-BIT [x 1/x 8]
## CMOS octaflash Memory

### *Key Features*

- *Protocol Support - Single I/O and Octa I/O*
- *Supports DTR (Double Transfer Rate) Mode*
- *Supports clock frequencies up to 133MHz*

深圳市满度科技有限公司
Web:www.manduic.com

Tel:150-1290-5940
Email:sales@manduic.com

微信扫码咨询客服

# Contents

**1. FEATURES ..... 5**
**2. GENERAL DESCRIPTION ..... 6**
Table 1. Operating Frequency Comparison ..... 6
**3. PIN CONFIGURATIONS ..... 7**
Table 2. PIN DESCRIPTION ..... 7
**4. BLOCK DIAGRAM ..... 8**
**5. MEMORY ORGANIZATION ..... 9**
**6. DATA PROTECTION ..... 10**
6-1. Block lock protection ..... 11
Table 3. Protected Area Sizes ..... 11
6-2. Additional 8K-bit secured OTP ..... 12
Table 4. Secured OTP Definition ..... 12
**7. DEVICE OPERATION ..... 13**
**8. COMMAND SET ..... 15**
8-1. SPI Command Set ..... 15
Table 5. Read/Write Array Commands (SPI - 3 Byte Address Command Set) ..... 15
Table 6. Read/Write Array Commands (SPI - 4 Byte Address Command Set) ..... 15
Table 7. Setting Commands (SPI) ..... 16
Table 8. Reset Commands (SPI) ..... 16
Table 9. Register Commands (SPI) ..... 17
8-2. OPI Command Set ..... 19
Table 10. Read/Write Array Commands (OPI) ..... 19
Table 11. Setting Commands (OPI) ..... 20
Table 12. Reset Commands (OPI) ..... 20
Table 13. Register Commands (OPI) ..... 21
**9. REGISTER DESCRIPTION ..... 23**
9-1. Status Register ..... 23
9-2. Configuration Register ..... 24
9-3. Configuration Register 2 ..... 25
9-4. Security Register ..... 28
Table 14. Security Register Definition ..... 28
**10. COMMAND DESCRIPTION ..... 29**
10-1. Write Enable (WREN) ..... 29
10-2. Write Disable (WRDI) ..... 30
10-3. Read Identification (RDID) ..... 31
Table 15. ID Definitions ..... 31
10-4. Read Status Register (RDSR) ..... 32
10-5. Read Configuration Register (RDCR) ..... 35
10-6. Write Status Register (WRSR) / Write Configuration Register (WRCR) ..... 36
10-7. Read Configuration Register 2 (RDCR2) ..... 39
10-8. Write Configuration Register 2 (WRCR2) ..... 40


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

10-9. Read Security Register (RDSCUR) ..... 41
10-10. Write Security Register (WRSCUR) ..... 42
10-11. Read Data Bytes (READ/READ3B/READ4B) ..... 43
10-12. Read Data Bytes at Higher Speed (FAST_READ/FAST_READ3B/FAST_READ4B) ..... 44
10-13. OCTA Read Mode (8READ) ..... 45
10-14. OCTA DTR Read Mode (8DTRD) ..... 46
10-15. Preamble Bit ..... 47
10-16. Burst Read ..... 48
10-17. Fast Boot ..... 49
10-18. Sector Erase (SE/SE3B/SE4B) ..... 54
10-19. Block Erase (BE/BE3B/BE4B) ..... 55
10-20. Chip Erase (CE) ..... 56
10-21. Page Program (PP/PP3B/PP4B) ..... 57
10-22. Deep Power-down (DP) ..... 59
10-23. Enter Secured OTP (ENSO) ..... 60
10-24. Exit Secured OTP (EXSO) ..... 60
10-25. Write Protection Selection (WPSEL) ..... 61
10-26. Advanced Sector Protection ..... 62
10-27. Program Suspend and Erase Suspend ..... 77
Table 16. Acceptable Commands During Suspend ..... 78
10-28. Program Resume and Erase Resume ..... 79
10-29. No Operation (NOP) ..... 80
10-30. Software Reset (Reset-Enable (RSTEN) and Reset (RST)) ..... 80
**11. Serial Flash Discoverable Parameter (SFDP) ..... 82**
11-1. Read SFDP Mode (RDSFDP) ..... 82
Table 17. Signature and Parameter Identification Data Values ..... 83
**12. Data Integrity check ..... 84**
12-1. ECC (Error Checking and Correcting) ..... 84
Table 18. 16-Byte Chunks within a Page ..... 84
12-2. ECS# (Error corrected Signal) Pin ..... 85
12-3. Parity Check (CRC1) ..... 86
**13. RESET ..... 88**
Table 19. Reset Timing-(Standby) ..... 88
Table 20. Reset Timing-(Other Operation) ..... 88
**14. POWER-ON STATE ..... 89**
**15. ELECTRICAL SPECIFICATIONS ..... 90**
Table 21. ABSOLUTE MAXIMUM RATINGS ..... 90
Table 22. CAPACITANCE TA = 25°C, f = 1.0 MHz ..... 90
Table 23. DC CHARACTERISTICS ..... 92
Table 24. AC CHARACTERISTICS ..... 93
**16. OPERATING CONDITIONS ..... 95**
Table 25. Power-Up/Down Voltage and Timing ..... 97
16-1. INITIAL DELIVERY STATE ..... 97


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

17. ERASE AND PROGRAMMING PERFORMANCE ..... 98
18. DATA RETENTION ..... 98
19. LATCH-UP CHARACTERISTICS ..... 98
20. ORDERING INFORMATION ..... 99
21. PART NAME DESCRIPTION ..... 100
22. PACKAGE INFORMATION ..... 101
23. REVISION HISTORY ..... 103


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**3V 256M-BIT [x 1/x 8] CMOS octaflash Memory**

## 1. FEATURES

### GENERAL

- Supports Serial Peripheral Interface -- Mode 0
- Single Power Supply Operation
  - 2.7 to 3.6 volt for read, erase, and program operations
- 268,435,456 x 1 bit structure or 33,554,432 x 8 bits (Octa I/O mode) structure
- Protocol Support
  - Single I/O and Octa I/O
  - Supports DTR (Double Transfer Rate) Mode
- Fast frequency support
  - Supports clock frequencies up to
    - Single I/O mode: 133MHz
    - Octa I/O mode: 133MHz
  - Configurable dummy cycle number for OPI read operation
- Octa Peripheral Interface (OPI) available
- Equal Sectors with 4K byte each, or Equal Blocks with 64K byte each
  - Any Block can be erased individually
- Programming :
  - 256byte page buffer
  - Octa Input/Output page program to enhance program performance
- Typical 100,000 erase/program cycles
- 20 years data retention

### SOFTWARE FEATURES

- Input Data Format
  - SPI: 1-byte command code
  - OPI: 2-byte command code
- Advanced Security Features
  - Block lock protection

  The BP0-BP3 and T/B status bits define the size of the area to be protected against program and erase instructions
  - Advanced Sector Protection (Solid and Password Protect)
- Additional 8K bit Secure OTP
  - Features unique identifier
  - Factory locked identifiable, and customer lockable
- Command Reset
- Program/Erase Suspend and Resume operation
- Electronic Identification
  - JEDEC 1-byte manufacturer ID and 2-byte device ID
- Support Serial Flash Discoverable Parameters (SFDP) mode

### HARDWARE FEATURES

- SCLK Input
  - Serial clock input
- SIO0 - SIO7
  - Serial Data Input or Serial Data Output
- DQS
  - Data strobe signal
- RESET#
  - Hardware Reset pin
- PACKAGE
  - 24-Ball BGA (5x5 ball array)
  - 16-Pin SOP

  **-All devices are RoHS Compliant and Halogen Free.**



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

## 2. GENERAL DESCRIPTION

MX25LM25645G is 256Mb bits Octal interface Serial NOR Flash memory, which is configured as 33,554,432 x 8 internally. MX25LM25645G feature a serial peripheral interface and software protocol allowing operation on a simple 3-wire bus while it is in single I/O mode. The three bus signals are a clock input (SCLK), a serial data input (SI), and a serial data output (SO). Serial access to the device is enabled by CS# input.

The MX25LM25645G octaflash provides sequential read operation on whole chip.

After program/erase command is issued, auto program/erase algorithms which program/erase and verify the specified page or sector/block locations will be executed. Program command is executed on byte basis, or page (256 bytes) basis, or word basis. Erase command is executed on sector (4K-byte), or block (64K-byte), or whole chip basis.

To provide user with ease of interface, a status register is included to indicate the status of the chip. The status read command can be issued to detect completion status of a program or erase operation via WIP bit.

When the device is not in operation and CS# is high, it is put in standby mode.

The MX25LM25645G utilizes Macronix's proprietary memory cell, which reliably stores memory contents even after 100,000 program and erase cycles.

**Table 1. Operating Frequency Comparison**


| | Numbers of Dummy Cycle | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 |
| Octa I/O STR (MHz) | 66 | 84 | 104 | 104 | 133 | 133 | 133 | 133* |
| Octa I/O DTR (MHz) | 66 | 84 | 104 | 104 | 133 | 133 | 133 | 133* |

Note: * Default Status



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

## 3. PIN CONFIGURATIONS

### 16-PIN SOP (300mil)




### 24-BALL BGA (5x5 ball array)

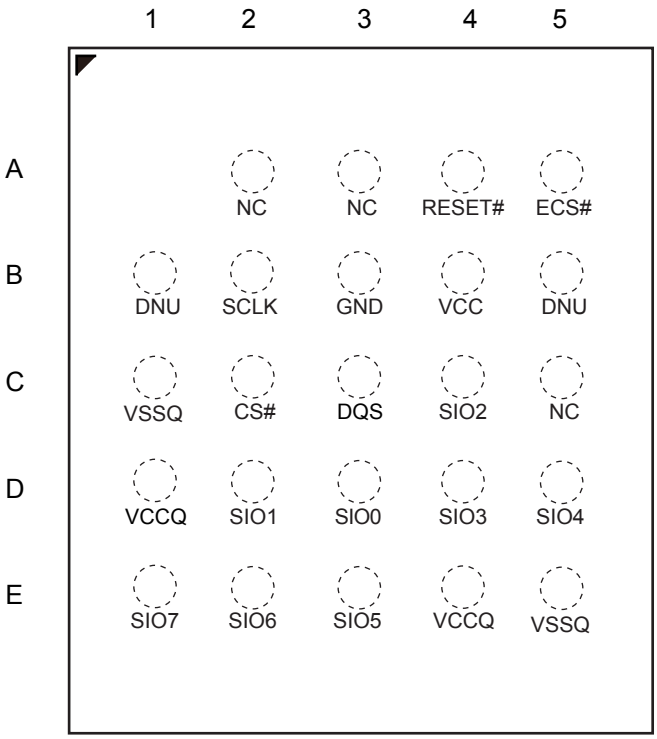



### Table 2. PIN DESCRIPTION

| SYMBOL | DESCRIPTION |
|---|---|
| CS# | Chip Select |
| SCLK | Clock Input |
| RESET# | Hardware Reset Pin Active low Note 1 |
| ECS# | ECC Correction Signal (open drain) |
| DQS | Data Strobe Signal |
| SI/SIO0 | Serial Data Input (for 1 x I/O)/ Serial Data Input & Output (for 8 x I/O read mode) |
| SO/SIO1 | Serial Data Output (for 1 x I/O)/ Serial Data Input & Output (for 8 x I/O read mode) |
| SIO2-SIO7 | Serial Data Input & Output (for 8 x I/O read mode) |
| VCC | 3V Power Supply |
| VCCQ | 3V Buffer Power Supply |
| GND | Ground |
| VSSQ | IO Ground Supply |
| NC | No Connection |
| DNU | Do Not Use |

***Note 1:*** The pin of RESET# will remain internal pull up function while this pin is not physically connected in system configuration. However, the internal pull up function will be disabled if the system has physical connection to RESET# pin.


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

## 4. BLOCK DIAGRAM

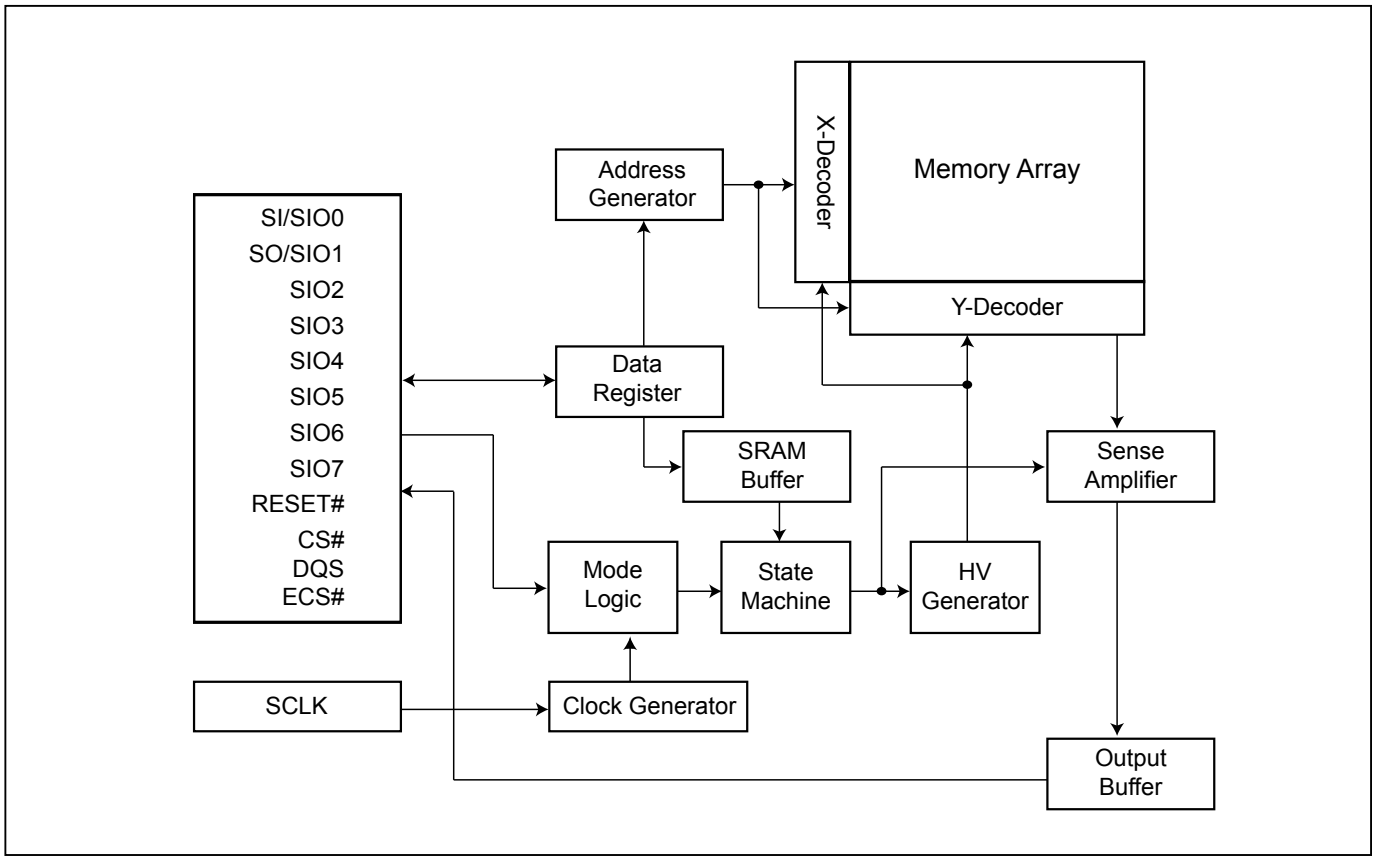



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150 2290-5940
Email:sales@manduic.com

## 5. MEMORY ORGANIZATION

| Block(64K-byte) | Sector | Address Range | |
|---|---|---|---|
| 511 | 8191 | 1FFF000h | 1FFFFFFh |
| | ⋮ | ⋮ | ⋮ |
| | 8184 | 1FF8000h | 1FF8FFFh |
| | 8183 | 1FF7000h | 1FF7FFFh |
| | ⋮ | ⋮ | ⋮ |
| | 8176 | 1FF0000h | 1FF0FFFh |
| 510 | 8175 | 1FEF000h | 1FEFFFFh |
| | ⋮ | ⋮ | ⋮ |
| | 8168 | 1FE8000h | 1FE8FFFh |
| | 8167 | 1FE7000h | 1FE7FFFh |
| | ⋮ | ⋮ | ⋮ |
| | 8160 | 1FE0000h | 1FE0FFFh |
| 509 | 8159 | 1FDF000h | 1FDFFFFh |
| | ⋮ | ⋮ | ⋮ |
| | 8152 | 1FD8000h | 1FD8FFFh |
| | 8151 | 1FD7000h | 1FD7FFFh |
| | ⋮ | ⋮ | ⋮ |
| | 8144 | 1FD0000h | 1FD0FFFh |



| | | | |
|---|---|---|---|
| 2 | 47 | 002F000h | 002FFFFh |
| | ⋮ | ⋮ | ⋮ |
| | 40 | 0028000h | 0028FFFh |
| | 39 | 027000h | 0027FFFh |
| | ⋮ | ⋮ | ⋮ |
| | 32 | 0020000h | 0020FFFh |
| 1 | 31 | 001F000h | 001FFFFh |
| | ⋮ | ⋮ | ⋮ |
| | 24 | 0018000h | 0018FFFh |
| | 23 | 0017000h | 0017FFFh |
| | ⋮ | ⋮ | ⋮ |
| | 16 | 0010000h | 0010FFFh |
| 0 | 15 | 000F000h | 000FFFFh |
| | ⋮ | ⋮ | ⋮ |
| | 8 | 0008000h | 0008FFFh |
| | 7 | 0007000h | 0007FFFh |
| | ⋮ | ⋮ | ⋮ |
| | 0 | 0000000h | 0000FFFh |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

## 6. DATA PROTECTION

During power transition, there may be some false system level signals which result in inadvertent erasure or programming. The device is designed to protect itself from these accidental write cycles.

The state machine will be reset as standby mode automatically during power up. In addition, the control register architecture of the device constrains that the memory contents can only be changed after specific command sequences have completed successfully.

In the following, there are several features to protect the system from the accidental write cycles during VCC power-up and power-down or from system noise.

- Valid command length (SPI Mode) or command/command# combination (OPI Mode) will be check.
- Write Enable (WREN) command: WREN command is required to set the Write Enable Latch bit (WEL) before other command to change data.
- Deep Power Down Mode: By entering deep power down mode, the flash device also is under protected from writing all commands except Release from deep power down mode command (RDP), and softreset command.


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

### 6-1. Block lock protection

- The Software Protected Mode (SPM) use (BP3, BP2, BP1, BP0 and T/B) bits to allow part of memory to be protected as read only. The protected area definition is shown as *Table 3* Protected Area Sizes, the protected areas are more flexible which may protect various area by setting value of BP0-BP3 bits.

**Table 3. Protected Area Sizes**

**Protected Area Sizes (T/B bit = 0)**

| Status bit | | | | Protect Level |
|---|---|---|---|---|
| BP3 | BP2 | BP1 | BP0 | 256Mb |
| 0 | 0 | 0 | 0 | 0 (none) |
| 0 | 0 | 0 | 1 | 1 (1 block, protected block 511th) |
| 0 | 0 | 1 | 0 | 2 (2 blocks, protected block 510th~511th) |
| 0 | 0 | 1 | 1 | 3 (4 blocks, protected block 508th~511th) |
| 0 | 1 | 0 | 0 | 4 (8 blocks, protected block 504th~511th) |
| 0 | 1 | 0 | 1 | 5 (16 blocks, protected block 496th~511th) |
| 0 | 1 | 1 | 0 | 6 (32 blocks, protected block 480th~511th) |
| 0 | 1 | 1 | 1 | 7 (64 blocks, protected block 448th~511th) |
| 1 | 0 | 0 | 0 | 8 (128 blocks, protected block 384th~511th) |
| 1 | 0 | 0 | 1 | 9 (256 blocks, protected block 256th~511th) |
| 1 | 0 | 1 | 0 | 10 (512 blocks, protected all) |
| 1 | 0 | 1 | 1 | 11 (512 blocks, protected all) |
| 1 | 1 | 0 | 0 | 12 (512 blocks, protected all) |
| 1 | 1 | 0 | 1 | 13 (512 blocks, protected all) |
| 1 | 1 | 1 | 0 | 14 (512 blocks, protected all) |
| 1 | 1 | 1 | 1 | 15 (512 blocks, protected all) |

**Protected Area Sizes (T/B bit = 1)**

| Status bit | | | | Protect Level |
|---|---|---|---|---|
| BP3 | BP2 | BP1 | BP0 | 256Mb |
| 0 | 0 | 0 | 0 | 0 (none) |
| 0 | 0 | 0 | 1 | 1 (1 block, protected block 0th) |
| 0 | 0 | 1 | 0 | 2 (2 blocks, protected block 0th~1st) |
| 0 | 0 | 1 | 1 | 3 (4 blocks, protected block 0th~3rd) |
| 0 | 1 | 0 | 0 | 4 (8 blocks, protected block 0th~7th) |
| 0 | 1 | 0 | 1 | 5 (16 blocks, protected block 0th~15th) |
| 0 | 1 | 1 | 0 | 6 (32 blocks, protected block 0th~31st) |
| 0 | 1 | 1 | 1 | 7 (64 blocks, protected block 0th~63rd) |
| 1 | 0 | 0 | 0 | 8 (128 blocks, protected block 0th~127th) |
| 1 | 0 | 0 | 1 | 9 (256 blocks, protected block 0th~255th) |
| 1 | 0 | 1 | 0 | 10 (512 blocks, protected all) |
| 1 | 0 | 1 | 1 | 11 (512 blocks, protected all) |
| 1 | 1 | 0 | 0 | 12 (512 blocks, protected all) |
| 1 | 1 | 0 | 1 | 13 (512 blocks, protected all) |
| 1 | 1 | 1 | 0 | 14 (512 blocks, protected all) |
| 1 | 1 | 1 | 1 | 15 (512 blocks, protected all) |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150 0290-5940
Email:sales@manduic.com

### 6-2. Additional 8K-bit secured OTP

The secured OTP for a unique identifier to provide an 8K-bit one-time program area for setting a device unique serial number. This may be accomplished in the factory or by an end systems customer.

- Security register bit 0 indicates whether the chip is locked by factory or not.

- The 8K-bit secured OTP area is programmed by entering secure OTP mode (with the Enter Security OTP command), and going through a normal program procedure. Exiting secured OTP mode is done by issuing the Exit Security OTP command.

- Customer may lock-down the customer lockable secured OTP by writing WRSCUR(write security register) command to set customer lock-down bit1 as "1". Please refer to *"Table 14. Security Register Definition"* for security register bit definition and *"Table 4. Secured OTP Definition"* for address range definition.

- Note: Once lock-down by factory or customer, the corresponding range cannot be changed any more. While in secured OTP mode, array access is not allowed.

**Table 4. Secured OTP Definition**

| Address range | Size | Lock-down |
|---|---|---|
| xxx000~xxx1FF | 4096-bit | Determined by Customer |
| xxx200~xxx3FF | 4096-bit | Determined by Factory |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150 0290-5940
Email:sales@manduic.com

## 7. DEVICE OPERATION

1. Before a command is issued, status register should be checked to ensure device is ready for the intended operation.

2. When an incorrect command is written to this device, it enters standby mode and stays in standby mode until the next CS# falling edge. In standby mode, This device's SO pin should be High-Z.

3. When an correct command# sequence is written to this device, it enters active mode and stays in active mode until the next CS# rising edge.

4. When device under STR mode, input data is latched on the rising edge of Serial Clock (SCLK) and data shifts out on the falling edge of SCLK. When device under DTR mode, input data is latched on the both rising and falling edge of Serial Clock (SCLK) and data shifts out on both rising and falling edge of SCLK.

5. While a Write Status Register, Program, or Erase operation is in progress, access to the memory array is ignored and will not affect the current operation of Write Status Register, Program, or Erase.

**Figure 1. Input Timing (STR mode)**


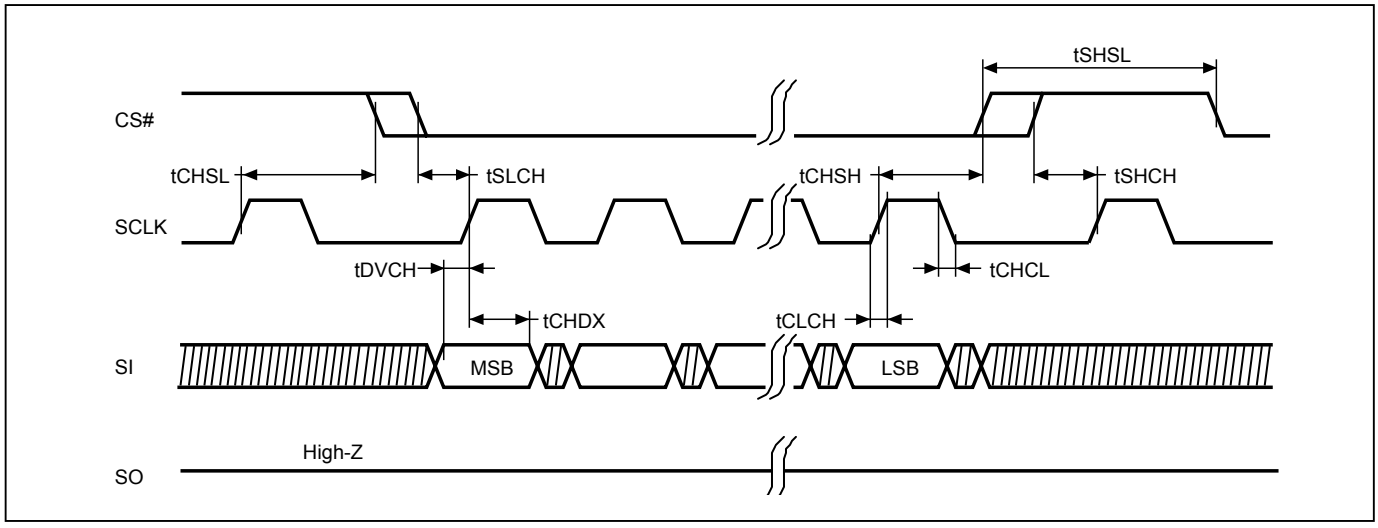



**Figure 2. Input Timing (DTR mode)**



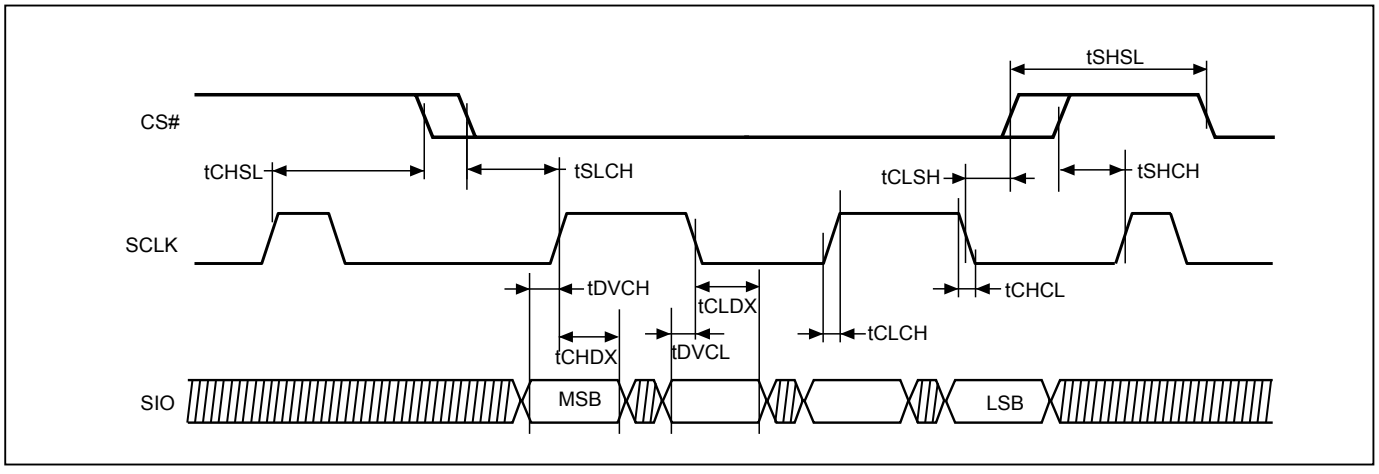

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Figure 3. Output Timing (STR mode)**


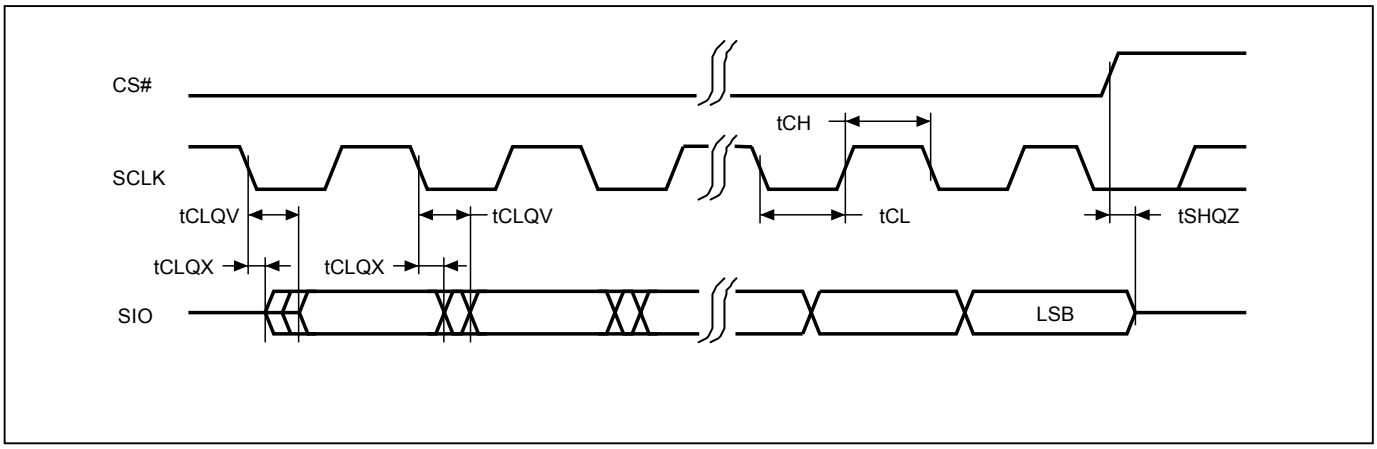



**Figure 4. Output Timing (DTR mode)**



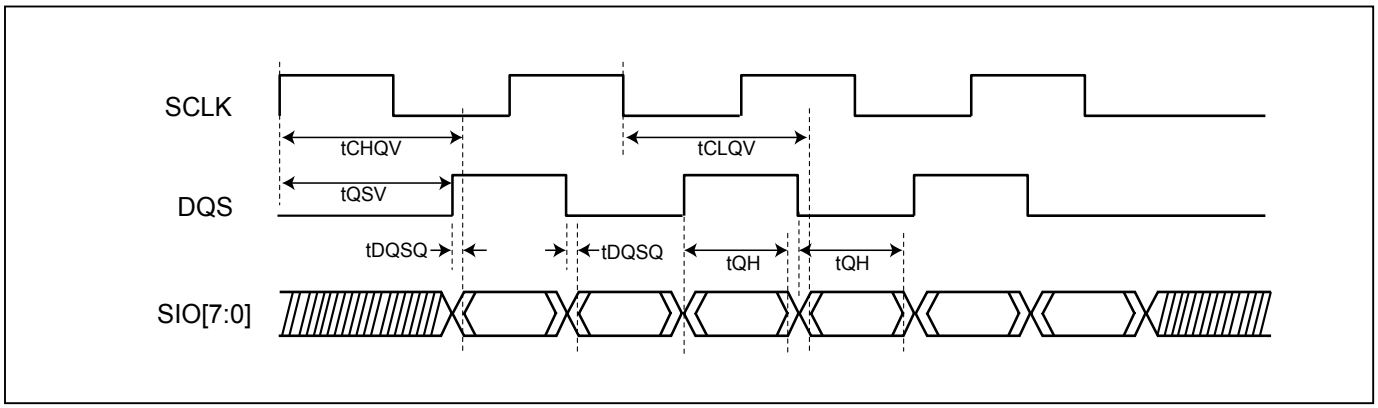

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

# 8. COMMAND SET

## 8-1. SPI Command Set

**Table 5. Read/Write Array Commands (SPI - 3 Byte Address Command Set)**

| Command (byte) | READ3B (normal read) | FAST_READ3B (fast read data) | PP3B (page program) | SE3B (sector erase) | BE3B (block erase 64KB) | CE (chip erase) |
|---|---|---|---|---|---|---|
| Address Bytes | 3 | 3 | 3 | 3 | 3 | |
| 1st byte | 03 (hex) | 0B (hex) | 02 (hex) | 20 (hex) | D8 (hex) | 60 or C7 (hex) |
| 2nd byte | ADD1 | ADD1 | ADD1 | ADD1 | ADD1 | |
| 3rd byte | ADD2 | ADD2 | ADD2 | ADD2 | ADD2 | |
| 4th byte | ADD3 | ADD3 | ADD3 | ADD3 | ADD3 | |
| 5th byte | | Dummy(8) (Note 3) | | | | |
| Data Cycles | | | 1-256 | | | |
| Action | n bytes read out until CS# goes high | n bytes read out until CS# goes high | to program the selected page | to erase the selected sector | to erase the selected block | to erase whole chip |

**Table 6. Read/Write Array Commands (SPI - 4 Byte Address Command Set)**

| Command (byte) | READ4B (normal read) | FAST_READ4B (fast read data) | PP4B (page program) | SE4B (sector erase) | BE4B (block erase 64KB) |
|---|---|---|---|---|---|
| Address Bytes | 4 | 4 | 4 | 4 | 4 |
| 1st byte | 13 (hex) | 0C (hex) | 12 (hex) | 21 (hex) | DC (hex) |
| 2nd byte | ADD1 | ADD1 | ADD1 | ADD1 | ADD1 |
| 3rd byte | ADD2 | ADD2 | ADD2 | ADD2 | ADD2 |
| 4th byte | ADD3 | ADD3 | ADD3 | ADD3 | ADD3 |
| 5th byte | ADD4 | ADD4 | ADD4 | ADD4 | ADD4 |
| 6th byte | | Dummy(8) (Note 3) | | | |
| Data Cycles | | | 1-256 | | |
| Action | n bytes read out until CS# goes high | n bytes read out until CS# goes high | to program the selected page | to erase the selected sector | to erase the selected block |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Table 7. Setting Commands (SPI)**

| Command (byte) | WREN (write enable) | WRDI (write disable) | PGM/ERS Suspend (Suspends Program/ Erase) | PGM/ERS Resume (Resumes Program/ Erase) | DP (Deep power down) |
|---|---|---|---|---|---|
| 1st byte | 06 (hex) | 04 (hex) | B0 (hex) | 30 (hex) | B9 (hex) |
| 2nd byte | | | | | |
| 3rd byte | | | | | |
| 4th byte | | | | | |
| 5th byte | | | | | |
| Data Cycles | | | | | |
| Action | sets the (WEL) write enable latch bit | resets the (WEL) write enable latch bit | | | enters deep power down mode |

| Command (byte) | SBL (Set Burst Length) | ENSO (enter secured OTP) | EXSO (exit secured OTP) |
|---|---|---|---|
| 1st byte | C0 (hex) | B1 (hex) | C1 (hex) |
| 2nd byte | | | |
| 3rd byte | | | |
| 4th byte | | | |
| 5th byte | | | |
| Data Cycles | 1 | | |
| Action | to set Burst length | to enter the 8K-bit secured OTP mode | to exit the 8K-bit secured OTP mode |

**Table 8. Reset Commands (SPI)**

| Command (byte) | NOP (No Operation) | RSTEN (Reset Enable) | RST (Reset Memory) |
|---|---|---|---|
| 1st byte | 00 (hex) | 66 (hex)(Note 2) | 99 (hex)(Note 2) |
| 2nd byte | | | |
| 3rd byte | | | |
| 4th byte | | | |
| 5th byte | | | |
| Action | | | |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Table 9. Register Commands (SPI)**

| Command (byte) | RDID (read identification) | RDSFDP | RDSR (read status register) | RDCR (read configuration register) | WRSR (write status/ configuration register) | RDCR 2 (read configuration register 2) | WRCR2 (Write configuration register 2 ) |
|---|---|---|---|---|---|---|---|
| 1st byte | 9F (hex) | 5A (hex) | 05 (hex) | 15 (hex) | 01 (hex) | 71 (hex) | 72 (hex) |
| 2nd byte | | ADD1 | | | | ADD1 | ADD1 |
| 3rd byte | | ADD2 | | | | ADD2 | ADD2 |
| 4th byte | | ADD3 | | | | ADD3 | ADD3 |
| 5th byte | | | | | | ADD4 | ADD4 |
| Data Cycles | | | 1 | 1 | 1-2 | 1 | 1 |
| Action | outputs JEDEC ID: 1-byte Manufacturer ID & 2-byte Device ID | Read SFDP mode | to read out the values of the status register | to read out the values of the configuration register | to write new values of the status/ configuration register | | |

| Command (byte) | RDFBR (read fast boot register) | WRFBR (write fast boot register) | ESFBR (erase fast boot register) | RDSCUR (read security register) | WRSCUR (write security register) | WRLR (write Lock register) | RDLR (read Lock register) |
|---|---|---|---|---|---|---|---|
| 1st byte | 16 (hex) | 17 (hex) | 18 (hex) | 2B (hex) | 2F (hex) | 2C (hex) | 2D (hex) |
| 2nd byte | | | | | | | |
| 3rd byte | | | | | | | |
| 4th byte | | | | | | | |
| 5th byte | | | | | | | |
| Data Cycles | 1-4 | 4 | | 1 | | 1 | 1 |
| Action | | | | to read value of security register | to set the lock-down bit as "1" (once lock-down, cannot be updated) | | |

| Command (byte) | WRSPB (SPB bit program) | ESSPB (all SPB bit erase) | RDSPB (read SPB status) | WRDPB (write DPB register) | RDDPB (read DPB register) | WPSEL (Write Protect Selection) | GBLK (gang block lock) | GBULK (gang block unlock) |
|---|---|---|---|---|---|---|---|---|
| Address Bytes | 4 | 0 | 4 | 4 | 4 | | 0 | 0 |
| 1st byte | E3 (hex) | E4 (hex) | E2 (hex) | E1 (hex) | E0 (hex) | 68 (hex) | 7E (hex) | 98 (hex) |
| 2nd byte | ADD1 | | ADD1 | ADD1 | ADD1 | | | |
| 3rd byte | ADD2 | | ADD2 | ADD2 | ADD2 | | | |
| 4th byte | ADD3 | | ADD3 | ADD3 | ADD3 | | | |
| 5th byte | ADD4 | | ADD4 | ADD4 | ADD4 | | | |
| Data Cycles | | | 1 | 1 | 1 | | | |
| Action | | | | | | to enter and enable individal block protect mode | whole chip write protect | whole chip unprotect |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

| Command (byte) | RDPASS (read password register) | WRPASS (write password register) | PASSULK (password unlock) |
|---|---|---|---|
| Mode | SPI | SPI | SPI |
| Address Bytes | 4 | 4 | 4 |
| 1st byte | 27 (hex) | 28 (hex) | 29 (hex) |
| 2nd byte | 00h | 00h | 00h |
| 3rd byte | 00h | 00h | 00h |
| 4th byte | 00h | 00h | 00h |
| 5th byte | 00h | 00h | 00h |
| 6th byte | Dummy(8)(Note 3) | | |
| Data Cycles | 8 | 8 | 8 |
| Action | | | |

Note 1: It is not recommended to adopt any other code/address not in the command definition table, which will potentially enter the hidden mode.
Note 2: The RSTEN command must be executed before executing the RST command. If any other command is issued in-between RSTEN and RST, the RST command will be ignored.
Note 3: The number in parentheses after “ADD” or “Data” or “Dummy” stands for how many clock cycles it has. For example, "Data(8)" represents there are 8 clock cycles for the data in.


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150 2290-5940
Email:sales@manduic.com

## 8-2. OPI Command Set

**Table 10. Read/Write Array Commands (OPI)**

| Command (byte) | 8READ (Octa IO Read) | 8DTRD (Octa IO DT Read) | RDID (read identification) | RDSFDP |
|---|---|---|---|---|
| 1st byte | EC (hex) | EE (hex) | 9F (hex) | 5A (hex) |
| 2nd byte | 13 (hex) | 11 (hex) | 60 (hex) | A5 (hex) |
| 3rd byte | ADD1 | ADD1 | 00h | ADD1 |
| 4th byte | ADD2 | ADD2 | 00h | ADD2 |
| 5th byte | ADD3 | ADD3 | 00h | ADD3 |
| 6th byte | ADD4 | ADD4 (Note 6) | 00h | ADD4 |
| 7th byte | Dummy (Note 4) | Dummy (Note 4) | | Dummy(20) |
| Data Cycles | | | 3 (Note 8) | |
| Action | Octa I/O STR read | Octa I/O DTR read | outputs JEDEC ID: 1-byte Manufacturer ID & 2-byte Device ID | Read SFDP mode |

| Command (byte) | PP (page program) | SE (sector erase) | BE (block erase 64KB) | CE (chip erase) |
|---|---|---|---|---|
| 1st byte | 12 (hex) | 21 (hex) | DC (hex) | 60 or C7 (hex) |
| 2nd byte | ED (hex) | DE (hex) | 23 (hex) | 9F or 38 (hex) |
| 3rd byte | ADD1 | ADD1 | ADD1 | |
| 4th byte | ADD2 | ADD2 | ADD2 | |
| 5th byte | ADD3 | ADD3 | ADD3 | |
| 6th byte | ADD4 (Note 6) | ADD4 | ADD4 | |
| 7th byte | | | | |
| Data Cycles | 1-256 | | | |
| Action | to program the selected page | to erase the selected sector | to erase the selected block | to erase whole chip |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Table 11. Setting Commands (OPI)**

| Command (byte) | WREN (write enable) | WRDI (write disable) | PGM/ERS Suspend (Suspends Program/ Erase) | PGM/ERS Resume (Resumes Program/ Erase) | DP (Deep power down) |
|---|---|---|---|---|---|
| 1st byte | 06 (hex) | 04 (hex) | B0 (hex) | 30 (hex) | B9 (hex) |
| 2nd byte | F9 (hex) | FB (hex) | 4F (hex) | CF (hex) | 46 (hex) |
| 3rd byte | | | | | |
| 4th byte | | | | | |
| 5th byte | | | | | |
| 6th byte | | | | | |
| 7th byte | | | | | |
| Action | sets the (WEL) write enable latch bit | resets the (WEL) write enable latch bit | | | enters deep power down mode |

| Command (byte) | SBL (Set Burst Length) | ENSO (enter secured OTP) | EXSO (exit secured OTP) |
|---|---|---|---|
| 1st byte | C0 (hex) | B1 (hex) | C1 (hex) |
| 2nd byte | 3F (hex) | 4E (hex) | 3E (hex) |
| 3rd byte | 00h | | |
| 4th byte | 00h | | |
| 5th byte | 00h | | |
| 6th byte | 00h | | |
| 7th byte | 1 | | |
| Action | to set Burst length | to enter the 8K-bit secured OTP mode | to exit the 8K-bit secured OTP mode |

**Table 12. Reset Commands (OPI)**

| Command (byte) | NOP (No Operation) | RSTEN (Reset Enable) | RST (Reset Memory) |
|---|---|---|---|
| 1st byte | 00 (hex) | 66 (hex)*(Note 2)* | 99 (hex)*(Note 2)* |
| 2nd byte | FF (hex) | 99 (hex) | 66 (hex) |
| 3rd byte | | | |
| 4th byte | | | |
| 5th byte | | | |
| 6th byte | | | |
| Action | | | |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Table 13. Register Commands (OPI)**

| Command (byte) | RDSR (read status register) | RDCR (read configuration register) | WRSR (write status register) | WRCR (write configuration register) | RDCR2 (read configuration register 2) | WRCR2 (Write configuration register 2 ) | RDFBR (read fast boot register) |
|---|---|---|---|---|---|---|---|
| 1st byte | 05 (hex) | 15 (hex) | 01 (hex) | 01 (hex) | 71 (hex) | 72 (hex) | 16 (hex) |
| 2nd byte | FA (hex) | EA (hex) | FE (hex) | FE (hex) | 8E (hex) | 8D (hex) | E9 (hex) |
| 3rd byte | 00h | 00h | 00h | 00h | ADD1 | ADD1 | 00h |
| 4th byte | 00h | 00h | 00h | 00h | ADD2 | ADD2 | 00h |
| 5th byte | 00h | 00h | 00h | 00h | ADD3 | ADD3 | 00h |
| 6th byte | 00h | 01h | 00h | 01h | ADD4 | ADD4 | 00h |
| 7th byte | Dummy(Note 5) | Dummy(Note 5) | | | Dummy(Note 5) | | Dummy(Note 5) |
| Data bytes | 1 | 1 | 1 | 1 | 1 | 1 | 1-4(Note 8) |
| Action | to read out the values of the status register | to read out the values of the configuration register | to write new values of the status register | to write new values of the configuration register | | | |

| Command (byte) | WRFBR (write fast boot register) | ESFBR (erase fast boot register) | RDSCUR (read security register) | WRSCUR (write security register) | WRLR (write Lock register) | RDLR (read Lock register) | WRSPB (SPB bit program) |
|---|---|---|---|---|---|---|---|
| 1st byte | 17 (hex) | 18 (hex) | 2B (hex) | 2F (hex) | 2C (hex) | 2D (hex) | E3 (hex) |
| 2nd byte | E8 (hex) | E7 (hex) | D4 (hex) | D0 (hex) | D3 (hex) | D2 (hex) | 1C (hex) |
| 3rd byte | 00h | | 00h | | 00h | 00h | ADD1 |
| 4th byte | 00h | | 00h | | 00h | 00h | ADD2 |
| 5th byte | 00h | | 00h | | 00h | 00h | ADD3 |
| 6th byte | 00h | | 00h | | 00h | 00h | ADD4 |
| 7th byte | | | Dummy(Note 5) | | | Dummy(Note 5) | |
| Data bytes | 4 | | 1 | | 1 | 1 | |
| Action | | | to read value of security register | to set the lock-down bit as "1" (once lock-down, cannot be updated) | | | |

| Command (byte) | ESSPB (all SPB bit erase) | RDSPB (read SPB status) | WRDPB (write DPB register) | RDDPB (read DPB register) | WPSEL (Write Protection Selection) | GBLK (gang block lock) | GBULK (gang block unlock) |
|---|---|---|---|---|---|---|---|
| 1st byte | E4 (hex) | E2 (hex) | E1 (hex) | E0 (hex) | 68 (hex) | 7E (hex) | 98 (hex) |
| 2nd byte | 1B (hex) | 1D (hex) | 1E (hex) | 1F (hex) | 97 (hex) | 81 (hex) | 67 (hex) |
| 3rd byte | | ADD1 | ADD1 | ADD1 | | | |
| 4th byte | | ADD2 | ADD2 | ADD2 | | | |
| 5th byte | | ADD3 | ADD3 | ADD3 | | | |
| 6th byte | | ADD4 | ADD4 | ADD4 | | | |
| 7th byte | | Dummy(Note 4) | | Dummy(Note 4) | | | |
| Data bytes | | 1 | 1 | 1 | | | |
| Action | | | | | to enter and enable individual block protect mode | whole chip write protect | whole chip unprotect |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

| Command (byte) | RDPASS (read password register) | WRPASS (write password register) | PASSULK (password unlock) |
|---|---|---|---|
| 1st byte | 27 (hex) | 28 (hex) | 29 (hex) |
| 2nd byte | D8 (hex) | D7 (hex) | D6 (hex) |
| 3rd byte | 00h | 00h | 00h |
| 4th byte | 00h | 00h | 00h |
| 5th byte | 00h | 00h | 00h |
| 6th byte | 00h | 00h | 00h |
| 7th byte | Dummy(20)(Note 3) | | |
| Data bytes | 8 | 8 | 8 |
| Action | | | |

Note 1: It is not recommended to adopt any other code/address not in the command definition table, which will potentially enter the hidden mode.
Note 2: The RSTEN command must be executed before executing the RST command. If any other command is issued in-between RSTEN and RST, the RST command will be ignored.
Note 3: The number in parentheses after “ADD” or “Data” or “Dummy” stands for how many clock cycles it has. For example, "Data(8)" represents there are 8 clock cycles for the data in.
Note 4: See dummy cycle and frequency table.
Note 5: 4 dummy cycles in both STR/DTR.
Note 6: The starting address must be even byte (A0 must be 0) in DTR OPI mode.
Note 7: The address data must be 00h.
Note 8: Data bytes are always output in STR.


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

# 9. REGISTER DESCRIPTION

## 9-1. Status Register

The definition of the status register bits is as below:

**WIP bit.** The Write in Progress (WIP) bit, a volatile bit, indicates whether the device is busy in program/erase/write status register progress. When WIP bit sets to 1, which means the device is busy in program/erase/write status register progress. When WIP bit sets to 0, which means the device is not in progress of program/erase/write status register cycle.

**WEL bit.** The Write Enable Latch (WEL) bit is a volatile bit that is set to "1" by the WREN instruction. WEL needs to be set to "1" before the device can accept program and erase instructions, otherwise the program and erase instructions are ignored. WEL automatically clears to "0" when a program or erase operation completes. To ensure that both WIP and WEL are "0" and the device is ready for the next program or erase operation, it is recommended that WIP be confirmed to be "0" before checking that WEL is also "0". If a program or erase instruction is applied to a protected memory area, the instruction will be ignored and WEL will clear to "0".

**BP3, BP2, BP1, BP0 bits.** The Block Protect (BP3, BP2, BP1, BP0) bits, non-volatile bits, indicate the protected area (as defined in *Table 3*) of the device to against the program/erase instruction without hardware protection mode being set. To write the Block Protect (BP3, BP2, BP1, BP0) bits requires the Write Status Register (WRSR) instruction to be executed. Those bits define the protected area of the memory to against Page Program (PP/PP3B/PP4B), Sector Erase (SE/SE3B/SE4B), Block Erase (BE/BE3B/BE4B) and Chip Erase (CE) instructions (only if Block Protect bits (BP3:BP0) set to 0, the CE instruction can be executed). The BP3, BP2, BP1, BP0 bits are "0" as default. Which is un-protected.

**Status Register**

| bit7 | bit6 | bit5 | bit4 | bit3 | bit2 | bit1 | bit0 |
|---|---|---|---|---|---|---|---|
| Reserved | Reserved | BP3 (level of protected block) | BP2 (level of protected block) | BP1 (level of protected block) | BP0 (level of protected block) | WEL (write enable latch) | WIP (write in progress bit) |
| Reserved | Reserved | (note 1) | (note 1) | (note 1) | (note 1) | 1=write enable 0=not write enable | 1=write operation 0=not in write operation |
| Reserved | Reserved | Non-volatile bit | Non-volatile bit | Non-volatile bit | Non-volatile bit | volatile bit | volatile bit |

Note 1: see the *Table 3* "Protected Area Size".


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

## 9-2. Configuration Register

The Configuration Register is able to change the default status of Flash memory. Flash memory will be configured after the CR bit is set.

**ODS bit**
The output driver strength (ODS2, ODS1, ODS0) bits are volatile bits, which indicate the output driver level (as defined in *"Output Driver Strength Table"*) of the device. To write the ODS bits requires the Write Status Register (WRSR) instruction to be executed.

**TB bit**
The Top/Bottom (TB) bit is a non-volatile bit. The Top/Bottom (TB) bit is used to configure the Block Protect area by BP bit (BP3, BP2, BP1, BP0), starting from TOP or Bottom of the memory array. The TB bit is defaulted as "0", which means Top area protect. When it is set as "1", the protect area will change to Bottom area of the memory device. To write the TB bits requires the Write Status Register (WRSR) instruction to be executed.

**PBE bit**
The Preamble Bit Enable (PBE) bit is a volatile bit. It is used to enable or disable the preamble bit data pattern output on dummy cycles. The PBE bit is defaulted as "0", which means preamble bit is disabled. When it is set as "1", the preamble bit will be enabled, and inputted into dummy cycles. To write the PBE bits requires the Write Status Register (WRSR) instruction to be executed.

**Configuration Register**

| bit7 | bit6 | bit5 | bit4 | bit3 | bit2 | bit1 | bit0 |
|---|---|---|---|---|---|---|---|
| Reserved | Reserved | Reserved | PBE (Preamble bit Enable) | TB (top/bottom selected) | ODS 2 (output driver strength) | ODS 1 (output driver strength) | ODS 0 (output driver strength) |
| x | x | x | 0=Disable<br>1=Enable | 0=Top area protect<br>1=Bottom area protect<br>(Default=0) | (Note 1) | (Note 1) | (Note 1) |
| x | x | x | volatile bit | OTP | volatile bit | volatile bit | volatile bit |

Note 1: see *"Output Driver Strength Table"*

**Output Driver Strength Table**

| ODS2 | ODS1 | ODS0 | Resistance (Ohm) | Note |
|---|---|---|---|---|
| 0 | 0 | 0 | 146 Ohms | Impedance at VCC/2 (Typical) |
| 0 | 0 | 1 | 76 Ohms | |
| 0 | 1 | 0 | 52 Ohms | |
| 0 | 1 | 1 | 41 Ohms | |
| 1 | 0 | 0 | 34 Ohms | |
| 1 | 0 | 1 | 30 Ohms | |
| 1 | 1 | 0 | 26 Ohms | |
| 1 | 1 | 1 | 24 Ohms (Default) | |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

### 9-3. Configuration Register 2

| Address | Bit | Symbol | Description | Define | Default | Readable/ Writable | Type |
|---|---|---|---|---|---|---|---|
| 00000000h | Bit 7-2 | x | Reserved (7) | Reserved | 0 | x | x |
| | Bit 1 | DOPI (3) | DTR OPI Enable | 00= SPI<br>01= STR OPI enable<br>10= DTR OPI enable<br>11= inhibit | 0 | R/W | Volatile Bit |
| | Bit 0 | SOPI (3) | STR OPI Enable | | 0 | R/W | Volatile Bit |
| 00000200h | Bit 7-2 | x | Reserved (7) | Reserved | 0 | x | x |
| | Bit 1 | DOS | DQS on STR mode | 0= Disable<br>1= Enable | 0 | R/W | Volatile Bit |
| | Bit 0 | DQSPRC | DTR DQS pre-cycle | 0= 0 cycle<br>1= 1 cycle | 0 | R/W | Volatile Bit |
| 00000300h | Bit 7-3 | x | Reserved (7) | Reserved | 0 | x | x |
| | Bit 2-0 | DC | Dummy cycle | Refer to *"Dummy Cycle and Frequency Table (MHz)"* | 000 | R/W | Volatile Bit |
| 00000400h | Bit 7-2 | x | Reserved (7) | Reserved | 0 | x | x |
| | Bit 1-0 | ECS | ECS# pin goes low define | 00= 2 bit error or double programmed<br>01= 1 or 2 bit error or double programmed<br>10= 2 bit error only<br>11= 1 or 2 bit error | 00 | R/W | Volatile Bit |
| 00000500h | Bit 7 | x | Reserved (7) | | 0 | x | x |
| | Bit 6-5 | CRC CYC | CRC chunk size configuration | 00= 16Byte<br>01= 32Byte<br>10= 64Byte<br>11= 128Byte | 00 | R/W | Volatile Bit |
| | Bit 4 | CRCBEN | CRC# output enable | 0= CRC# output Disable<br>1= CRC# output Enable | 0 | R/W | Volatile Bit |
| | Bit 3-1 | x | Reserved (7) | Reserved | 0 | x | x |
| | Bit 0 | PPTSEL | Preamble pattern selection | refer to *"9-3-2. Preamble Pattern Select Bit Table"* | 0 | R/W | Volatile Bit |
| 00000800h | Bit 7 | ECCFAVLD | ECC fail address valid indicator | 0= ECC failure address invalid (no fail address recorded)<br>1= ECC failure address valid (there's fail address recorded) | 0 | R (5) | Volatile Bit |
| | Bit 6-4 | ECCFS | ECC fail status | 000= None<br>xx1= 1 bit corrected<br>x1x= 2 bits deteced<br>1xx= Double programmed page detected | 000 | R (5) | Volatile Bit |
| | Bit 3-0 | ECCCNT(1) | ECC failure chunk counter | | 0000 | R (5) | Volatile Bit |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

| Address | Bit | Symbol | Description | Define | Default | Readable/ Writable | Type |
|---|---|---|---|---|---|---|---|
| 00000C00h(2) | Bit 7-4 | ECCFA | ECC failure chunk address | ECC 1st failure chunk address (A7:A4) | x | R | Volatile Bit |
| | Bit 3-0 | x | Reserved (7) | Reserved | x | x | Volatile Bit |
| 00000D00h(2) | Bit 7-0 | ECCFA | ECC failure chunk address | ECC 1st failure chunk address (A15:A8) | x | R | Volatile Bit |
| 00000E00h(2) | Bit 7-0 | ECCFA | ECC failure chunk address | ECC 1st failure chunk address (A23:A16) | x | R | Volatile Bit |
| 00000F00h(2) | Bit 7-2 | x | Reserved (7) | Reserved | x | x | Volatile Bit |
| | Bit 1-0 | ECCFA | ECC failure chunk address | ECC 1st failure chunk address (A25:A24) | x | R | Volatile Bit |
| 40000000h | Bit 7-4 | x | Reserved (7) | Reserved | 1 | x | x |
| | Bit 3 | CRCEN# | Enable Parity checking | 0= Parity check Enable<br>1= Parity check Disable | 1 | R/W | OTP |
| | Bit 2 | x | Reserved (7) | Reserved | 1 | x | x |
| | Bit 1 | DEFDOPI# (3,4) | Enable DOPI after Power on or reset | 00= inhibit<br>01= default DTR OPI mode<br>10= default STR OPI mode<br>11= default SPI mode | 1 | R/W | OTP |
| | Bit 0 | DEFSOPI# (3,4) | Enable SOPI after Power on or reset | | 1 | R/W | OTP |
| 80000000h | Bit 7-5 | x | Reserved (7) | Reserved | 0 | x | x |
| | Bit 4 | CRCERR | CMD# or Parity checked fail | 0= CMD# or Parity check pass<br>1= CMD# or Parity check fail | 0 | R (6) | Volatile Bit |
| | Bit 3-0 | x | Reserved (7) | Reserved | 0 | x | x |

Notes:

1. ECC failure chunk counter (00000800h bit[3:0]) stops counting once reach maximum value 15. The counting number increases if user reads the failure chunk multipe times.
2. ECC fail address only records first fail chunk fail address. For both 1bit and 2bit fail. ECCFA is valid only if ECCFAVLD value is 1.
3. The default status of DOPI and SOPI reflect the DEFDOPI# and DEFSOPI# setting. For example, if DEFDOPI#/DEFSOPI# are 01, DOPI and SOPI value will change to 10 after next Power on or reset and default status of the device will be DTR OPI.
4. The default DEFDOPI# status depends on the device model selection.
5. Write "00" data into 00000800h can reset the ECC status registers.
6. Write "00" data into 80000000h can reset the CMD# or Parity check status register.
7. All reserved bits must keep value factory default. All addresses not shown in the table must keep value unchanged.
8. Once either DOPI or SOPI bit ( 00000000h[0,1] ) set, user need to clear the bit to "00h" before change the setting.
   For example: set the 00000000h[0,1] from "00h"<=>"01h" or "00h"<=>"10h" is allowed. However, it is not allowed directly from "01h" to "10h".


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

### 9-3-1. Dummy Cycle and Frequency Table (MHz)

| DC [2:0] | Numbers of Dummy Cycle | Octa I/O STR (MHz) | Octa I/O DTR (MHz) |
|---|---|---|---|
| **000(Default)** | 20 | 133 | 133 |
| **001** | 18 | 133 | 133 |
| **010** | 16 | 133 | 133 |
| **011** | 14 | 133 | 133 |
| **100** | 12 | 104 | 104 |
| **101** | 10 | 104 | 104 |
| **110** | 8 | 84 | 84 |
| **111** | 6 | 66 | 66 |

### 9-3-2. Preamble Pattern Select Bit Table

| | All SIOs (Except SIO3) | SIO3 |
|---|---|---|
| Bit 0= 0 | 0011 0100 1001 1010 | 0011 0101 0001 0100 |
| Bit 0= 1 | 0101 0101 0101 0101 | 0101 0101 0101 0101 |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

### 9-4. Security Register

The definition of the Security Register bits is as below:

**Erase Fail bit.** The Erase Fail bit is a status flag, which indicates the status of last Erase operation. The bit will be set to "1" if the erase operation failed or the erase region is protected. It will be automatically cleared to "0" if the next erase operation succeeds. Please note that it does not interrupt or stop any operation in the flash memory.

**Program Fail bit.** The Program Fail bit is a status flag, which indicates the status of the last Program operation. The bit will be set to "1" if the program operation failed or the program region is protected. It will be automatically cleared to "0" if the next program operation succeeds. Please note that it does not interrupt or stop any operation in the flash memory.

**Erase Suspend bit.** Erase Suspend Bit (ESB) indicates the status of Erase Suspend operation. Users may use ESB to identify the state of flash memory. After the flash memory is suspended by Erase Suspend command, ESB is set to "1". ESB is cleared to "0" after erase operation resumes.

**Program Suspend bit.** Program Suspend Bit (PSB) indicates the status of Program Suspend operation. Users may use PSB to identify the state of flash memory. After the flash memory is suspended by Program Suspend command, PSB is set to "1". PSB is cleared to "0" after program operation resumes.

**Secured OTP Indicator bit.** The Secured OTP indicator bit shows the secured OTP area is locked by factory or not. When it is "0", it indicates non-factory lock; "1" indicates factory-lock.

**Lock-down Secured OTP (LDSO) bit.** By writing WRSCUR instruction, the LDSO bit may be set to "1" for customer lock-down purpose. However, once the bit is set to "1" (lock-down), the LDSO bit and the 4K-bit Secured OTP area cannot be updated any more. While it is in 8K-bit secured OTP mode, main array access is not allowed.

**Table 14. Security Register Definition**

| bit7 | bit6 | bit5 | bit4 | bit3 | bit2 | bit1 | bit0 |
|---|---|---|---|---|---|---|---|
| WPSEL | E_FAIL | P_FAIL | Reserved | ESB (Erase Suspend bit) | PSB (Program Suspend bit) | LDSO (indicate if lock-down) | Secured OTP indicator bit |
| 0=normal WP mode 1=individual mode (default=0) | 0=normal Erase succeed 1=indicate Erase failed (default=0) | 0=normal Program succeed 1=indicate Program failed (default=0) | - | 0=Erase is not suspended 1= Erase suspended (default=0) | 0=Program is not suspended 1= Program suspended (default=0) | 0 = not lock-down 1 = lock-down (cannot program/ erase OTP) | 0 = non-factory lock 1 = factory lock |
| Non-volatile bit (OTP) | Volatile bit | Volatile bit | - | Volatile bit | Volatile bit | Non-volatile bit (OTP) | Non-volatile bit (Read only) |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

## 10. COMMAND DESCRIPTION

### 10-1. Write Enable (WREN)

The Write Enable (WREN) instruction sets the Write Enable Latch (WEL) bit. Instructions like PP/PP3B/PP4B, SE/SE3B/SE4B, BE/BE3B/BE4B, CE, WRSR, WRCR2, SBL, WRFBR, ESFBR, WRSCUR, WRLR, WSPB and ESSPB that are intended to change the device content, should be preceded by the WREN instruction.

The sequence of issuing WREN instruction is: CS# goes low→sending WREN instruction code→ CS# goes high.

**Figure 5. Write Enable (WREN) Sequence (SPI Mode)**

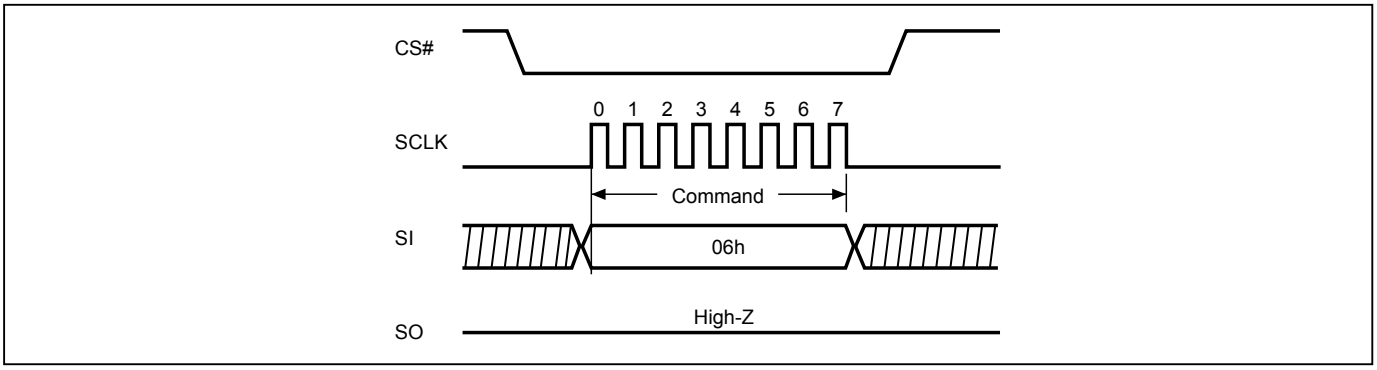



**Figure 6. Write Enable (WREN) Sequence (STR-OPI Mode)**


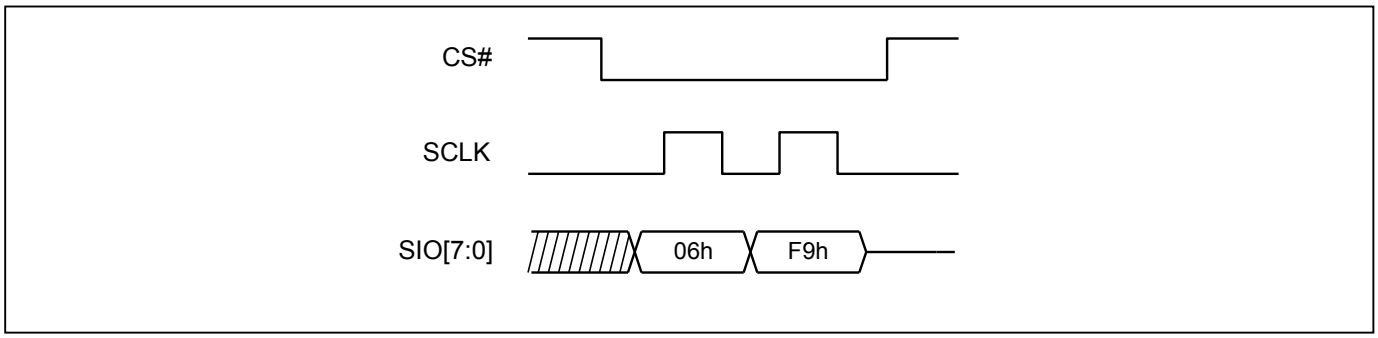



**Figure 7. Write Enable (WREN) Sequence (DTR-OPI Mode)**



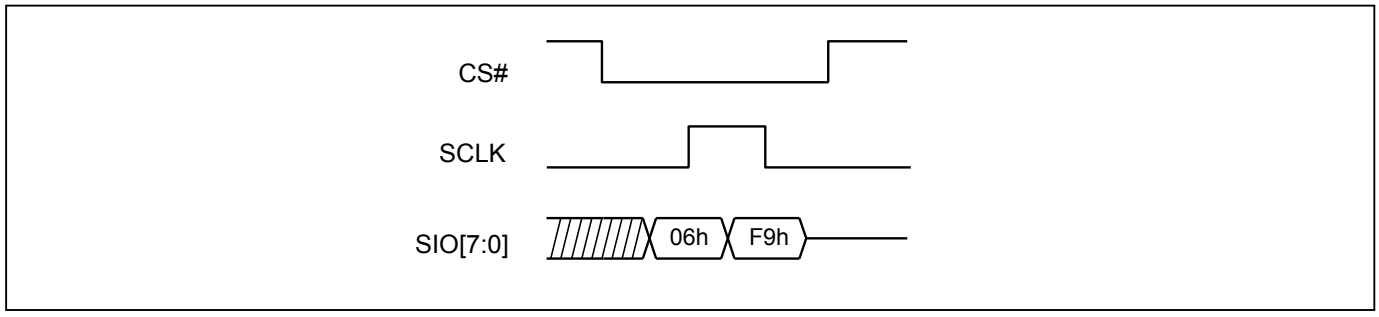

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

### 10-2. Write Disable (WRDI)

The Write Disable (WRDI) instruction resets the Write Enable Latch (WEL) bit. The sequence of issuing WRDI instruction is: CS# goes low→sending WRDI instruction code→CS# goes high.
The WEL bit is reset in the following situations:

- Power-up
- Reset# pin driven low
- WRDI command completion
- WRSR/WRCR/WRCR2 command completion
- PP/PP3B/PP4B command completion
- SE/SE3B/SE4B/BE/BE3B/BE4B/CE command completion
- SBL command completion
- PGM/ERS Suspend command completion
- Softreset command completion
- WRSCUR command completion
- WRFBR/ESFBR command completion
- WRLR/WSPB/ESSPB command completion
- GBLK/GBULK command completion

**Figure 8. Write Disable (WRDI) Sequence (SPI Mode)**

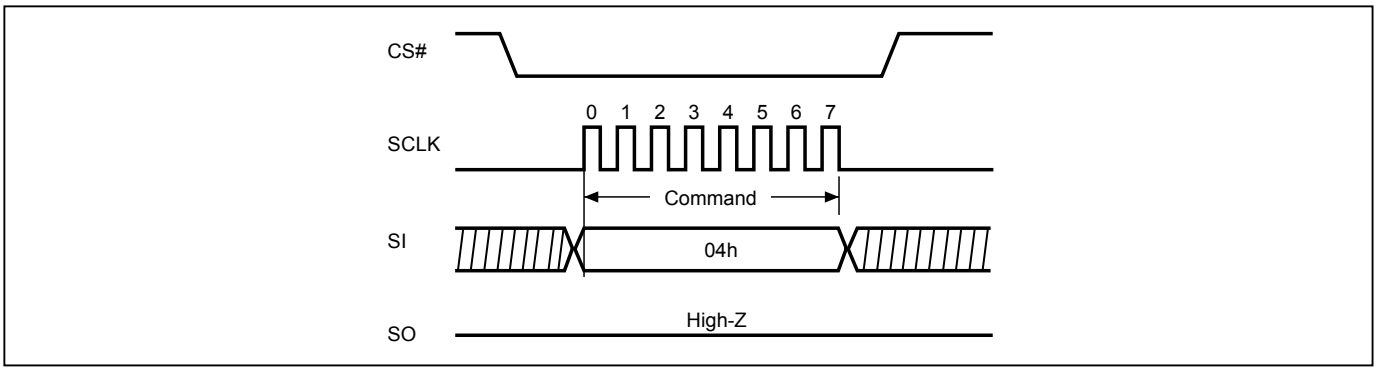



**Figure 9. Write Disable (WRDI) Sequence (STR-OPI Mode)**


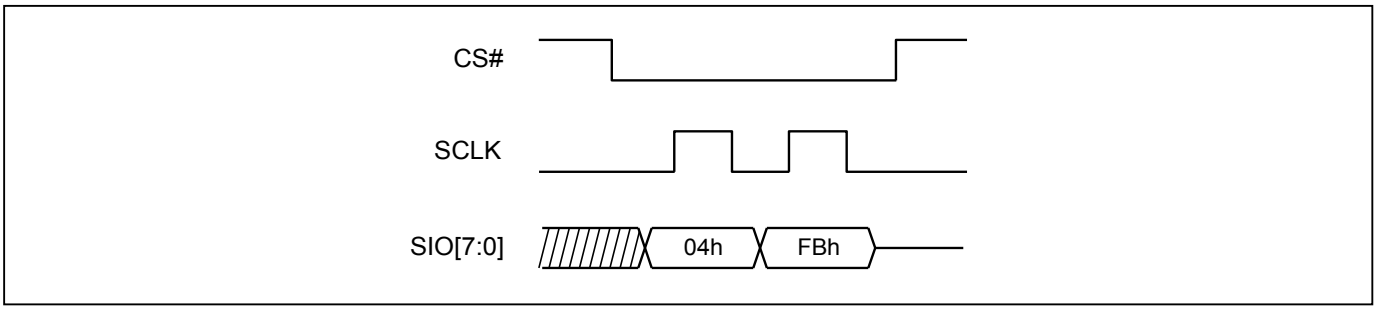



**Figure 10. Write Disable (WRDI) Sequence (DTR-OPI Mode)**



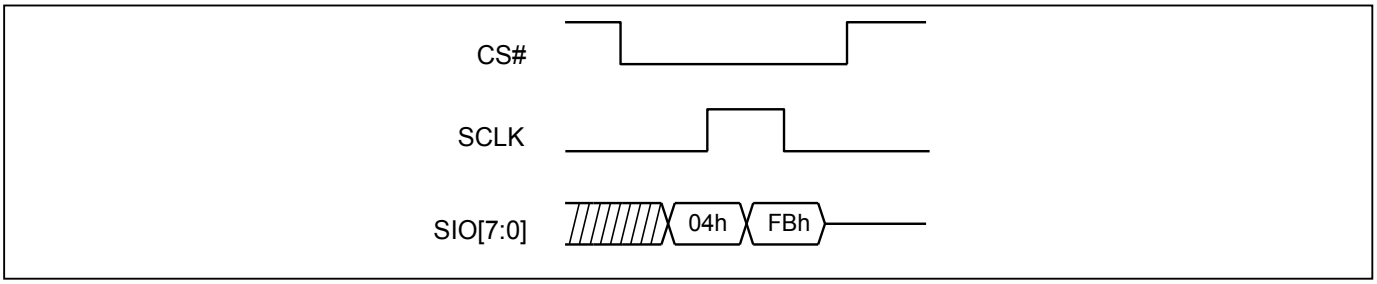

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

### 10-3. Read Identification (RDID)

The RDID instruction is for reading the 1-byte manufacturer ID and the 2-byte Device ID that follows. The Macronix Manufacturer ID and Device ID are listed as *Table 15* ID Definitions.

The sequence of issuing RDID instruction is: CS# goes low→ sending RDID instruction code→24-bits ID data out on SO→ to end RDID operation can drive CS# to high at any time during data out.

While Program/Erase operation is in progress, it will not decode the RDID instruction, therefore there's no effect on the cycle of program/erase operation which is currently in progress. When CS# goes high, the device is at standby stage.

**Table 15. ID Definitions**

| RDID | 9Fh | Manufacturer ID | Memory type | Memory density |
|---|---|---|---|---|
| | | C2 | 85 | 39 |

**Figure 11. Read Identification (RDID) Sequence (SPI mode)**

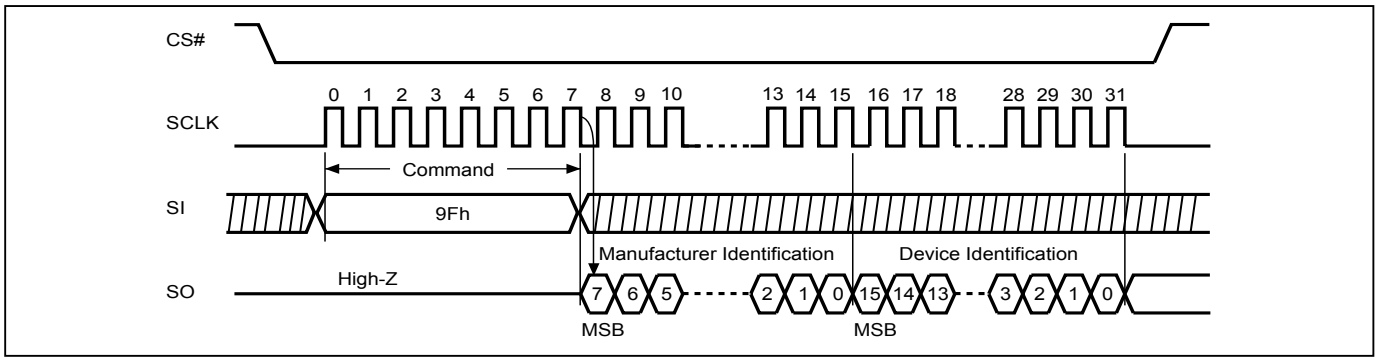



**Figure 12. Read Identification (RDID) Sequence (STR-OPI Mode)**


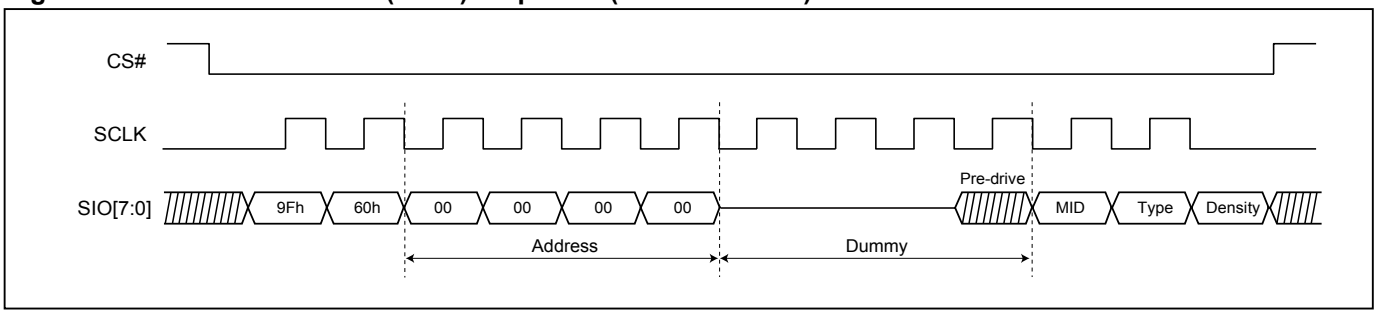



**Figure 13. Read Identification (RDID) Sequence (DTR-OPI Mode)**



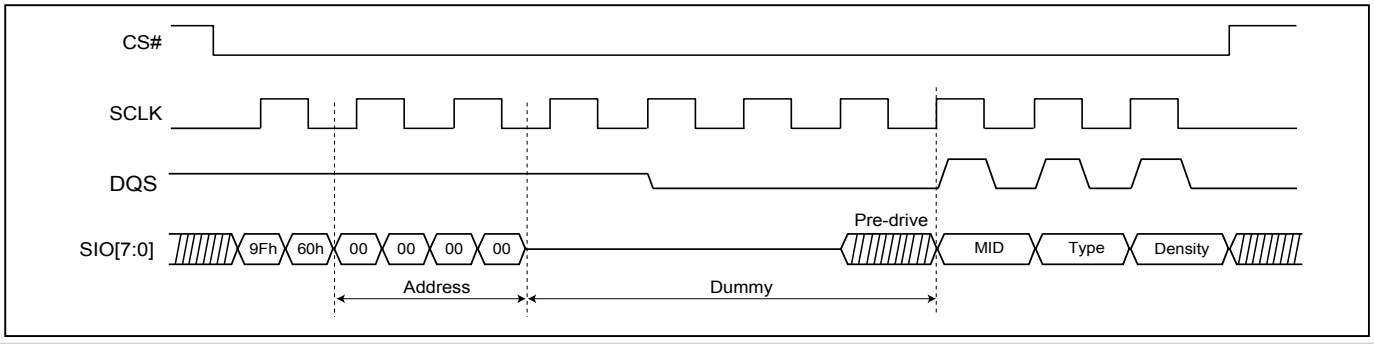

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150 0290-5940
Email:sales@manduic.com

### 10-4. Read Status Register (RDSR)

The RDSR instruction is for reading Status Register Bits. The Read Status Register can be read at any time (even in program/erase/write status register condition). It is recommended to check the Write in Progress (WIP) bit before sending a new instruction when a program, erase, or write status register operation is in progress.

The sequence of issuing RDSR instruction is: CS# goes low→ sending RDSR instruction code→ Status Register data out on SO.

**Figure 14. Read Status Register (RDSR) Sequence (SPI Mode)**

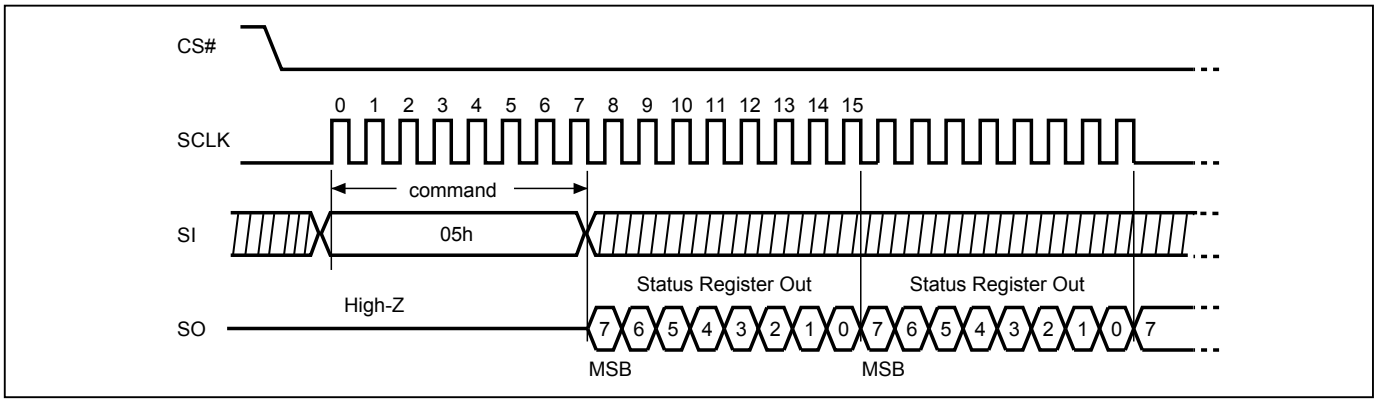



**Figure 15. Read Status Register (RDSR) Sequence (STR-OPI Mode)**


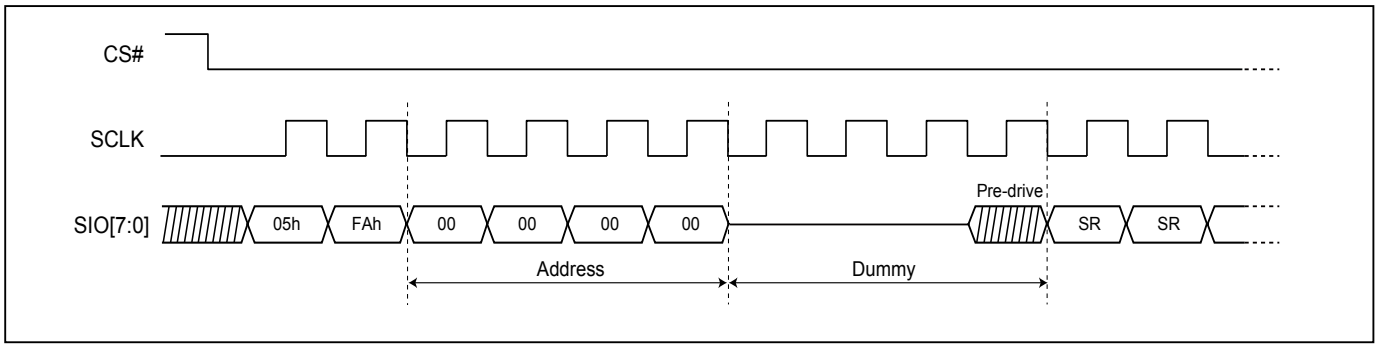



**Figure 16. Read Status Register (RDSR) Sequence (DTR-OPI Mode)**




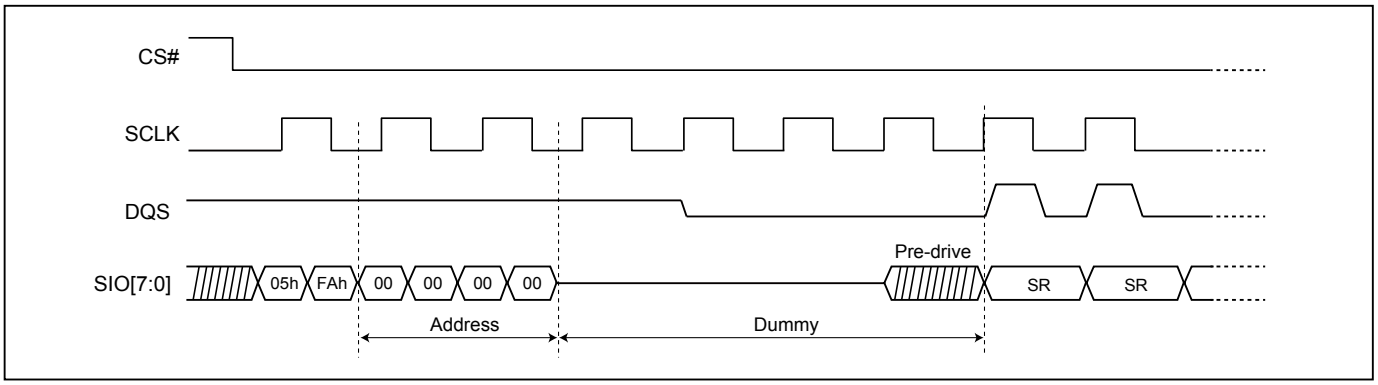

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

For user to check if Program/Erase operation is finished or not, RDSR instruction flow are shown as follows:


**Figure 17. Program/Erase flow with read array data**

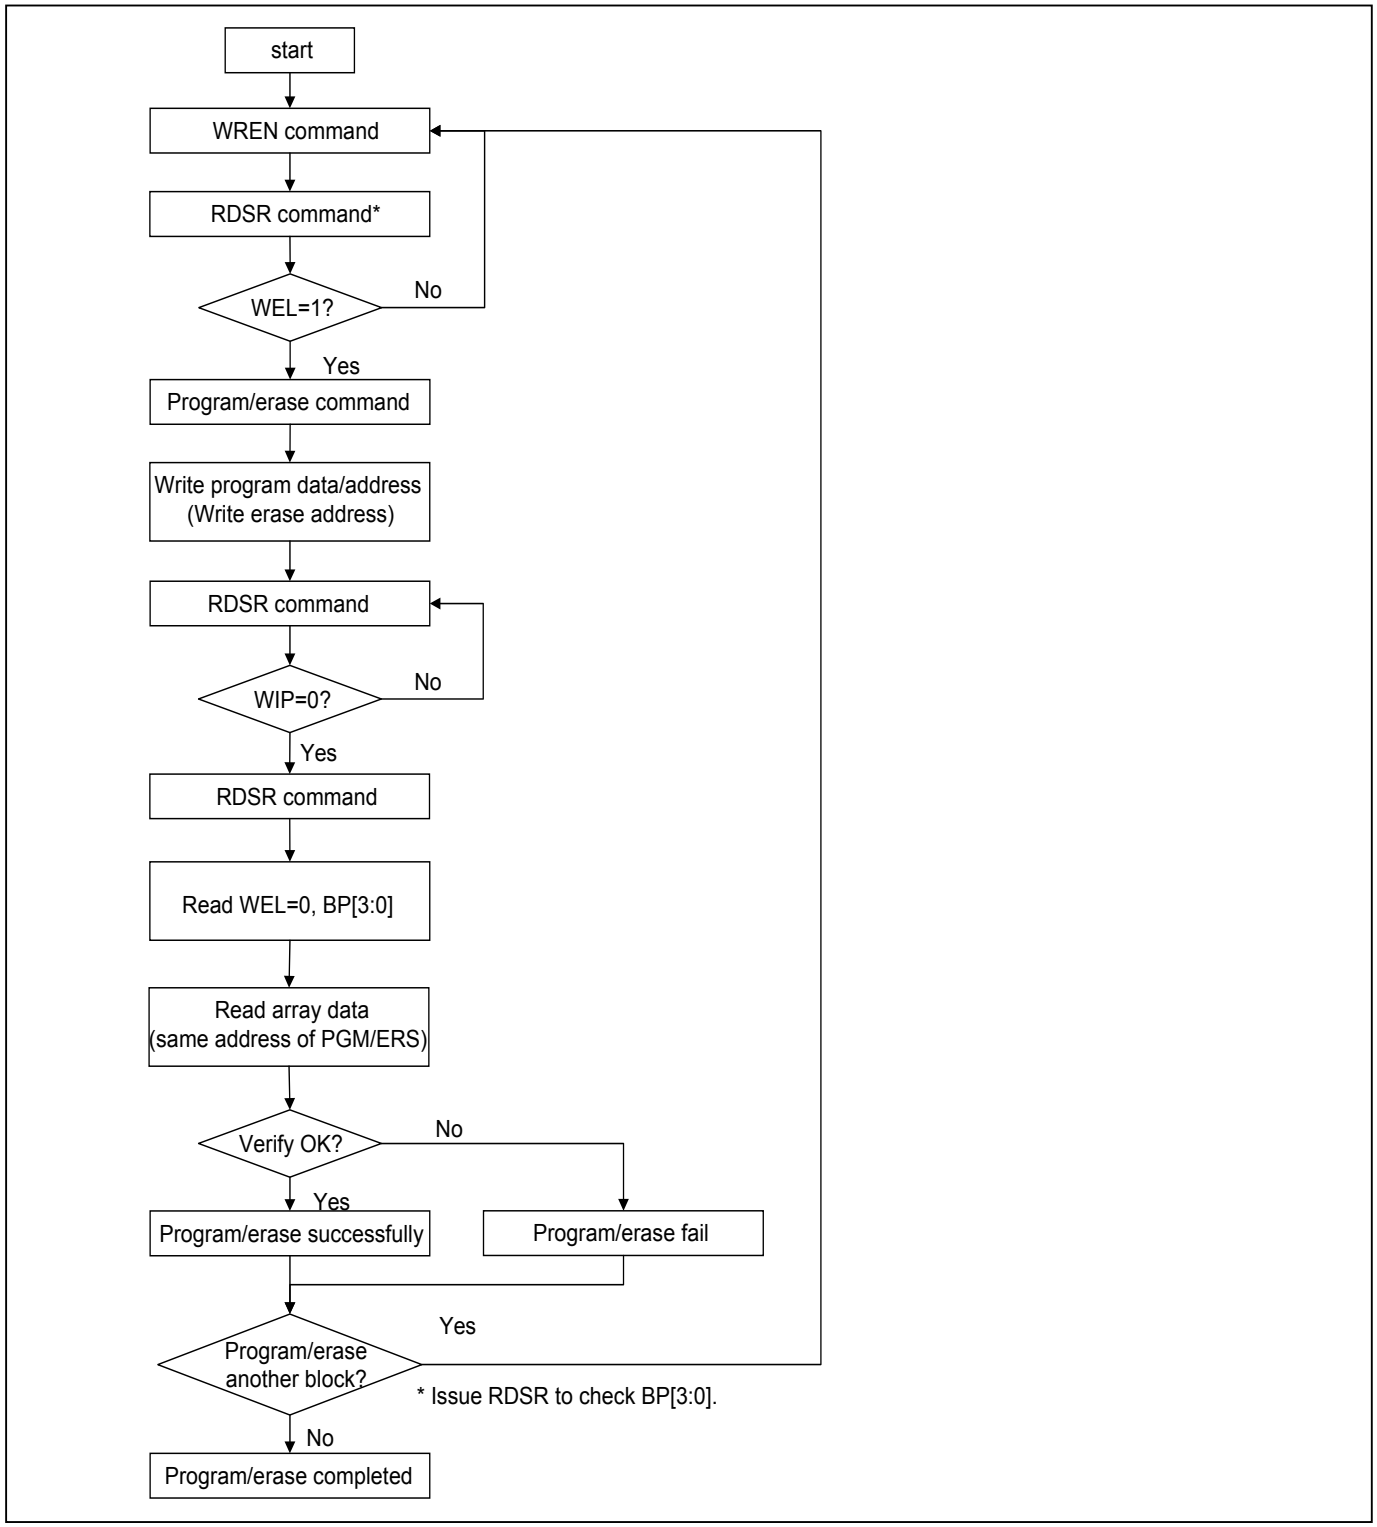



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Figure 18. Program/Erase flow without read array data (read P_FAIL/E_FAIL flag)**

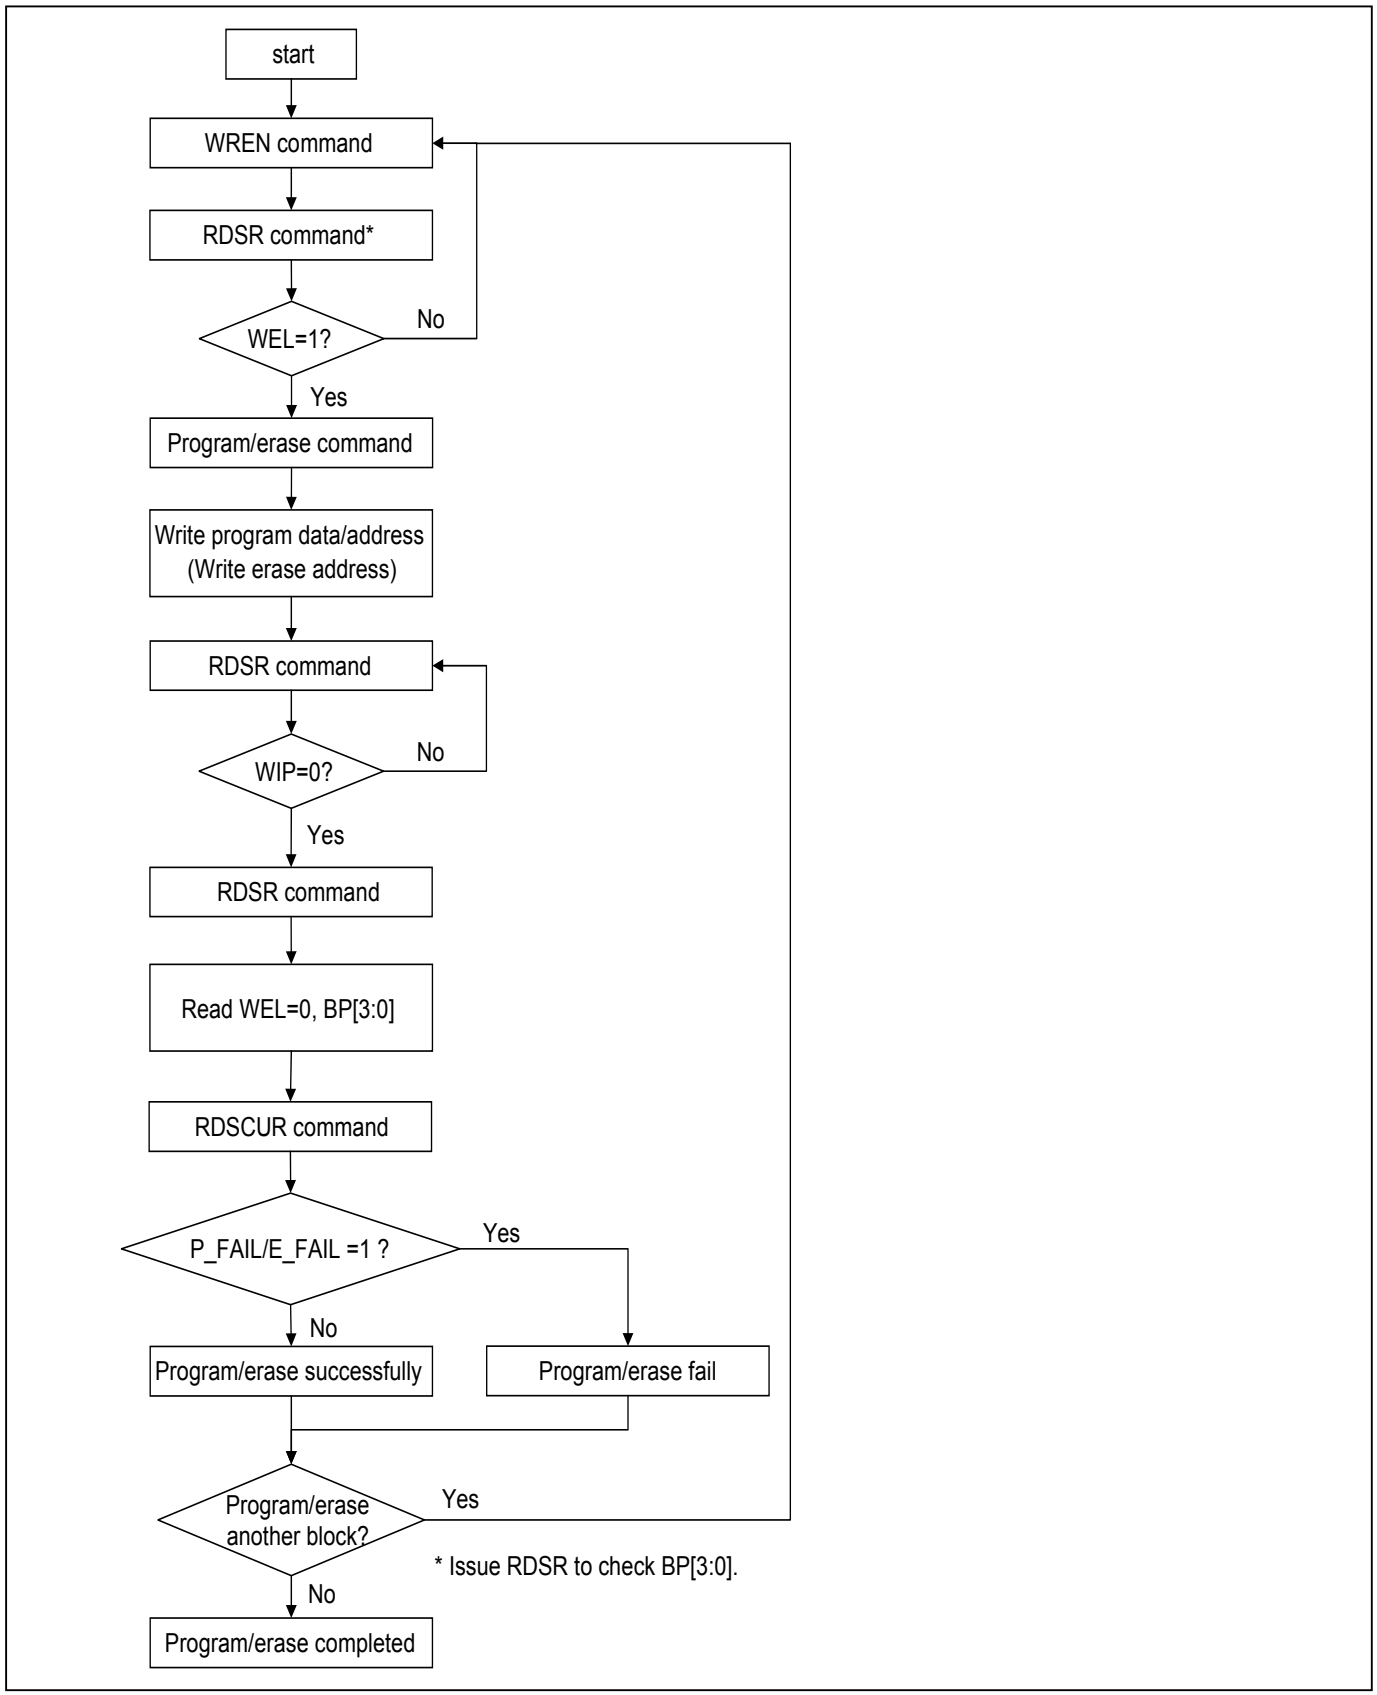



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

### 10-5. Read Configuration Register (RDCR)

The RDCR instruction is for reading Configuration Register Bits. The Read Configuration Register can be read at any time (even in program/erase/write configuration register condition).

The sequence of issuing RDCR instruction is: CS# goes low→ sending RDCR instruction code→ Configuration Register data out on SO.

**Figure 19. Read Configuration Register (RDCR) Sequence (SPI Mode)**

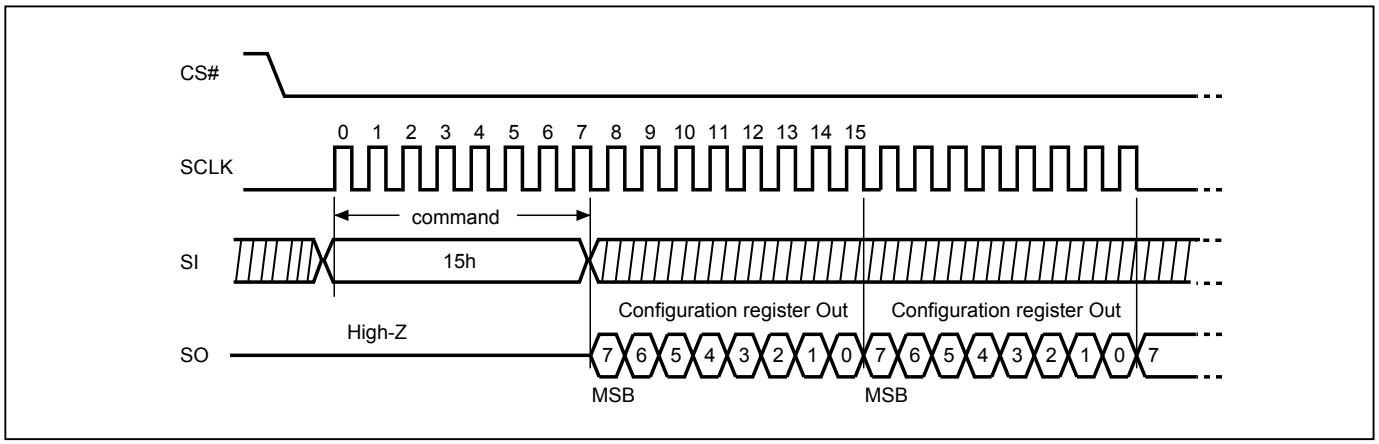



**Figure 20. Read Configuration Register (RDCR) (STR-OPI Mode)**


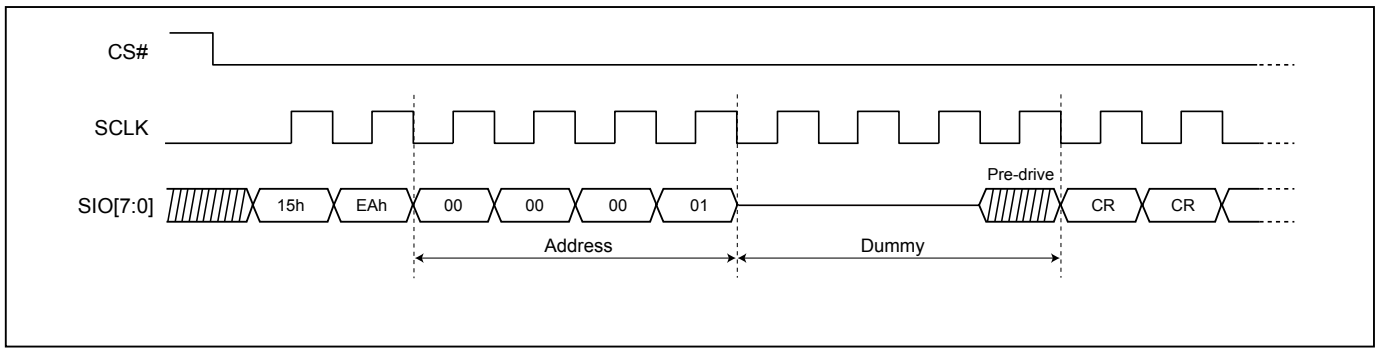



**Figure 21. Read Configuration Register (RDCR) (DTR-OPI Mode)**



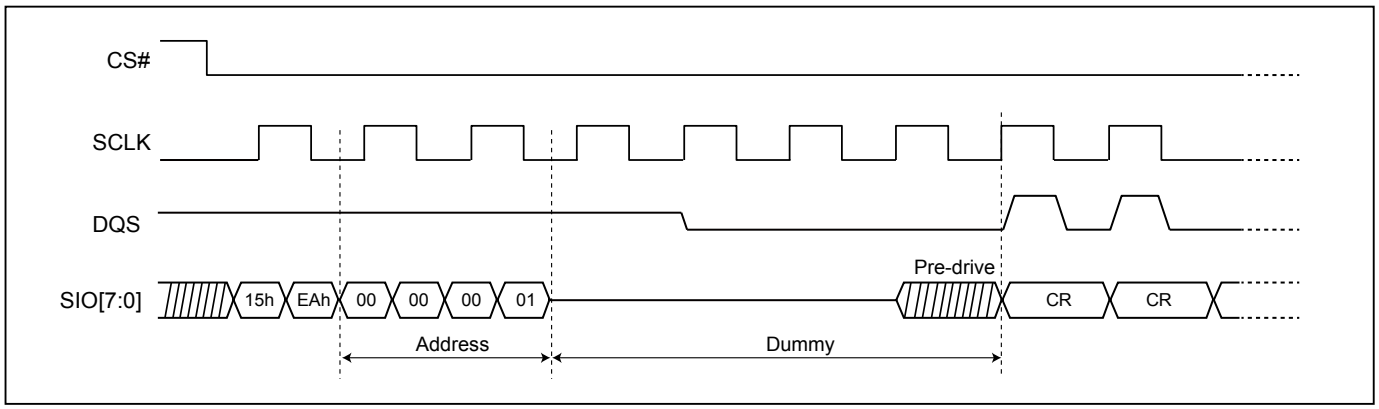


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

### 10-6. Write Status Register (WRSR) / Write Configuration Register (WRCR)

The WRSR instruction is for changing the values of Status Register Bits and Configuration Register Bits. Before sending WRSR instruction, the Write Enable (WREN) instruction must be decoded and executed to set the Write Enable Latch (WEL) bit in advance. The WRSR instruction can change the value of Block Protect (BP3, BP2, BP1, BP0) bits to define the protected area of memory (as shown in *"Table 3. Protected Area Sizes"*). The WRSR has no effect on bit1(WEL) and bit0 (WIP) of the status register.

In SPI, CS# must go high exactly at the 8 bits or 16 bits data boundary; In DOPI, CS# must go high while clock is low; otherwise, the instruction will be rejected and not executed. The self-timed Write Status Register cycle time (tW) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be check out during the Write Status Register cycle is in progress. The WIP sets 1 during the tW timing, and sets 0 when Write Status Register Cycle is completed, and the Write Enable Latch (WEL) bit is reset.

**Figure 22. Write Status Register (WRSR) Sequence (SPI Mode)**

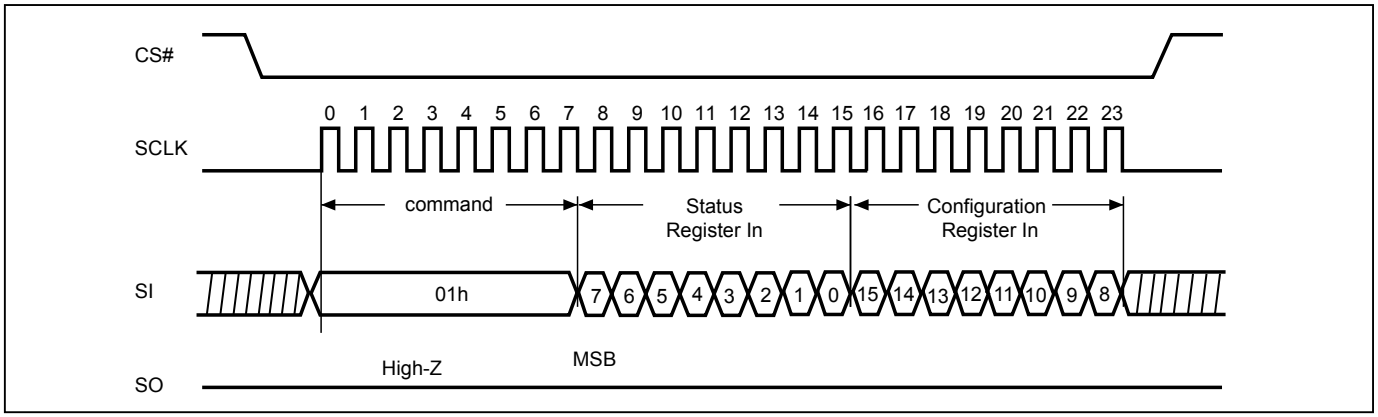


Note : The CS# must go high exactly at 8 bits or 16 bits data boundary to completed the write register command.


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Figure 23. Write Status Register (WRSR) Sequence (STR-OPI Mode)**


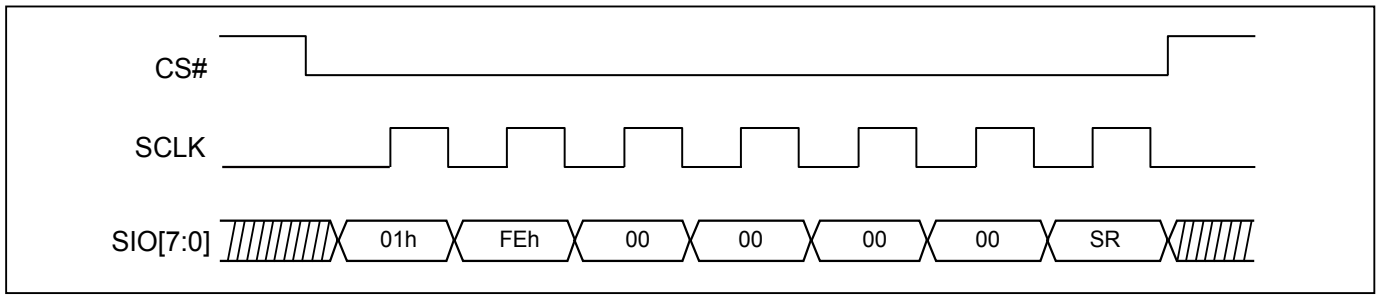



**Figure 24. Write Status Register (WRSR) Sequence (DTR-OPI Mode)**

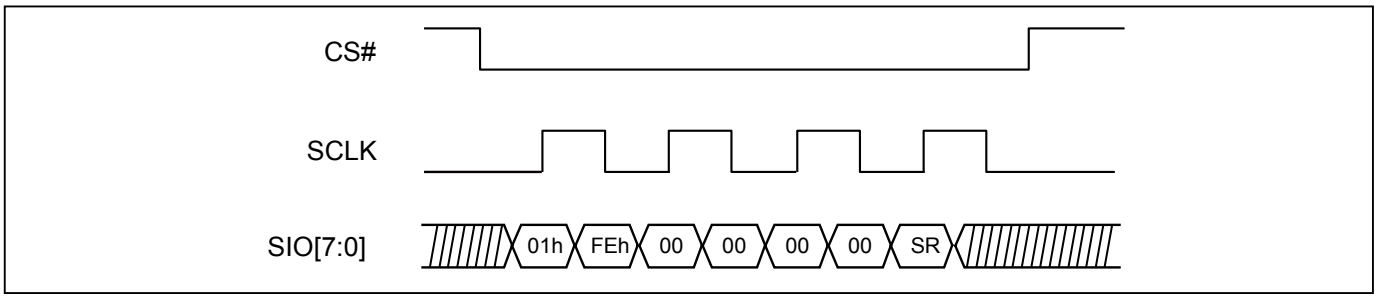


Note: CS# must go high while SCLK is low.

**Figure 25. Write Configuration Register (WRCR) Sequence (STR-OPI Mode)**


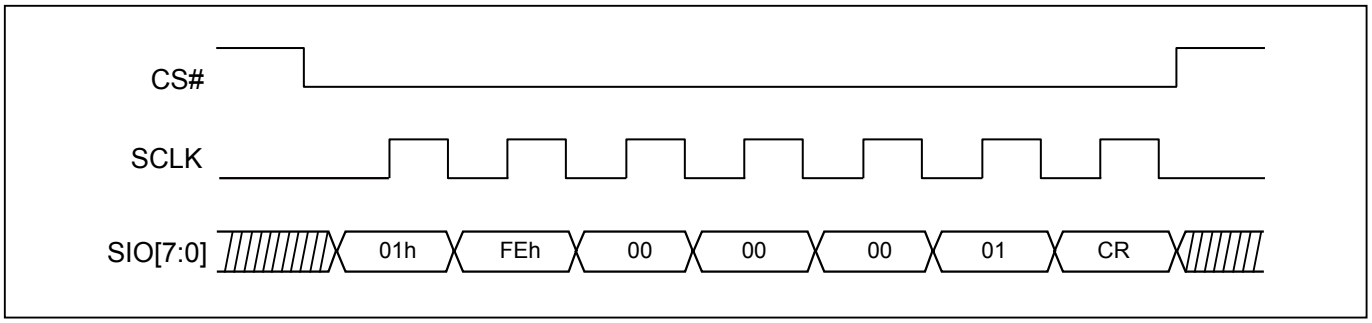




**Figure 26. Write Configuration Register (WRCR) Sequence (DTR-OPI Mode)**

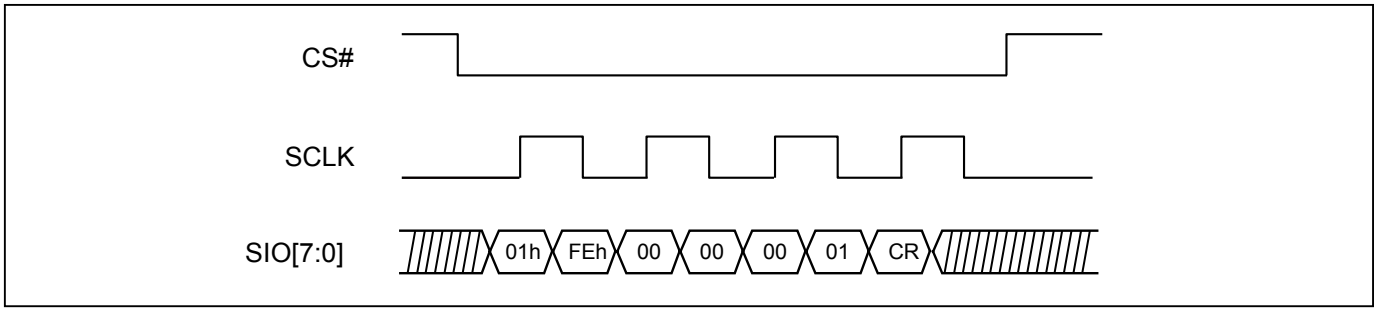


Note: CS# must go high while SCLK is low.


深圳市满度科技有限公司
Web:www.manduic.com
Tel:15012900-5940
Email:sales@manduic.com

**Figure 27. WRSR flow**

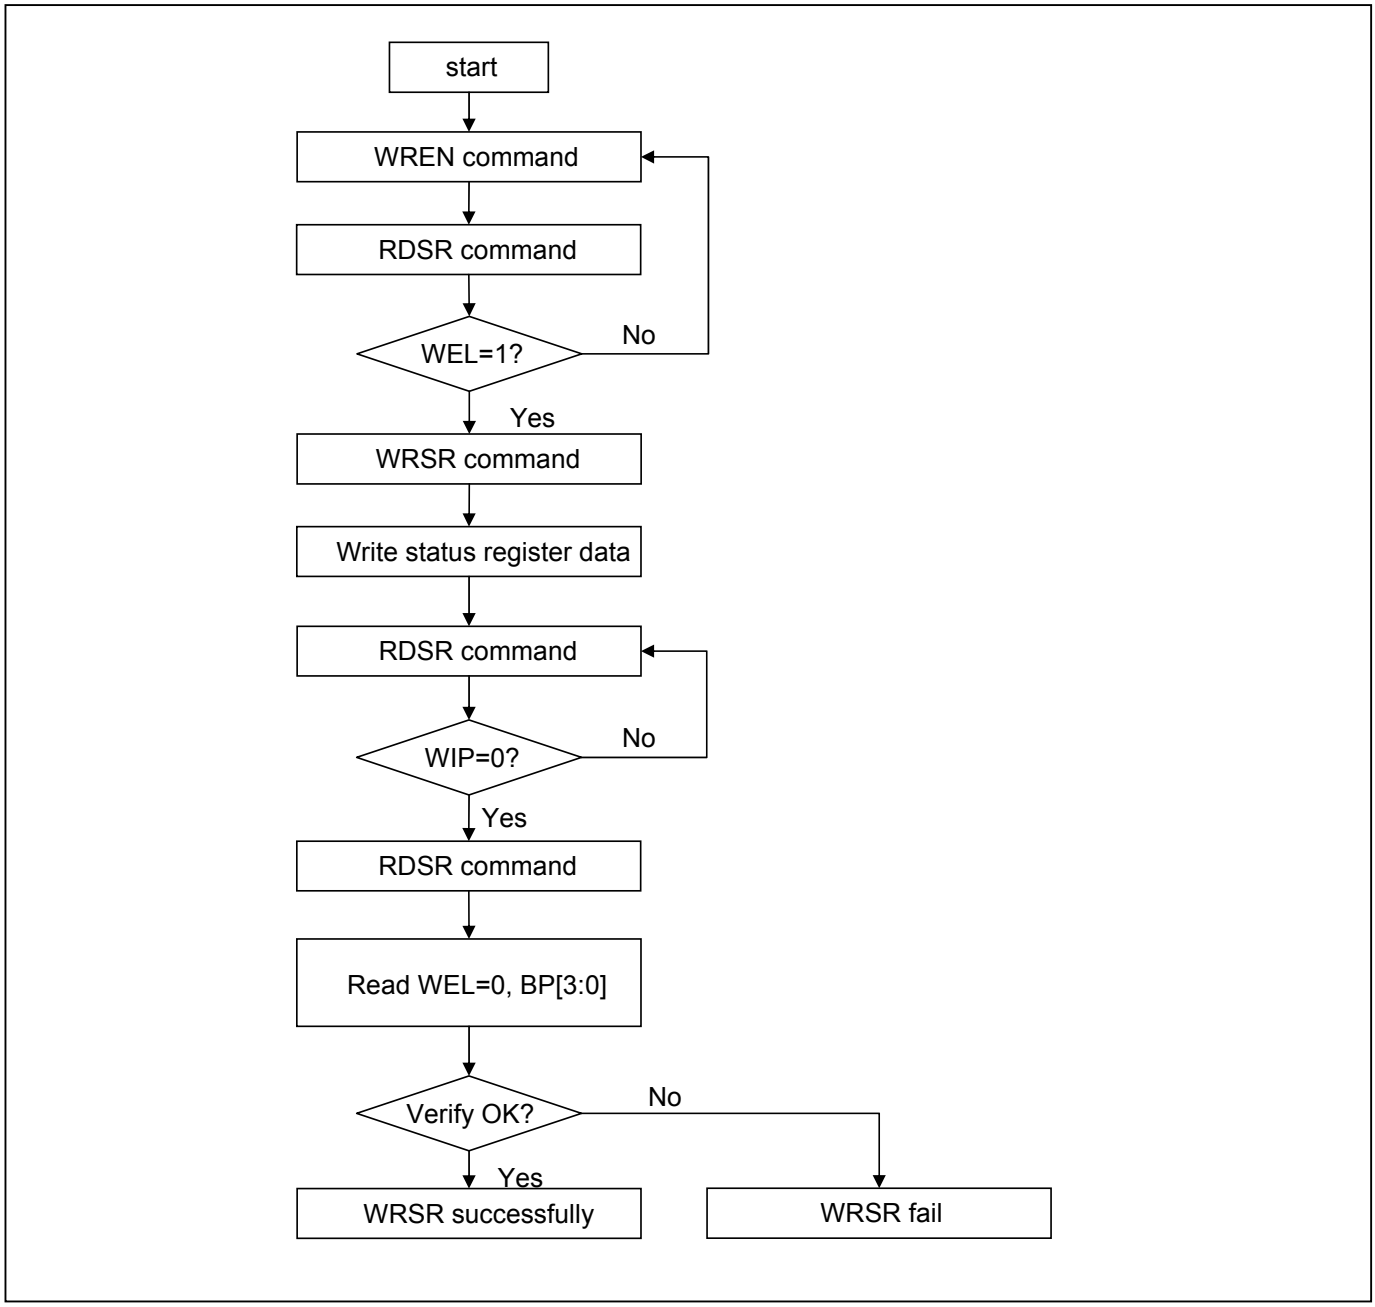




深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

### 10-7. Read Configuration Register 2 (RDCR2)

The RDCR2 instruction is for reading Configuration Register 2. Except CRCERR bit, the Read Configuration Register 2 command would be rejected while Internal write operation is in progress (WIP=1).


The sequence of issuing RDCR2 instruction is: CS# goes low→ sending RDCR2 instruction code→ Sending 4 byte address → Configuration Register 2 data out on SO.

**Figure 28. Read Configuration Register 2 (RDCR2) Sequence (SPI Mode)**

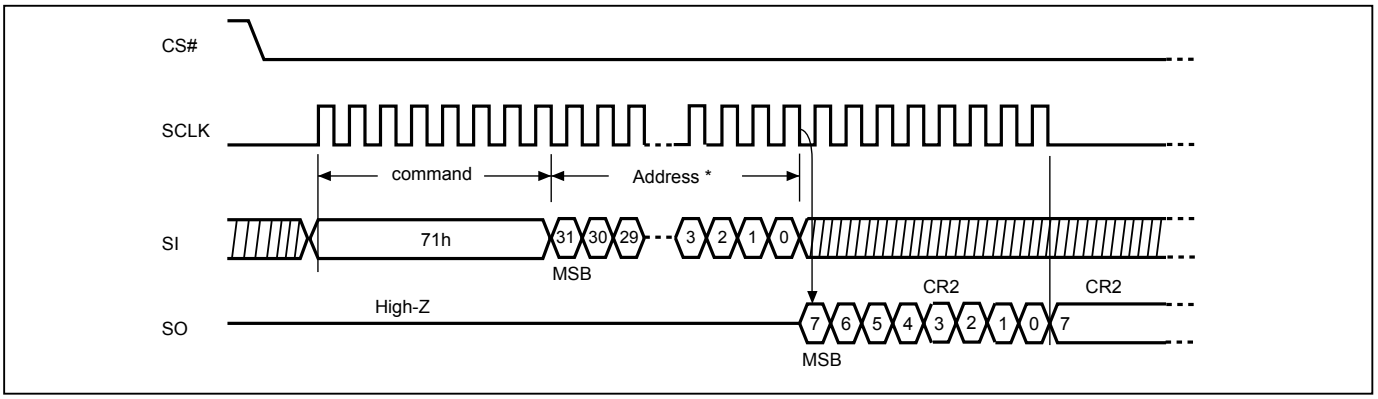



Note: * See *"9-3. Configuration Register 2"* for defining address .

**Figure 29. Read Configuration Register 2 (RDCR2) Sequence (STR-OPI Mode)**

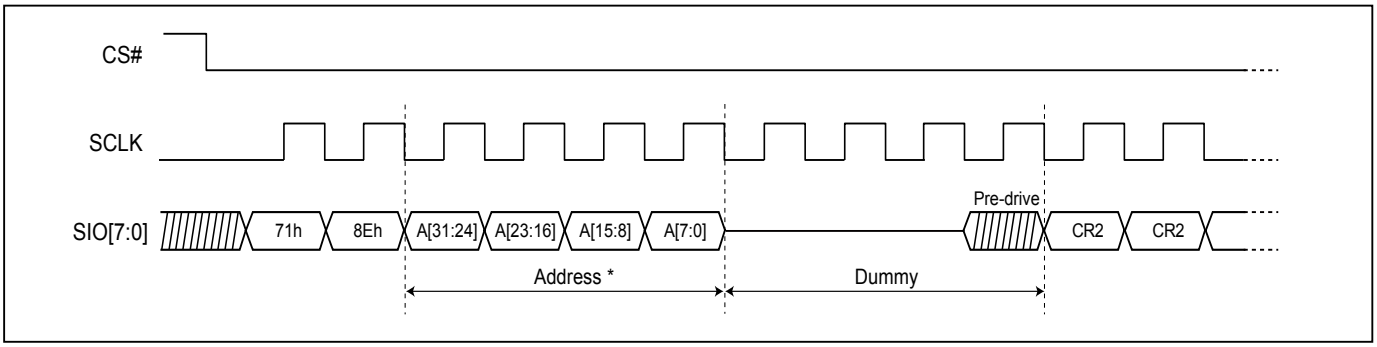


Note: * See *"9-3. Configuration Register 2"* for defining address .

**Figure 30. Read Configuration Register 2 (RDCR2) (DTR-OPI Mode)**

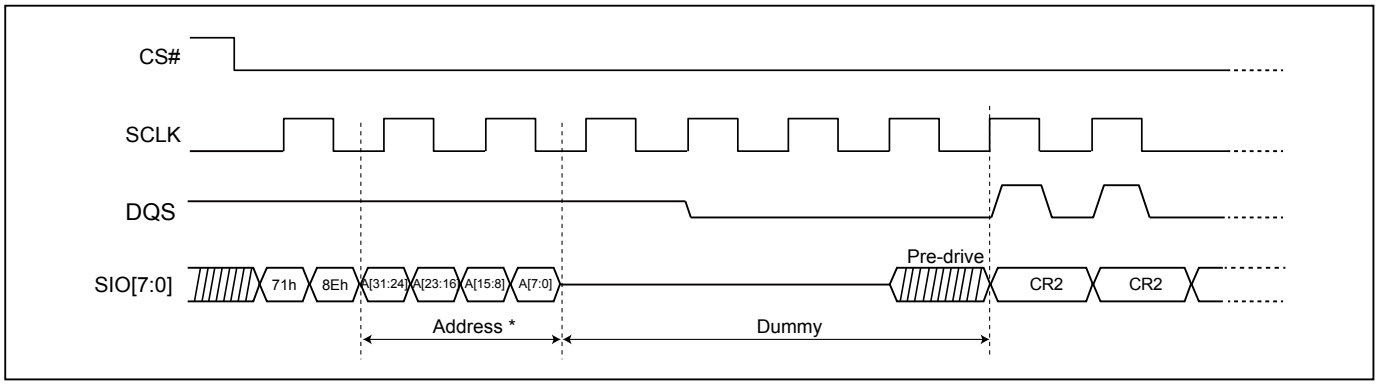


Note: * See *"9-3. Configuration Register 2"* for defining address .



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

### 10-8. Write Configuration Register 2 (WRCR2)

The WRCR2 instruction is for changing the values of Configuration Register 2. Before sending WRCR2 instruction, the Write Enable (WREN) instruction must be decoded and executed to set the Write Enable Latch (WEL) bit in advance.


In SPI, CS# must go high exactly at the 8 bits data boundary; In DOPI, CS# must go high while clock is low; otherwise, the instruction will be rejected and not executed, and the Write Enable Latch (WEL) bit is reset.

**Figure 31. Write Configuration Register 2 (WRCR2) Sequence (SPI Mode)**

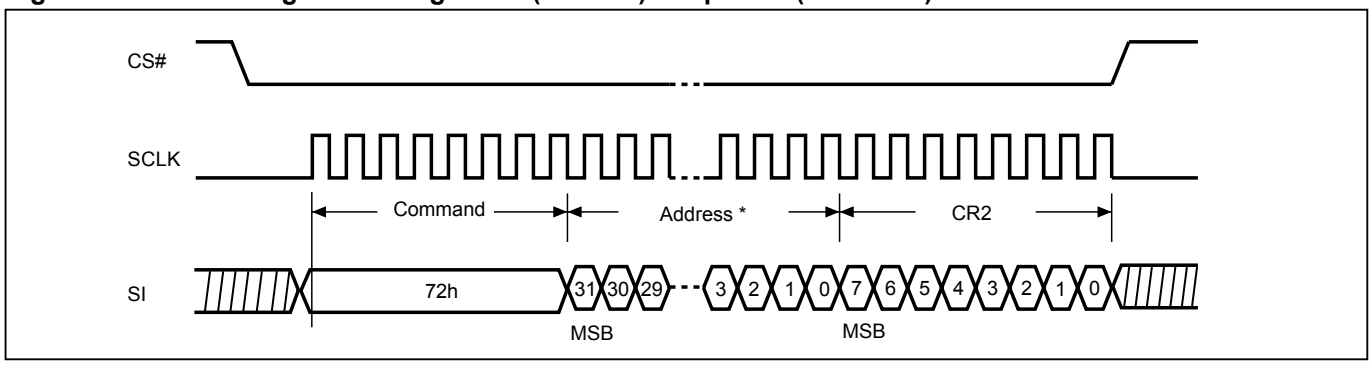



Note 1: * See *"9-3. Configuration Register 2"* for defining address .

**Figure 32. Write Configuration Register 2 (WRCR2) Sequence (STR-OPI Mode)**

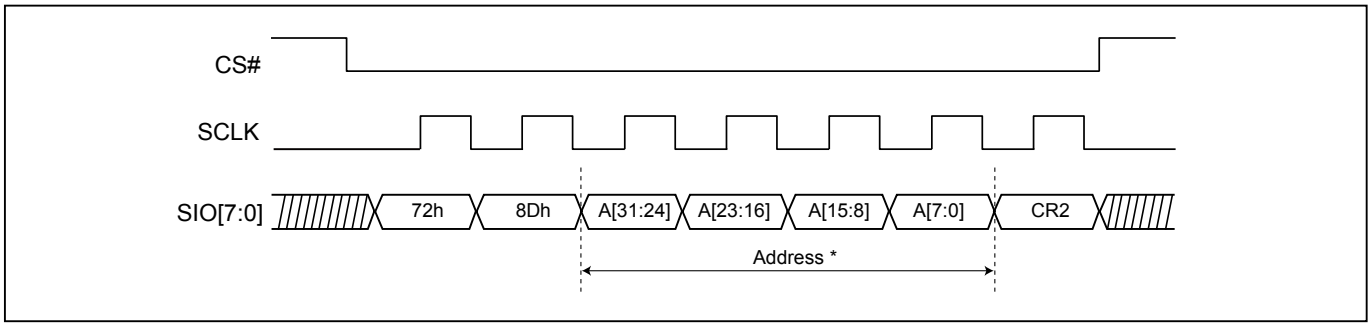


Note 1: * See *"9-3. Configuration Register 2"* for defining address .

**Figure 33. Write Configuration Register 2 (WRCR2) Sequence (DTR-OPI Mode)**

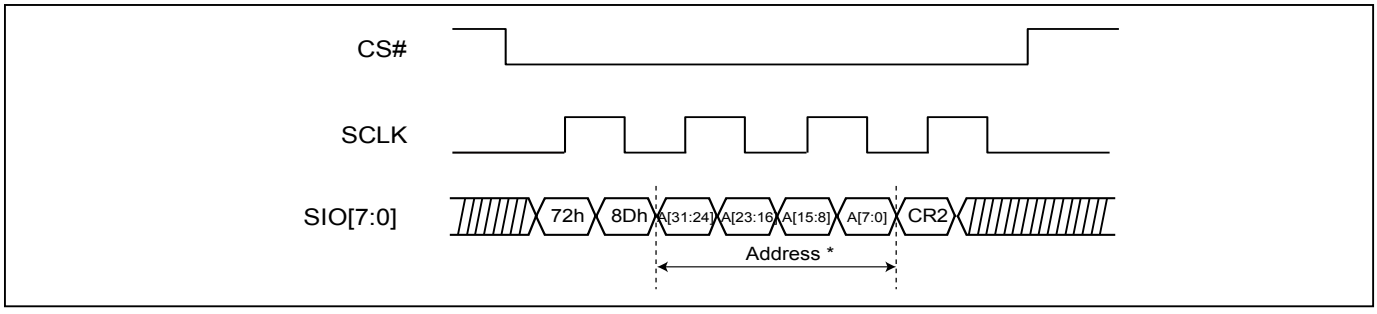


Note 1 : * See *"9-3. Configuration Register 2"* for defining address.
Note 2 : CS# must go high while SCLK is low


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

### 10-9. Read Security Register (RDSCUR)

The RDSCUR instruction is for reading the value of Security Register bits. The Read Security Register can be read at any time (even in program/erase/write status register/write security register condition) and continuously.

The sequence of issuing RDSCUR instruction is : CS# goes low→sending RDSCUR instruction→Security Register data out on SO→ CS# goes high.

**Figure 34. Read Security Register (RDSCUR) Sequence (SPI Mode)**

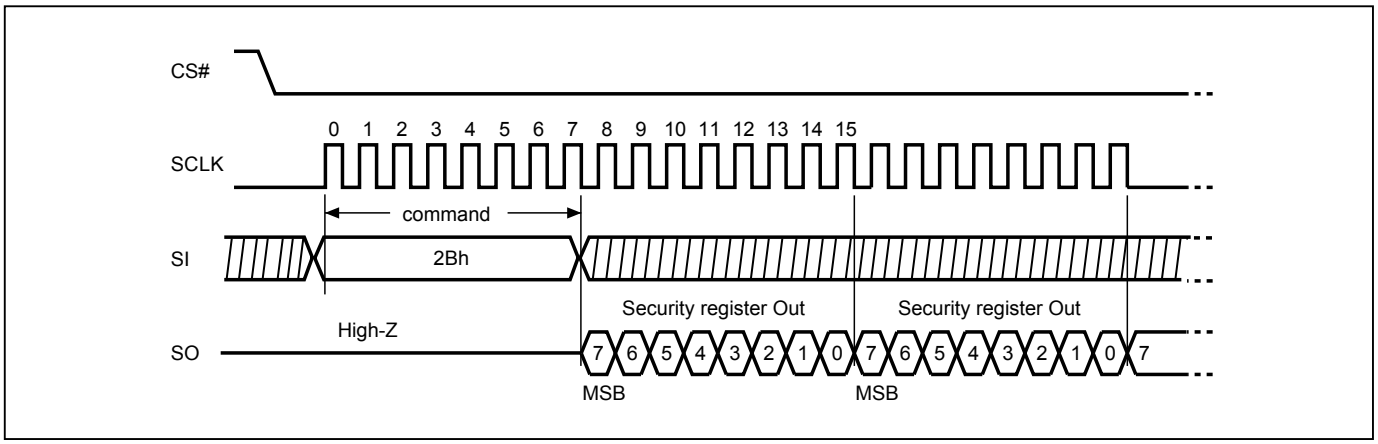



**Figure 35. Read Security Register (RDSCUR) Sequence (STR-OPI Mode)**


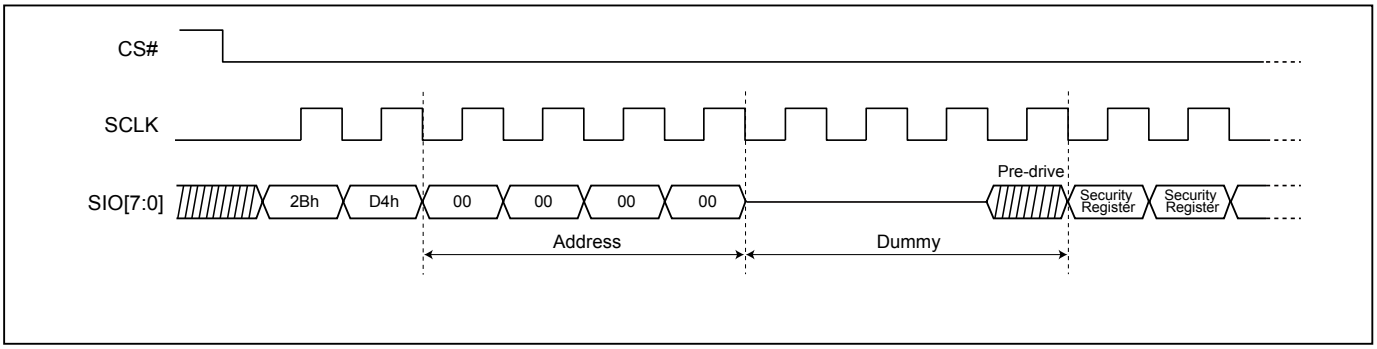



**Figure 36. Read Security Register (RDSCUR) Sequence (DTR-OPI Mode)**



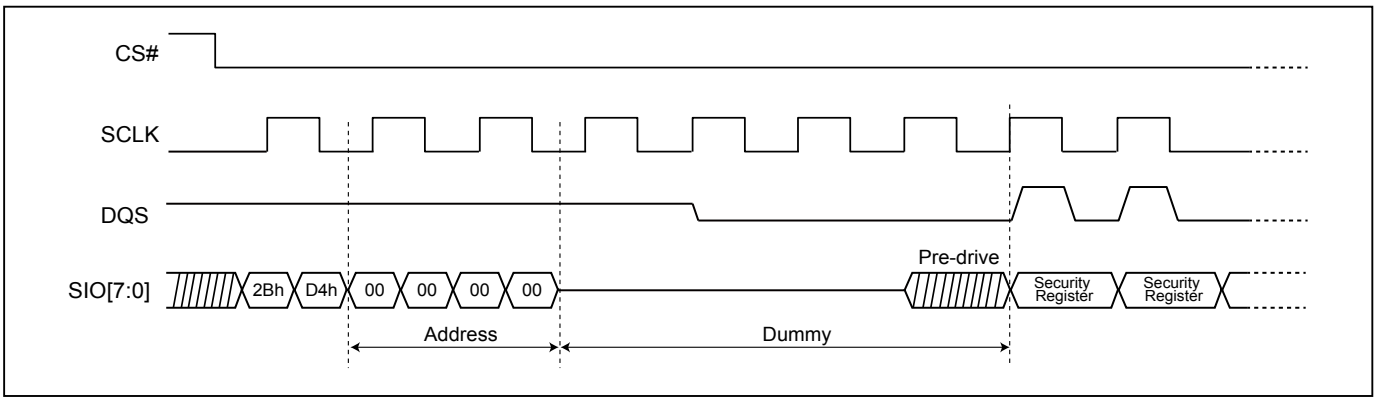

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

### 10-10. Write Security Register (WRSCUR)

The WRSCUR instruction sets the LDSO bit of the Security Register. The WREN (Write Enable) instruction is required before issuing WRSCUR instruction. The WRSCUR instruction may change the values of bit1 (LDSO bit) for customer to lock-down the 4K-bit customer usage area of Secured OTP. Once the LDSO bit is set to "1", the customer usage area of Secured OTP cannot be updated any more.

The sequence of issuing WRSCUR instruction is :CS# goes low→ sending WRSCUR instruction → CS# goes high.

The CS# must go high exactly at the boundary; otherwise, the instruction will be rejected and not executed.

**Figure 37. Write Security Register (WRSCUR) Sequence (SPI Mode)**

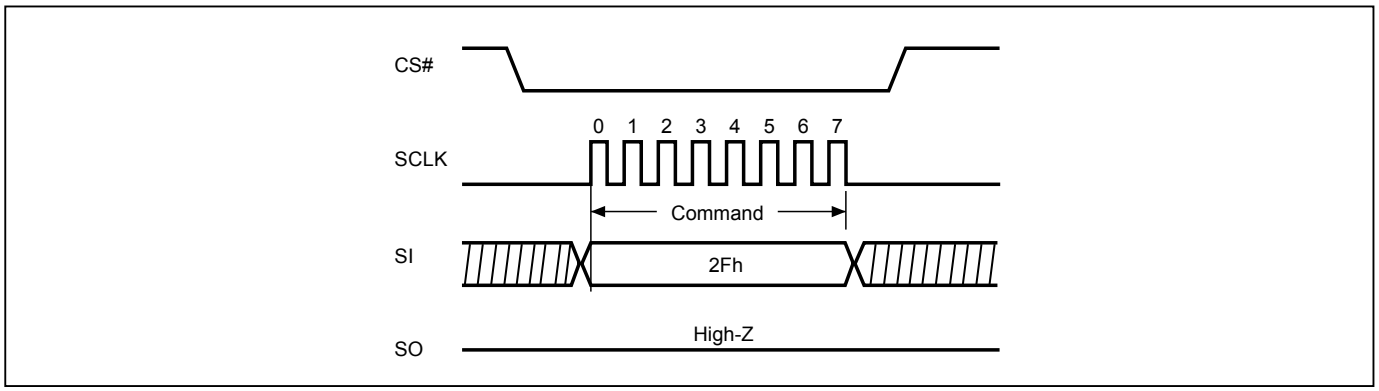



**Figure 38. Write Security Register (WRSCUR) Sequence (STR-OPI Mode)**


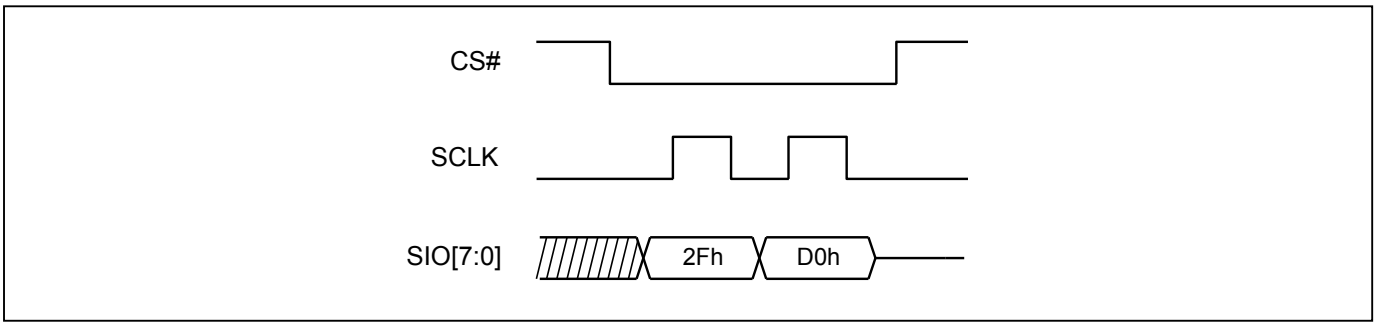



**Figure 39. Write Security Register (WRSCUR) Sequence (DTR-OPI Mode)**



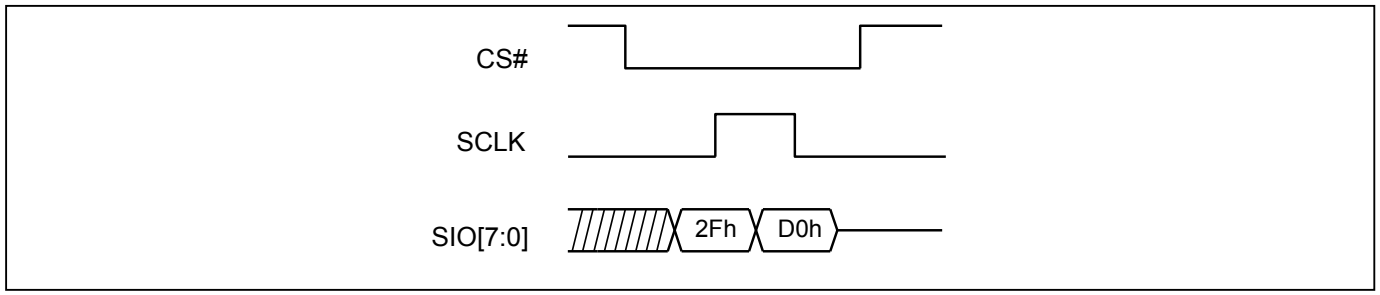


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

### 10-11.Read Data Bytes (READ/READ3B/READ4B)

The read instruction is for reading data out. The address is latched on rising edge of SCLK, and data shifts out on the falling edge of SCLK at a maximum frequency fR. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single READ/READ3B/READ4B instruction. The address counter rolls over to 0 when the highest address has been reached.

The sequence of issuing READ/READ3B/READ4B instruction is: CS# goes low→sending READ/READ3B/READ4B instruction code→ 3-byte or 4-byte address on SI→ data out on SO→to end READ/READ3B/READ4B operation can use CS# to high at any time during data out.

**Figure 40. Read Data Bytes (READ/READ3B/READ4B) Sequence (SPI Mode only)**

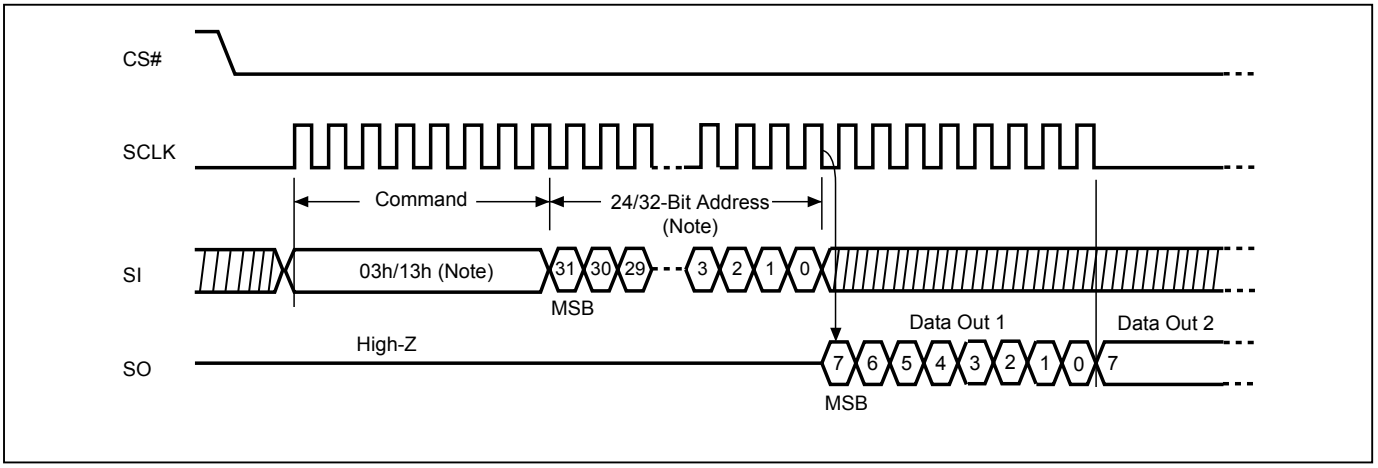


Note: The number of address cycles are based on different address mode. In 3-Byte command operation, it is 24-bit. In 4-Byte command operation, it is 32-bit.


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com


### 10-12. Read Data Bytes at Higher Speed (FAST_READ/FAST_READ3B/FAST_READ4B)

The FAST_READ/FAST_READ3B/FAST_READ4B instruction is for quickly reading data out. The address is latched on rising edge of SCLK, and data of each bit shifts out on the falling edge of SCLK at a maximum frequency fC. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single FAST_READ/FAST_READ3B/FAST_READ4B instruction. The address counter rolls over to 0 when the highest address has been reached.

The sequence of issuing FAST_READ/FAST_READ3B/FAST_READ4B instruction is: CS# goes low→ sending FAST_READ/FAST_READ3B/FAST_READ4B instruction code→ 3-byte or 4-byte address on SI→ 8 dummy cycles → data out on SO→ to end FAST_READ/FAST_READ3B/FAST_READ4B operation can use CS# to high at any time during data out.

While Program/Erase/Write Status Register cycle is in progress, FAST_READ/FAST_READ3B/FAST_READ4B instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

**Figure 41. Read at Higher Speed (FAST_READ/FAST_READ3B/FAST_READ4B) Sequence (SPI Mode only)**

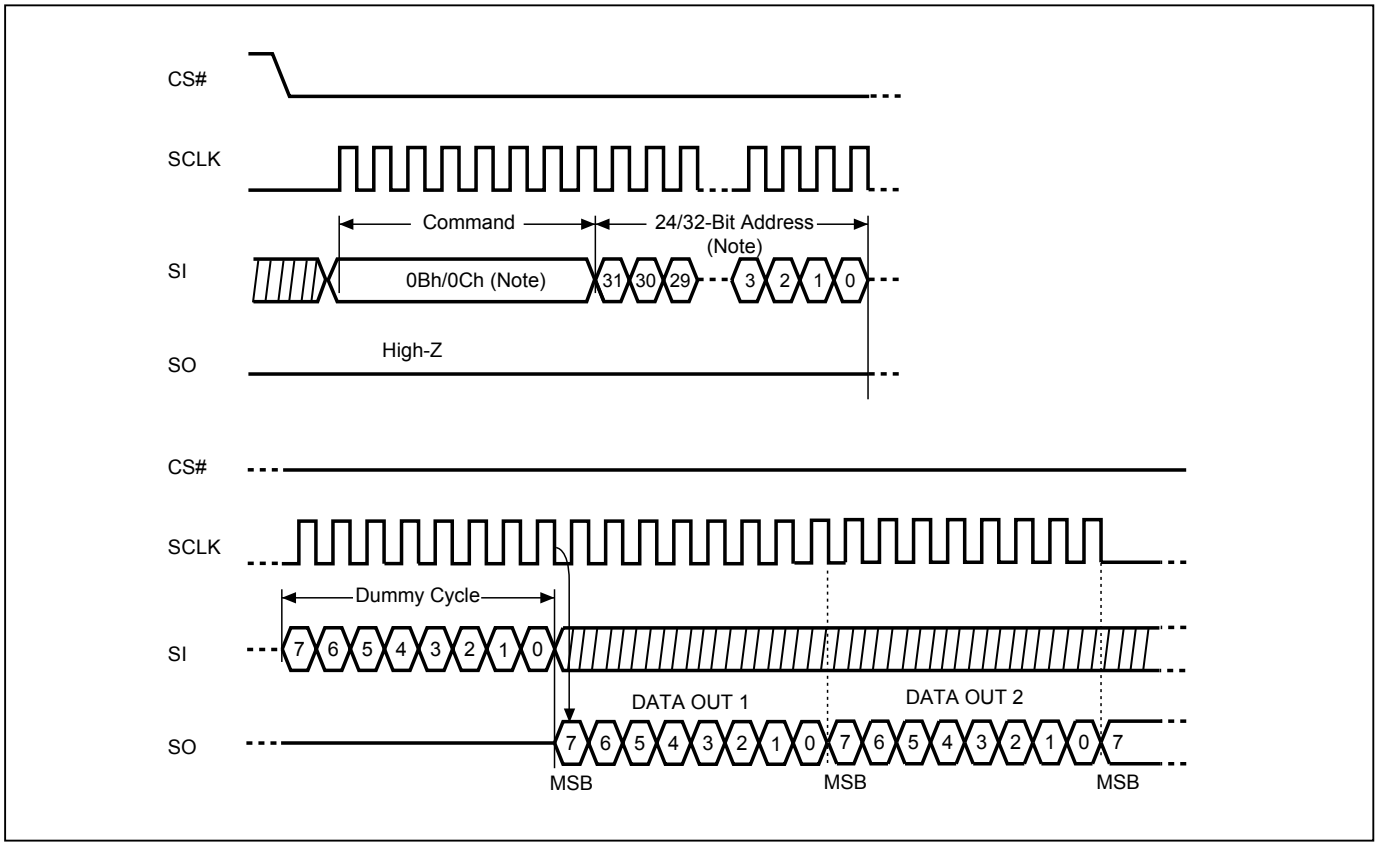


Note: The number of address cycles are based on different address mode. In 3-Byte command operation, it is 24-bit. In 4-Byte command operation, it is 32-bit.



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

### 10-13. OCTA Read Mode (8READ)

The 8READ instruction enables Octa throughput of the Serial NOR Flash in read mode. An OPI Enable bit of Configuration Register 2 must be set to "1" before sending the STR Octa READ instruction.

While Program/Erase/Write Status Register cycle is in progress, 8READ instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

**Figure 42. OCTA Read Mode Sequence (STR-OPI Mode)**

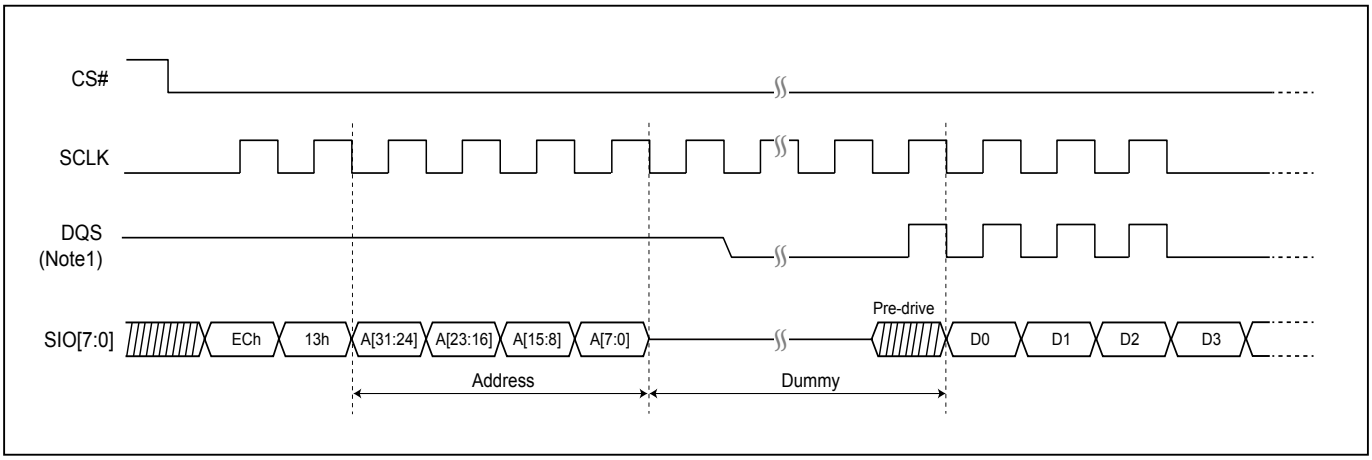


Note1: DQS is enabled only when DOS (DQS on STR mode) bit is set. Otherwise, it keeps Hi-Z.


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

### 10-14. OCTA DTR Read Mode (8DTRD)

The 8DTRD instruction enables DTR Octa throughput of the Serial NOR Flash in read mode. An DOPI Enable bit of Configuration Register 2 must be set to "1" before sending the DTR Octa READ instruction.

While Program/Erase/Write Status Register cycle is in progress, 8DTRD instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

In DTR Octa READ mode, the starting address must be even byte (A0=0).

**Figure 43. OCTA Read Mode Sequence (DTR-OPI Mode)**


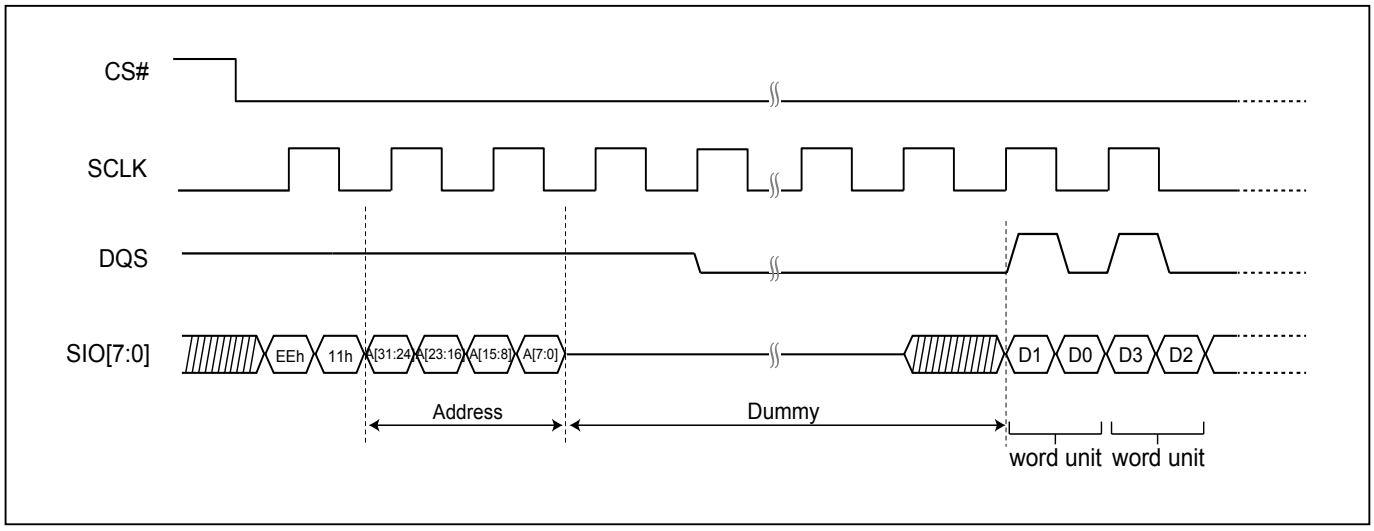



**Figure 44. OCTA Read Mode Sequence (DTR-OPI Mode) with DQS pre-cycle enabled (CR2 DQSPRC=1)**



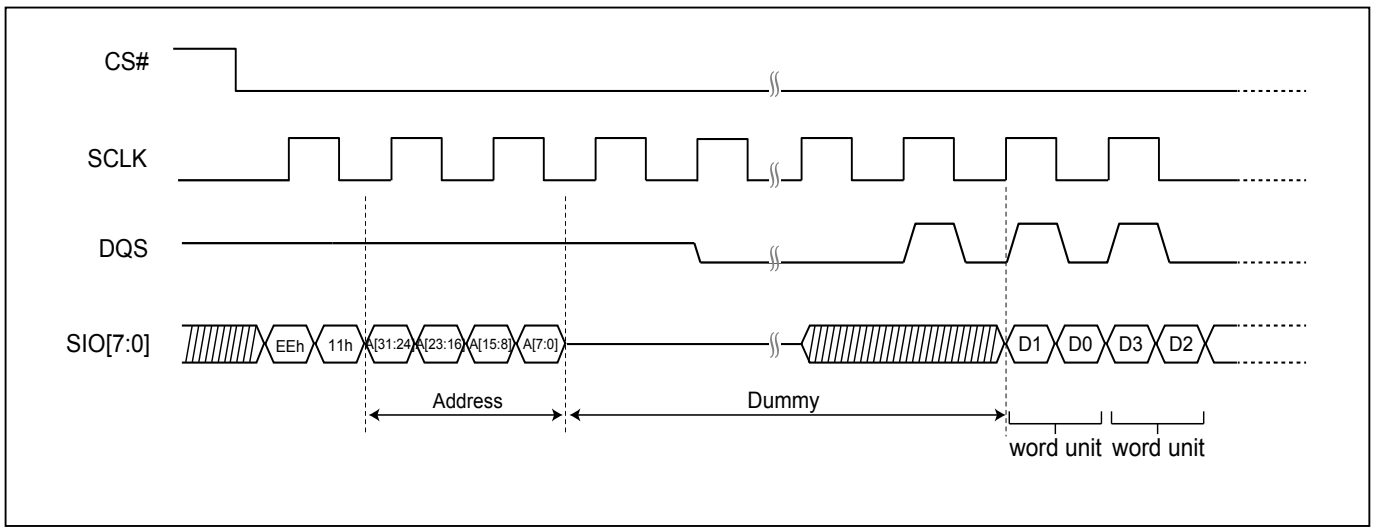

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

### 10-15. Preamble Bit

The Preamble Bit data pattern supports system/memory controller to determine the valid windows of data output more easily and improve data capture reliability while the flash memory is running in high frequency.


The preamble bit is designed as a 16-bit data pattern, which can be enabled or disabled by setting the bit4 of Configuration register (Preamble bit Enable bit). Once CR<4> is set, the preamble bit is inputted into dummy cycles. Two different patterns are selectable by setting CR<2> PSB (Pattern Select Bit), and please refer to *"9-3. Configuration Register 2"* for details.

Once Preamble Bit feature is enabled, the preamble bit pattern will be output after a pre-driven signal. When the device is under OPI mode, all SIO pins except SIO3 will output the same learning pattern. The signal on SIO3 will be different from other I/O pins in case PSB=0.

In OPI, when dummy cycle number reaches 20, the complete 16 bits will start to output right after the pre-driven signal. When dummy cycle number is not sufficient of 16 cycles, the rest of the preamble bits will be cut off.


In DOPI, when dummy cycles number reaches 12, the complete 16 bits will start to output right after the pre-driven signal.

**Figure 45. Preamble Bit data pattern Output Sequence (STR-OPI Mode)**

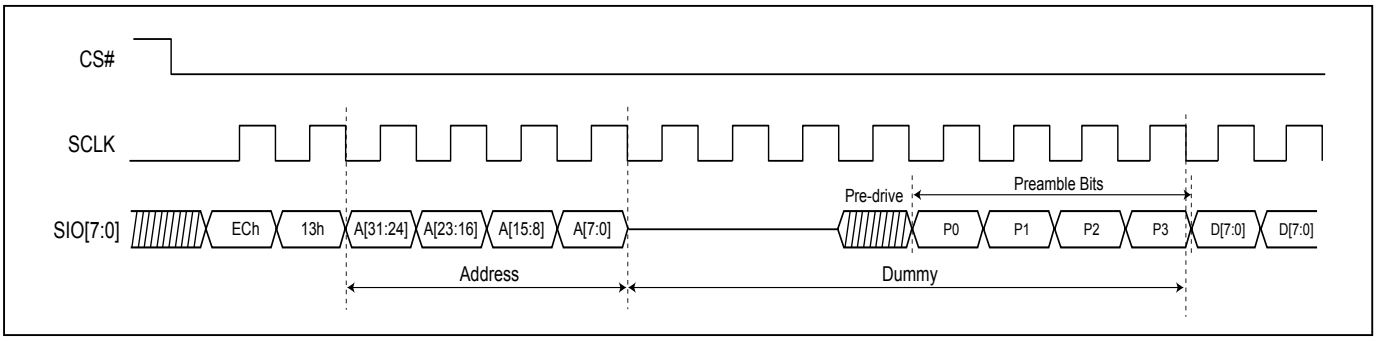


Note: 8 dummy cycle example.

**Figure 46. Preamble Bit data pattern Output Sequence (DTR-OPI Mode)**

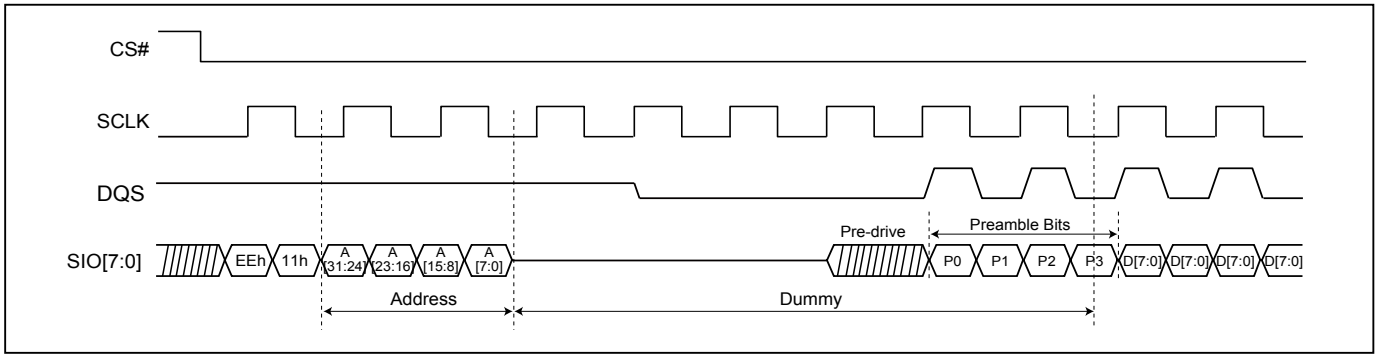


Note: 6 dummy cycle example.


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

### 10-16. Burst Read

To set the Burst length, following command operation is required to issue command: “C0h” in the first Byte, following clock defining wrap around register value.

Their definitions are as the following table:

| Data | Wrap Around | Wrap Depth |
|---|---|---|
| 00h | Reserved | Reserved |
| 01h | Yes | 16-byte |
| 02h | Yes | 32-byte |
| 03h | Yes | 64-byte |
| 1xh | No | X |

The wrap around unit is defined with the 16/32/64 Byte, with random initial address. It is defined as “wrap-around mode disable” for the default state of the device. To exit wrap around, it is required to issue another “C0h” command in which data=‘1xh”. Otherwise, wrap around status will be retained until power down or reset command. To change wrap around depth, it is requried to issue another “C0h” command in which data=“0xh”. The device is default without Burst read.

**Figure 47. Set Burst Length (SPI Mode)**


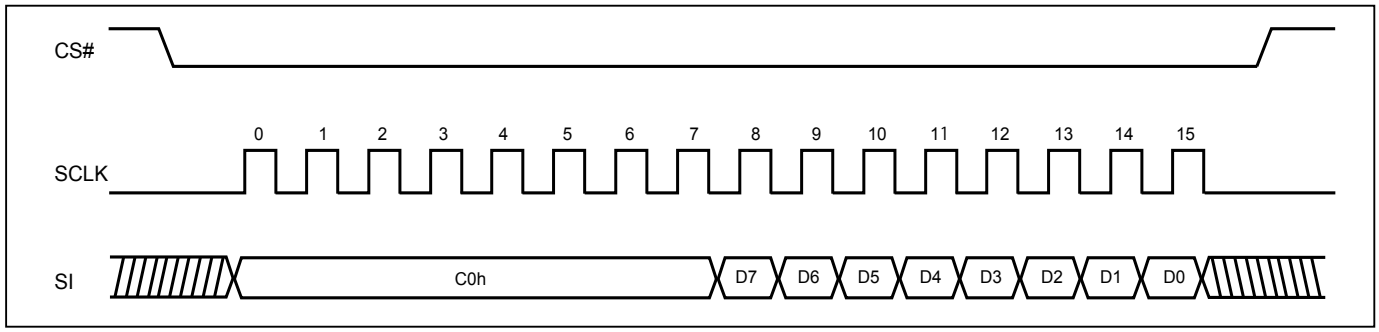



**Figure 48. Set Burst Length (STR-OPI Mode)**



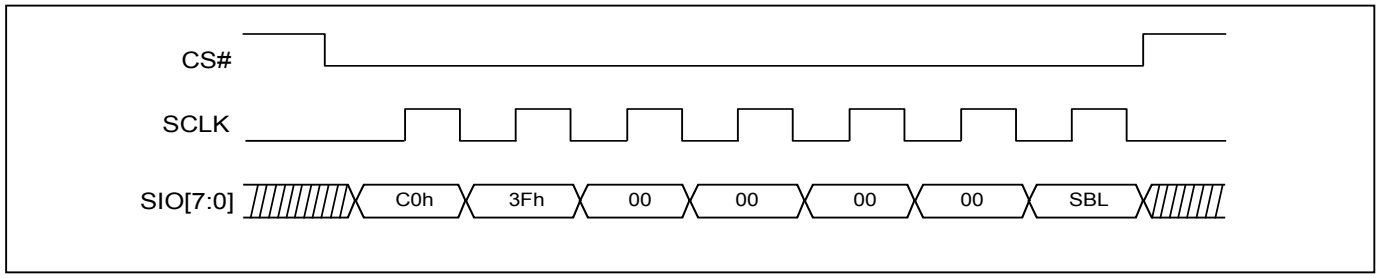

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

## 10-17. Fast Boot

The Fast Boot Feature provides the ability to automatically execute read operation after power on cycle or reset without any read instruction.

A Fast Boot Register is provided on this device. It can enable the Fast Boot function and also define the number of delay cycles and start address (where boot code being transferred). Instruction WRFBR (write fast boot register) and ESFBR (erase fast boot register) can be used for the status configuration or alternation of the Fast Boot Register bit. RDFBR (read fast boot register) can be used to verify the program state of the Fast Boot Register. The default number of delay cycles is 21 cycles in OPI/DOPI; while the number of delay cycles is 13 in SPI and there is a 16bytes boundary address for the start of boot code access.


When CS# starts to go low, data begins to output from default address after the delay cycles. After CS# returns to go high, the device will go back to standard SPI/OPI/DOPI mode and user can start to input command. In the fast boot data out process from CS# goes low to CS# goes high, a minimum of one byte must be output.

Once Fast Boot feature has been enabled, the device will automatically start a read operation after power on cycle, reset command, or hardware reset operation.

**Fast Boot Register (FBR)**

| Bits | Description | Bit Status | Default State | Type |
|---|---|---|---|---|
| 31 to 4 | FBSA (FastBoot Start Address) | 16 bytes boundary address for the start of boot code access. | FFFFFFF | Non-Volatile |
| 3 | Reserved | | 1 | Non-Volatile |
| 2 to 1 | FBSD (FastBoot Start Delay Cycle) | 00: 11 delay cycles<br>01: 15 delay cycles<br>10: 17 delay cycles<br>11: 21 delay cycles | 11 | Non-Volatile |
| 0 | FBE (FastBoot Enable) | 0=FastBoot is enabled.<br>1=FastBoot is not enabled. | 1 | Non-Volatile |


**Figure 49. Fast Boot Sequence (SPI Mode)**

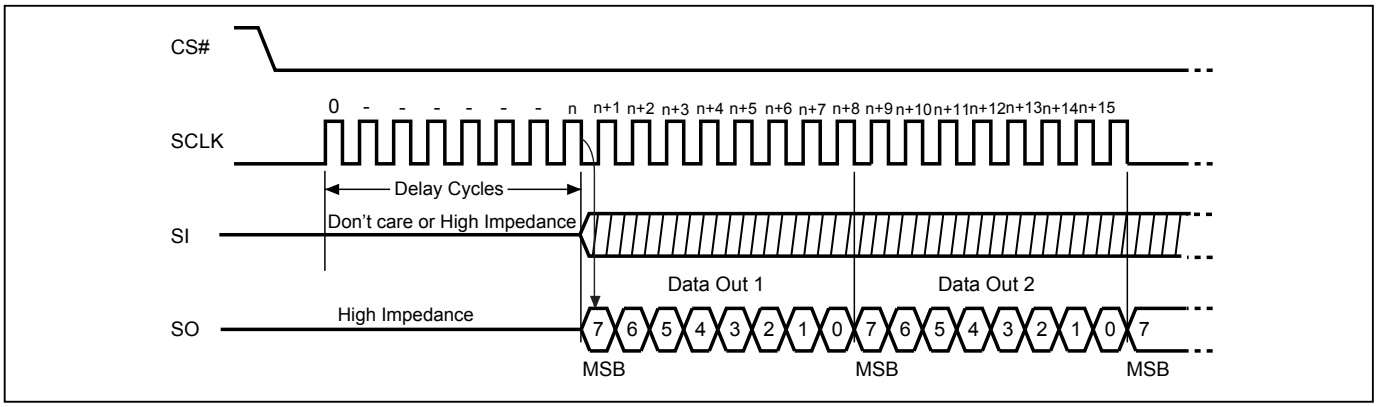


Note: The delay cycle is always 13 in SPI mode.



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Figure 50. Fast Boot Sequence (STR-OPI Mode)**

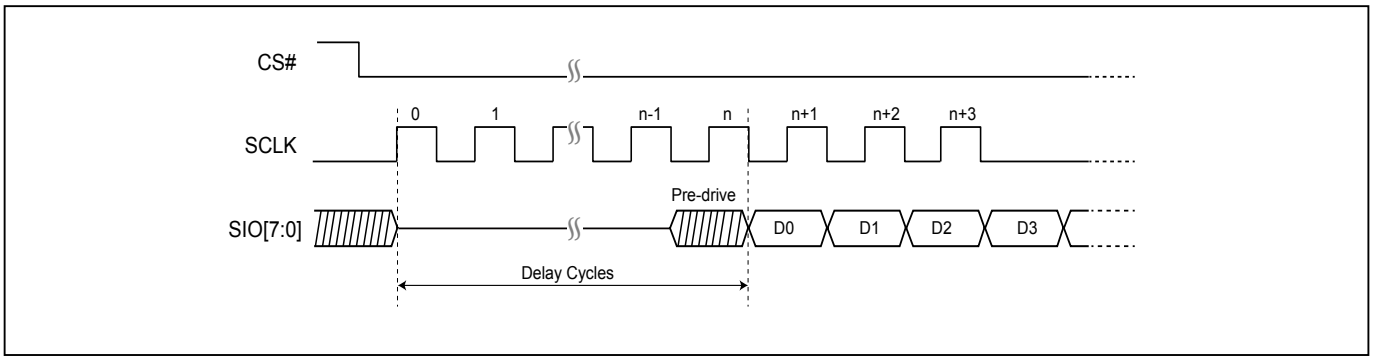


Note: If FBSD = 11, delay cycles is 21 and n is 20.
If FBSD = 10, delay cycles is 17 and n is 16.
If FBSD = 01, delay cycles is 15 and n is 14.
If FBSD = 00, delay cycles is 11 and n is 10.

**Figure 51. Fast Boot Sequence (DTR-OPI Mode)**

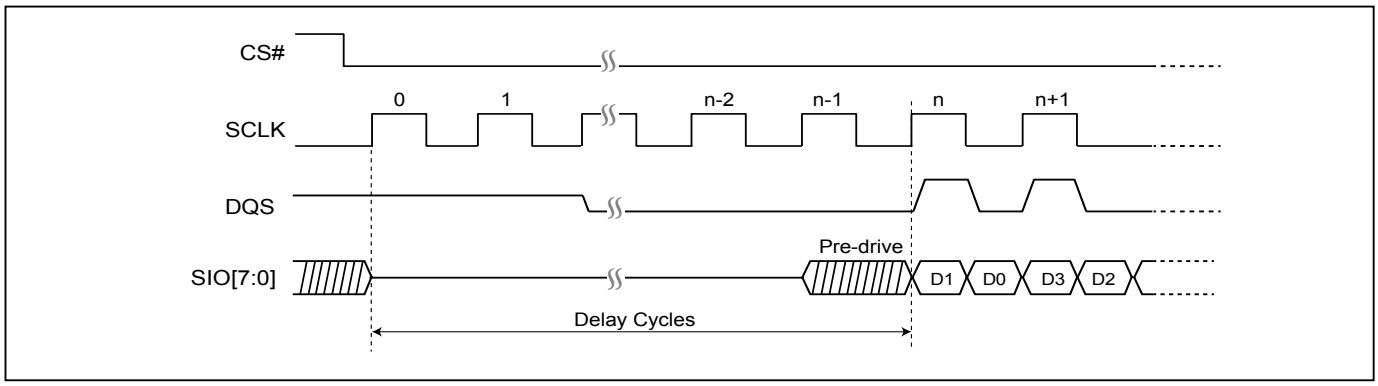


Note: If FBSD = 11, delay cycles is 21 and n is 21.
If FBSD = 10, delay cycles is 17 and n is 17.
If FBSD = 01, delay cycles is 15 and n is 15.
If FBSD = 00, delay cycles is 11 and n is 11.


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Figure 52. Read Fast Boot Register (RDFBR) Sequence**

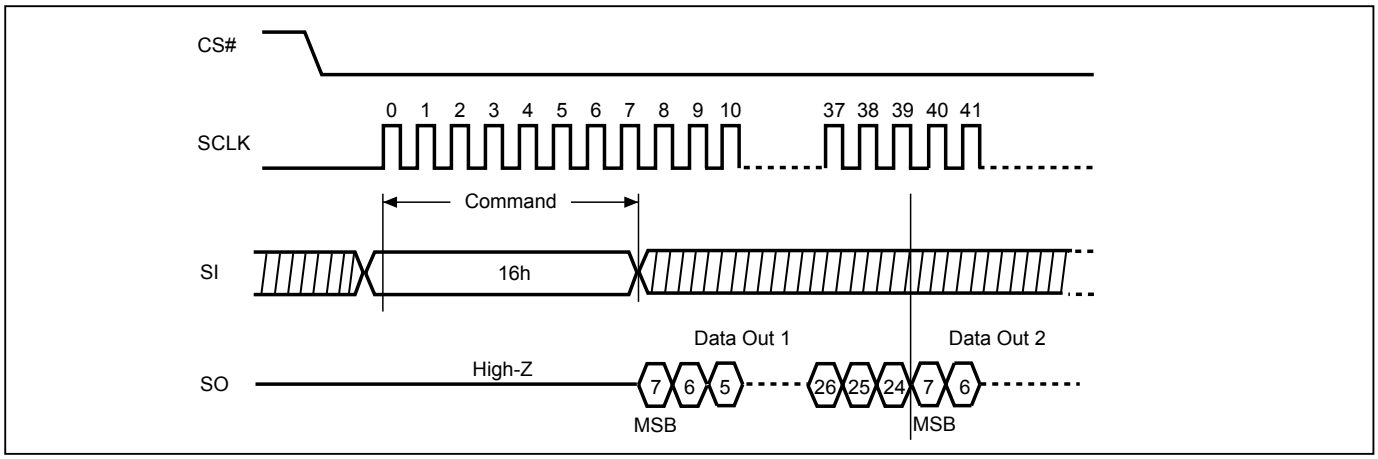



**Figure 53. Read Fast Boot Register (RDFBR) Sequence (STR-OPI Mode)**


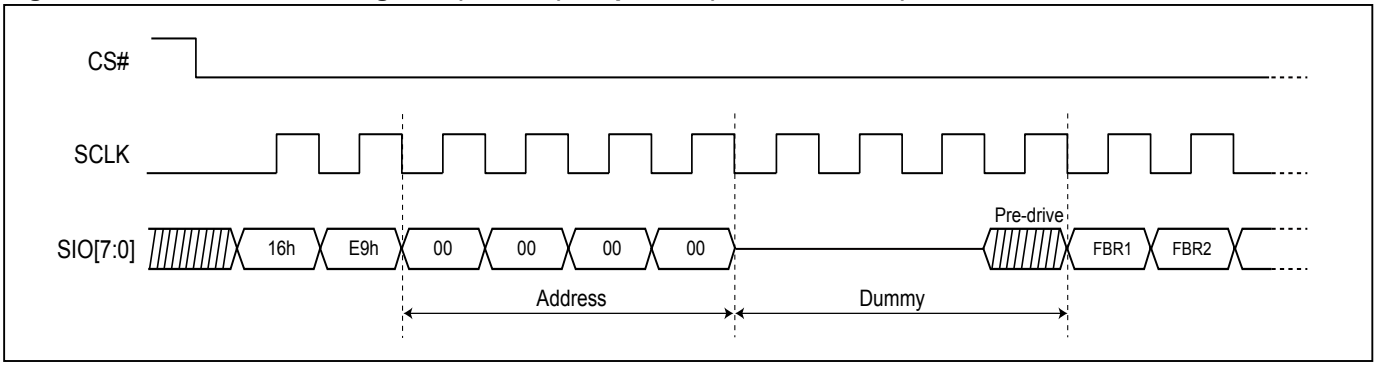



**Figure 54. Read Fast Boot Register (RDFBR) Sequence (DTR-OPI Mode)**



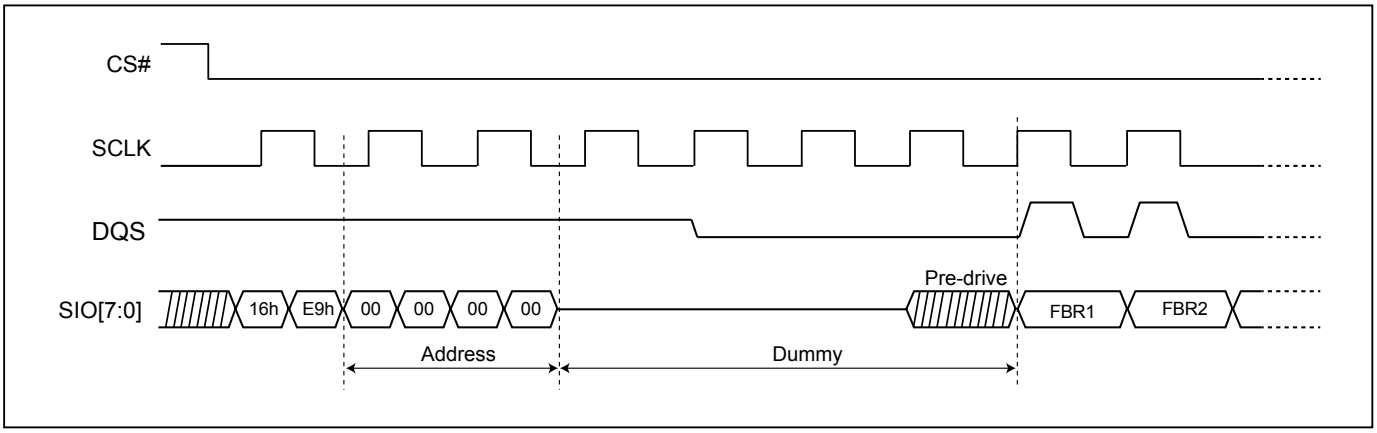

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150 0290-5940
Email:sales@manduic.com

**Figure 55. Write Fast Boot Register (WRFBR) Sequence**

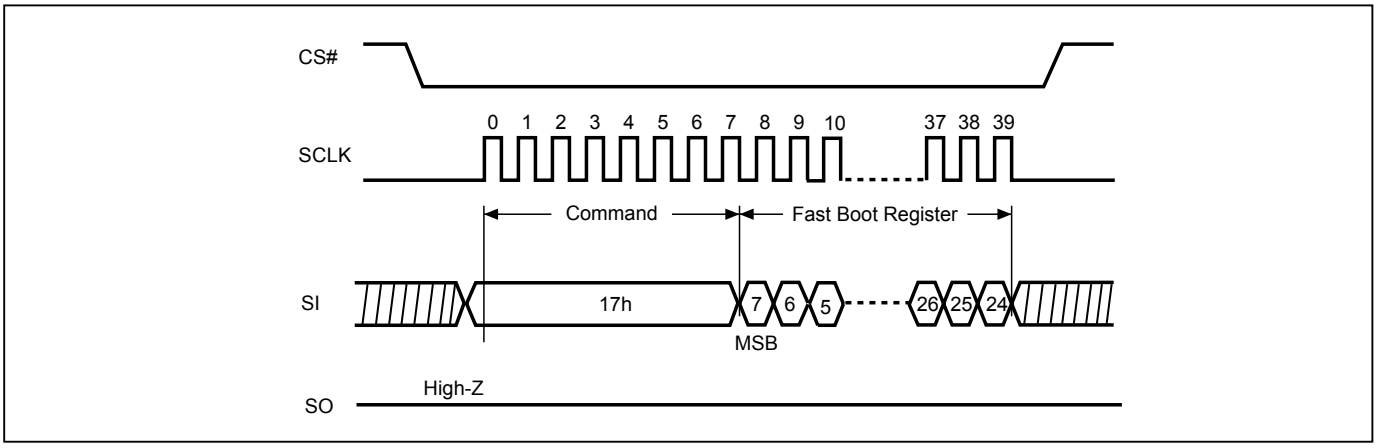



**Figure 56. Write Fast Boot Register (WRFBR) Sequence (STR-OPI Mode)**


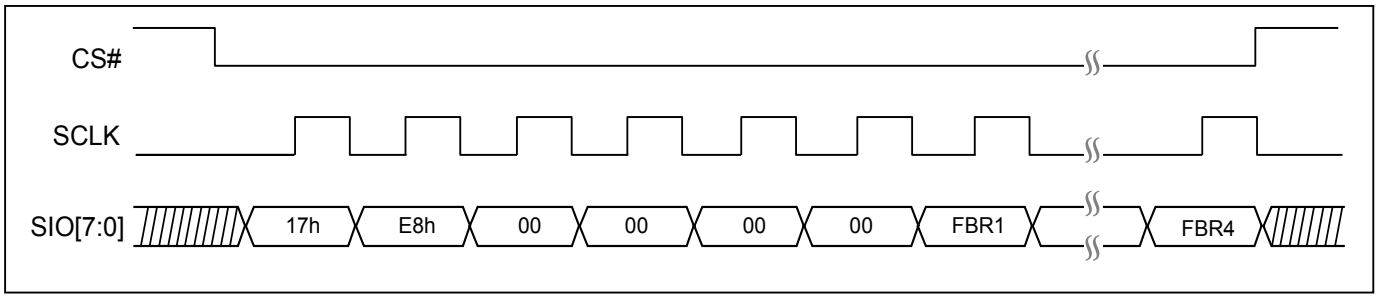



**Figure 57. Write Fast Boot Register (WRFBR) Sequence (DTR-OPI Mode)**



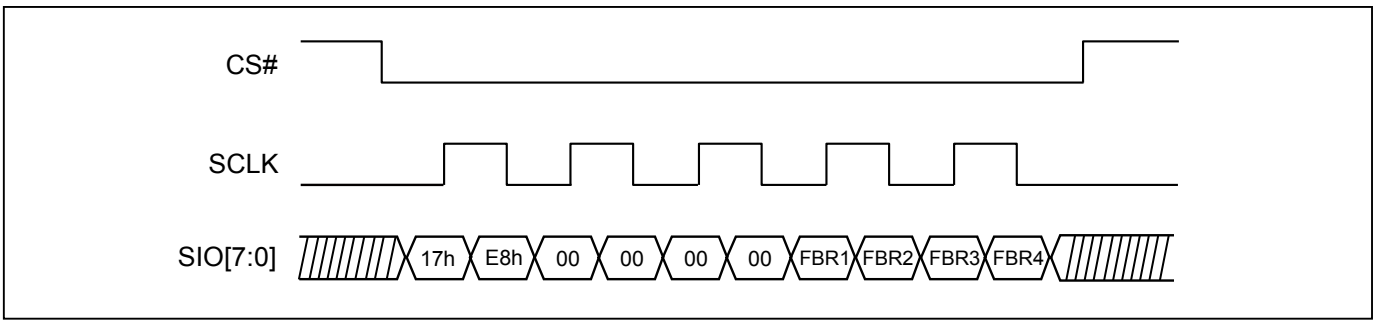

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Figure 58. Erase Fast Boot Register (ESFBR) Sequence**

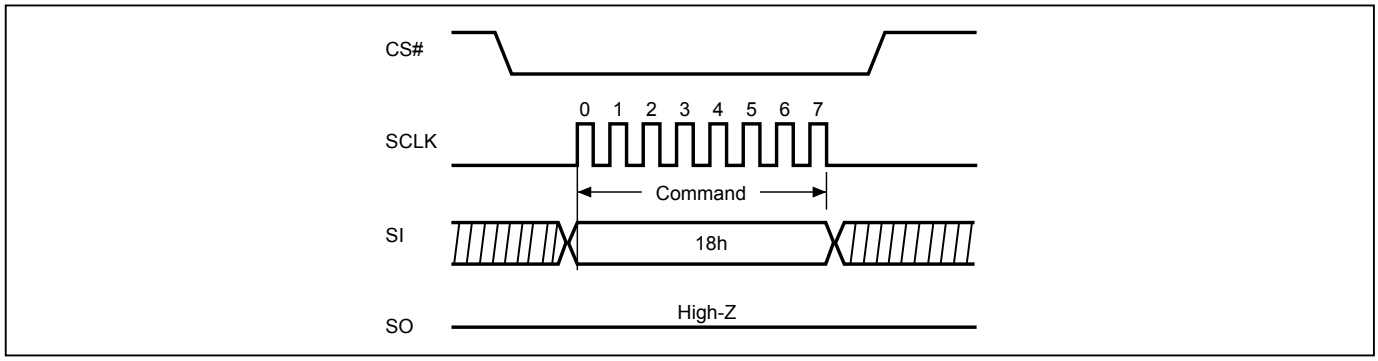



**Figure 59. Erase Fast Boot Register (ESFBR) Sequence (STR-OPI Mode)**


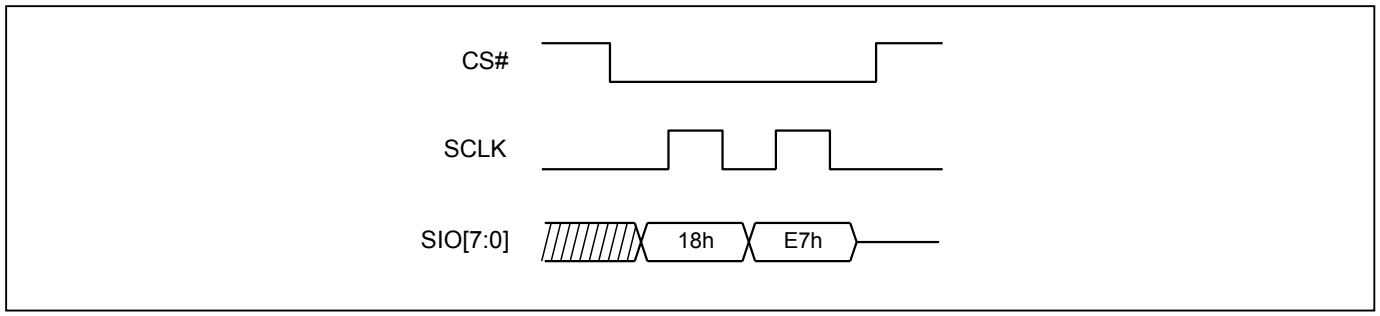



**Figure 60. Erase Fast Boot Register (ESFBR) Sequence (DTR-OPI Mode)**



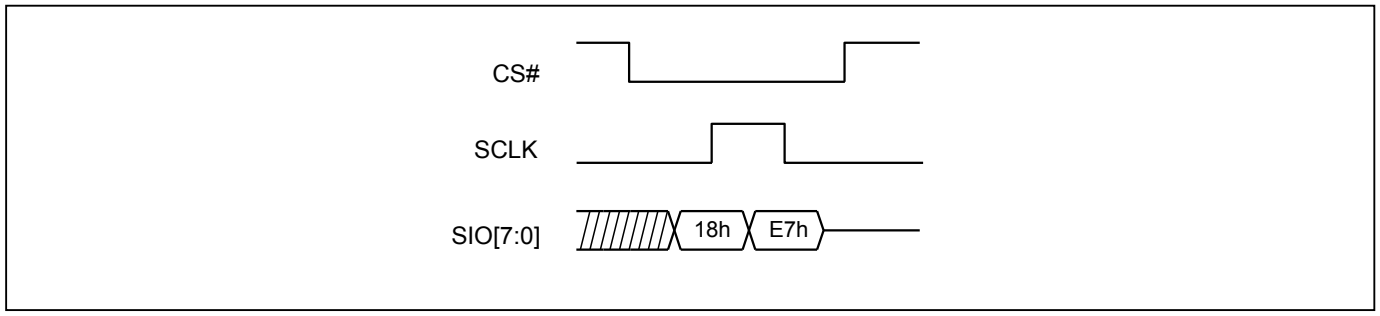

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com


### 10-18. Sector Erase (SE/SE3B/SE4B)

The Sector Erase (SE/SE3B/SE4B) instruction is for erasing the data of the chosen sector to be "1". The instruction is used for any 4K-byte sector. A Write Enable (WREN) instruction must execute to set the Write Enable Latch (WEL) bit before sending the Sector Erase (SE/SE3B/SE4B). Any address of the sector (Please refer to *"5. MEMORY ORGANIZATION"*) is a valid address for Sector Erase (SE/SE3B/SE4B) instruction. The CS# must go high exactly at the byte boundary (the least significant bit of the address byte been latched-in); otherwise, the instruction will be rejected and not executed.

The sequence of issuing SE/SE3B/SE4B instruction is: CS# goes low→ sending SE/SE3B/SE4B instruction code→ 3-byte or 4-byte address → CS# goes high.

The self-timed Sector Erase Cycle time (tSE) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked while the Sector Erase cycle is in progress. The WIP sets 1 during the tSE timing, and clears when Sector Erase Cycle is completed, and the Write Enable Latch (WEL) bit is cleared. If the Block is protected by BP bits (Block Protect Mode), the Sector Erase (SE/SE3B/SE4B) instruction will not be executed on the block.

**Figure 61. Sector Erase (SE/SE3B/SE4B) Sequence (SPI Mode)**

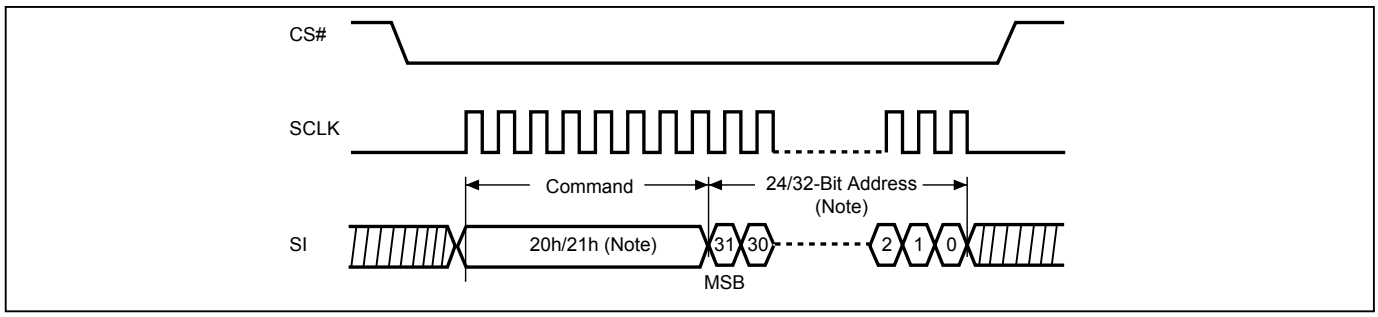


Note: The number of address cycles are based on different address mode. In 3-Byte command operation, it is 24-bit. In 4-Byte command operation, it is 32-bit.

**Figure 62. Sector Erase (SE) Sequence (STR-OPI Mode)**


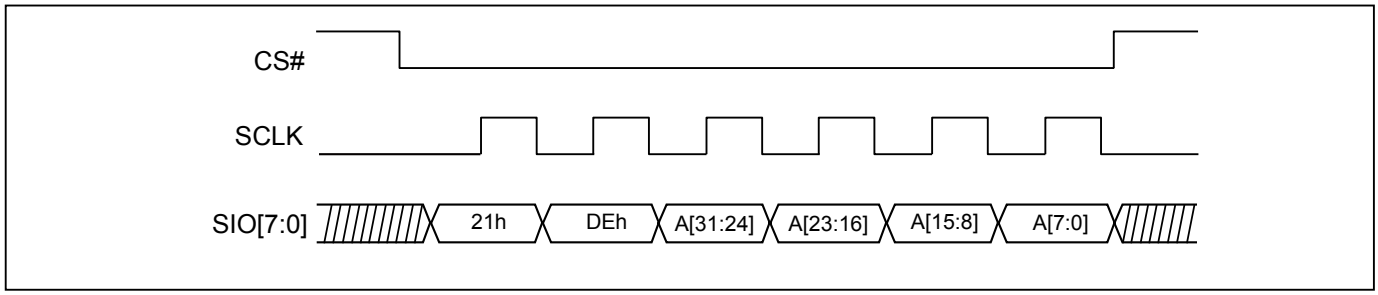



**Figure 63. Sector Erase (SE) Sequence (DTR-OPI Mode)**



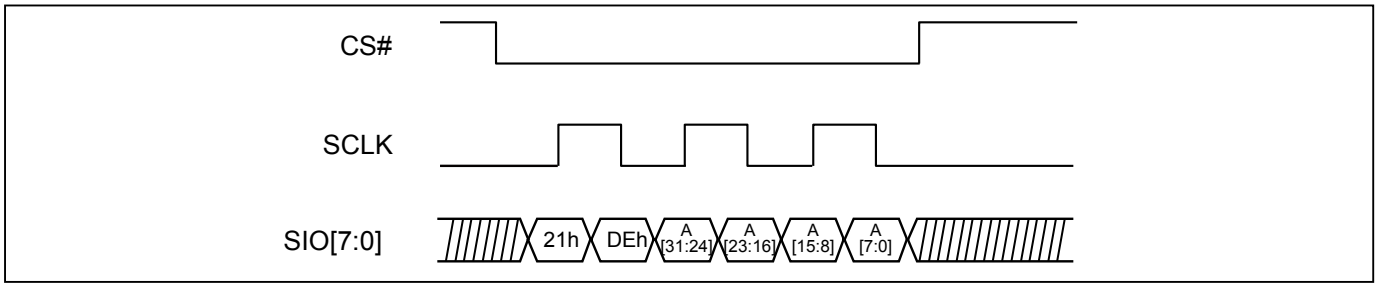

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150 0290-5940
Email:sales@manduic.com


### 10-19. Block Erase (BE/BE3B/BE4B)

The Block Erase (BE/BE3B/BE4B) instruction is for erasing the data of the chosen block to be "1". The instruction is used for 64K-byte block erase operation. A Write Enable (WREN) instruction must be executed to set the Write Enable Latch (WEL) bit before sending the Block Erase (BE/BE3B/BE4B). Any address of the block (Please refer to *"5. MEMORY ORGANIZATION"*) is a valid address for Block Erase (BE/BE3B/BE4B) instruction. The CS# must go high exactly at the byte boundary (the least significant bit of address byte been latched-in); otherwise, the instruction will be rejected and not executed.

The sequence of issuing BE/BE3B/BE4B instruction is: CS# goes low→ sending BE/BE3B/BE4B instruction code→ 3-byte or 4-byte address → CS# goes high.

The self-timed Block Erase Cycle time (tBE) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked while the Block Erase cycle is in progress. The WIP sets during the tBE timing, and clears when Block Erase Cycle is completed, and the Write Enable Latch (WEL) bit is reset. If the Block is protected by BP bits (Block Protect Mode), the Block Erase (BE/BE3B/BE4B) instruction will not be executed on the block.

**Figure 64. Block Erase (BE/BE3B/BE4B) Sequence (SPI Mode)**

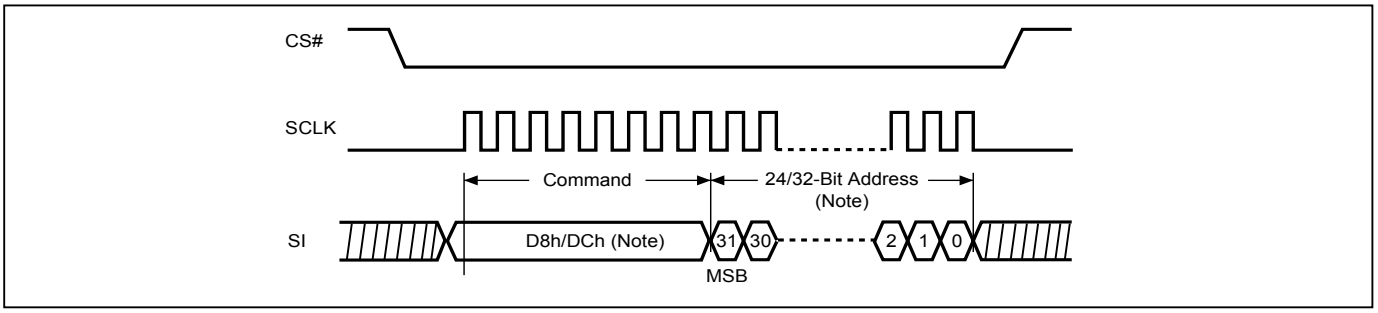


Note: The number of address cycles are based on different address mode. In 3-Byte command operation, it is 24-bit. In 4-Byte command operation, it is 32-bit.

**Figure 65. Block Erase (BE) Sequence (STR-OPI Mode)**


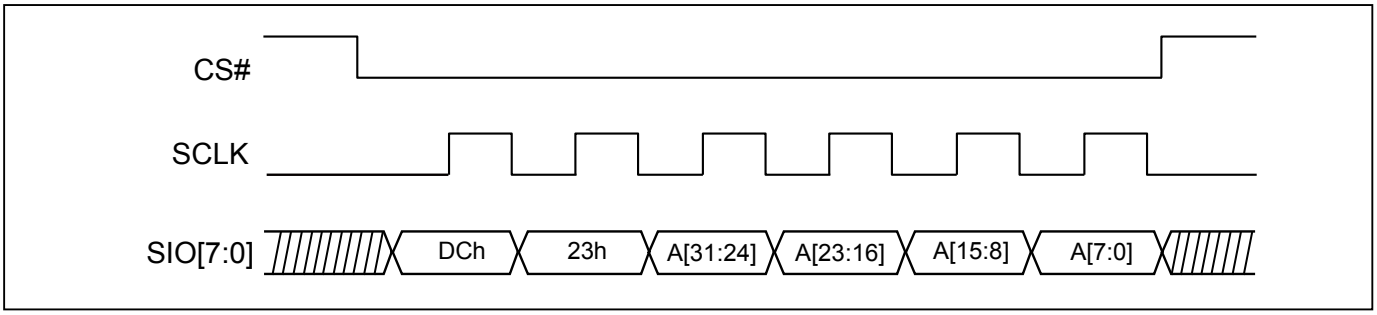



**Figure 66. Block Erase (BE) Sequence (DTR-OPI Mode)**



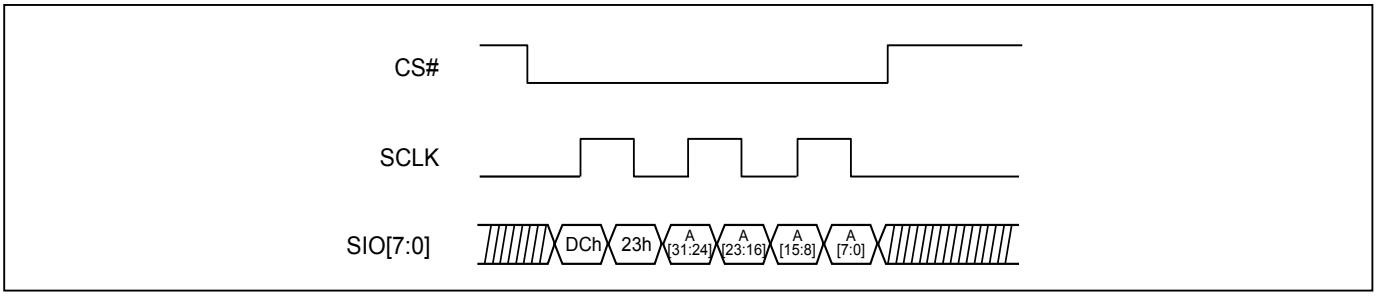

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0200-5940
Email:sales@manduic.com

### 10-20. Chip Erase (CE)

The Chip Erase (CE) instruction is for erasing the data of the whole chip to be "1". A Write Enable (WREN) instruction must be executed to set the Write Enable Latch (WEL) bit before sending the Chip Erase (CE). The CS# must go high exactly at the byte boundary, otherwise the instruction will be rejected and not executed.

The sequence of issuing CE instruction is: CS# goes low→sending CE instruction code→CS# goes high.

The self-timed Chip Erase Cycle time (tCE) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked while the Chip Erase cycle is in progress. The WIP sets during the tCE timing, and clears when Chip Erase Cycle is completed, and the Write Enable Latch (WEL) bit is cleared.

When the chip is under "Block protect (BP) Mode". The Chip Erase (CE) instruction will not be executed, if one (or more) sector is protected by BP3-BP0 bits. It will be only executed when BP3-BP0 all set to "0".

**Figure 67. Chip Erase (CE) Sequence (SPI Mode)**

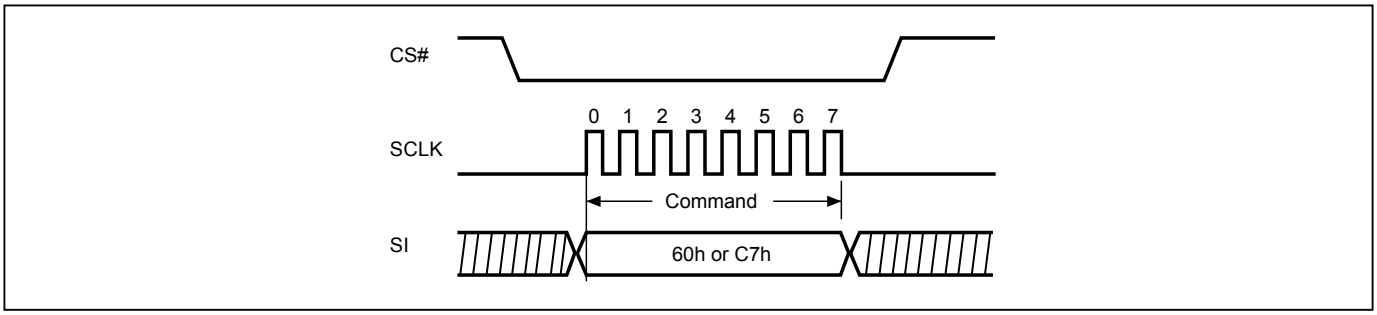



**Figure 68. Chip Erase (CE) Sequence (STR-OPI Mode)**


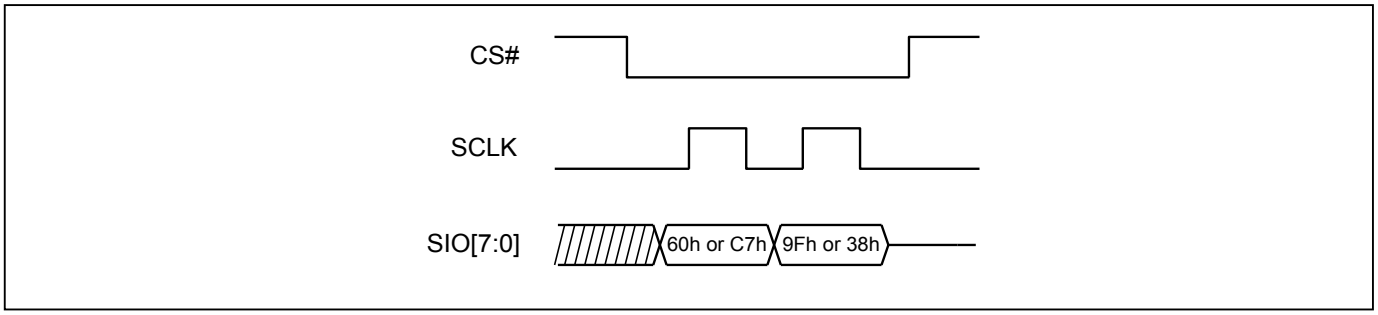



**Figure 69. Chip Erase (CE) Sequence (DTR-OPI Mode)**



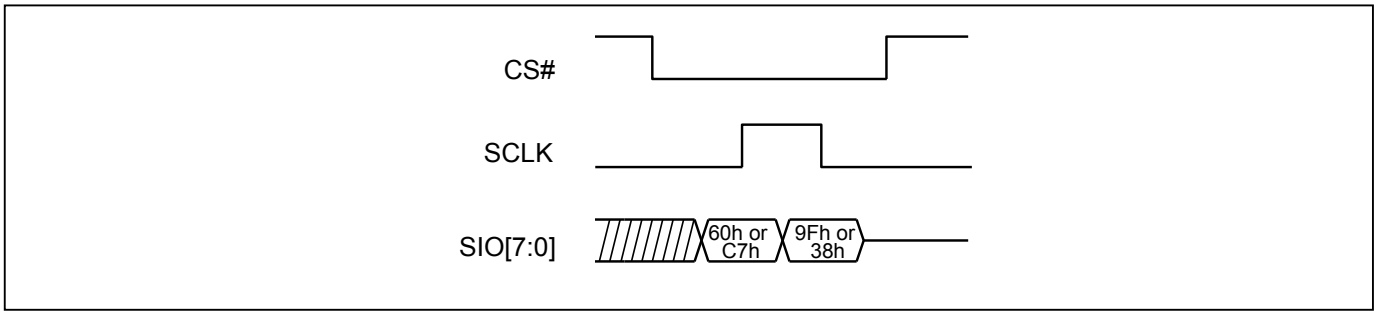

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

### 10-21. Page Program (PP/PP3B/PP4B)

The Page Program (PP/PP3B/PP4B) instruction is for programming the memory to be "0". A Write Enable (WREN) instruction must be executed to set the Write Enable Latch (WEL) bit before sending each Page Program (PP/PP3B/PP4B) command. The device programs only the last 256 data bytes sent to the device. The last address byte (the 8 least significant address bits, A7-A0) must be set to 0 for 256 bytes page program. If A7-A0 are not all zero, transmitted data that exceed page length are programmed from the starting address (32-bit address that last 8 bit are all 0) of currently selected page. If the data bytes sent to the device exceeds 256, the last 256 data byte is programmed at the request page and previous data will be disregarded. If the data bytes sent to the device has not exceeded 256, the data will be programmed at the request address of the page. There will be no effort on the other data bytes of the same page. Please refer *"12-1. ECC (Error Checking and Correcting)"* for Partial program or double program restriction.


In DTR OPI, the starting address given must be even address (A0=0) and data byte number must be even.

The sequence of issuing PP/PP3B/PP4B instruction is: CS# goes low→ sending PP/PP3B/PP4B instruction code→ 3-byte or 4-byte address → at least 1-byte on data in SPI and STR OPI; at least two bytes in DOPI→ CS# goes high.

The CS# must be kept to low during the whole Page Program cycle; The CS# must go high exactly at the byte boundary in SPI (the latest eighth bit of data being latched in), CS# must go high while SCLK is low in DOPI, otherwise the instruction will be rejected and will not be executed.

The self-timed Page Program Cycle time (tPP) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked while the Page Program cycle is in progress. The WIP sets during the tPP timing, and clears when Page Program Cycle is completed, and the Write Enable Latch (WEL) bit is cleared. If the page is protected by BP bits (Block Protect Mode), the Page Program (PP/PP3B/PP4B) instruction will not be executed.

**Figure 70. Page Program (PP/PP3B/PP4B) Sequence (SPI Mode)**

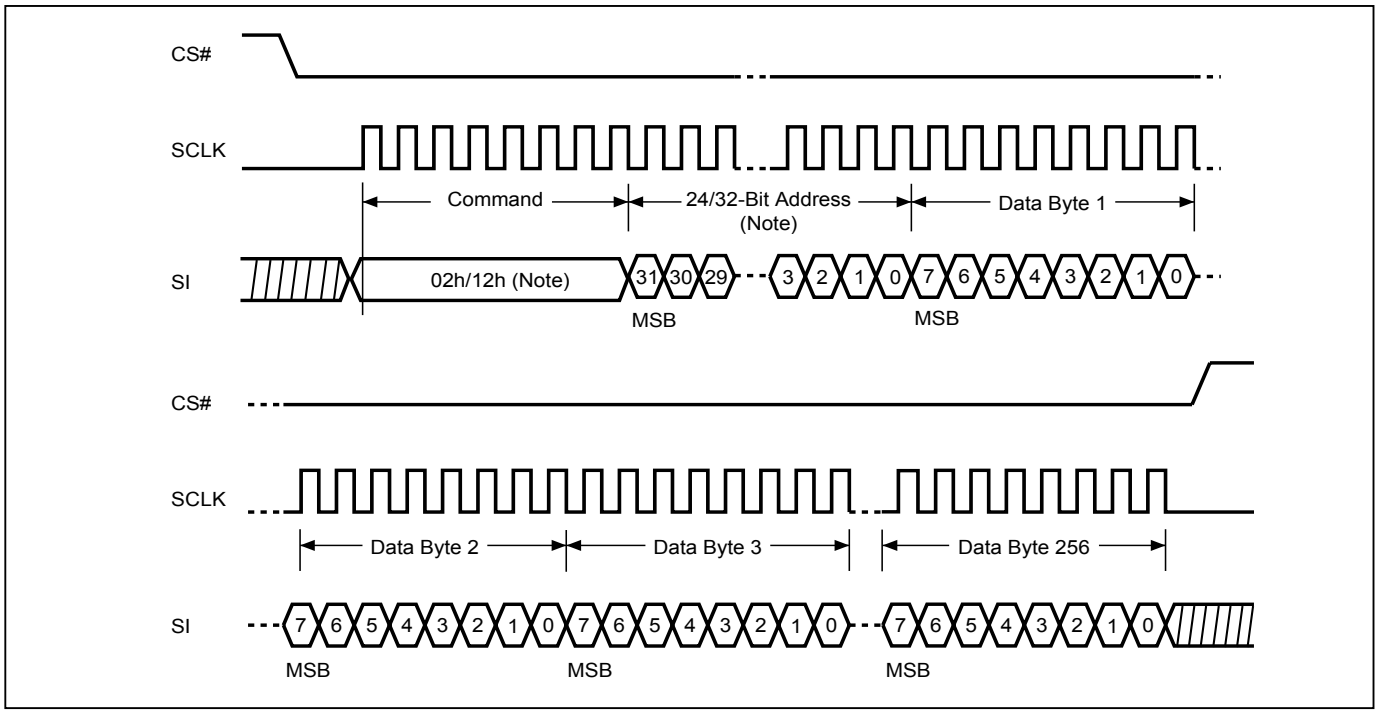


Note: The number of address cycles are based on different address mode. In 3-Byte command operation, it is 24-bit. In 4-Byte command operation, it is 32-bit.


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Figure 71. Page Program (PP) Sequence (STR-OPI Mode)**


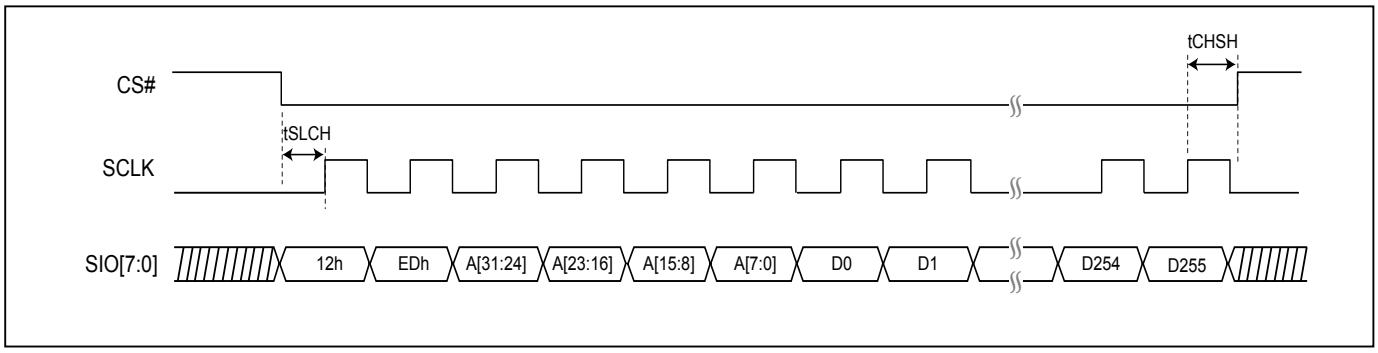



**Figure 72. Page Program (PP) Sequence (DTR-OPI Mode)**

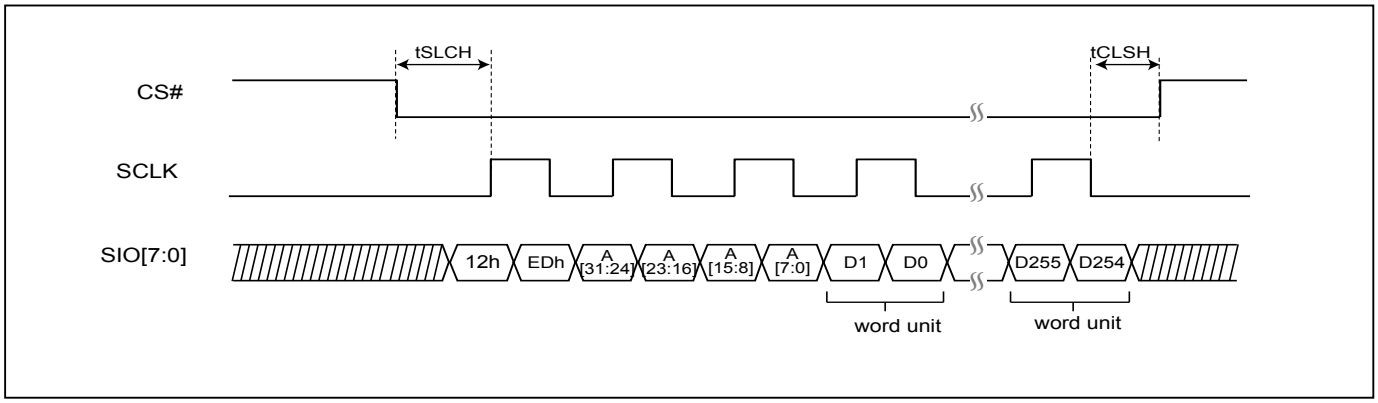


Note: CS# must go high while SCLK is low.


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

### 10-22. Deep Power-down (DP)

The Deep Power-down (DP) instruction places the device into a minimum power consumption state, Deep Power down mode, in which the quiescent current is reduced from ISB1 to ISB2.

The sequence of issuing DP instruction: CS# goes low→ send DP instruction code→ CS# goes high. The CS# must go high at the byte boundary; otherwise the instruction will not be executed. SIO[3:1] are "don't care".

After CS# goes high there is a delay of tDP before the device transitions from Stand-by mode to Deep Power-down mode and the current reduces from ISB1 to ISB2.

The device exits Deep Power-down mode and returns to Stand-by mode if CS# pulses low for tCRDP or if the device is power-cycled or hardware reset. After CS# goes high, there is a delay of tRES1 before the device transitions from Deep Power-down mode back to Stand-by mode.

**Figure 73. Deep Power-down (DP) Sequence (SPI Mode)**


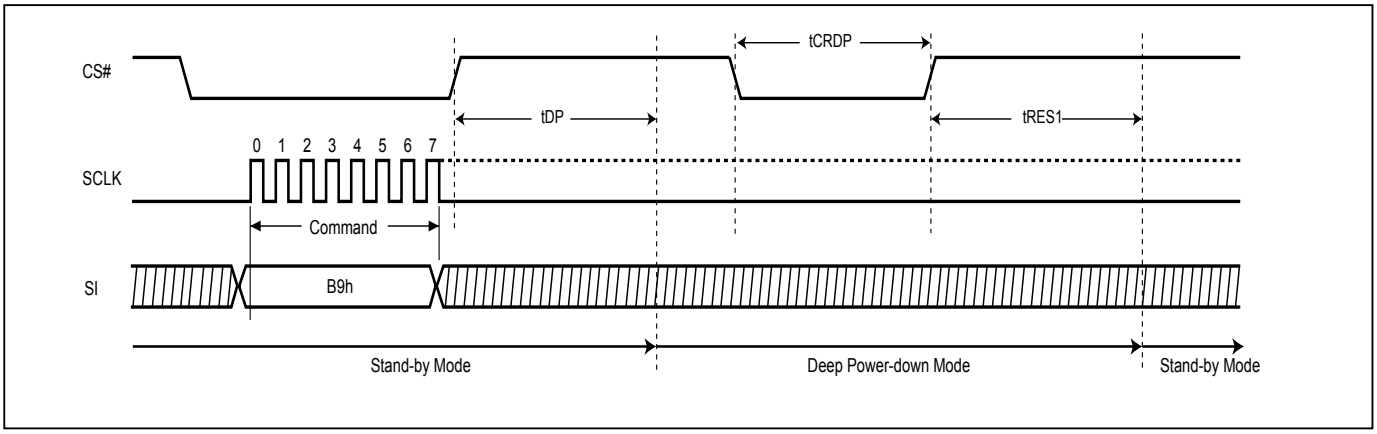




**Figure 74. Deep Power-down (DP) Sequence (STR-OPI Mode)**



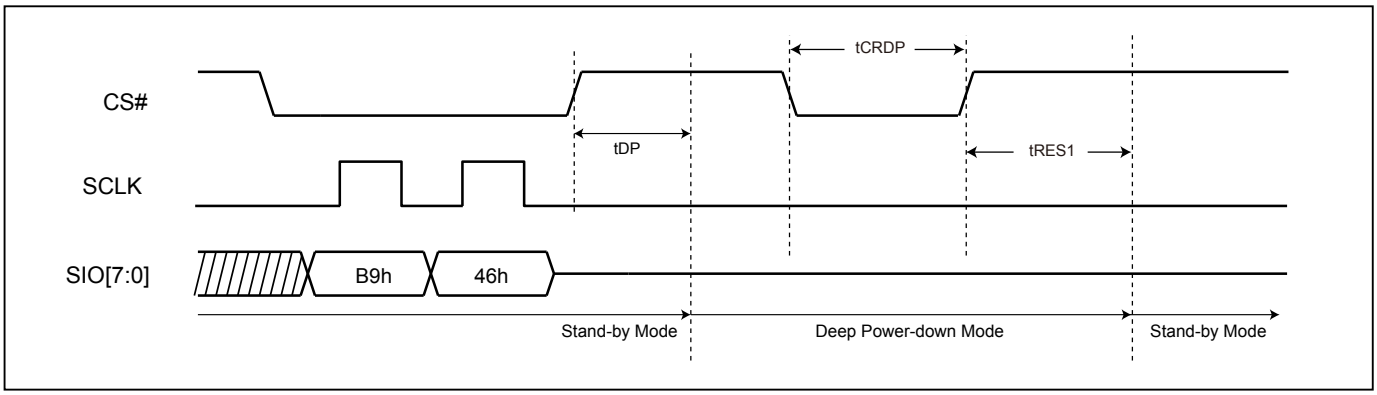

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Figure 75. Deep Power-down (DP) Sequence (DTR-OPI Mode)**

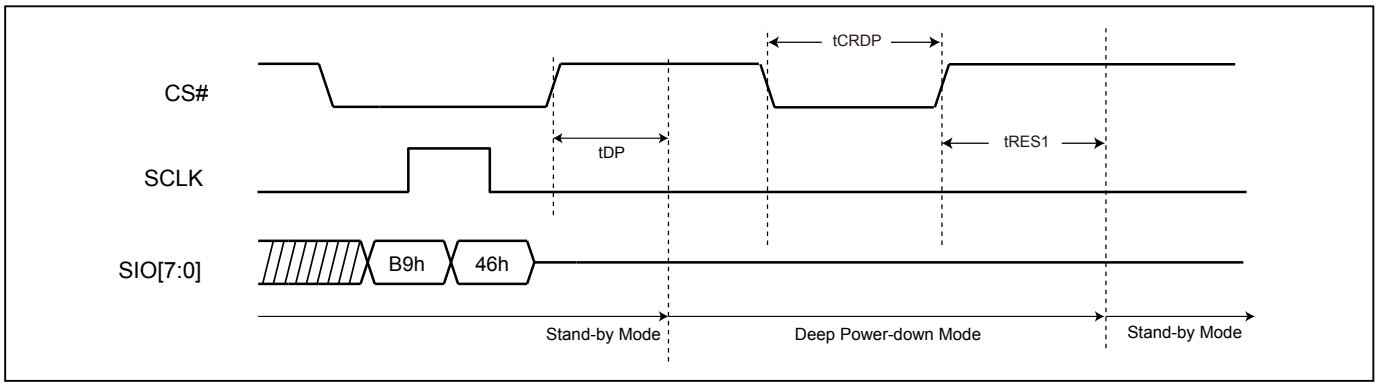


### 10-23. Enter Secured OTP (ENSO)

The ENSO instruction is for entering the additional 8K-bit secured OTP mode. While device is in 8K-bit secured OTP mode, main array access is not available. The additional 8K-bit secured OTP is independent from main array and may be used to store unique serial number for system identifier. After entering the Secured OTP mode, follow standard read or program procedure to read out the data or update data. The Secured OTP data cannot be updated again once it is lock-down.

The sequence of issuing ENSO instruction is: CS# goes low→ send ENSO instruction to enter Secured OTP mode→ CS# goes high.

Please note that after issuing ENSO command user can only access secure OTP region with standard read or program procedure. Furthermore, once security OTP is lock down, only read related commands are valid.

### 10-24. Exit Secured OTP (EXSO)

The EXSO instruction is for exiting the additional 8K-bit secured OTP mode.

The sequence of issuing EXSO instruction is: CS# goes low→ send EXSO instruction to exit Secured OTP mode→ CS# goes high.


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

## 10-25. Write Protection Selection (WPSEL)


There are two write protection methods provided on this device, (1) Block Protection (BP) mode or (2) Advanced Sector Protection mode. The protection modes are mutually exclusive. The WPSEL bit selects which protection mode is enabled. If WPSEL=0 (factory default), BP mode is enabled and Advanced Sector Protection mode is disabled. If WPSEL=1, Advanced Sector Protection mode is enabled and BP mode is disabled. The WPSEL command is used to set WPSEL=1. A WREN command must be executed to set the WEL bit before sending the WPSEL command. **Please note that the WPSEL bit is an OTP bit. Once WPSEL is set to "1", it cannot be programmed back to "0".**

When WPSEL = 0: Block Protection (BP) mode,
The memory array is write protected by the BP3~BP0 bits.

When WPSEL =1: Advanced Sector Protection mode,
Blocks are individually protected by their own SPB or DPB. On power-up, all blocks are write protected by the Dynamic Protection Bits (DPB) by default. The Advanced Sector Protection instructions WRLR, RDLR, WRPASS, RDPASS, PASSULK, WRSPB, ESSPB, WRDPB, RDDPB, GBLK, and GBULK are activated. The BP3~BP0 bits of the Status Register are disabled and have no effect.

The sequence of issuing WPSEL instruction is: CS# goes low → send WPSEL instruction to enable the Advanced Sector Protect mode → CS# goes high.

**Write Protection Selection**

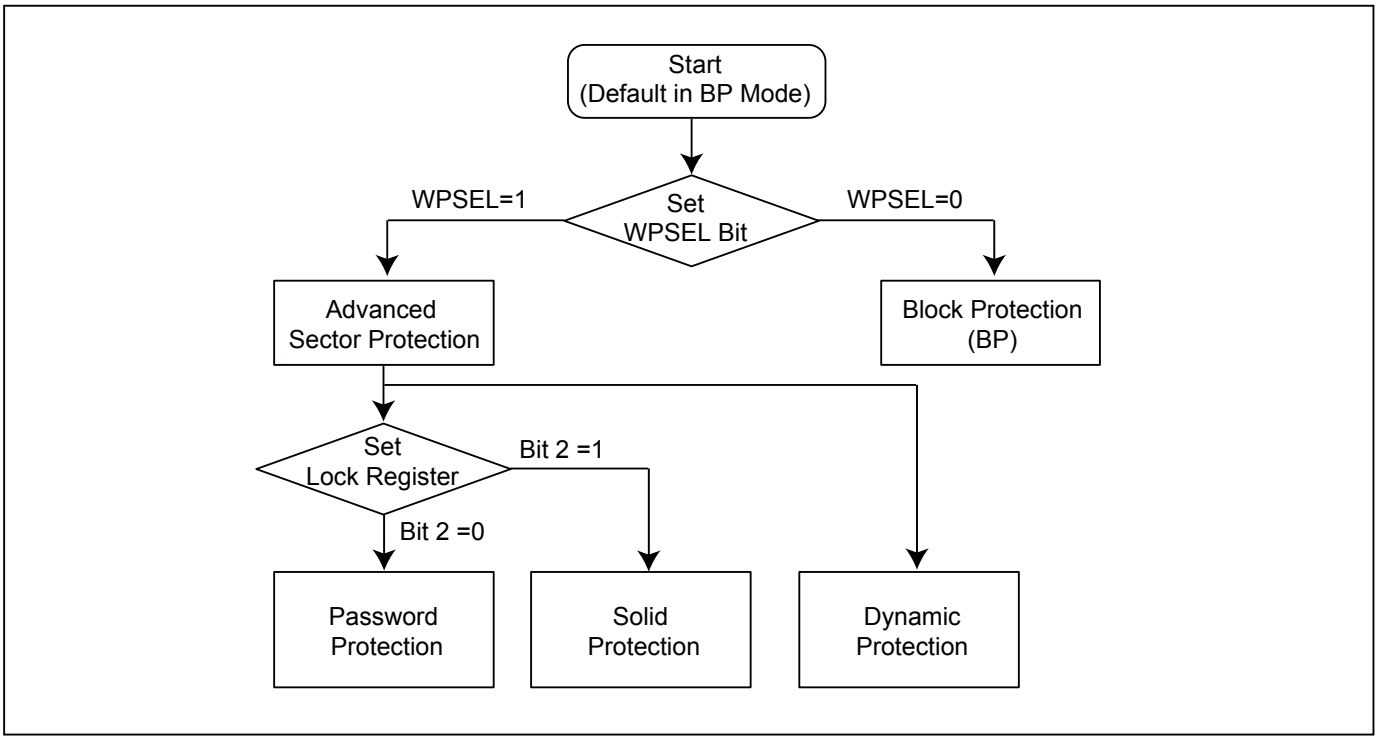



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com


## 10-26. Advanced Sector Protection

There are two ways to implement software Advanced Sector Protection on this device. Through these two protection methods, user can disable or enable the programming or erasing operation to any individual sector or all sectors.

There is a non-volatile (SPB) and volatile (DPB) protection bit related to the single sector in main flash array. Each of the sectors is protected from programming or erasing operation when the bit is set.

The figure below helps describing an overview of these methods. The device is default to the Solid mode when shipped from factory. The detail algorithm of advanced sector protection is shown as follows:

**Figure 76. Advanced Sector Protection Overview**

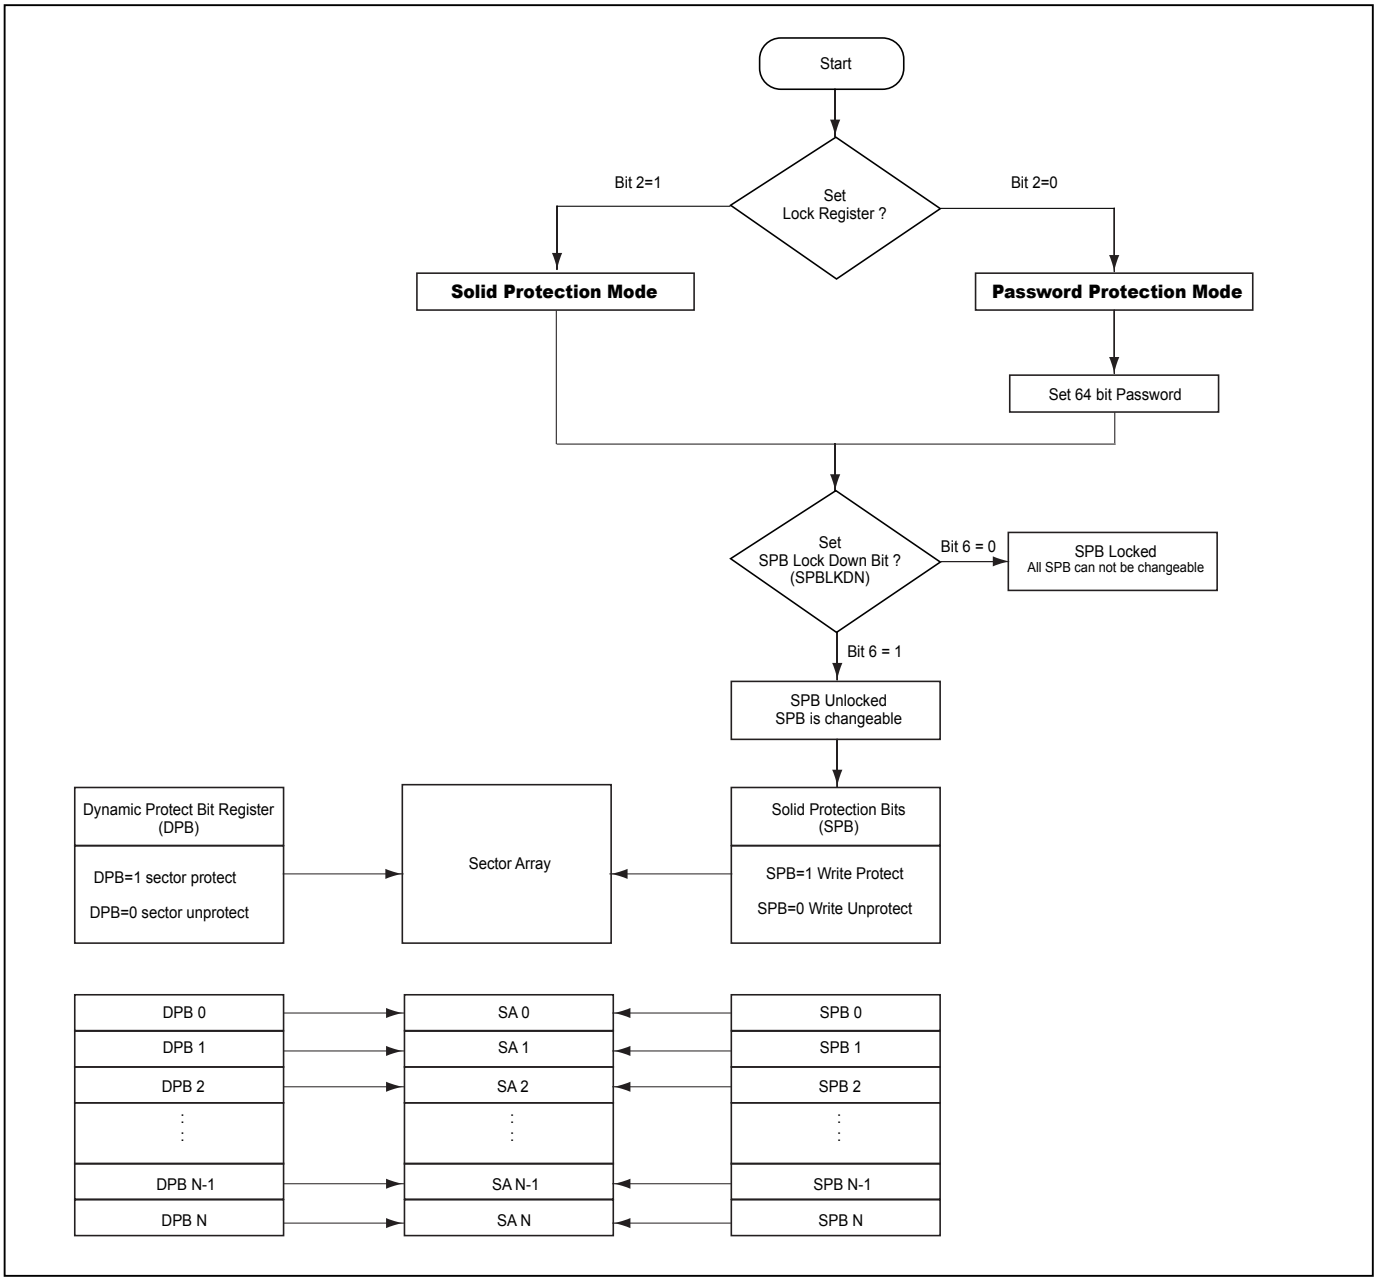



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

### 10-26-1. Lock Register

The Lock Register is a 8-bit register. Lock Register Bit[6] is SPB Lock Down Bit (SPBLKDN) which is assigned to control all SPB bit status. Lock Register Bit[2] is Password Protection Mode Lock Bit. Both bits are defaulted as 1 when shipping from factory.

When SPBLKDN is 1, SPB can be changed. When it is locked as 0, all SPB can not be changed.

Users can choose their favorite sector protecting method via setting Lock Register Bit[2] using WRLR command. The device default status was in Solid Protection Mode (Bit[2]=1), Once Bit[2] has been programmed (cleared to "0"), the device will enable the Password Protection Mode and lock in that mode permanently.

In Solid Protection Mode (Bit[2]=1, factory default), the SPBLKDN can be programmed using the WRLR command and permanently lock down the SPB bits. After programming SPBLKDN to 0, all SPB can not be changed anymore, and neither Lock Register Bit[2] nor Bit[6] can be altered anymore.

In Password Protection Mode (Bit[2]=0), the SPBLKDN becomes a volatile bit with default 0 (SPB bit protected). A correct password is required with PASSULK command to set SPBLKDN to 1. To clear SPBLKDN back to 0, a Hardware/Software Reset or power-up cycle is required.

If user selects Password Protection mode, the password setting is required. User can set password by issuing WRPASS command before Lock Register Bit[2] set to 0.

**Lock Register**

| Bits | Description | Bit Status | Default | Type |
|---|---|---|---|---|
| 7 | Reserved | Reserved | | Reserved |
| 6 | SPB Lock Down bit (SPBLKDN) | 0: SPB bit Protected<br>1: SPB bit Unprotected | Solid Protection Mode: 1<br>Password Protection Mode: 0 | Bit 2=1: OTP<br>Bit 2=0: Volatile |
| 5 to 3 | Reserved | Reserved | | Reserved |
| 2 | Password Protection Mode Lock Bit | 0=Password Protection Mode Enable<br>1= Solid Protection Mode | 1 | OTP |
| 1 to 0 | Reserved | Reserved | | Reserved |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Figure 77. Read Lock Register (RDLR) Sequence**

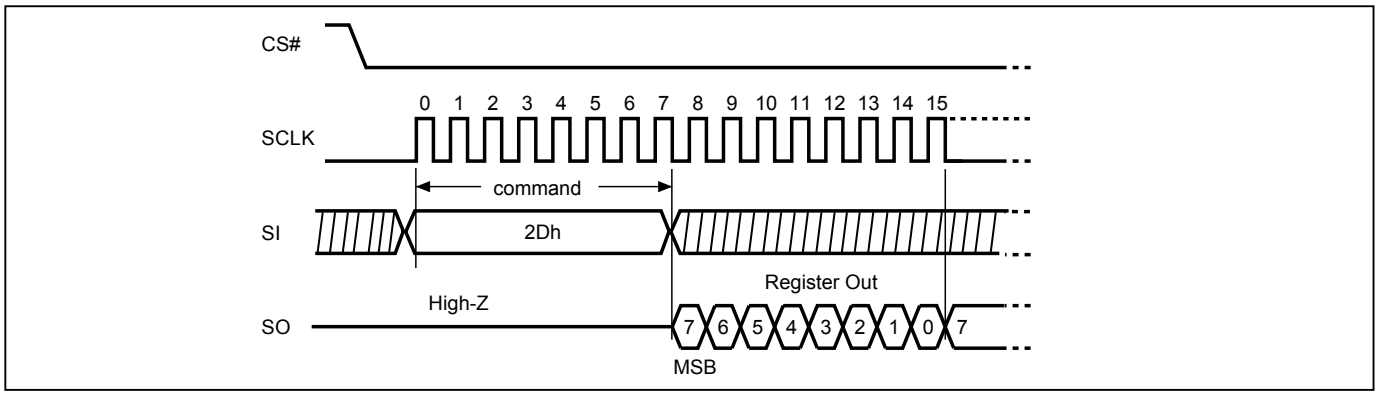



**Figure 78. Read Lock Register (RDLR) Sequence (STR-OPI Mode)**


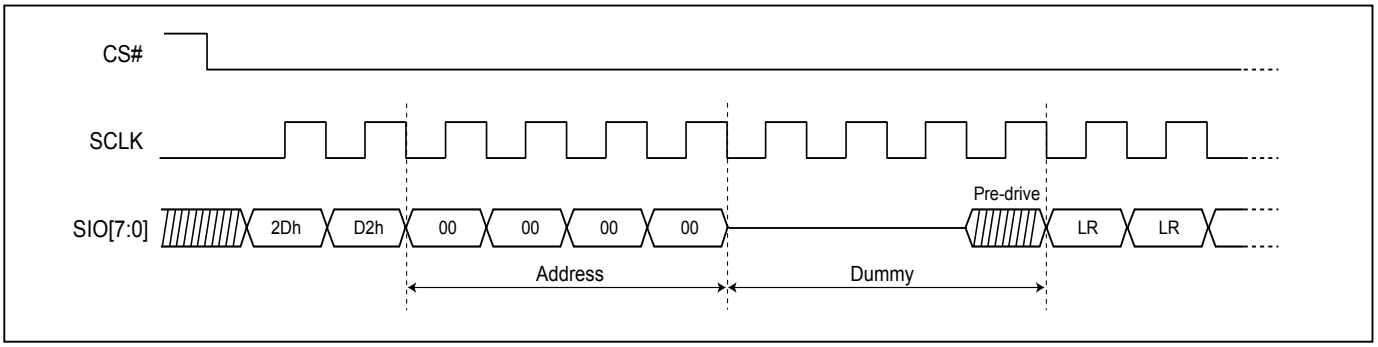



**Figure 79. Read Lock Register (RDLR) Sequence (DTR-OPI Mode)**



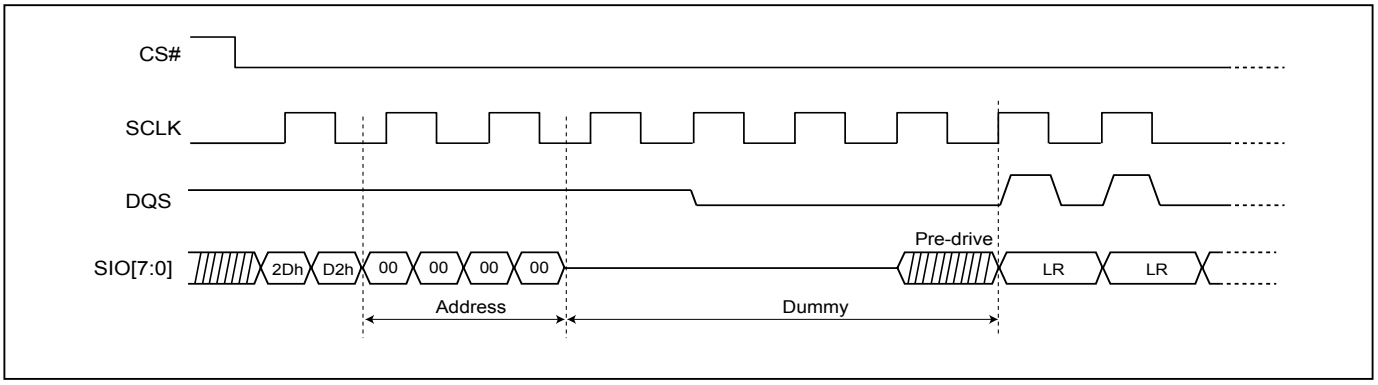

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Figure 80. Write Lock Register (WRLR) Sequence**

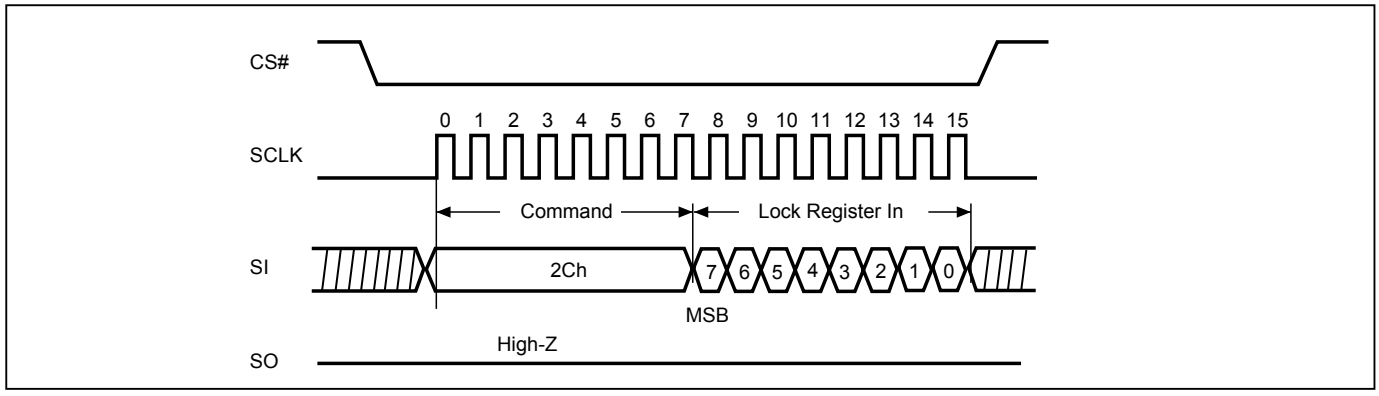



**Figure 81. Write Lock Register (WRLR) Sequence (STR-OPI Mode)**


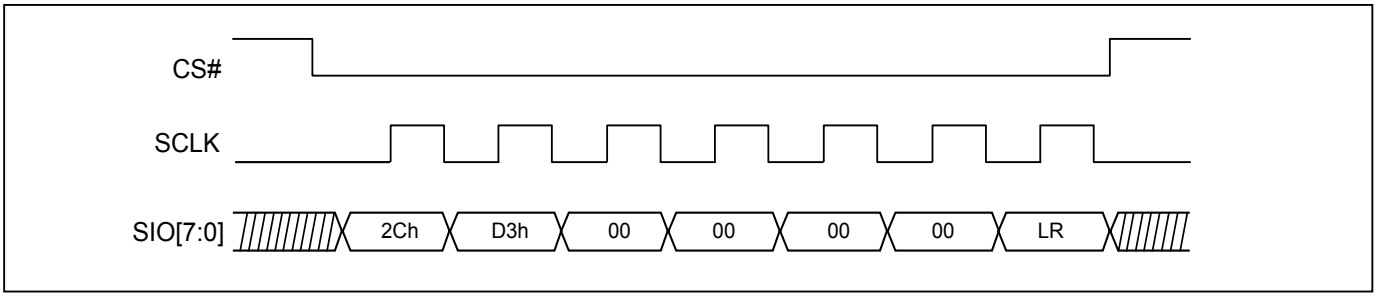



**Figure 82. Write Lock Register (WRLR) Sequence (DTR-OPI Mode)**

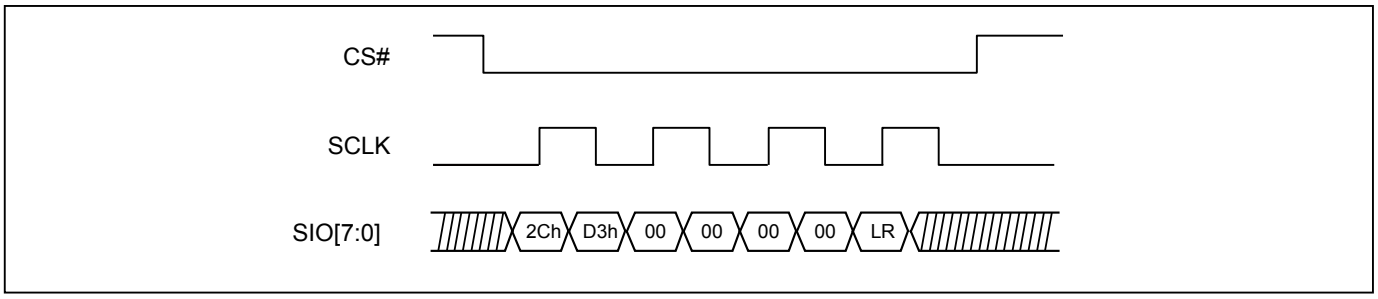


Note: CS# must go high while SCLK is low.

### 10-26-2. Solid Protection Bits

The Solid Protection Bits (SPBs) are nonvolatile bits for enabling or disabling write-protection to sectors and blocks. The SPB bits have the same endurance as the Flash memory. An SPB is assigned to each 4KB sector in the bottom and top 64KB of memory and to each 64KB block in the remaining memory. The factory default state of the SPB bits is “0”, which has the sector/block write-protection disabled.

When an SPB is set to “1”, the associated sector or block is write-protected. Program and erase operations on the sector or block will be inhibited. SPBs can be individually set to “1” by the WRSPB command. However, the SPBs cannot be individually cleared to “0”. Issuing the ESSPB command clears all SPBs to “0”. A WREN command must be executed to set the WEL bit before sending the WRSPB or ESSPB command.

The RDSPB command reads the status of the SPB of a sector or block. The RDSPB command returns 00h if the SPB is “0”, indicating write-protection is disabled. The RDSPB command returns FFh if the SPB is “1”, indicating write-protection is enabled.

***Note:*** If SPBLKDN=0, commands to set or clear the SPB bits will be ignored.

**SPB Register**

| Bit | Description | Bit Status | Default | Type |
|---|---|---|---|---|
| 7 to 0 | SPB (Solid Protection Bit) | 00h = Unprotect Sector / Block<br>FFh = Protect Sector / Block | 00h | Non-volatile |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Figure 83. Read SPB Status (RDSPB) Sequence**

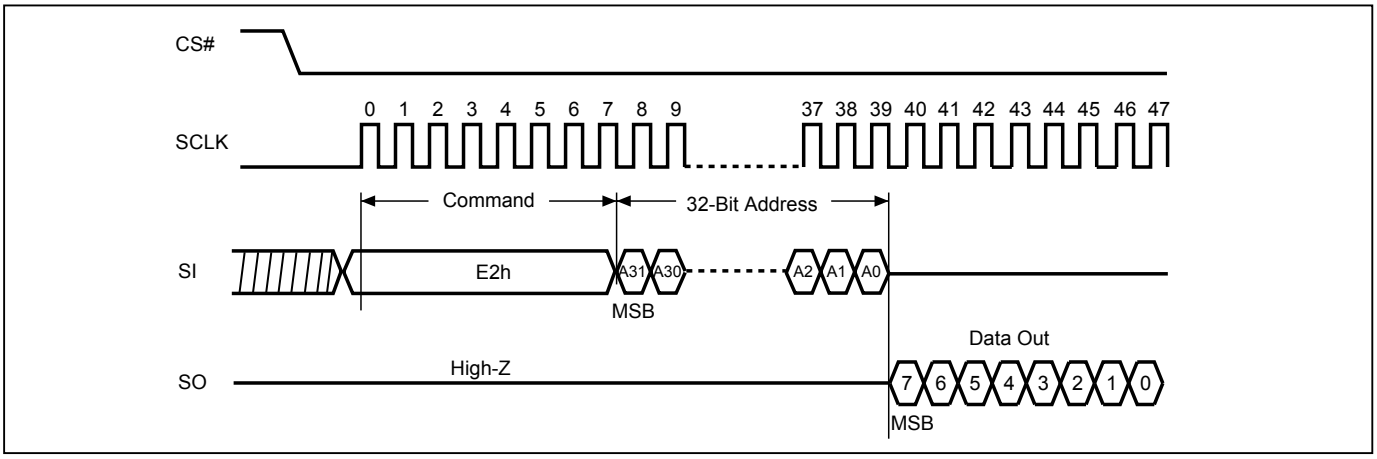



**Figure 84. Read SPB Status (RDSPB) Sequence (STR-OPI Mode)**


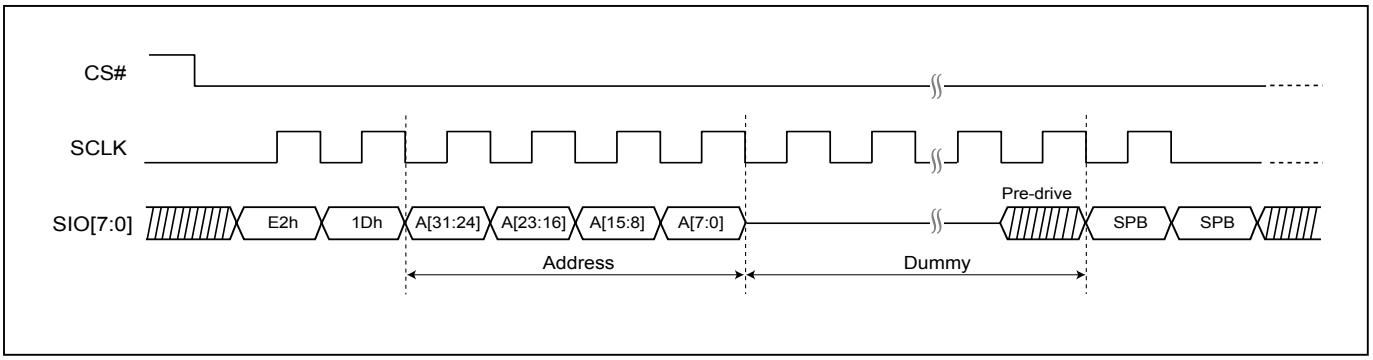



**Figure 85. Read SPB Status (RDSPB) Sequence (DTR-OPI Mode)**



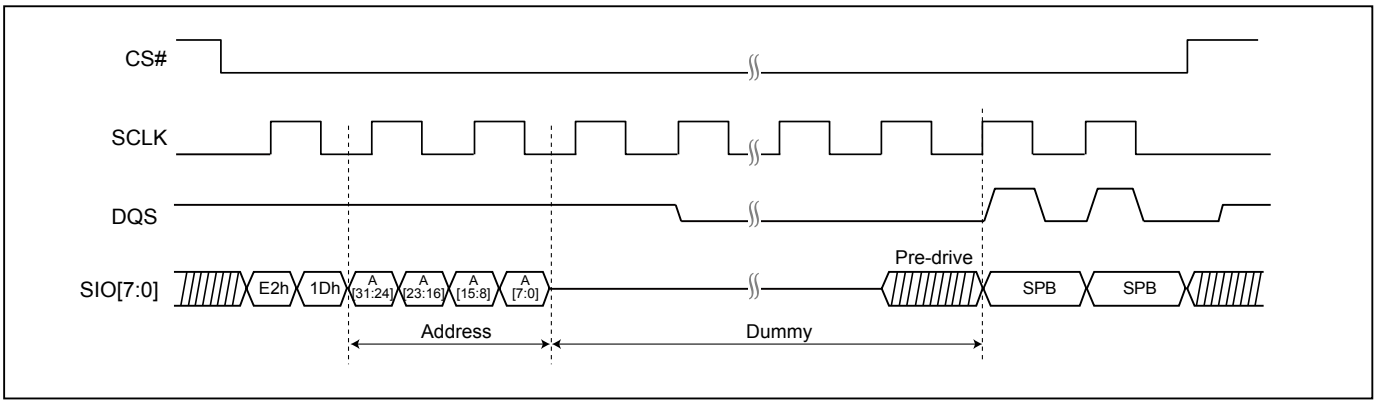

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Figure 86. SPB Erase (ESSPB) Sequence**

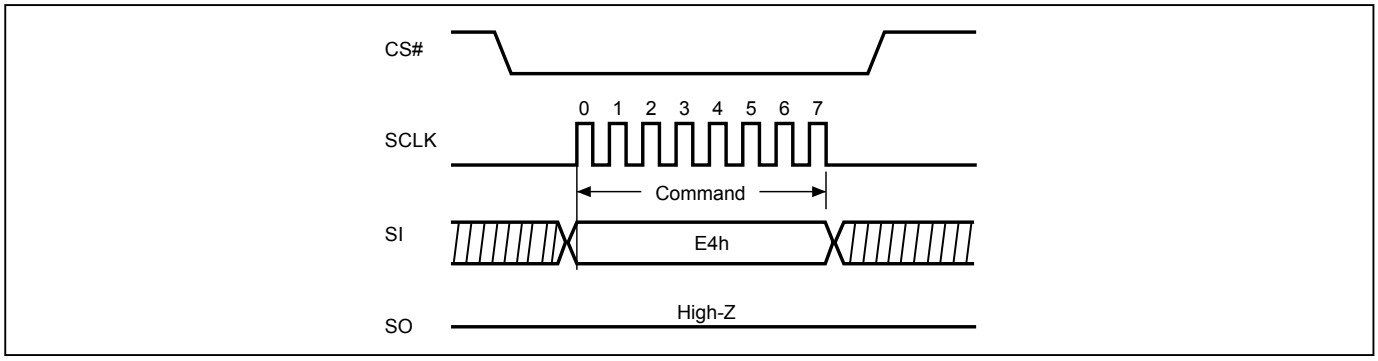



**Figure 87. SPB Erase (ESSPB) Sequence (STR-OPI Mode)**


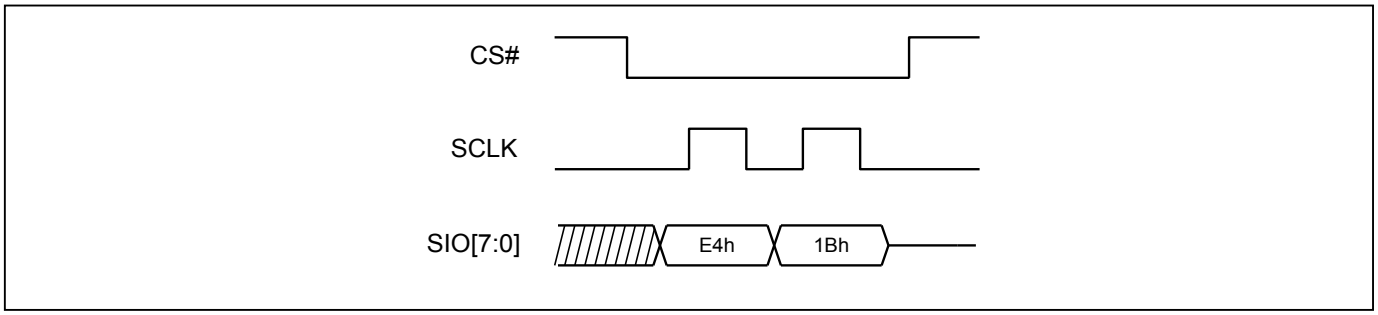



**Figure 88. SPB Erase (ESSPB) Sequence (DTR-OPI Mode)**



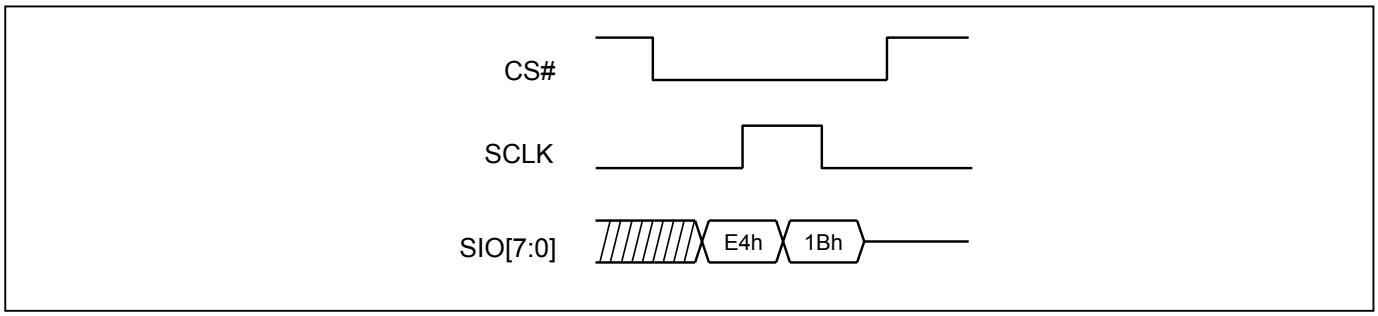

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Figure 89. SPB Program (WRSPB) Sequence**

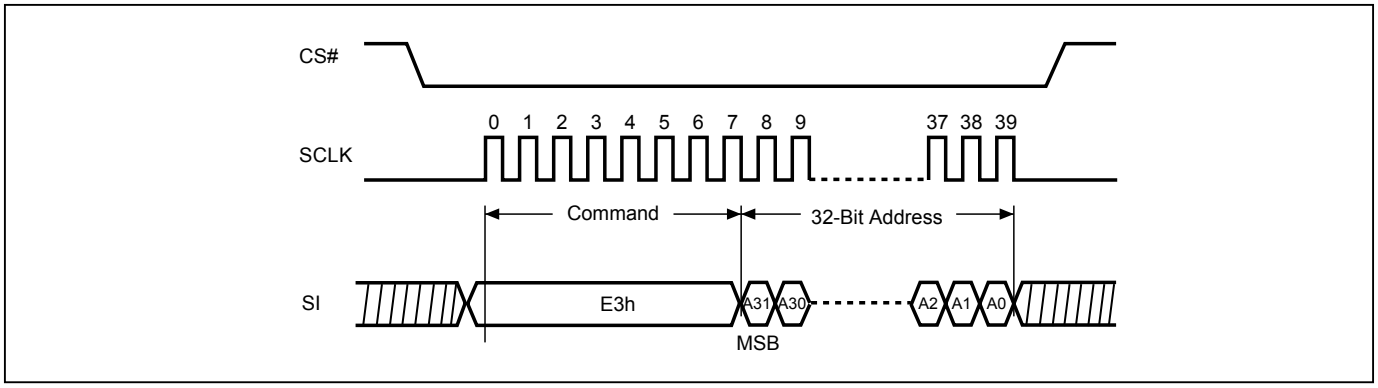



**Figure 90. SPB Program (WRSPB) Sequence (STR-OPI Mode)**


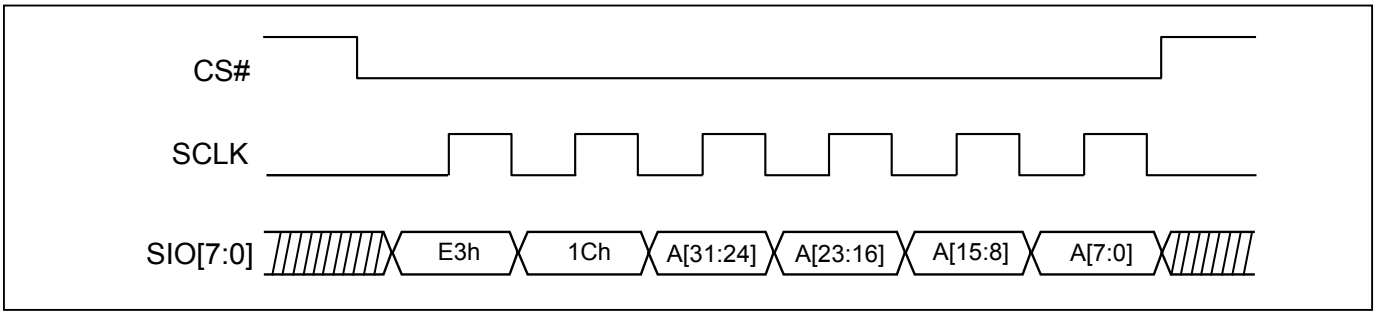



**Figure 91. SPB Program (WRSPB) Sequence (DTR-OPI Mode)**



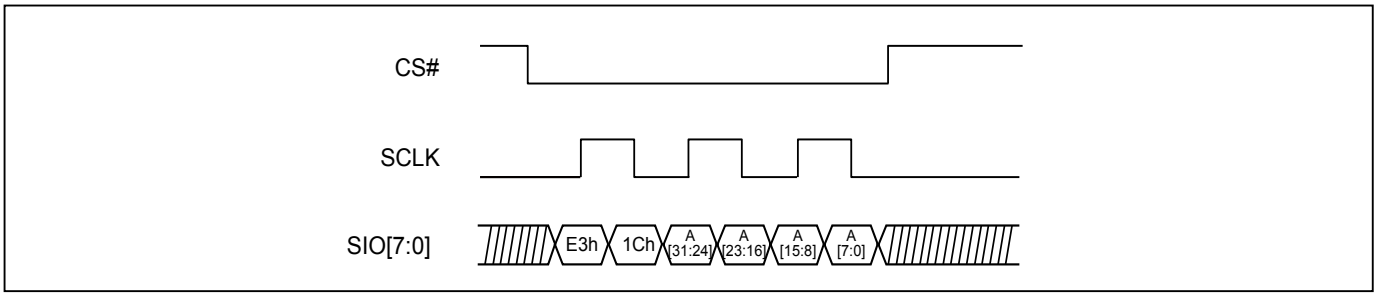

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

### 10-26-3. Dynamic Write Protection Bits

The Dynamic Protection features a volatile type protection to each individual sector. It can protect sectors from unintentional change, and is easy to disable when there are necessary changes.

All DPBs are default as protected (FFh) after reset or upon power up cycle. Via setting up Dynamic Protection bit (DPB) by write DPB command (WRDPB), user can cancel the Dynamic Protection of associated sector.

The Dynamic Protection only works on those unprotected sectors whose SPBs are cleared. After the DPB state is cleared to “0”, the sector can be modified if the SPB state is unprotected state.

**DPB Register**

| Bit | Description | Bit Status | Default | Type |
|---|---|---|---|---|
| 7 to 0 | DPB (Dynamic protected Bit) | 00h= DPB for the sector address unprotected<br>FFh= DPB for the sector address protected | FFh | Volatile |

**Figure 92. Read DPB Register (RDDPB) Sequence**


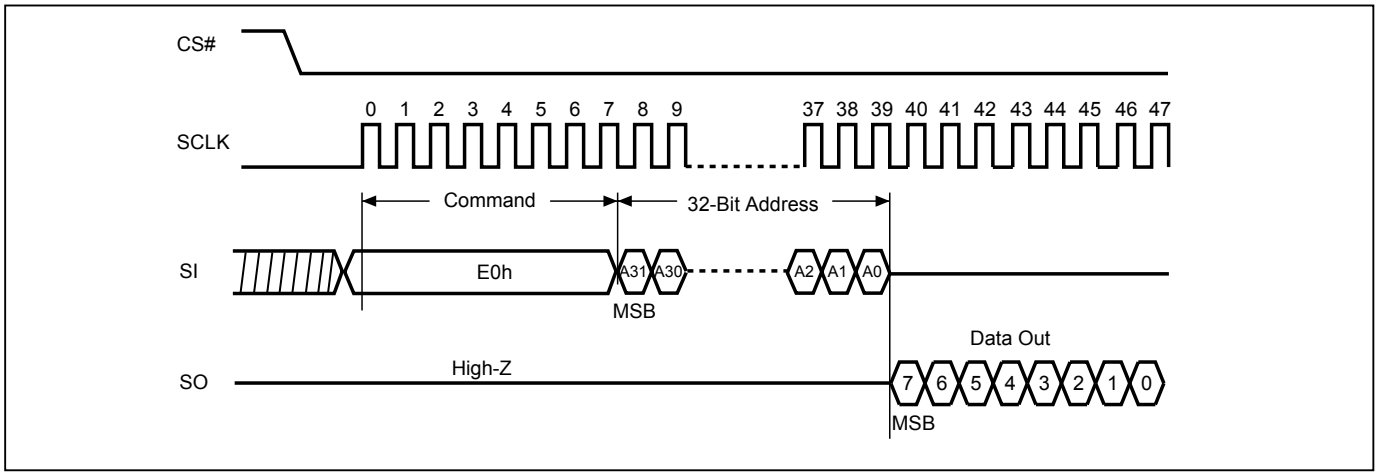



**Figure 93. Read DPB Register (RDDPB) Sequence (STR-OPI Mode)**



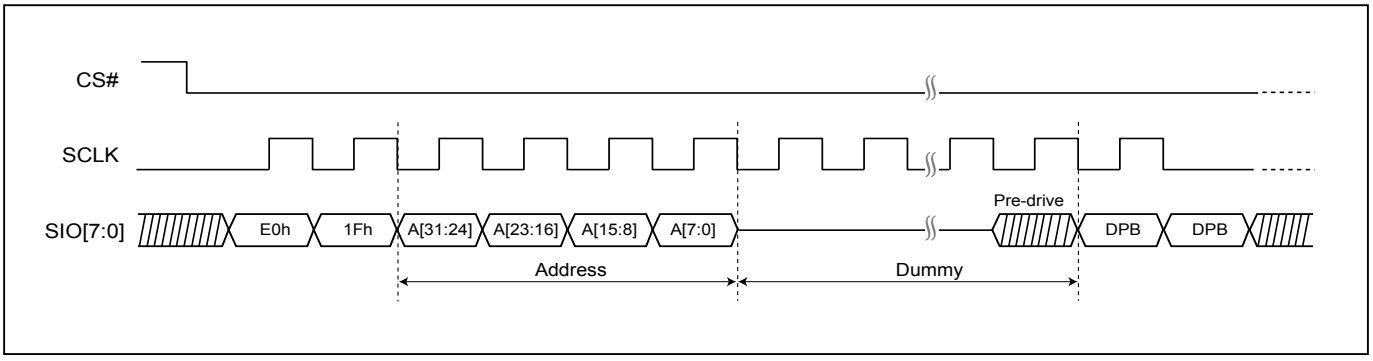

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150 0290-5940
Email:sales@manduic.com

**Figure 96. Read DPB Register (RDDPB) Sequence (DTR-OPI Mode)**

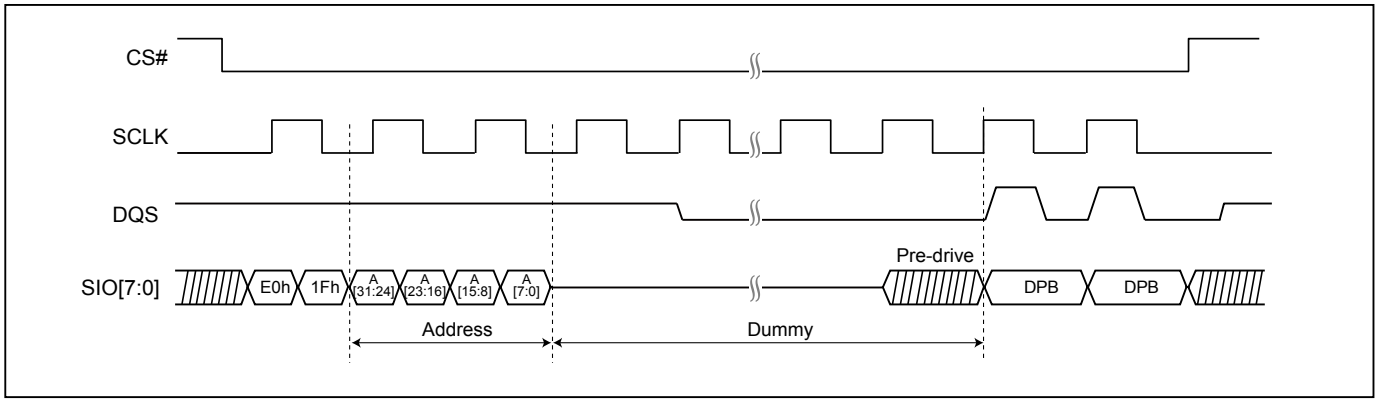



**Figure 94. Write DPB Register (WRDPB) Sequence**

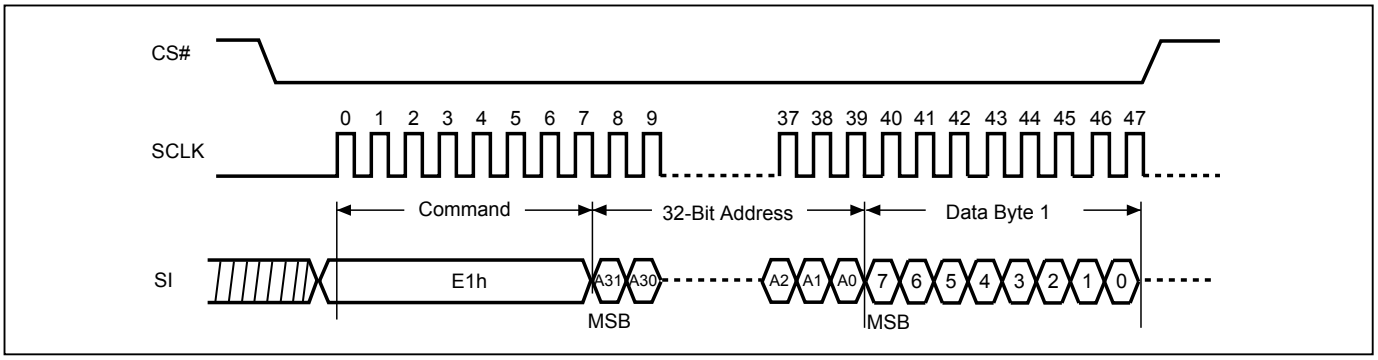



**Figure 95. Write DPB Register (WRDPB) Sequence (STR-OPI Mode)**


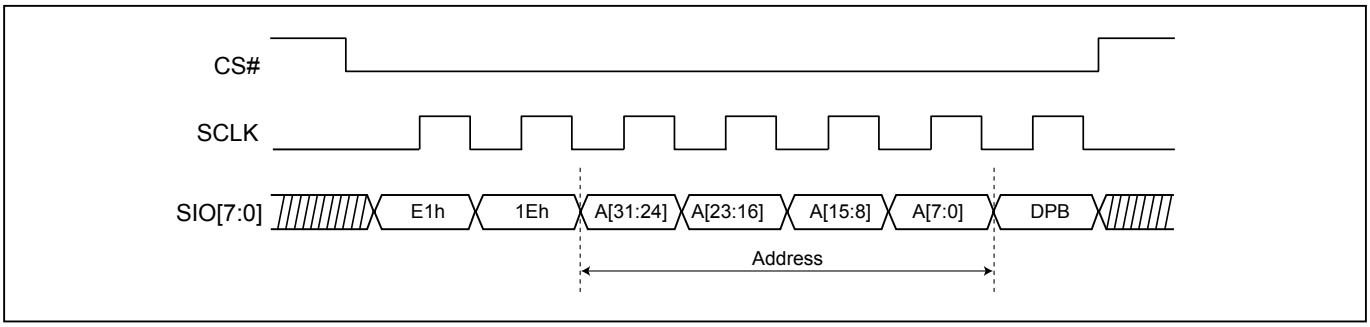



**Figure 97. Write DPB Register (WRDPB) Sequence (DTR-OPI Mode)**



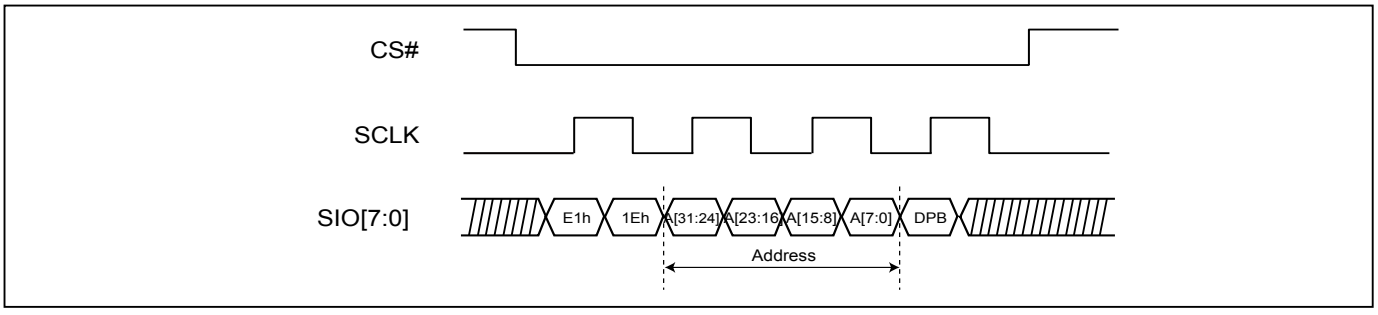

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

### 10-26-4. Password Protection Mode

Password Protection mode potentially provides a higher level of security than Solid Protection mode. In Password Protection mode, the SPBLKDN bit defaults to “0” after a power-on cycle or reset. When SPBLKDN=0, the SPBs are locked and cannot be modified. A 64-bit password must be provided to unlock the SPBs.

The PASSULK command with the correct password will set the SPBLKDN bit to “1” and unlock the SPB bits. After the correct password is given, a wait of 2us is necessary for the SPB bits to unlock. The Status Register WIP bit will clear to “0” upon completion of the PASSULK command. Once unlocked, the SPB bits can be modified. A WREN command must be executed to set the WEL bit before sending the PASSULK command.

Several steps are required to place the device in Password Protection mode. Prior to entering the Password Protection mode, it is necessary to set the 64-bit password and verify it. The WRPASS command writes the password and the RDPASS command reads back the password. Password verification is permitted until the Password Protection Mode Lock Bit has been written to “0”. Password Protection mode is activated by programming the Password Protection Mode Lock Bit to “0”. This operation is not reversible. Once the bit is programmed, it cannot be erased. The device remains permanently in Password Protection mode and the 64-bit password can neither be retrieved nor reprogrammed.

The password is all “1’s” when shipped from the factory. The WRPASS command can only program password bits to “0”. The WRPASS command cannot program “0’s” back to “1’s”. All 64-bit password combinations are valid password options. A WREN command must be executed to set the WEL bit before sending the WRPASS command.

- The unlock operation will fail if the password provided by the PASSULK command does not match the stored password. This will set the P_FAIL bit to “1” and insert a delay before clearing the WIP bit to “0”. User has to wait 150us before issuing another PASSULK command. This restriction makes it impractical to attempt all combinations of a 64-bit password (such an effort would take millions of years). Monitor the WIP bit to determine whether the device has completed the PASSULK command.

- When a valid password is provided, the PASSULK command does not insert the delay before returning the WIP bit to zero. The SPBLKDN bit will set to “1” and the P_FAIL bit will be “0”.

- It is not possible to set the SPBLKDN bit to “1” if the password had not been set prior to the Password Protection mode being selected.

**Password Register (PASS)**

| Bits | Field Name | Function | Type | Default State | Description |
|---|---|---|---|---|---|
| 63 to 0 | PWD | Hidden Password | OTP | FFFFFFFFFFFFFFFFh | Non-volatile OTP storage of 64 bit password. The password is no longer readable after the Password Protection mode is selected by programming Lock Register bit 2 to zero. |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Figure 98. Read Password Register (RDPASS) Sequence**

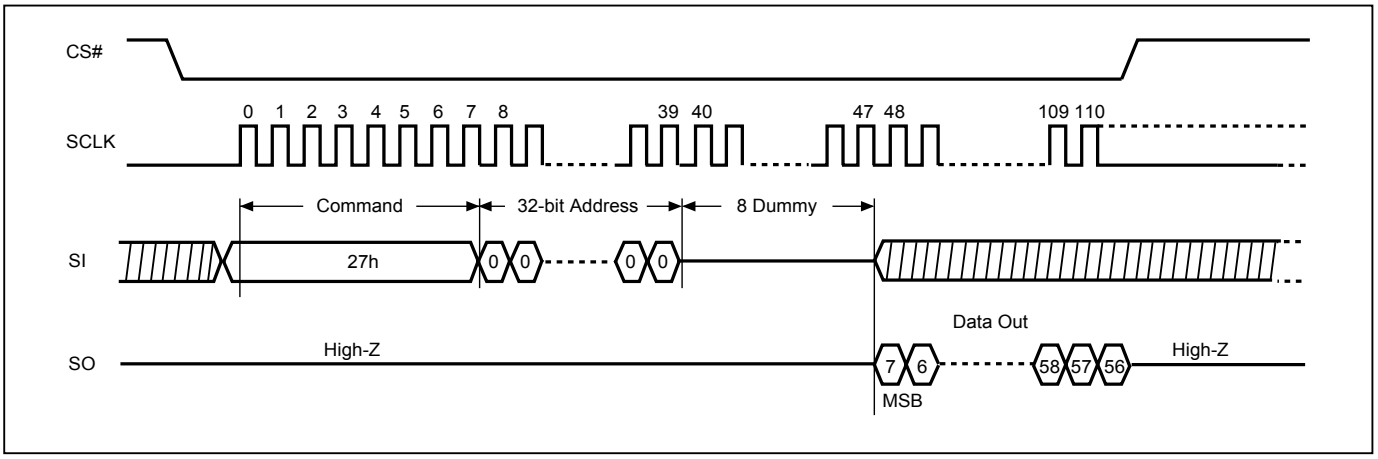



**Figure 99. Read Password Register (RDPASS) Sequence (STR-OPI Mode)**


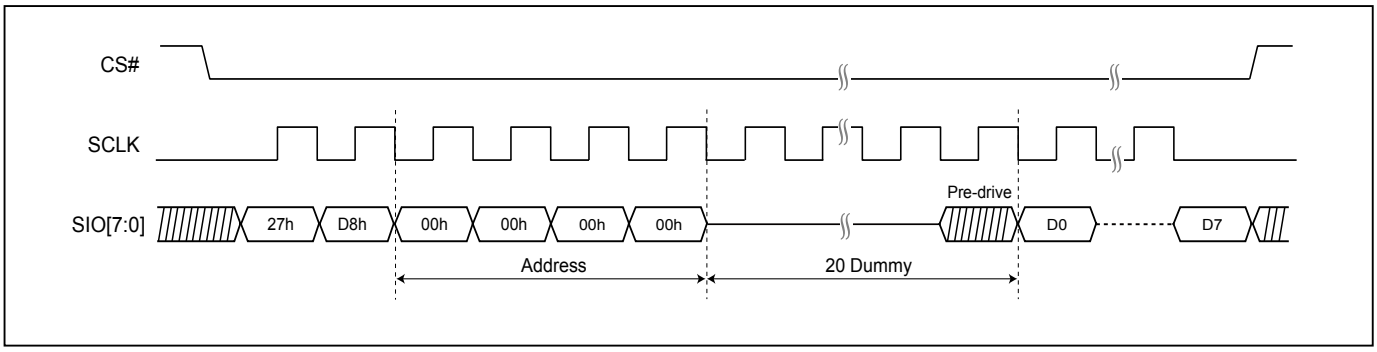



**Figure 100. Read Password Register (RDPASS) Sequence (DTR-OPI Mode)**



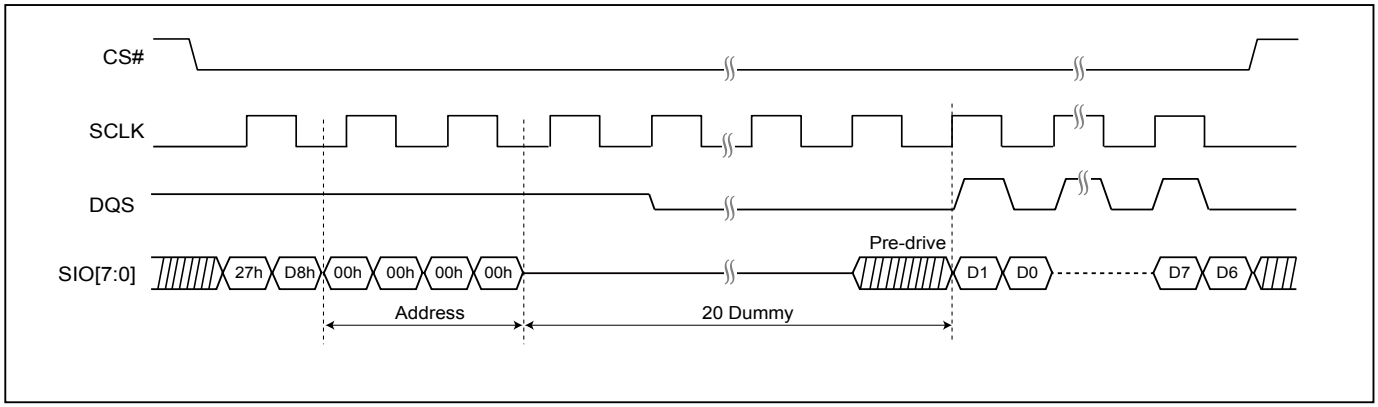

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Figure 101. Write Password Register (WRPASS) Sequence**

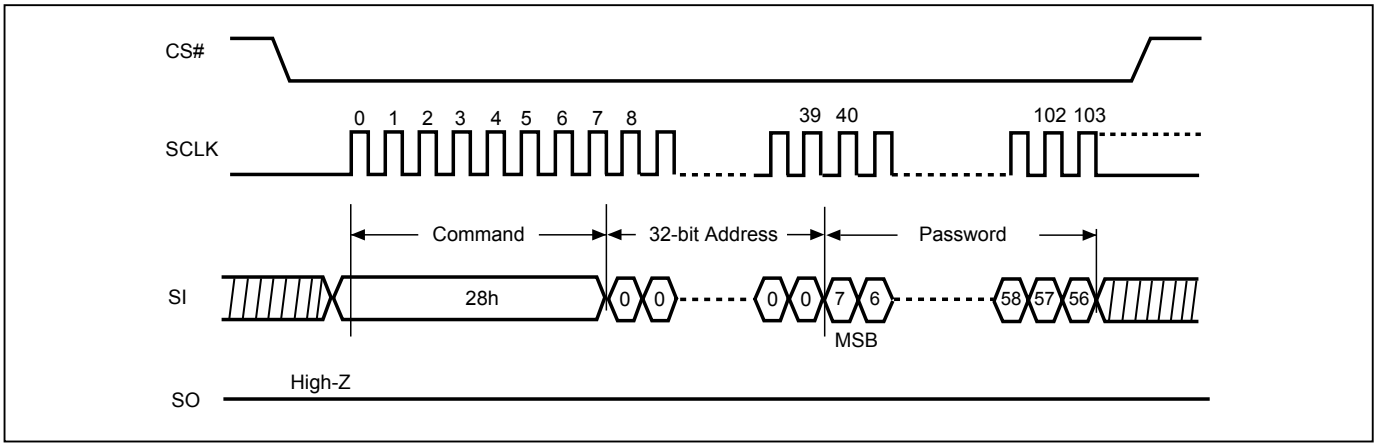



**Figure 102. Write Password Register (WRPASS) Sequence (STR-OPI Mode)**


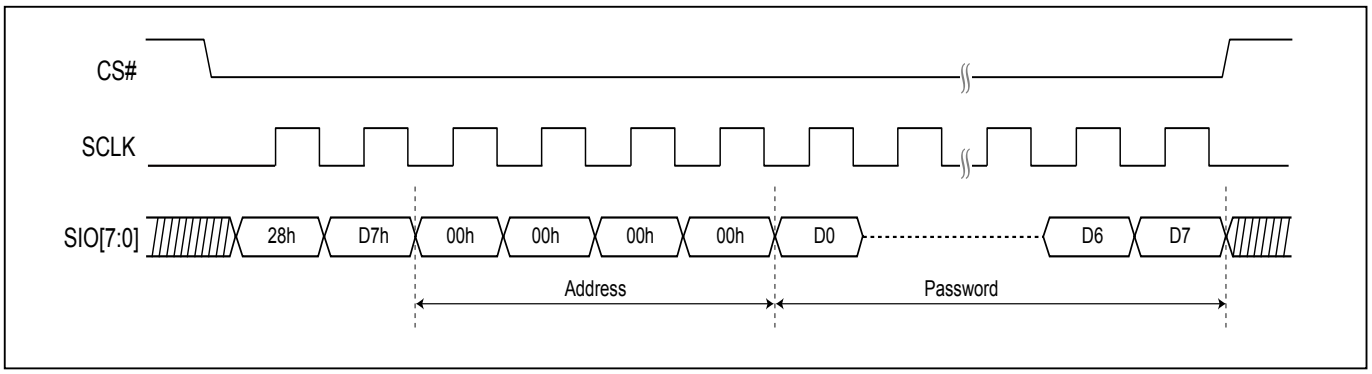



**Figure 103. Write Password Register (WRPASS) Sequence (DTR-OPI Mode)**



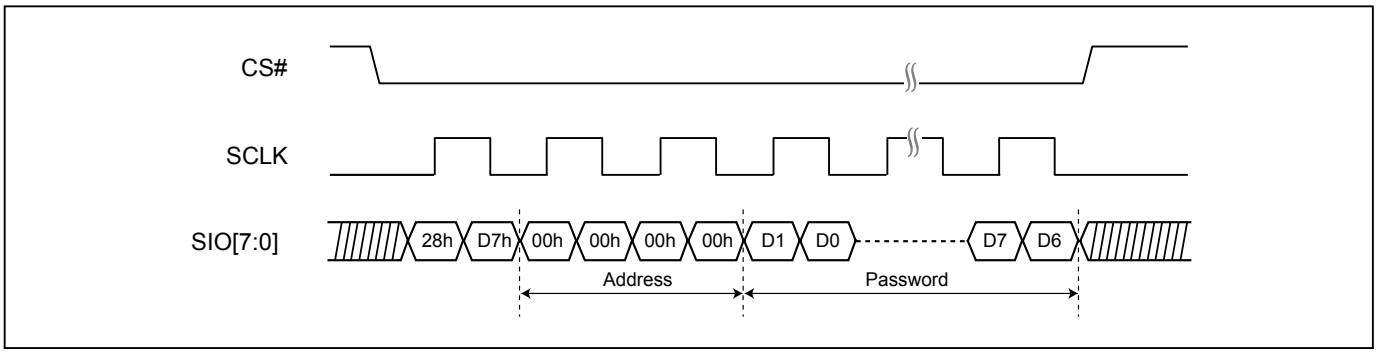

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150 2290-5940
Email:sales@manduic.com

**Figure 104. Password Unlock (PASSULK) Sequence**

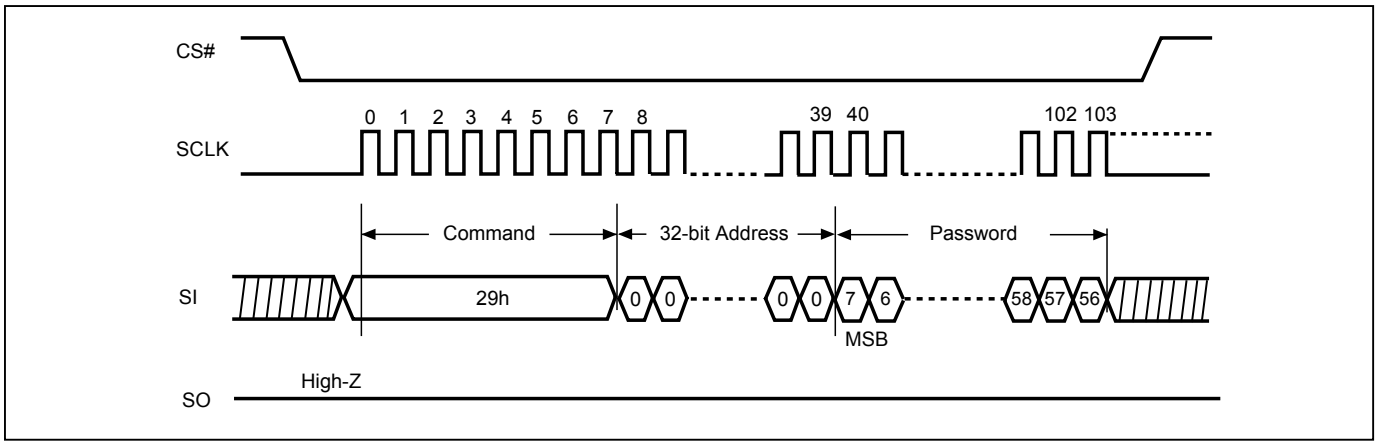



**Figure 105. Password Unlock (PASSULK) (STR-OPI Mode)**


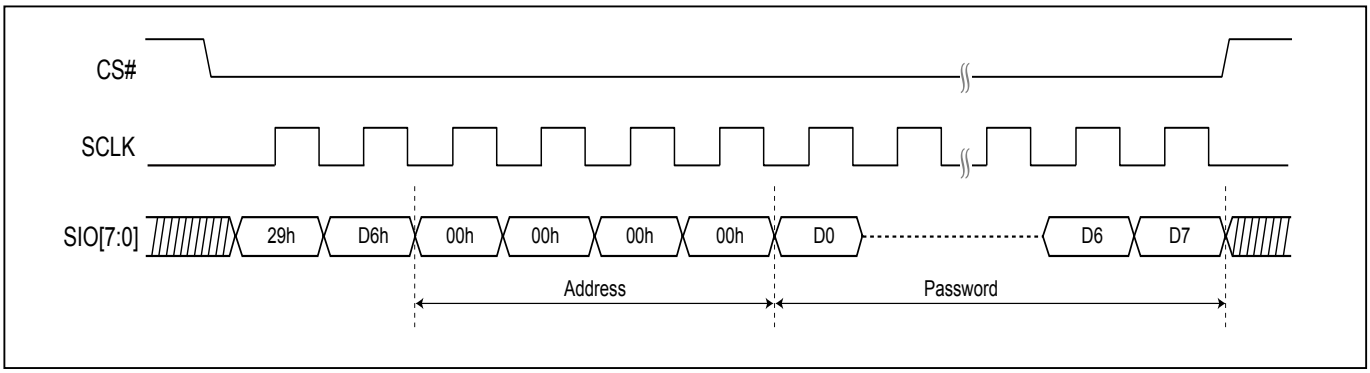



**Figure 106. Password Unlock (PASSULK) (DTR-OPI Mode)**



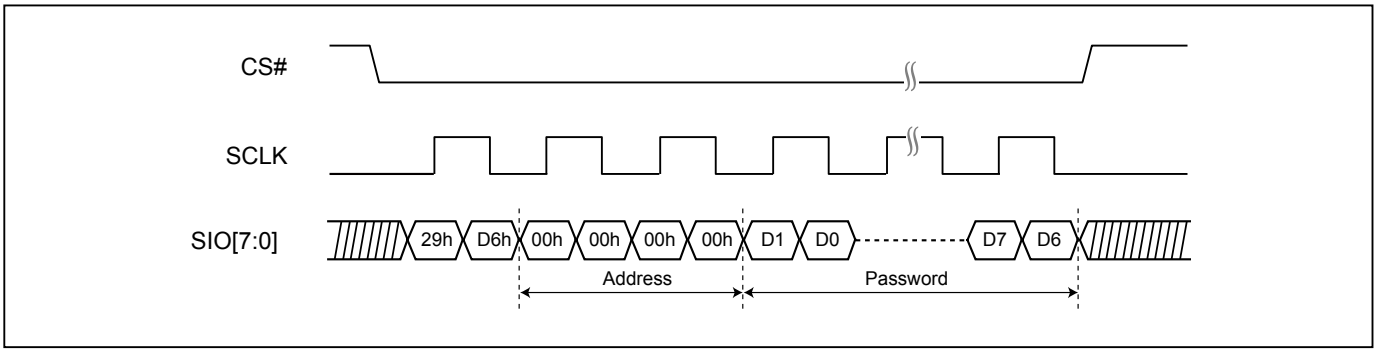

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

### 10-26-5. Gang Block Lock/Unlock (GBLK/GBULK)

These instructions are only effective after WPSEL was executed. The GBLK/GBULK instruction is a chip-based protected or unprotected operation. It can enable or disable all DPB.

The WREN (Write Enable) instruction is required before issuing GBLK/GBULK instruction.
The sequence of issuing GBLK/GBULK instruction is: CS# goes low → send GBLK/GBULK (7Eh/98h) instruction →CS# goes high.

The CS# must go high exactly at the byte boundary, otherwise, the instruction will be rejected and not be executed.

### 10-26-6. Sector Protection States Summary Table

| Protection Status | | Sector State |
|---|---|---|
| DPB bit | SPB bit | |
| 0 | 0 | Unprotect |
| 0 | 1 | Protect |
| 1 | 0 | Protect |
| 1 | 1 | Protect |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

### 10-27. Program Suspend and Erase Suspend

The Suspend instruction interrupts a Program or Erase operation to allow the device conduct other operations.

After the device has entered the suspended state, the memory array can be read except for the page being programmed or the sector being erased.


Security Register bit 2 (PSB) and bit 3 (ESB) can be read to check the suspend status. The PSB (Program Suspend Bit) sets to “1” when a program operation is suspended. The ESB (Erase Suspend Bit) sets to “1” when an erase operation is suspended. The PSB or ESB clears to “0” when the program or erase operation is resumed.

When the Serial NOR Flash receives the Suspend instruction, Program Suspend Latency(tPSL) or Erase Suspend latency(tESL) is required to complete suspend operation. (Refer to *"Table 24. AC CHARACTERISTICS"*) After the device has entered the suspended state, the WEL bit is clears to “0” and the PSB or ESB in security register is set to “1”, then the device is ready to acceptanother command.

However, some commands can be executed without tPSL or tESL latency during the program/erase suspend, and can be issued at any time during the Suspend.

Please refer to *"Table 16. Acceptable Commands During Suspend"*.

**Figure 107. Suspend to Read Latency**

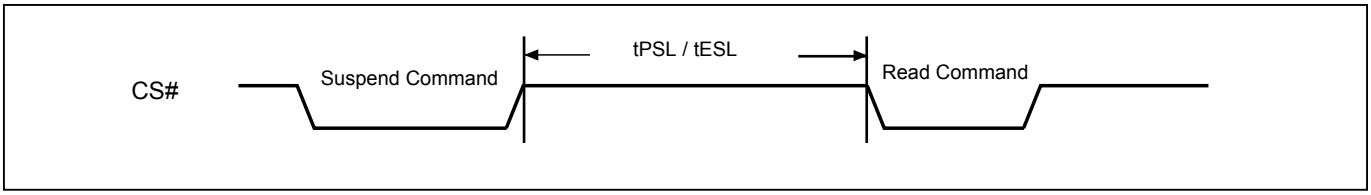



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Table 16. Acceptable Commands During Suspend**

| Command Name | Command Code | Suspend Type | |
|---|---|---|---|
| | | Program Suspend | Erase Suspend |
| **Commands which require tPSL/tESL delay** | | | |
| READ | 03h/13h | • | • |
| FAST_READ | 0Bh/0Ch | • | • |
| 8READ | ECh | • | • |
| 8DTRD | EEh | • | • |
| RDSFDP | 5Ah | • | • |
| RDID | 9Fh | • | • |
| SBL | C0h | • | • |
| ENSO | B1h | • | • |
| EXSO | C1h | • | • |
| WREN | 06h | • | • |
| RESUME | 30h | • | • |
| RDLR | 2Dh | • | • |
| RDSPB | E2h | • | • |
| RDFBR | 16h | • | • |
| RDDPB | E0h | • | • |
| RDCR2 with A[31:30]=00/01 | 71h | • | • |
| WRCR2 with A[31:30]=00 | 72h | • | • |
| WRCR2 with A[31:30]=01 | | | |
| **Commands not requiring tPSL/tESL delay** | | | |
| WRDI | 04h | • | • |
| RDSR | 05h | • | • |
| RDCR | 15h | • | • |
| RDCR2 with A[31:30]=10 | 71h | • | • |
| WRCR2 with A[31:30]=10 | 72h | • | • |
| RDSCUR | 2Bh | • | • |
| RES | ABh | • | • |
| RSTEN | 66h | • | • |
| RST | 99h | • | • |
| NOP | 00h | • | • |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

## 10-28. Program Resume and Erase Resume

The Resume instruction resumes a suspended Program or Erase operation. After the device receives the Resume instruction, the WEL and WIP bits are set to “1” and the PSB or ESB is cleared to “0”.The program or erase operation will continue until it is completed or until another Suspend instruction is received.

To issue another Suspend instruction, the minimum resume-to-suspend latency (tPRS or tERS) is required. However, in order to finish the program or erase progress, a period equal to or longer than the typical timing is required.

To issue other command except suspend instruction, a latency of the self-timed Page Program Cycle time (tPP) or Sector Erase (tSE) is required. The WEL and WIP bits are cleared to “0” after the Program or Erase operation is completed.

**Figure 108. Resume to Read Latency**


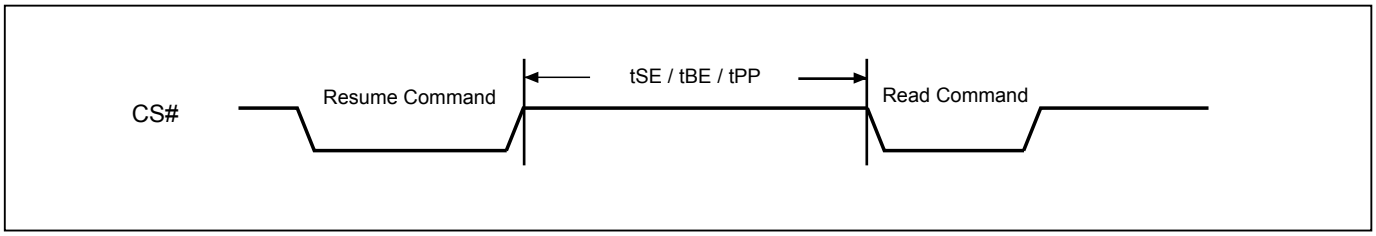



**Figure 109. Resume to Suspend Latency**



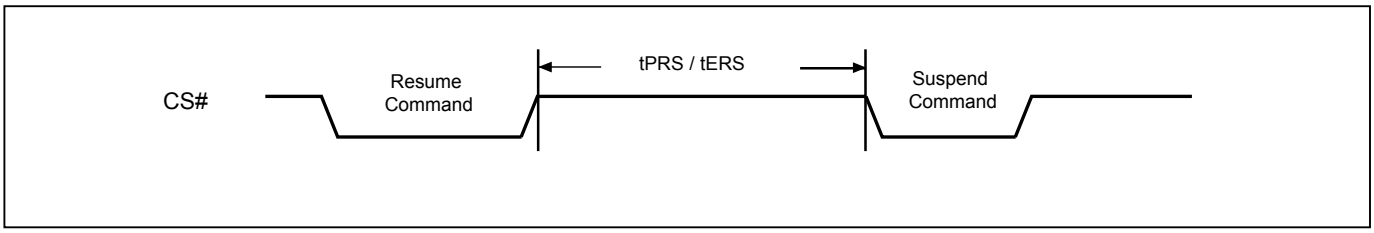

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

### 10-29. No Operation (NOP)

The “No Operation” command is only able to terminate the Reset Enable (RSTEN) command and will not affect any other command.

### 10-30. Software Reset (Reset-Enable (RSTEN) and Reset (RST))

The Software Reset operation combines two instructions: Reset-Enable (RSTEN) command following a Reset (RST) command. It returns the device to a standby mode. All the volatile bits and settings will be cleared then, which makes the device return to the default status as power on.


To execute Reset command (RST), the Reset-Enable (RSTEN) command must be executed first to perform the Reset operation. If there is any other command to interrupt after the Reset-Enable command, the Reset-Enable will be invalid.

If the Reset command is executed during program or erase operation, the operation will be disabled, the data under processing could be damaged or lost.

The reset time is different depending on the last operation. For details, please refer to *"Table 20. Reset Timing-(Other Operation)"* for tREADY2.


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Figure 110. Software Reset Recovery**

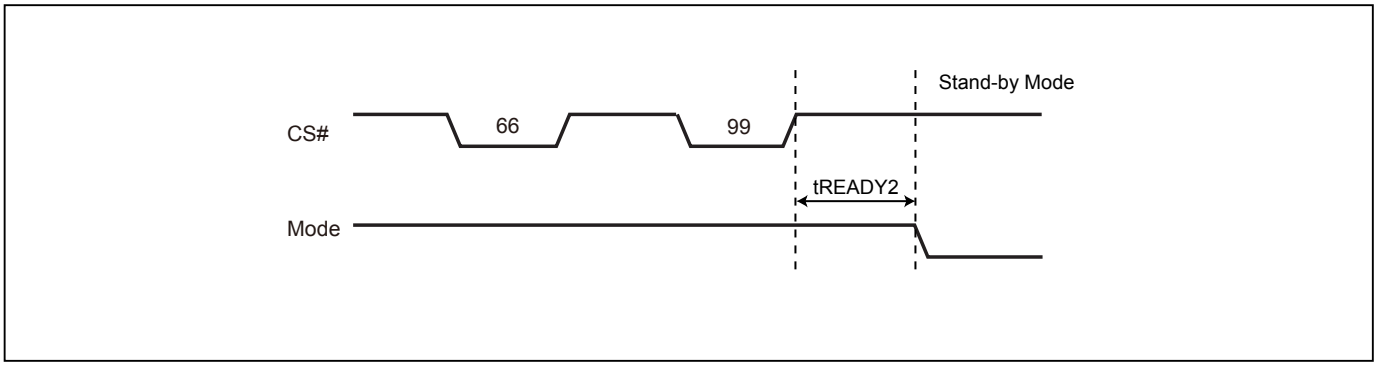


Note: Refer to *"Table 20. Reset Timing-(Other Operation)"* for tREADY2.

**Figure 111. Reset Sequence (SPI mode)**

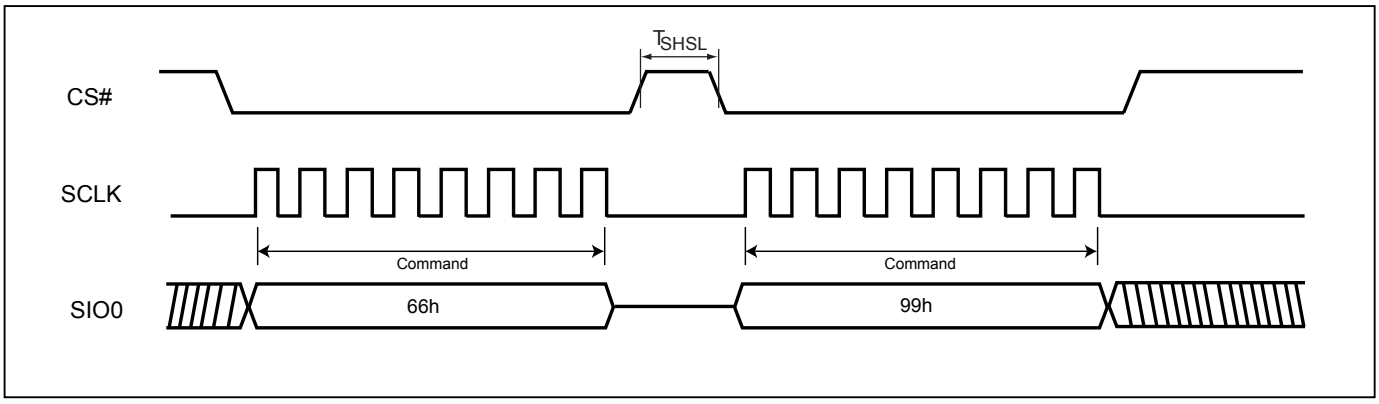



**Figure 112. Reset Sequence (STR-OPI mode)**


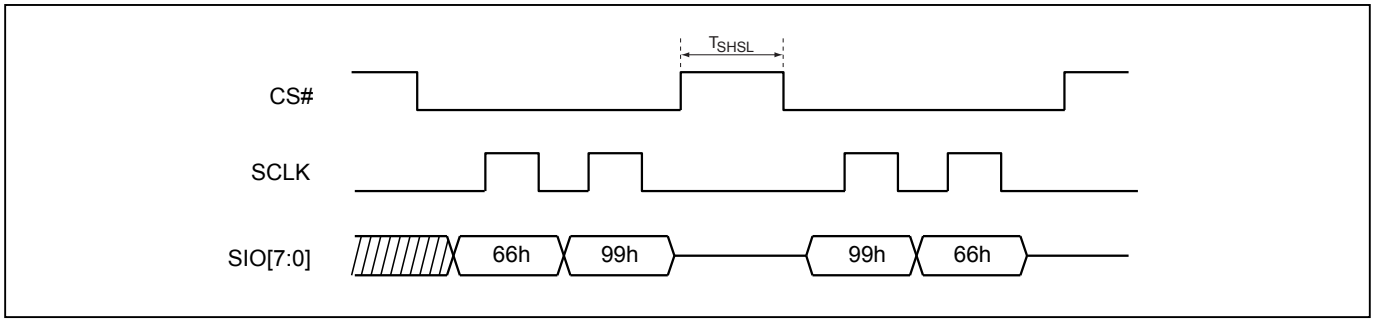



**Figure 113. Reset Sequence (DTR-OPI mode)**



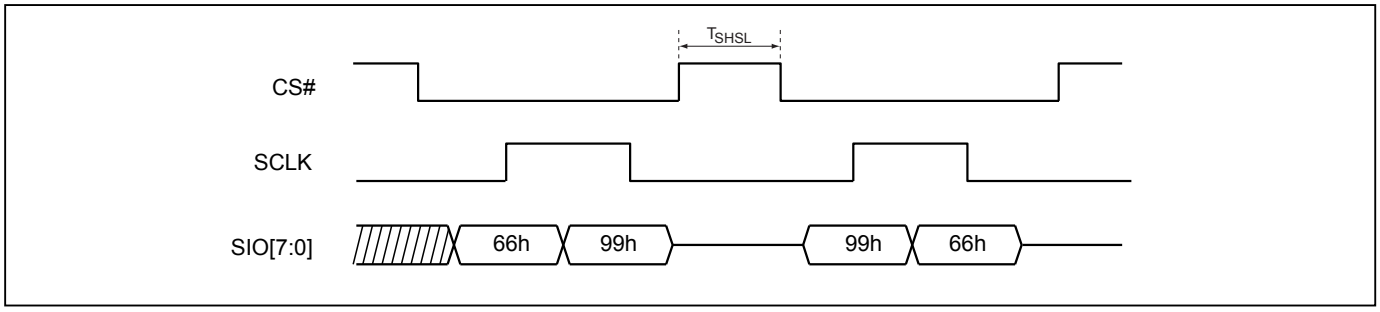

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

## 11. Serial Flash Discoverable Parameter (SFDP)

### 11-1. Read SFDP Mode (RDSFDP)


The Serial Flash Discoverable Parameter (SFDP) standard provides a consistent method of describing the functional and feature capabilities of serial flash devices in a standard set of internal parameter tables. These parameter tables can be interrogated by host system software to enable adjustments needed to accommodate divergent features from multiple vendors. The concept is similar to the one found in the Introduction of JEDEC Standard, JESD68 on CFI.

The sequence of issuing RDSFDP instruction in SPI is CS# goes low→send RDSFDP instruction (5Ah)→send 3 address bytes on SI pin→ send 8 dummy cycles → read SFDP code on SO→to end RDSFDP operation can use CS# to high at any time during data out.

SFDP in SPI is a JEDEC standard, JESD216D.

The sequcn of issuing RDSFDP instruction in OPI/DOPI mode:
CS# low → send RDSFDP instruction (5Ah/A5h) → send 4 address bytes on SIO pin→ send 20 dummy cycles → read SFDP code on SIO[7:0] → to end RDSFDP operation can use CS# to high at any time during data out.

**Figure 114. Read Serial Flash Discoverable Parameter (RDSFDP) Sequence**

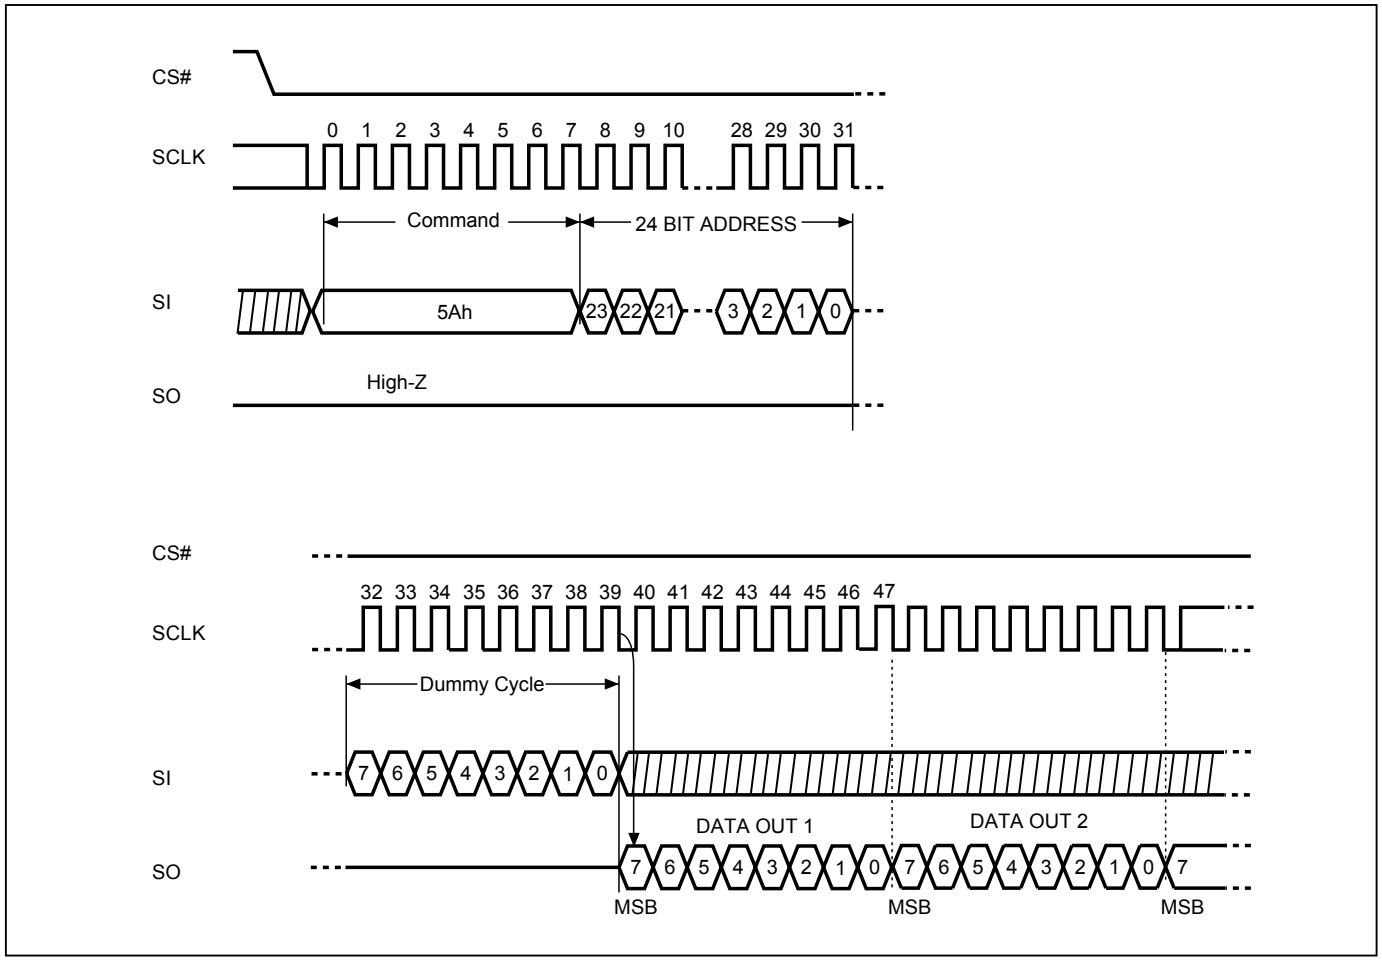



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Figure 115. Read Serial Flash Discoverable Parameter (RDSFDP) Sequence (STR-OPI Mode)**


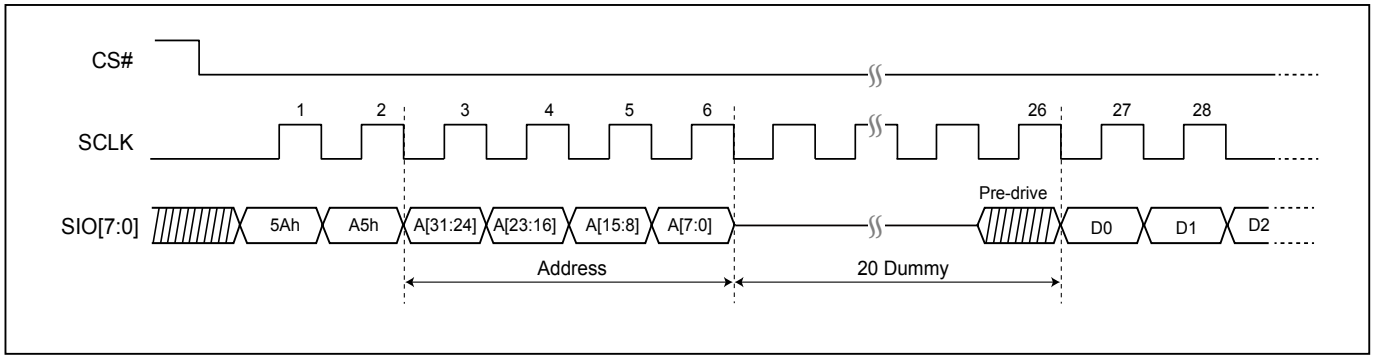



**Figure 116. Read Serial Flash Discoverable Parameter (RDSFDP) Sequence (DTR-OPI Mode)**

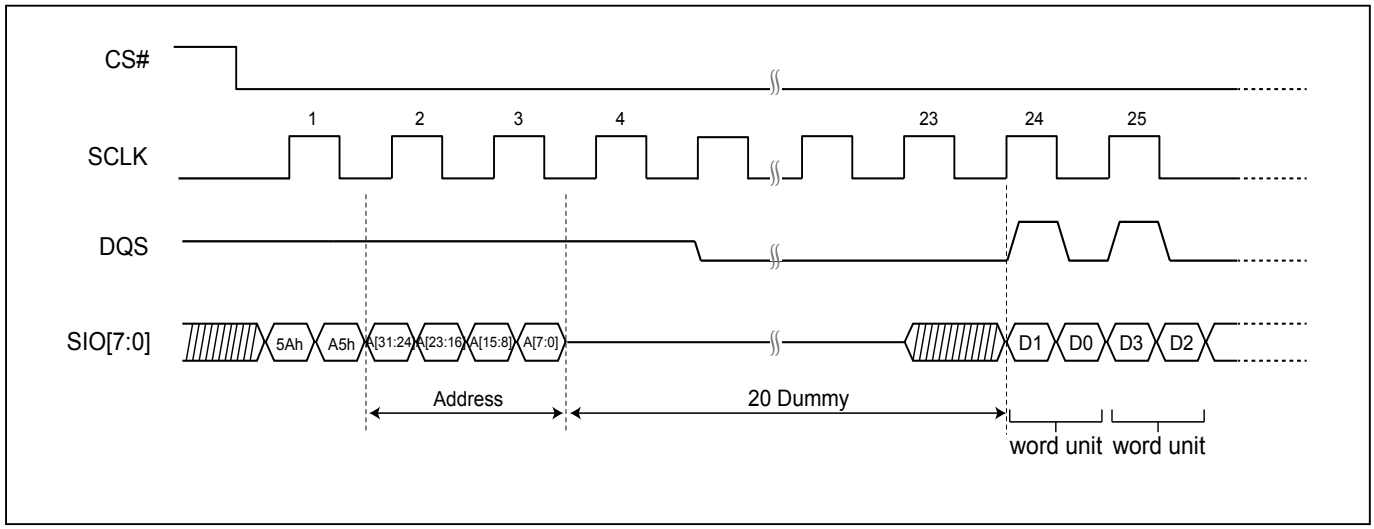


Note: Address must be low byte (A0=0) in DTR OPI.

**Table 17. Signature and Parameter Identification Data Values**

For SFDP register values detail, please contact local Macronix sales channel for Application Note.


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150 0290-5940
Email:sales@manduic.com

## 12. Data Integrity check

The data storage and transmission errors will cause unexpected Flash device variation that makes a harmful impact on overall system functions. To prevent these errors, MX25LM25645G product provides advanced Data Integrity Check function. For the data storage and data transmission in the flash device, Data Integrity Check can check errors and correct them, allowing self-checking and preventing errors in advance.

The Data Integrity Check function includes two methods:

- **ECC (Error Checking and Correcting): to prevent the data storage errors**
- **Parity Check (CRC1): to prevent the data transmission errors**

The status register data and software signals can also be used to associate the Data Integrity Check function to fully record the results of checking, and can also immediately feedback.

### 12-1. ECC (Error Checking and Correcting)

Macronix Serial Octa SPI Flash products have built-in ECC. The ECC algorithm uses a Hamming code that can correct a single bit error per 16-Byte chunk. During a page program operation, the internal state machine will create the ECC automatically. During a read operation, the internal ECC state machine corrects bit errors automatically.

It is recommended that data be programmed in multiples of 16 bytes in the predefined 16-byte chunk address (see *"Table 18. 16-Byte Chunks within a Page"*) using the Page Program command instead of programming a byte or a word at a time using the Program command. However, partial program of 16-byte chunk is allowed under the restriction that user won't program or alter the content of partially programmed chunk without erasing the sector first.

ECC checking of a 16-Byte chunk will be disabled if double program (rewriting without erase), or rewrite a chunk (alternating of single bit, byte, or word) happens in that chunk. Once ECC checking of a chuck is disabled, it will not be re-activated until the sector, containing the ECC disabled chunk, is erased.

The ECC registers show detailed information for error correction activity on the device. The ECC status registers are placed on CR2. Which include 3-bit ECC status to identify the error type, 4-bit failure chunk counter and first failure chunk address.

The ECC register can be  reset through either of the following situations:

- Write "00" data into ECC status register
- Issuing Software Reset Command
- Hardware Reset
- Power-up cycle

**Table 18. 16-Byte Chunks within a Page**

| Chunk# | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 16 Bytes | B0 ~B15 | B16 ~B31 | B32 ~B47 | B48 ~B63 | B64 ~B79 | B80 ~B95 | B96 ~B111 | B112 ~B127 | B128 ~B143 | B144 ~B159 | B160 ~B175 | B176 ~B191 | B192 ~B207 | B208 ~B223 | B224 ~B239 | B240 ~B255 |



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150 2290-5940
Email:sales@manduic.com

### 12-2. ECS# (Error corrected Signal) Pin

The ECS# pin is a real time hardware signal to feedback the ECC correction status. The ECS# pin is designed as an open drain structure. In normal situation, the ECS# is kept on Hi-Z state. Once error correction begins, the ECS# pin will pull low during the whole ECC chunk unit after a duration of tECSV delay timing.

The ECS# pin is default as going low when 2-bit error detection is enabled and double program detected. However, user can select the different option for error correction by setting the ECS register in CR2 [00000400h].

**Figure 117. ECS# Timing**

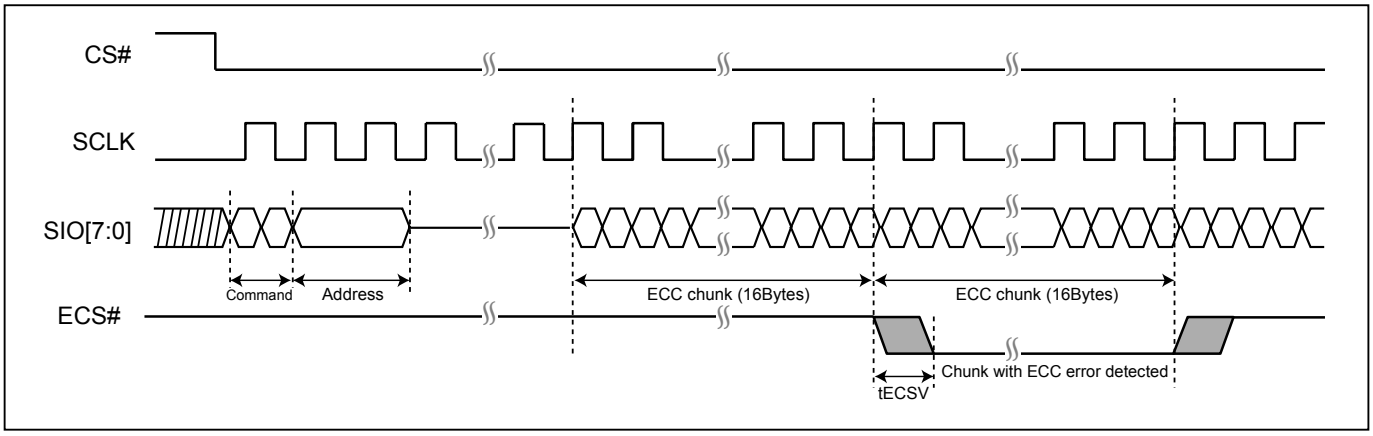



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

### 12-3. Parity Check (CRC1)

The parity check function can only be operated at DTR OPI mode, it does not support OPI mode. The CRCEN# bit in CR2 [address 40000000h] bit3 can enable the parity check function. CRCEN# is an OTP bit; once it is programmed to "0", it cannot be disabled anyhow.

For write operation after the Parity check function is enabled, the CRC code needs to be set after the address and data cycles. The starting address for the Flash device has to be issued at CRC chunk boundary, and the data CRC bit also should be output by each CRC chunk unit. Otherwise, read CRC code might be error; and program command would abort.

There is a bit [CR2 00000500h] that output data is CRC on both clock edges, or is CRC/CRC# on clock rising/ falling edge respectively. The CRC chunk unit is default to set as 16bytes. It can also configure the chunk unit to 32bytes, 64bytes or 128bytes by CRC register setting in CR2 [address 00000500h].

For register write, an extra DATA# cycle must be set right after data cycle as in *"Figure 121. CRC Timing (Write Register - example for 1byte data)"*.
For register read, an extra DATA# would be output after the data cycle as in *"Figure 122. CRC Timing (Read register - example for 1byte data)"*.

The address CRC byte is calculated by exclusive-OR of all the address bytes; the data CRC bytes are calculated by exclusive-OR of all the data bytes in the CRC chunk.

**Figure 118. CRC Timing (Without CRC# output)**


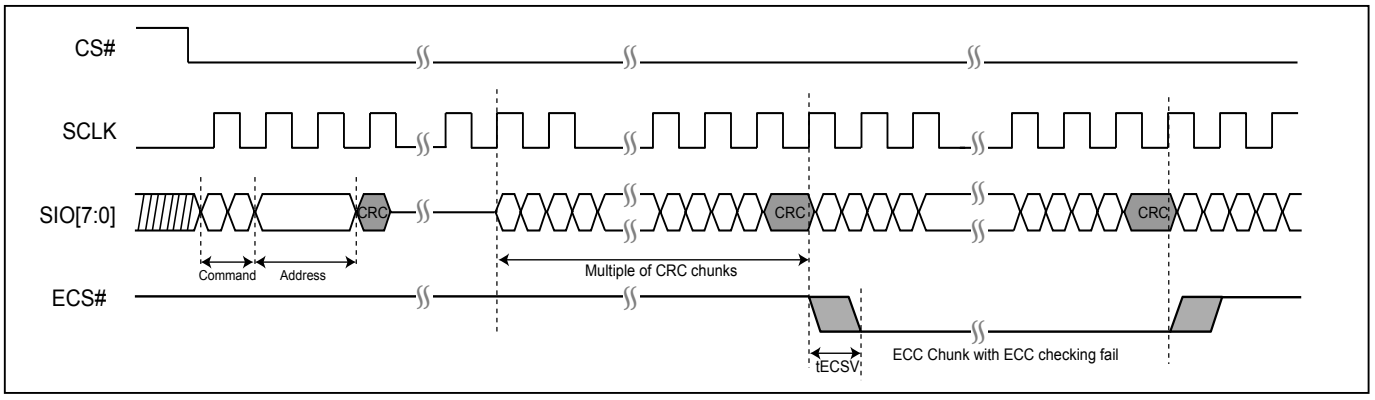



**Figure 119. CRC Timing (With CRC# output)**



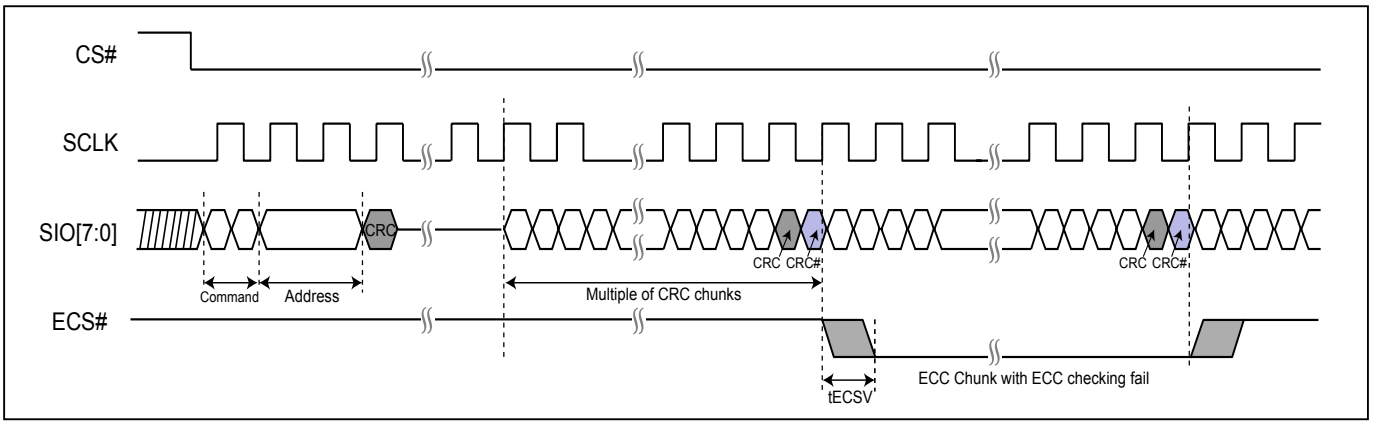

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Figure 120. CRC Timing (Page Program)**

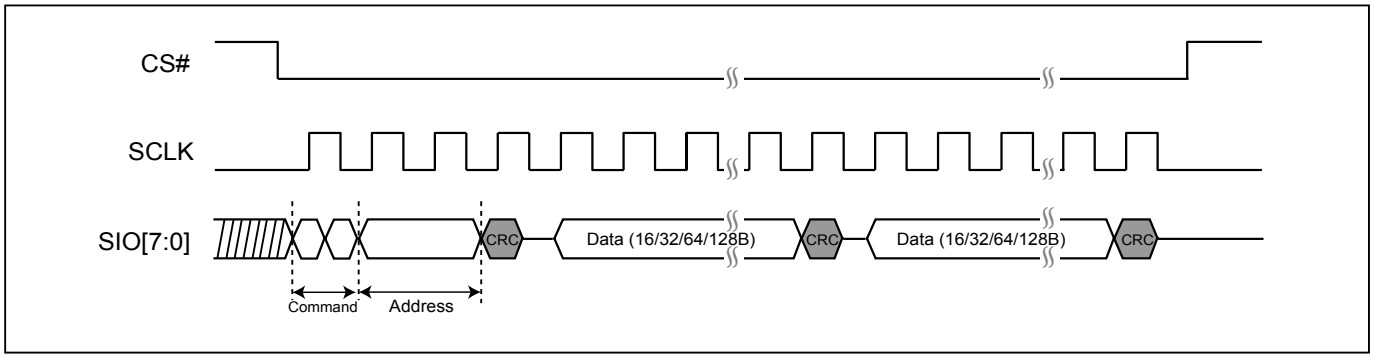



**Figure 121. CRC Timing (Write Register - example for 1byte data)**


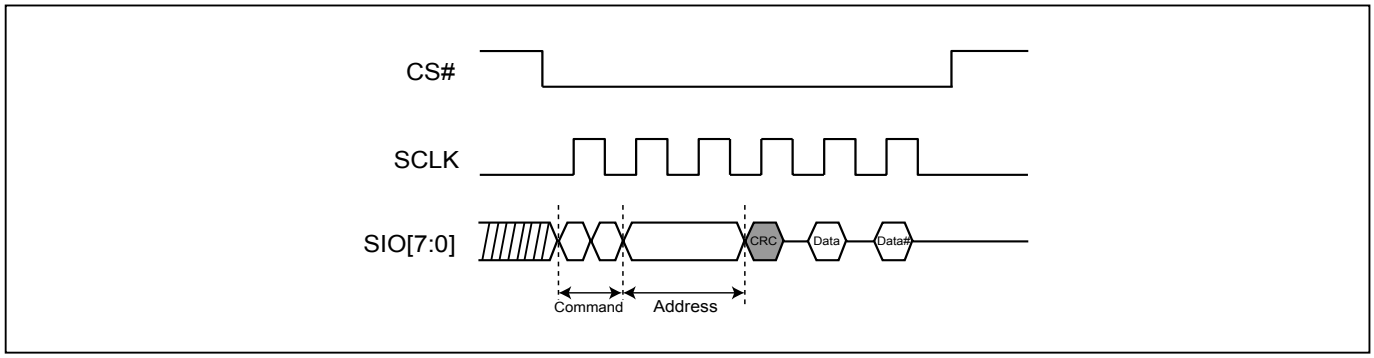



**Figure 122. CRC Timing (Read register - example for 1byte data)**



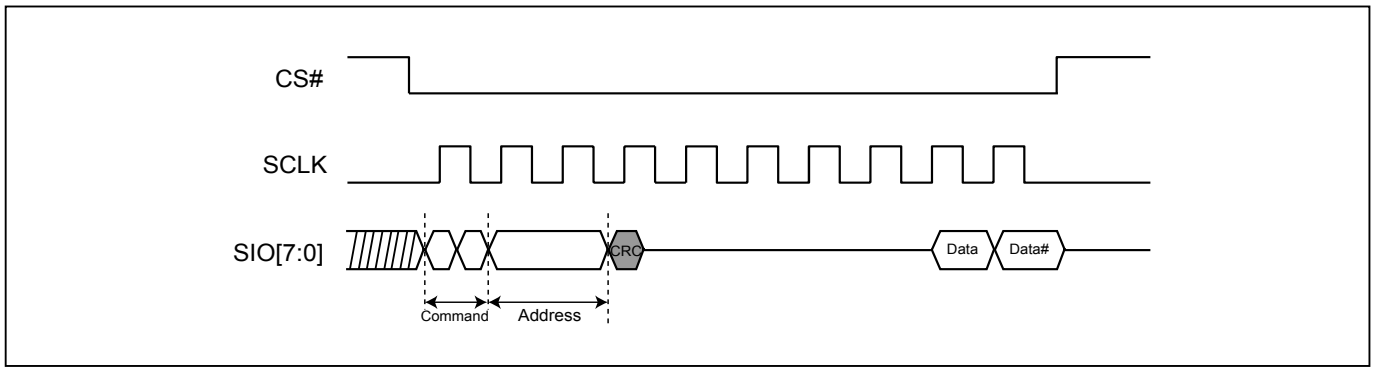

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

## 13. RESET

Driving the RESET# pin low for a period of tRLRH or longer will reset the device. After the reset cycle, the device is in the following states:
- Standby mode
- All the volatile bits such as WEL/WIP will return to the default status as power on.
- All the volatile bits in CR2 will return to the default status as power on.
- Fastboot read will be executed on first CS# pin goes low

If the device is under programming or erasing, driving the RESET# pin low will also terminate the operation and data could be lost. During the resetting cycle, the SIO data becomes high impedance and the current will be reduced to minimum.

**Figure 123. RESET Timing**

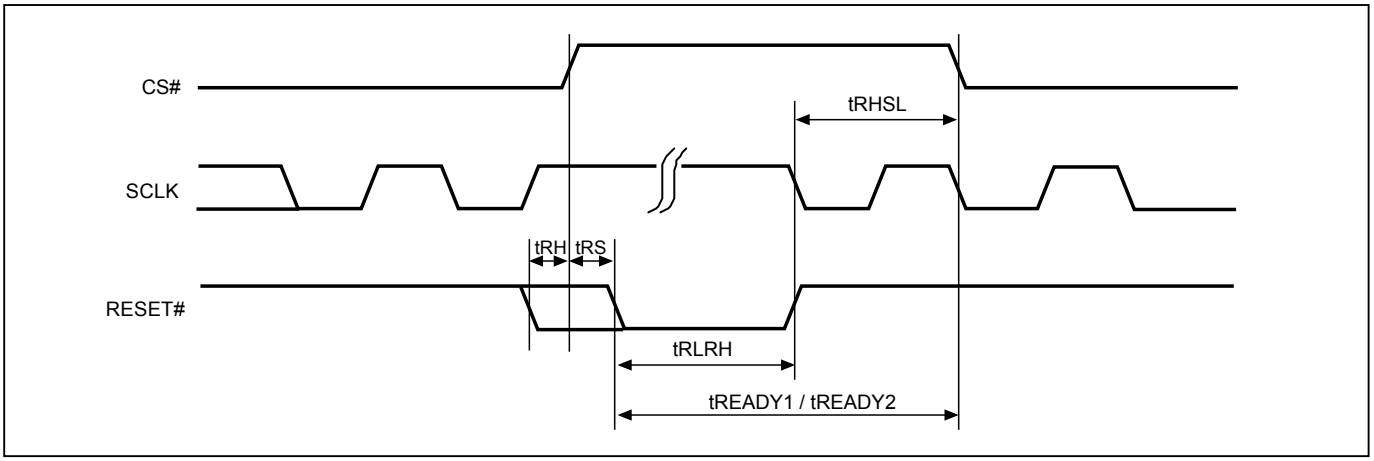



**Table 19. Reset Timing-(Standby)**

| Symbol | Parameter | Min. | Typ. | Max. | Unit |
|---|---|---|---|---|---|
| tRHSL | Reset# high before CS# low | 10 | | | us |
| tRS | Reset# setup time | 15 | | | ns |
| tRH | Reset# hold time | 15 | | | ns |
| tRLRH | Reset# low pulse width | 10 | | | us |
| tREADY1 | Reset Recovery time | 35 | | | us |

**Table 20. Reset Timing-(Other Operation)**

| Symbol | Parameter | Min. | Typ. | Max. | Unit |
|---|---|---|---|---|---|
| tRHSL | Reset# high before CS# low | 10 | | | us |
| tRS | Reset# setup time | 15 | | | ns |
| tRH | Reset# hold time | 15 | | | ns |
| tRLRH | Reset# low pulse width | 10 | | | us |
| tREADY2 | Reset Recovery time (During instruction decoding) | 40 | | | us |
| | Reset Recovery time (for read operation) | 40 | | | us |
| | Reset Recovery time (for program operation) | 310 | | | us |
| | Reset Recovery time(for SE4KB operation) | 12 | | | ms |
| | Reset Recovery time (for BE64K operation) | 25 | | | ms |
| | Reset Recovery time (for Chip Erase operation) | 100 | | | ms |
| | Reset Recovery time (for WRSR operation) | 40 | | | ms |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

## 14. POWER-ON STATE

The device is in the states below when power-up:
- Standby mode (please note it is not deep power-down mode)
- Write Enable Latch (WEL) bit is reset

The device must not be selected during power-up and power-down stage unless the VCC achieves below correct level:
- VCC minimum at power-up stage and then after a delay of tVSL
- GND at power-down

Please note that a pull-up resistor on CS# may ensure a safe and proper power-up/down level.

An internal power-on reset (POR) circuit may protect the device from data corruption and inadvertent data change during power up state. When VCC is lower than VWI (POR threshold voltage value), the internal logic is reset and the flash device has no response to any command.

For further protection on the device, if the VCC does not reach the VCC minimum level, the correct operation is not guaranteed. The write, erase, and program command should be sent after the below time delay:
- tVSL after VCC reached VCC minimum level

The device can accept read command after VCC reached VCC minimum and a time delay of tVSL.
Please refer to the "*"Power-up Timing"*".

Note:
- To stabilize the VCC level, the VCC rail decoupled by a suitable capacitor close to package pins is recommended. (generally around 0.1uF)
- At power-down stage, the VCC drops below VWI level, all operations are disable and device has no response to any command. The data corruption might occur during the stage while a write, program, erase cycle is in progress.
- To stabilize the VCCQ level, the VCCQ/VSSQ rail decoupled by a suitable capacitor close to package pins is recommended. One VCCQ pin connect to one capacitor.
- It is recommended VCC and VCCQ power are separated system supply with same supply voltage.


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

## 15. ELECTRICAL SPECIFICATIONS

**Table 21. ABSOLUTE MAXIMUM RATINGS**

| RATING | | VALUE |
|---|---|---|
| Ambient Operating Temperature | Industrial grade | -40°C to 85°C |
| Storage Temperature | | -65°C to 150°C |
| Applied Input Voltage | | -0.5V to VCC+0.5V |
| Applied Output Voltage | | -0.5V to VCC+0.5V |
| VCC to Ground Potential | | -0.5V to 4.0V |

NOTICE:
1. Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is stress rating only and functional operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended period may affect reliability.
2. Specifications contained within the following tables are subject to change.
3. During voltage transitions, all pins may overshoot to VCC+1.0V or -1.0V for period up to 20ns.

**Figure 124. Maximum Negative Overshoot Waveform**

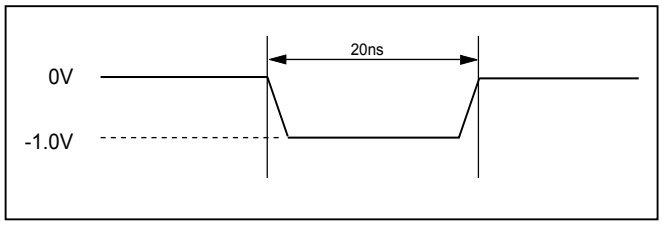



**Figure 125. Maximum Positive Overshoot Waveform**

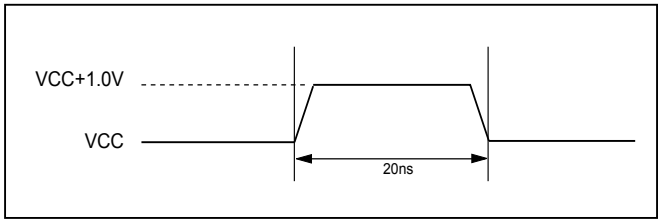



**Table 22. CAPACITANCE TA = 25°C, f = 1.0 MHz**

| Symbol | Parameter | Min. | Typ. | Max. | Unit | Conditions |
|---|---|---|---|---|---|---|
| CIN | Input Capacitance | | | 8 | pF | VIN = 0V |
| COUT | Output Capacitance | | | 12 | pF | VOUT = 0V |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Figure 126. DATA INPUT TEST WAVEFORMS AND MEASUREMENT LEVEL**


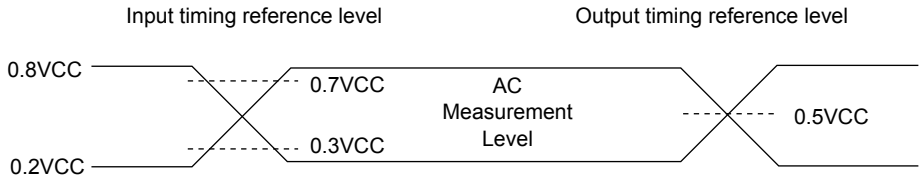



**Figure 127. SCLK TIMING DEFINITION**



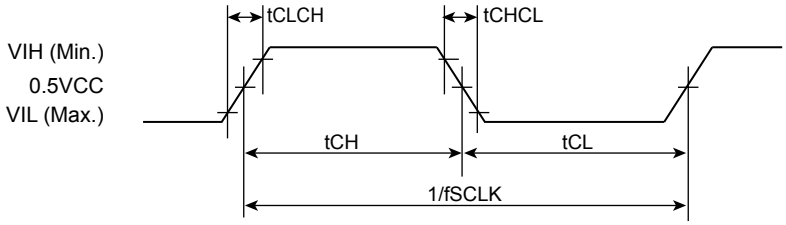

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150 0290-5940
Email:sales@manduic.com

**Table 23. DC CHARACTERISTICS**

Temperature = -40°C to 85°C, VCC = 2.7V ~ 3.6V

| Symbol | Parameter | Notes | Min. | Typ. | Max. | Units | Test Conditions |
|---|---|---|---|---|---|---|---|
| ILI | Input Load Current | 1 | | | ±2 | uA | VCC = VCC Max, VIN = VCC or GND |
| ILO | Output Leakage Current | 1 | | | ±2 | uA | VCC = VCC Max, VOUT = VCC or GND |
| ISB1 | VCC Standby Current | 1 | | 35 | 180 | uA | VIN = VCC or GND, CS# = VCC |
| ISB2 | Deep Power-down Current | | | 25 | 80 | uA | VIN = VCC or GND, CS# = VCC |
| ICC1 | VCC Read | 1,3 | | 20 | 40 | mA | 100MHz 8IO STR (SIO floating) |
| | | | | 30 | 45 | mA | 100MHz 8IO DTR (SIO floating) |
| | | | | 25 | 50 | mA | 133MHz 8IO STR (SIO floating) |
| | | | | 40 | 60 | mA | 133MHz 8IO DTR (SIO floating) |
| ICC2 | VCC Program Current | 1 | | 30 | 40 | mA | Program in Progress, CS# = VCC |
| ICC3 | VCC Write Status Register (WRSR) Current | | | 20 | 40 | mA | Program status register in progress, CS#=VCC |
| ICC4 | VCC Sector Erase Current (SE) | 1 | | 20 | 40 | mA | Erase in Progress, CS#=VCC |
| ICC4 | VCC Block Erase Current (BE) | 1 | | 30 | 40 | mA | Erase in Progress, CS#=VCC |
| ICC5 | VCC Chip Erase Current (CE) | 1 | | 20 | 40 | mA | Erase in Progress, CS#=VCC |
| VIL | Input Low Voltage | | -0.4 | | 0.3VCC | V | |
| VIH | Input High Voltage | | 0.7VCC | | VCC+0.4 | V | |
| VOL | Output Low Voltage | | | | 0.2 | V | IOL=100uA |
| VOH | Output High Voltage | | VCC-0.2 | | | V | IOH=-100uA |

Notes :
1. Typical values at VCC = 3.3V, T = 25°C. These currents are valid for all product versions (package and speeds).
2. Typical value is calculated by simulation.
3. VCC current only; not include VCCQ current.


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Table 24. AC CHARACTERISTICS**

Temperature = -40°C to 85°C, VCC = 2.7V - 3.6V

| Symbol | Alt. | Parameter | | Min. | Typ. | Max. | Unit |
|---|---|---|---|---|---|---|---|
| fSCLK | fC | Clock frequency for SPI commands (except Read operation) | | | | 133 | MHz |
| | | Clock frequency for OPI commands | | | | 133 | MHz |
| fRSCLK | fR | Clock Frequency for READ instructions | | | | 66 | MHz |
| fTSCLK | | Clock Frequency for FAST READ | | | | 133 | MHz |
| | | Clock Frequency for 8READ, 8DTRD | | *"9-3-1. Dummy Cycle and Frequency Table (MHz)"* | | | MHz |
| tCH(1) | tCLH | Clock High Time | | 0.45*T | | | ns |
| tCL(1) | tCL | Clock Low Time | | 0.45*T | | | ns |
| tCLCH / tCHCL | | Clock Rise Time / Clock Fall Time | fSCLK ≤ 100MHz | 1 | | | V/ns |
| | | | fSCLK ≤ 133MHz | 1.4 | | | V/ns |
| tSLCH | tCSS | CS# Active Setup Time (relative to SCLK) | | 4.5 | | | ns |
| tCHSL | | CS# Not Active Hold Time (relative to SCLK) | | 3 | | | ns |
| tSHSL | tCSH | CS# Deselect Time | From Read to next Read | 10 | | | ns |
| | | | From Write/Erase/Program to Read Status Register | 40 | | | ns |
| tDVCH | tDSU | Data In Setup Time (10) | STR ≤ 133MHz | 2 | | | ns |
| tDVCH / tDVCL | | Data setup time (9) (10) | DTR ≤ 100MHz | 1 | | | ns |
| | | | DTR ≤ 133MHz | 0.8 | | | |
| tCHDX | tDH | Data In Hold Time (10) | STR ≤ 133MHz | 2 | | | ns |
| tCHDX / tCLDX | | Data hold time (9) (10) | DTR ≤ 100MHz | 1 | | | ns |
| | | | DTR ≤ 133MHz | 0.8 | | | |
| tCHSH | | CS# Active Hold Time (relative to SCLK) | STR | 3 | | | ns |
| tCLSH | | CS# active hold time | DTR | 3 | | | ns |
| tSHCH | | CS# Not Active Setup Time (relative to SCLK) | STR | 3 | | | ns |
| | | | DTR | 3 | | | ns |
| tSHQZ | tDIS | Output Disable Time | | | | 8 | ns |
| tQSV | | Clock transient to DQS valid time | | | | 8 | ns |
| tCLQV / tCHQV | tV | Clock transient to Output Valid | Loading: 30pF | | | 8 | ns |
| | | | Loading: 20pF | | | 7 | |
| | | | Loading: 15pF | | | 6 | |
| | | | Loading: 10pF | | | 5.5 | |
| tCLQX | tHO | Output Hold Time | | 1 | | | ns |
| tDQSQ(10) | | SIO valid skew related to DQS | Loading: 10pF | | | 0.8 | ns |
| | | | Loading: 15pF | | | 0.8 | |
| | | | Loading: 20pF | | | 0.8 | |
| | | | Loading: 30pF | | | 1 | |
| tQH(10) | | SIO hold time related to DQS | | min(tCL,tCH)-tQHS | | | ns |
| tQHS(10) | | SIO hold skew factor | Loading: 10pF | | | 1 | ns |
| | | | Loading: 15pF | | | 1 | |
| | | | Loading: 20pF | | | 1 | |
| | | | Loading: 30pF | | | 1.2 | |
| tECSV(10) | | ECS go low time | Loading: 30pF | | | 10 | ns |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150 0290-5940
Email:sales@manduic.com

AC Characteristics (Temperature = -40°C to 85°C) - continued

| Symbol | Alt. | Parameter | Min. | Typ. | Max. | Unit |
|---|---|---|---|---|---|---|
| tDP | | CS# High to Deep Power-down Mode | | | 10 | us |
| tRES1 | | CS# High to Standby Mode | | | 50 | us |
| tCRDP | | CS# Toggling Time before Release from Deep Power-Down Mode | 20 | | | ns |
| tW | | Write Status/Configuration Register Cycle Time | | | 40 | ms |
| tW2V | | Write Configuration Register 2 volatile bit | | 40 | | ns |
| tW2N(10) | | Write Configuration Register 2 non-volatile bit | | | 60 | us |
| tPP(4) | | Page Program Cycle Time | | 0.15 | 0.75 | ms |
| tSE | | Sector Erase Cycle Time | | 25 | 400 | ms |
| tBE | | Block Erase (64KB) Cycle Time | | 220 | 2000 | ms |
| tCE | | Chip Erase Cycle Time | | 75 | 150 | s |
| tESL(6) | | Erase Suspend Latency | | | 25 | us |
| tPSL(6) | | Program Suspend Latency | | | 25 | us |
| tPRS(7) | | Latency between Program Resume and next Suspend | 0.3 | 100 | | us |
| tERS(8) | | Latency between Erase Resume and next Suspend | 0.3 | 400 | | us |

**Notes:**

1. tCH + tCL must be greater than or equal to 1/ Frequency.
2. Typical values given for TA=25°C. The value guaranteed by characterization, not 100% tested in production.
3. Test condition is shown as *Figure 126*.
4. While programming consecutive bytes, Page Program instruction provides optimized timings by selecting to program the whole 256 bytes or only a few bytes between 1~256 bytes.
5. By default dummy cycle value. Please refer to the *"Table 1. Operating Frequency Comparison"*.
6. Latency time is required to complete Erase/Program Suspend operation until WIP bit is "0".
7. For tPRS, minimum timing must be observed before issuing the next program suspend command. However, a period equal to or longer than the typical timing is required in order for the program operation to make progress.
8. For tERS, minimum timing must be observed before issuing the next erase suspend command. However, a period equal to or longer than the typical timing is required in order for the erase operation to make progress.
9. tDVCH+tCHDX>1.5ns for each SIO; tDVCL+tCLDX>1.5ns for each SIO.
10. Sampled, not 100% tested.


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com


## 16. OPERATING CONDITIONS

### At Device Power-Up and Power-Down

AC timing illustrated in *Figure 128* and *Figure 129* are for the supply voltages and the control signals at device power-up and power-down. If the timing in the figures is ignored, the device will not operate correctly.

During power-up and power-down, CS# needs to follow the voltage applied on VCC to keep the device not to be selected. The CS# can be driven low when VCC reach Vcc(min.) and wait a period of tVSL.

**Figure 128. AC Timing at Device Power-Up**

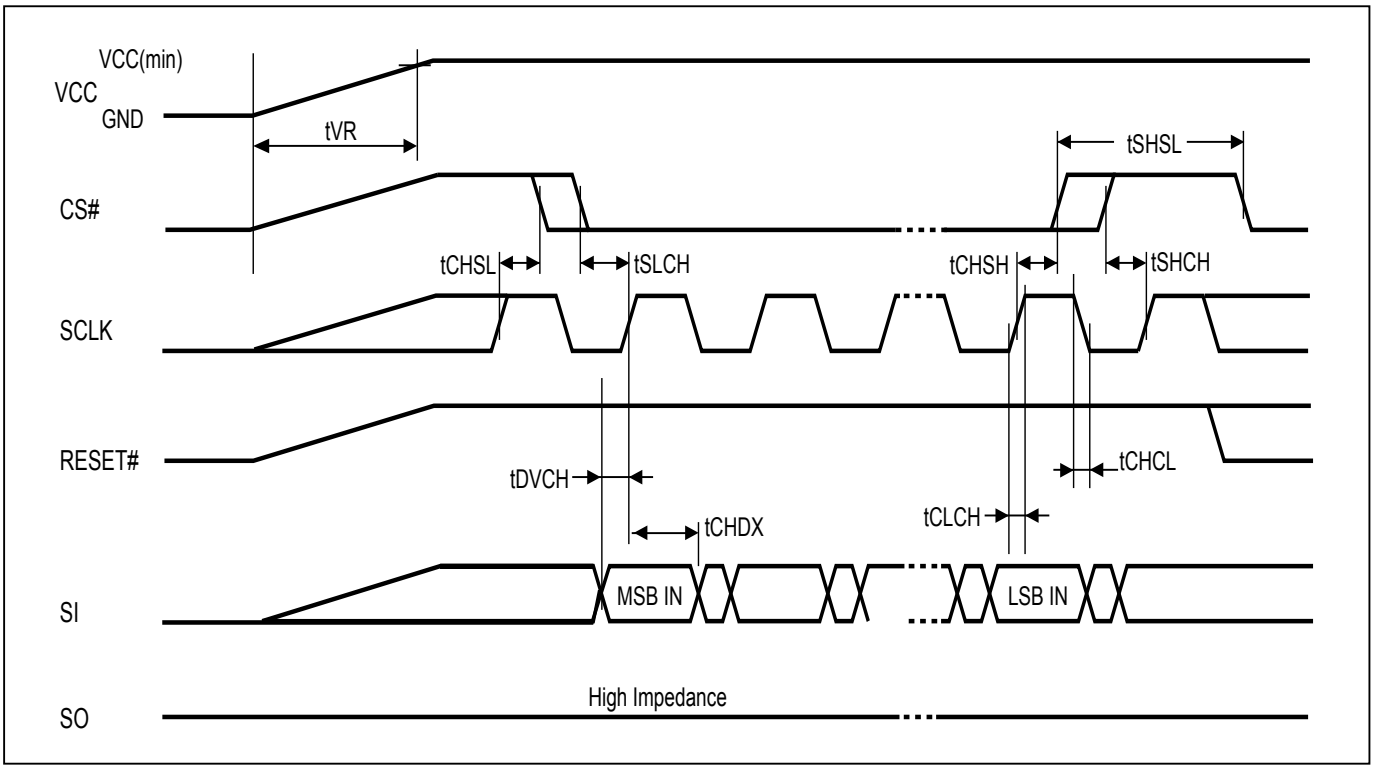


| Symbol | Parameter | Notes | Min. | Max. | Unit |
|---|---|---|---|---|---|
| tVR | VCC Rise Time | 1 | | 500000 | us/V |

Notes :
1. Sampled, not 100% tested.
2. For AC spec tCHSL, tSLCH, tDVCH, tCHDX, tSHSL, tCHSH, tSHCH, tCHCL, tCLCH in the figure, please refer to *Table 24.* AC CHARACTERISTICS.


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Figure 129. Power-Down Sequence**

During power-down, CS# needs to follow the voltage drop on VCC to avoid mis-operation.


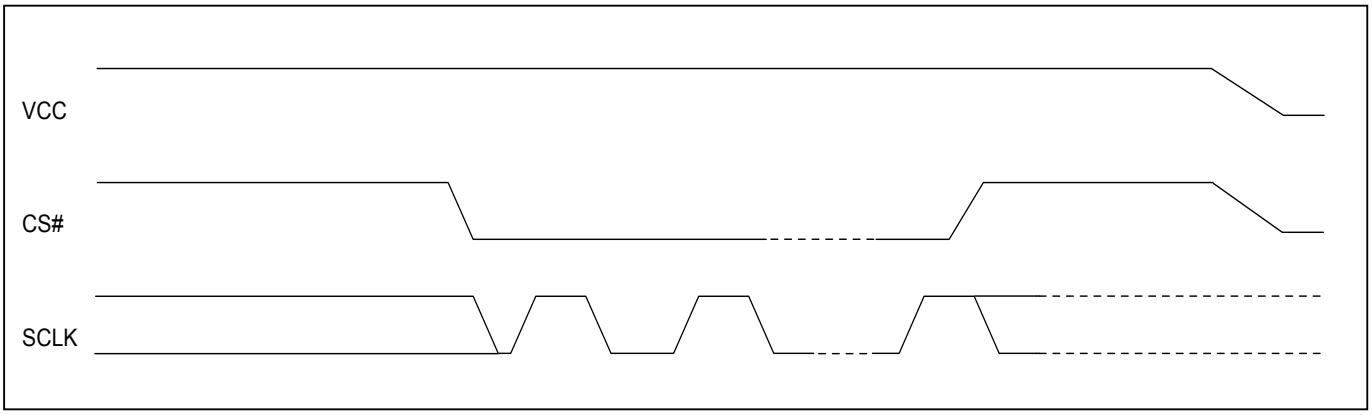



**Figure 130. Power-up Timing**



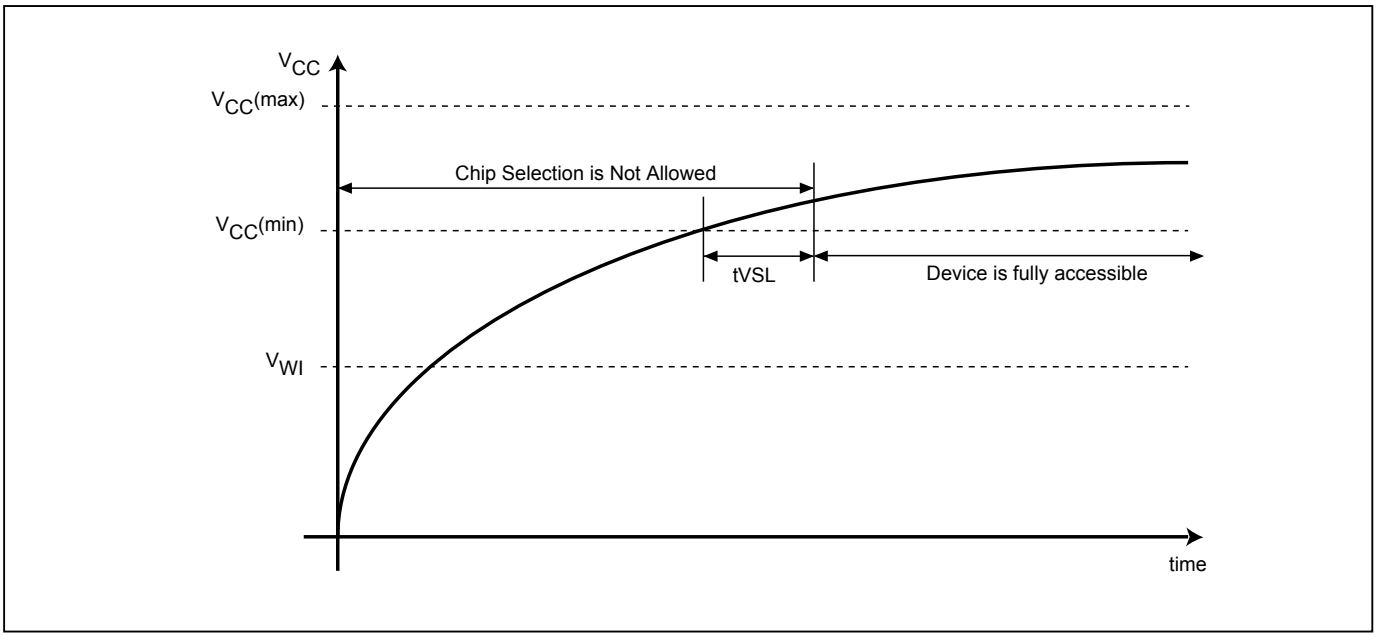

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

**Figure 131. Power Up/Down and Voltage Drop**

When powering down the device, VCC must drop below $V_{PWD}$ for at least tPWD to ensure the device will initialize correctly during power up. Please refer to *"Figure 131. Power Up/Down and Voltage Drop"* and *"Table 25. Power-Up/Down Voltage and Timing"* below for more details.

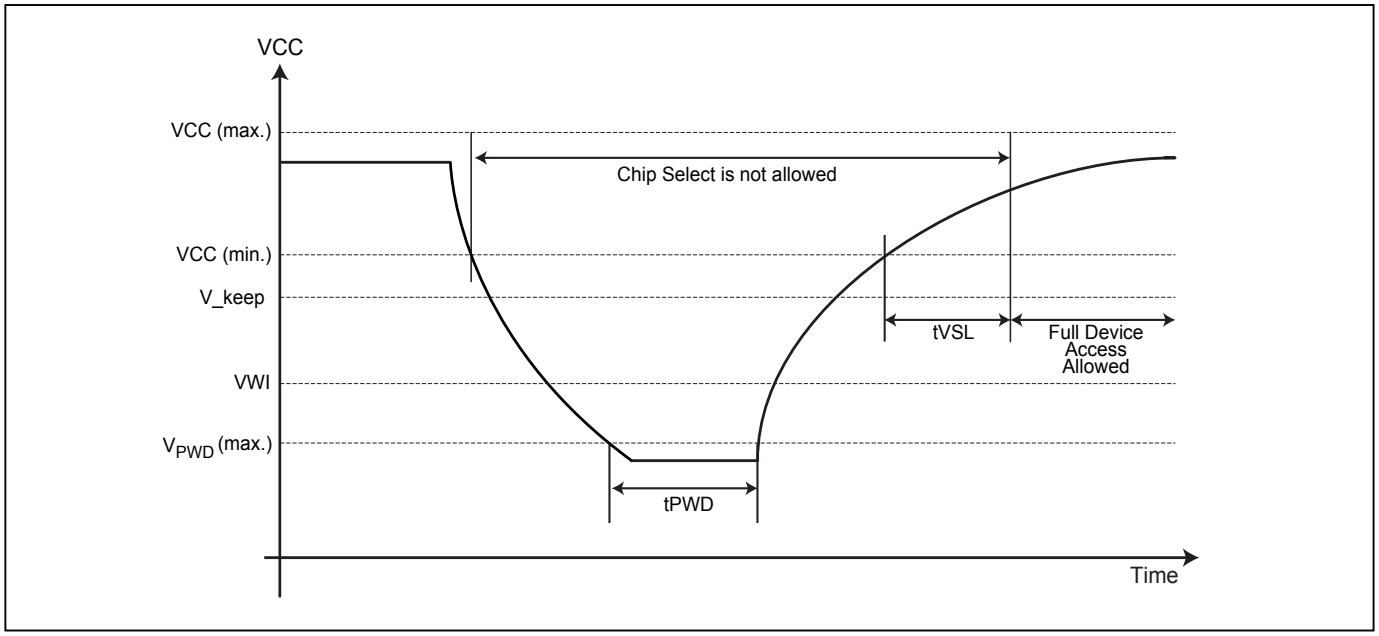



**Table 25. Power-Up/Down Voltage and Timing**

| Symbol | Parameter | Min. | Max. | Unit |
|---|---|---|---|---|
| $V_{PWD}$ | VCC voltage needed to below $V_{PWD}$ for ensuring initialization will occur | | 0.9 | V |
| V_keep | Voltage that a re-initialization is necessary if VDD drop below to VKEEP | 2.4 | | V |
| tPWD | The minimum duration for ensuring initialization will occur | 300 | | us |
| tVSL | VCC(min.) to device operation | 1500 | | us |
| VCC | VCC Power Supply | 2.7 | 3.6 | V |
| VWI | Write Inhibit Voltage | 2.0 | 2.3 | V |

**Note:** These parameters are characterized only.

## 16-1. INITIAL DELIVERY STATE

The device is delivered with the memory array erased: all bits are set to 1 (each byte contains FFh). The Status Register contains 00h (all Status Register bits are 0). DEFDOPI# in CR2 depends on shipping device model.


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

## 17. ERASE AND PROGRAMMING PERFORMANCE

| Parameter | Min. | Typ. (1) | Max. (2) | Unit |
|---|---|---|---|---|
| Write Status Register Cycle Time | | | 40 | ms |
| Sector Erase Cycle Time (4KB) | | 25 | 400 | ms |
| Block Erase Cycle Time (64KB) | | 220 | 2000 | ms |
| Chip Erase Cycle Time | | 75 | 150 | s |
| Page Program Time | | 0.15 | 0.75 | ms |
| Erase/Program Cycle | | 100,000 | | cycles |

Note:
1. Typical program and erase time assumes the following conditions: 25°C, 3V, and checkboard pattern.
2. Under worst conditions of 2.7V, highest operation temperature, post program/erase cycling.
3. System-level overhead is the time required to execute the first-bus-cycle sequence for the programming command.

## 18. DATA RETENTION

| Parameter | Condition | Min. | Max. | Unit |
|---|---|---|---|---|
| Data retention | 55˚C | 20 | | years |

## 19. LATCH-UP CHARACTERISTICS

| | Min. | Max. |
|---|---|---|
| Input Voltage with respect to GND on all power pins | | 1.5 VCCmax |
| Input Current on all non-power pins | -100mA | +100mA |
| Test conditions: VCC = VCCmax, one pin at a time (compliant to JEDEC JESD78 standard). | | |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com


## 20. ORDERING INFORMATION

Please contact Macronix regional sales for the latest product selection and available form factors.

| PART NO. | Package | Temp. | I/O Configuration | | | H/W Configuration | Remark |
|---|---|---|---|---|---|---|---|
| | | | CS# | Default I/O | Dummy Cycle | H/W Pin | |
| MX25LM25645GXDI00 | 24-Ball BGA (5x5 ball array) | -40°C to 85°C | 1 Pin | Standard | Standard | Reset# | |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

## 21. PART NAME DESCRIPTION

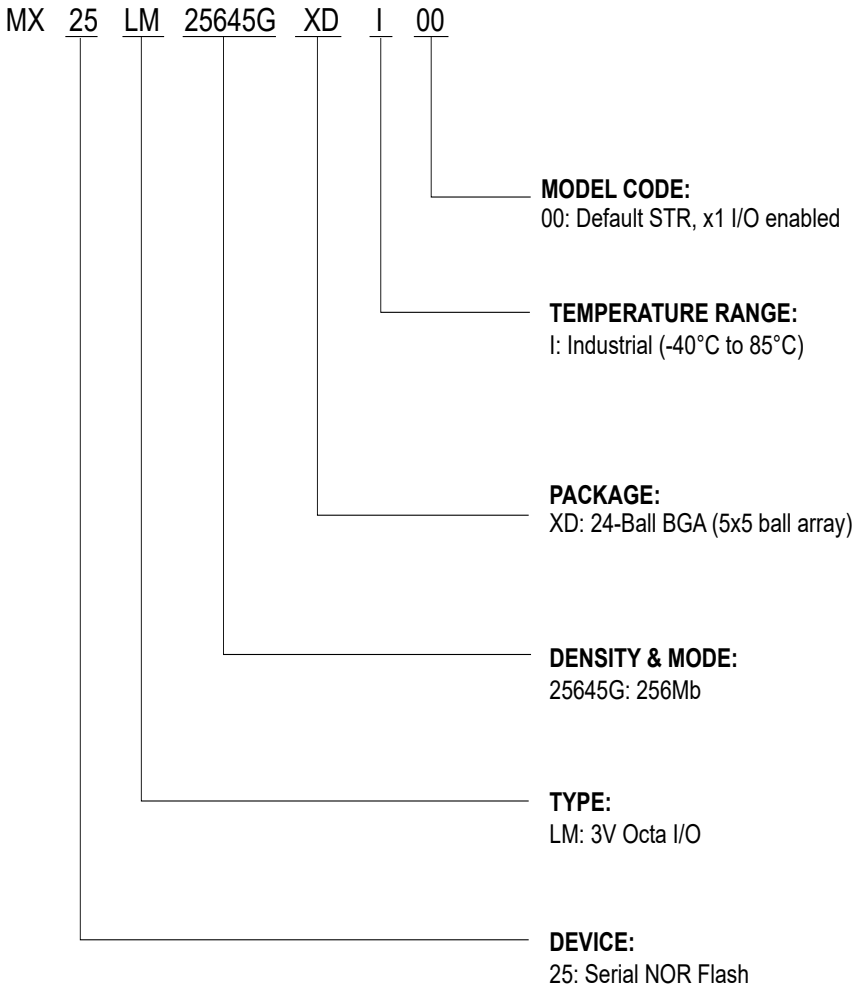




深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

## 22. PACKAGE INFORMATION

Doc. Title: Package Outline for CSP 24BALL (6x8x1.2MM, BALL PITCH 1.0MM, BALL DIAMETER 0.4MM, 5x5 BALL ARRAY)

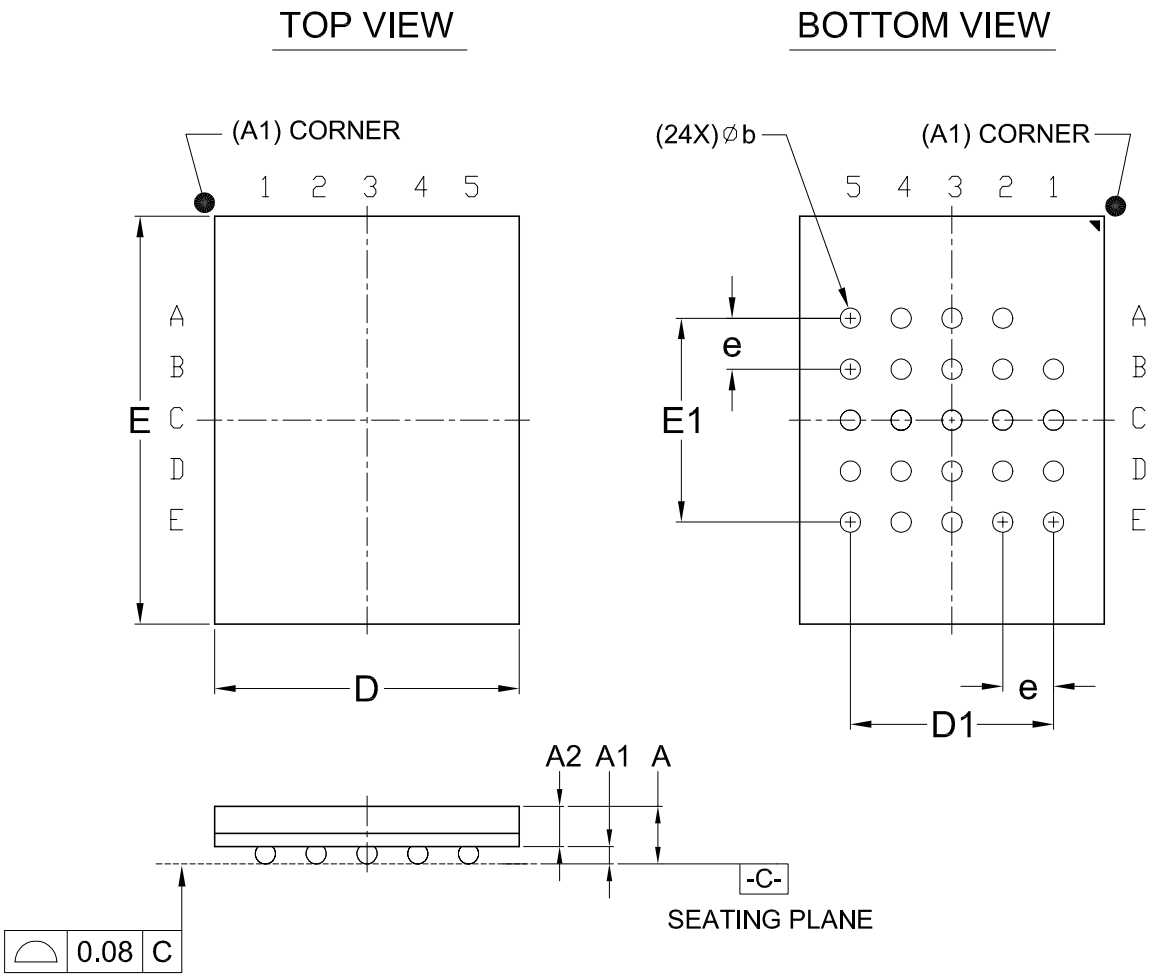



Dimensions (inch dimensions are derived from the original mm dimensions)

| SYMBOL / UNIT | | A | A1 | A2 | b | D | D1 | E | E1 | e |
|---|---|---|---|---|---|---|---|---|---|---|
| mm | Min. | --- | 0.25 | 0.65 | 0.35 | 5.90 | --- | 7.90 | --- | --- |
| | Nom. | --- | 0.30 | --- | 0.40 | 6.00 | 4.00 | 8.00 | 4.00 | 1.00 |
| | Max. | 1.20 | 0.35 | --- | 0.45 | 6.10 | --- | 8.10 | --- | --- |
| Inch | Min. | --- | 0.010 | 0.026 | 0.014 | 0.232 | --- | 0.311 | --- | --- |
| | Nom. | --- | 0.012 | --- | 0.016 | 0.236 | 0.157 | 0.315 | 0.157 | 0.039 |
| | Max. | 0.047 | 0.014 | --- | 0.018 | 0.240 | --- | 0.319 | --- | --- |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

Doc. Title: Package Outline for SOP 16L (300MIL)

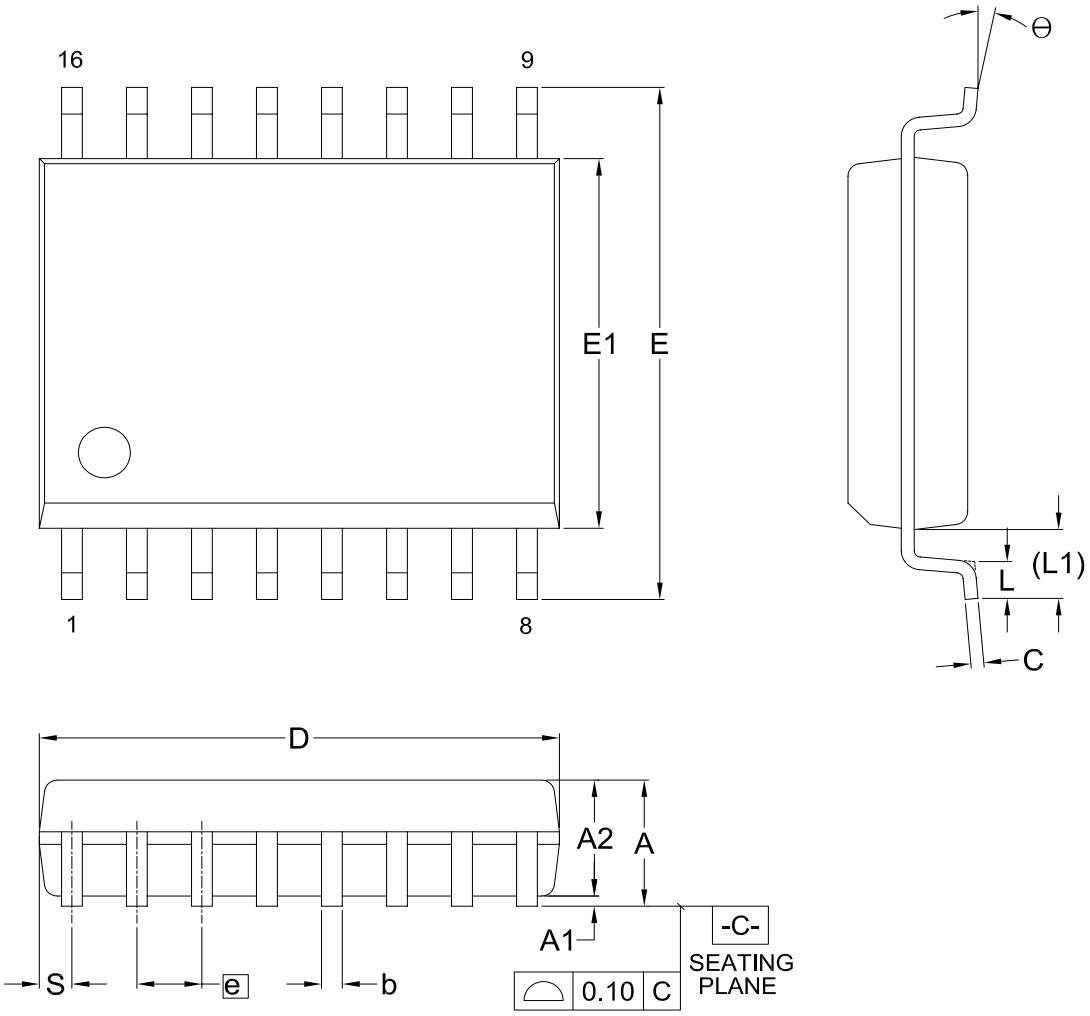


Dimensions (inch dimensions are derived from the original mm dimensions)

| SYMBOL / UNIT | | A | A1 | A2 | b | C | D | E | E1 | e | L | L1 | S | Θ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| mm | Min. | --- | 0.10 | 2.25 | 0.31 | 0.20 | 10.10 | 10.10 | 7.42 | --- | 0.40 | 1.31 | 0.51 | 0° |
| | Nom. | --- | 0.20 | 2.35 | 0.41 | 0.25 | 10.30 | 10.30 | 7.52 | 1.27 | 0.84 | 1.44 | 0.64 | 5° |
| | Max. | 2.65 | 0.30 | 2.45 | 0.51 | 0.30 | 10.50 | 10.50 | 7.60 | --- | 1.27 | 1.57 | 0.77 | 8° |
| Inch | Min. | --- | 0.004 | 0.089 | 0.012 | 0.008 | 0.397 | 0.397 | 0.292 | --- | 0.016 | 0.052 | 0.020 | 0° |
| | Nom. | --- | 0.008 | 0.093 | 0.016 | 0.010 | 0.405 | 0.405 | 0.296 | 0.050 | 0.033 | 0.057 | 0.025 | 5° |
| | Max. | 0.104 | 0.012 | 0.096 | 0.020 | 0.012 | 0.413 | 0.413 | 0.299 | --- | 0.050 | 0.062 | 0.030 | 8° |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

## 23. REVISION HISTORY

| Revision | Descriptions | Page |
|---|---|---|
| February 21, 2020 | | |
| 0.00 | 1. Initial Release. | ALL |
| July 20, 2020 | | |
| 1.0 | 1. Removed "Advanced Information" to align with the product status | ALL |
| | 2. Added Note 10 for tQH | P93 |
| | 3. Content correction. | P17,21,93,98 |
| July 31, 2020 | | |
| 1.1 | 1. Modified tRES1(Max.) value | P94 |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-0290-5940
Email:sales@manduic.com

Except for customized products which have been expressly identified in the applicable agreement, Macronix's products are designed, developed, and/or manufactured for ordinary business, industrial, personal, and/or household applications only, and not for use in any applications which may, directly or indirectly, cause death, personal injury, or severe property damages. In the event Macronix products are used in contradicted to their target usage above, the buyer shall take any and all actions to ensure said Macronix's product qualified for its actual use in accordance with the applicable laws and regulations; and Macronix as well as it's suppliers and/or distributors shall be released from any and all liability arisen therefrom.

Copyright© Macronix International Co., Ltd. 2020. All rights reserved, including the trademarks and tradename thereof, such as Macronix, MXIC, MXIC Logo, MX Logo, Integrated Solutions Provider, Nbit, Macronix NBit, HybridNVM, HybridFlash, HybridXFlash, XtraROM, KH Logo, BE-SONOS, KSMC, Kingtech, MXSMIO, Macronix vEE, RichBook, Rich TV, OctaBus, FitCAM, ArmorFlash. The names and brands of third party referred thereto (if any) are for identification purposes only.

For the contact and order information, please visit Macronix's Web site at: http://www.macronix.com