# P25Q64SH

## Ultra-Low Power, 64M-bit

## Serial Multi I/O Flash Memory Datasheet

### Performance Highlight

- *Supply Range from 2.3 to 3.6V for Read, Erase and Program*
- *Ultra-Low Power consumption for Read, Erase and Program*
- *X1, X2, and X4 Multi I/O, QPI, DTR Support*
- *High reliability with 100K cycling and 20 Year-retention*

PUYA CONFIDENTIAL

# 1 Overview

## General

- **Single 2.3V to 3.60V supply**
- **Industrial Temperature Range -40C to 85C**
- **Serial Peripheral Interface (SPI) Compatible: Mode 0 and Mode 3**
- **Single, Dual, Quad SPI, QPI, DTR**
  - Standard SPI: SCLK, CS#, SI, SO, WP#, HOLD#
  - Dual SPI: SCLK, CS#, IO0, IO1, WP#, HOLD#
  - Quad SPI: SCLK, CS#, IO0, IO1, IO2, IO3
  - QPI: SCLK, CS#, IO0, IO1, IO2, IO3
  - DTR: Double Transfer Rate Read
- **Flexible Architecture for Code and Data Storage**
  - Uniform 256-byte Page Program
  - Uniform 256/512/1024-byte Page Erase
  - Uniform 4K-byte Sector Erase
  - Uniform 32K/64K-byte Block Erase
  - Full Chip Erase
- **Hardware Controlled Locking of Protected Sectors by WP Pin**
- **One Time Programmable (OTP) Security Register**
  - 3*1024-Byte Security Registers with OTP Lock
- **128 bits unique ID for each device**
- **Fast Program and Erase Speed**
  - 2ms Page program time
  - 16ms Page erase time
  - 16ms 4K-byte sector erase time
  - 16ms 32K/64K-byte block erase time
- **JEDEC Standard Manufacturer and Device ID Read Methodology**
- **Ultra-Low Power Consumption**
  - 0.3uA Deep Power Down current (typical)
  - 10.0uA Standby current (typical)
  - 7.5mA Active Read current at 85MHz, 4IO (typical)
  - 3.0mA Active Program or Erase current (typical)
- **High Reliability**
  - 100,000 Program / Erase Cycles
  - 20-year Data Retention
- **Industry Standard Green Package Options**
  - 8-Lead SOP (150mil/208mil)
  - 8-Pad USON (4x4x0.45mm, 3x2x0.55mm)
  - 8-Pad WSON (6x5mm)
  - KGD for SiP

PUYA CONFIDENTIAL


深圳市满度科技有限公司 Tel:150-1290-5940
Web:www.manduic.com Email:sales@manduic.com

# 2 Description

The P25Q64SH is a serial interface Flash memory device designed for use in a wide variety of high-volume consumer-based applications in which program code is shadowed from Flash memory into embedded or external RAM for execution. The flexible erase architecture of the device, with its page erase granularity it is ideal for data storage as well, eliminating the need for additional data storage devices.

The erase block sizes of the device have been optimized to meet the needs of today's code and data storage applications. By optimizing the size of the erase blocks, the memory space can be used much more efficiently. Because certain code modules and data storage segments must reside by themselves in their own erase regions, the wasted and unused memory space that occurs with large sectored and large block erase Flash memory devices can be greatly reduced. This increased memory space efficiency allows additional code routines and data storage segments to be added while still maintaining the same overall device density.

The device also contains an additional 3*1024-byte security registers with OTP lock (One-Time Programmable), can be used for purposes such as unique device serialization, system-level Electronic Serial Number (ESN) storage, locked key storage, etc.


Specifically designed for use in many different systems, the device supports read, program, and erase operations with a wide supply voltage range of 2.3V to 3.6V. No separate voltage is required for programming and erasing.

PUYA CONFIDENTIAL



深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

# 3 Pin Definition

## 3.1 Pin Configurations

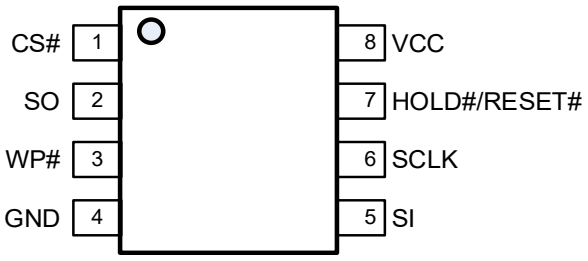


8-Lead SOP (150mil/208mil)

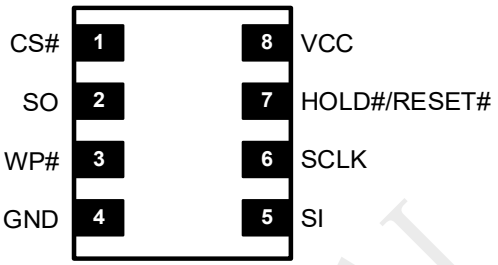


8-Pad USON (4x4mm/3x2mm) and WSON(6x5mm)

## 3.2 Pin Descriptions

| No. | Symbol | Extension | Pull Up | Remarks |
|---|---|---|---|---|
| 1 | CS# | - | - | Chip select |
| 2 | SO | SIO1 | - | Serial data output for 1 x I/O<br>Serial data input and output for 2/4 x I/O read mode |
| 3 | WP# | SIO2 | YES | Write protection active low<br>Serial data input and output for 4 x I/O read mode |
| 4 | GND | - | - | Ground of the device |
| 5 | SI | SIO0 | - | Serial data input for 1x I/O<br>Serial data input and output for 2/4 x I/O read mode |
| 6 | SCLK | - | - | Serial interface clock input |
| 7 | HOLD#/<br>RESET# | SIO3 | YES | Hardware Reset Pin Active low or to pause the device without deselecting the device<br>Serial data input and output for 4 x I/O read mode |
| 8 | VCC | - | - | Power supply of the device |


Notes:

1. SIO0 and SIO1 are used for Standard and Dual SPI instructions.
2. SIO0 – SIO3 are used for Quad SPI and QPI instructions. WP#& HOLD# (or RESET#) functions are only available for Standard/Dual SPI with QE=0.
3. WP# and HOLD#/RESET# pin with weak pull up

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

# 4 Block Diagram

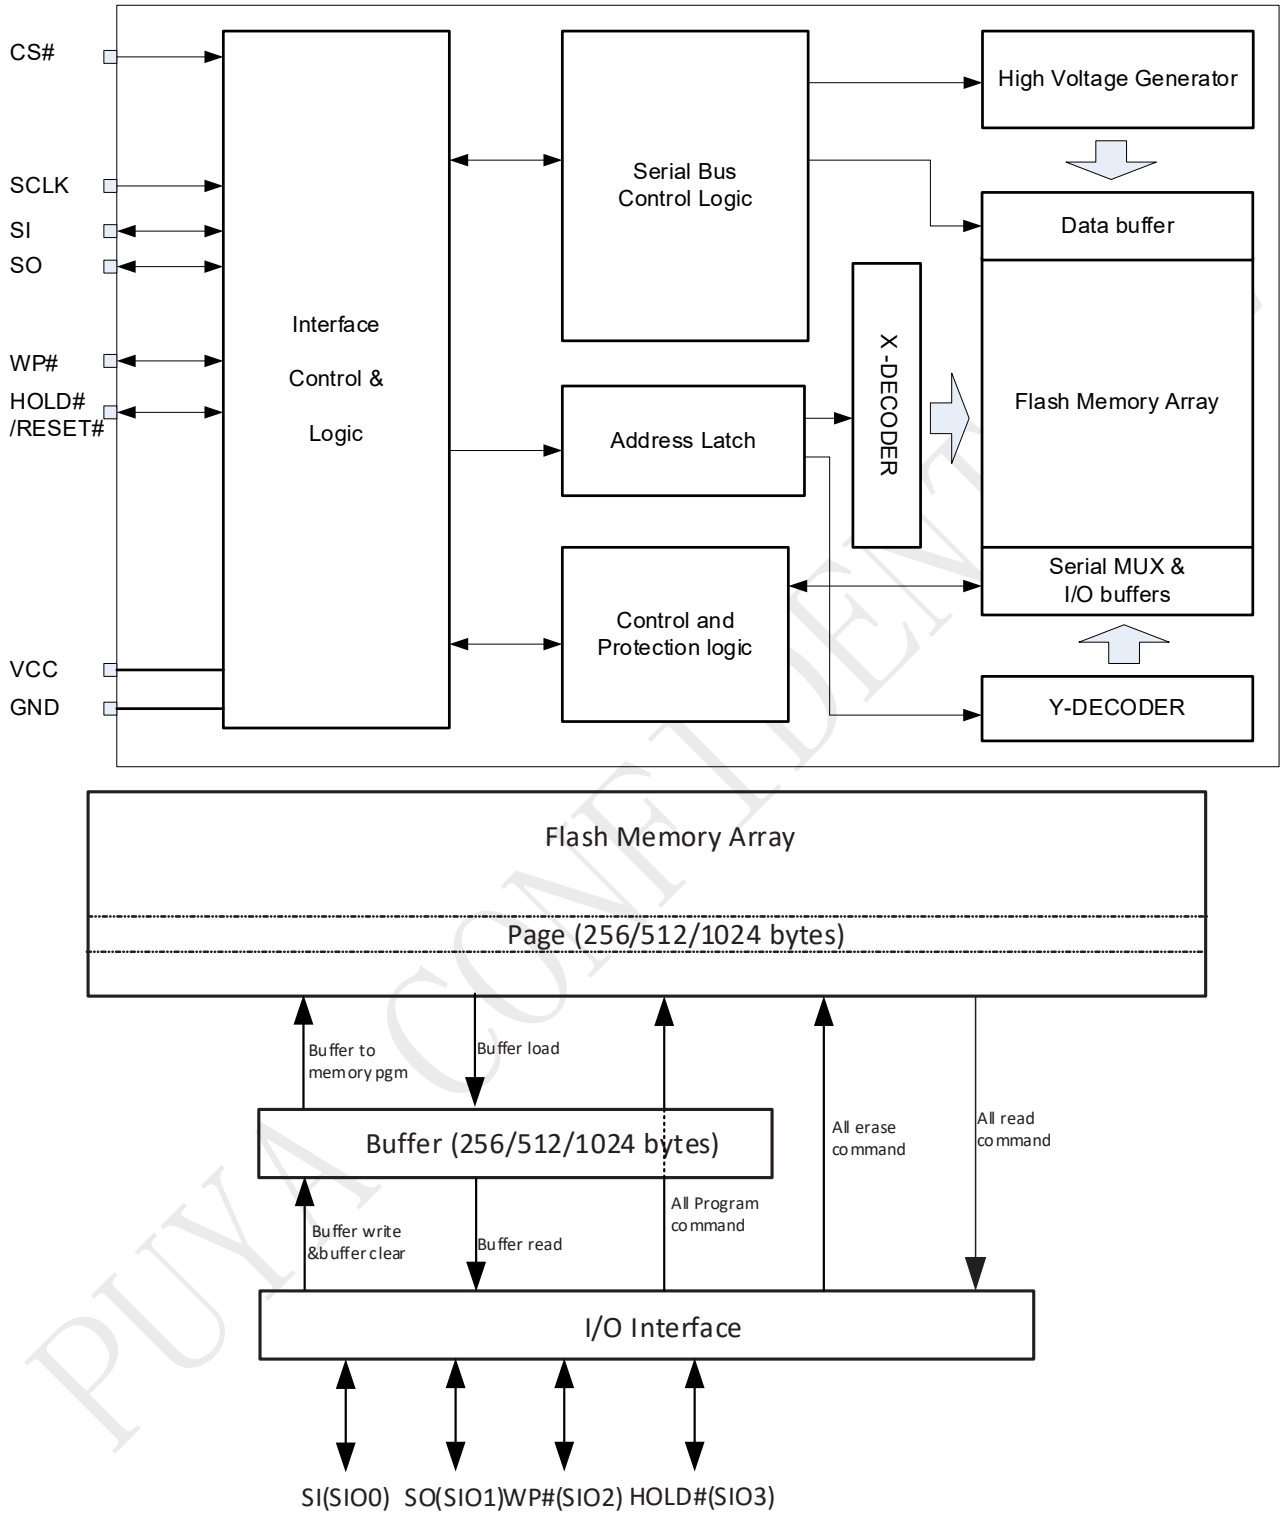


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

# 5 Electrical Specifications

## 5.1 Absolute Maximum Ratings

- Storage Temperature .....-65°C to +150°C
- Operation Temperature .....-40°C to +85°C
- Maximum Operation Voltage..... 4.0V
- Voltage on Any Pin with respect to Ground.....-0.6V to VCC+0.5V
- DC Output Current .....5.0 mA

**NOTICE:** Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational listings of this specification is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

**Table 5-1 Pin Capacitance [1]**

| Symbol | Parameter | Max. | Units | Test Condition |
|---|---|---|---|---|
| $C_{OUT}$ | Output Capacitance | 8 | pF | $V_{OUT}$=GND |
| $C_{IN}$ | Input Capacitance | 6 | pF | $V_{IN}$=GND |

**Note:**

1. Test Conditions: $T_A$= 25°C, F = 1MHz, VCC = 3.0V.

**Figure 5-1 Input Test Waveforms and Measurement Level**


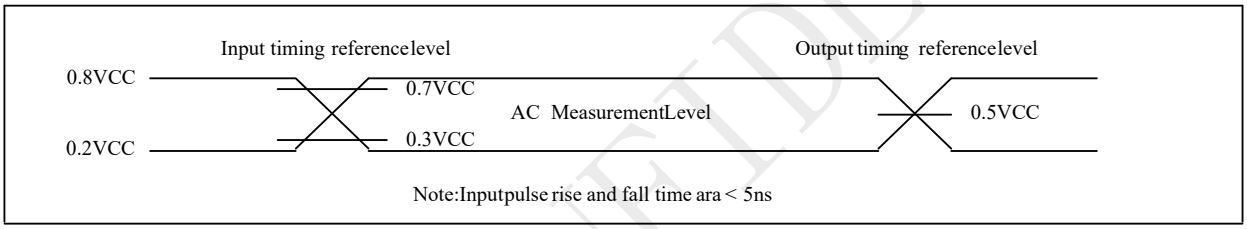



**Figure 5-2 Output Loading**

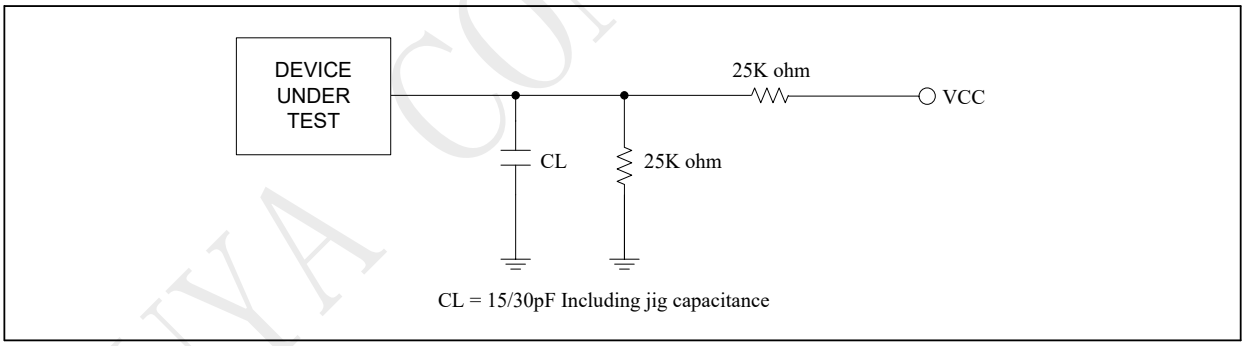


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 5.2 DC Characteristics

**Table 5-2 DC parameters (Ta=-40°C ~ +85°C)**

| Symbol | Parameter | Conditions | 2.3V~3.6V | | | Units |
|---|---|---|---|---|---|---|
| | | | Min | Typ | Max | |
| $I_{DPD}$ | Deep power down current | CS#=VCC, all other inputs at 0V or VCC | | 0.3 | 5.0 | uA |
| $I_{SB}$ | Standby current | CS#, HOLD#, WP#=VIH all inputs at CMOS levels | | 10.0 | 18.0 | uA |
| $I_{CC1}$ | Low power read current (03h) | f=1MHz; IOUT=0mA | | 0.3 | 0.5 | mA |
| | | f=33MHz; IOUT=0mA | | 1.5 | 3.0 | mA |
| $I_{CC2_DC}$ | All Read | IOUT=0mA | | 0.3 | 0.5 | mA |
| $I_{CC2_AC}$ | Read current, SPI(STR, x1) | IOUT=0mA | | 0.04 | 0.06 | mA/MHz |
| | Read current, DSPI(STR, x2) | IOUT=0mA | | 0.052 | 0.08 | mA/MHz |
| | Read current, QSPI/QPI(STR) | IOUT=0mA | | 0.080 | 0.12 | mA/MHz |
| | Read current, SPI(DTR, x1) | IOUT=0mA | | 0.060 | 0.09 | mA/MHz |
| | Read current, DSPI(DTR, x2) | IOUT=0mA | | 0.090 | 0.13 | mA/MHz |
| | Read current, QSPI/QPI(DTR) | IOUT=0mA | | 0.135 | 0.19 | mA/MHz |
| $I_{CC3}$ | Program current | CS#=VCC | | 3.0 | 5.0 | mA |
| $I_{CC4}$ | Erase current | CS#=VCC | | 3.0 | 5.0 | mA |
| $I_{LI}$ | Input load current | All inputs at CMOS level | | | 2.0 | uA |
| $I_{LO}$ | Output leakage | All inputs at CMOS level | | | 2.0 | uA |
| $V_{IL}$ | Input low voltage | | -0.5 | | 0.3Vcc | V |
| $V_{IH}$ | Input high voltage | | 0.7Vcc | | Vcc+0.3 | V |
| $V_{OL}$ | Output low voltage | IOL=100uA | | | 0.2 | V |
| $V_{OH}$ | Output high voltage | IOH=-100uA | Vcc- 0.2 | | | V |

Note：

1. Typical values measured at 3.0V @ 25°C for the 2.3V to 3.6V range.
2. $I_{CC2}=I_{CC2_DC}+I_{CC2_AC} * f_{SCLK}$

**Figure 5-3 Maximum Overshoot Waveform**




During DC conditions, input or I/O signals should remain equal to or between VSS and VCC. During voltage transitions, inputs or I/Os may negative overshoot to –0.6V or positive overshoot to VCC + 0.5 V, for periods up to 20 ns.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 5.3 AC Characteristics

**Table 5-3-1 AC parameters (Ta=-40°C ~ +85°C)**

| Symbol | Alt. | Parameter | 2.3V~3.6V | | | Units |
|---|---|---|---|---|---|---|
| | | | Min | Typ | Max | |
| fSCLK | fC | Clock Frequency for all instructions except for special marking | | | 120 | MHz |
| fRSCLK | fR | Clock Frequency for READ instructions | | | 55 | MHz |
| fTSCLK | fT | Clock Frequency for 2READ, DREAD instructions | | | 120 | MHz |
| | fQ | Clock Frequency for 4READ, QREAD, QPI 0Bh, QPI EBh, QPI 0Ch instructions | | | 120 | MHz |
| | fD | Clock Frequency for DTR 1IO/2IO instructions | | | 85 | MHz |
| | fQD | Clock Frequency for DTR 4IO instructions | | | 70 | MHz |
| fQPP | | Clock Frequency for QPP (Quad page program) | | | 120 | MHz |
| tCH (1) | tCLH | Clock High Time | 3.7 | | | ns |
| tCL (1) | tCLL | Clock Low Time, 45% x (1/fSCLK) | 3.7 | | | ns |
| tCH (1) | tCLH | Clock High Time for READ instructions | 8 | | | ns |
| tCL (1) | tCLL | Clock Low Time for READ instructions | 8 | | | ns |
| tCLCH (4) | | Clock Rise Time (peak to peak) | 0.1 | | | v/ns |
| tCHCL (4) | | Clock Fall Time (peak to peak) | 0.1 | | | v/ns |
| tSLCH | tCSS | CS# Active Setup Time (relative to SCLK) | 5 | | | ns |
| tCHSL | | CS# Not Active Hold Time (relative to SCLK) | 5 | | | ns |
| tDVCH | tDSU | Data in Setup Time | 2 | | | ns |
| tCHDX | tDH | Data in Hold Time | 3 | | | ns |
| tCHSH | | CS# Active Hold Time (relative to SCLK) | 5 | | | ns |
| tSHCH | | CS# Not Active Setup Time (relative to SCLK) | 5 | | | ns |
| tSHSL | tCSH | CS# Deselect Time from Read to next Read | 20 | | | ns |
| | | CS# Deselect Time from Write, Erase, Program to Read Status Register | 30 | | | ns |
| tSHQZ (4) | tDIS | Output Disable Time | | | 6 | ns |
| tCLQV | tV | Clock Low to Output Valid Loading 30pF | 1.5 | | 6 | ns |
| | | Clock Low to Output Valid Loading 15pF | 1.5 | | 5 | ns |
| tCLQX | tHO | Output Hold Time | 0.8 | | | ns |
| tHLCH | | HOLD# Active Setup Time (relative to SCLK) | 5 | | | ns |
| tCHHH | | HOLD# Active Hold Time (relative to SCLK) | 5 | | | ns |
| tHHCH | | HOLD# Not Active Setup Time (relative to SCLK) | 5 | | | ns |
| tCHHL | | HOLD# Not Active Hold Time (relative to SCLK) | 5 | | | ns |
| tHHQX | tLZ | HOLD# to Output Low-Z | | | 6 | ns |
| tHLQZ | tHZ | HOLD# to Output High-Z | | | 6 | ns |
| tWHSL(3) | | Write Protect Setup Time | 20 | | | ns |
| tSHWL(3) | | Write Protect Hold Time | 100 | | | ns |
| tDP | | CS# High to Deep Power-down Mode | | | 3 | us |
| tRES1 | | CS# High to Standby Mode Without Electronic Signature Read | | | 8 | us |
| tRES2 | | CS# High to Standby Mode with Electronic Signature Read | | | 8 | us |
| tW | | Write Status Register Cycle Time | | 8 | 12 | ms |
| tReady | | Reset recovery time (for erase/program operation except WRSR) | 30 | | | us |
| | | Reset recovery time (for WRSR operation) | 12 | 8 | | ms |
| tBL | | Load memory page data to buffer time(256Byte) | | | 60 | us |
| | | Load memory page data to buffer time(512Byte) | | | 120 | us |
| | | Load memory page data to buffer time(1024Byte) | | | 240 | us |
| tBC | | Clear Page Buffer time | | | 0.3 | us |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

**Table 5-3-2 SPI Read Command Performance Comparison (MHz)**

| Read command | Dummy Cycles (VCC=2.3V~3.6V) | | | |
|---|---|---|---|---|
| | 4 | 6 | 8 | 10 |
| FREAD | - | - | 120 | - |
| DREAD | - | - | 120 | - |
| 2READ | 104 | - | 120 | - |
| QREAD | - | - | 120 | - |
| 4READ | - | 104 | - | 120 |
| DTR_FREAD | - | 85 | - | - |
| DTR_2READ | - | 85 | - | - |
| DTR_4READ | - | - | 70 | - |

**Table 5-3-3 QPI Read Command Performance Comparison (MHz)**

| Read command | Dummy Cycles (VCC=2.3V~3.6V) | | | |
|---|---|---|---|---|
| | 4 | 6 | 8 | 10 |
| FREAD | 80 | 104 | 120 | 120(default) |
| 4READ | 80 | 104 | 120 | 120(default) |
| BURST READ | 80 | 104 | 120 | 120(default) |
| DTR_FREAD | - | - | 85 | - |
| DTR_4READ | - | - | 70 | - |
| DTR_BURST READ | - | - | 70 | - |

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 5.4 AC Characteristics for Program and Erase

**Table 5-4 AC parameters from program and erase (Ta=-40°C ~ +85°C)**

| Symbol | Parameter | 2.3V~3.6V | | | Units |
|---|---|---|---|---|---|
| | | Min | Typ | Max | |
| $t_{PSL(5)}$ | Program Suspend Latency | | | 20 | us |
| $t_{ESL(5)}$ | Erase Suspend Latency | | | 20 | us |
| $t_{PRS(6)}$ | Latency between Program Resume and next Suspend | 20 | | | us |
| $t_{ERS(7)}$ | Latency between Erase Resume and next Suspend | 20 | | | us |
| $t_{PP}$ | Page program time (up to 256/512/1024 bytes) | | 1.6 | 2.5 | ms |
| $t_{PE}$ | Page erase time | | 16 | 25 | ms |
| $t_{SE}$ | Sector erase time | | 16 | 25 | ms |
| $t_{BE1}$ | Block erase time for 32K bytes | | 16 | 25 | ms |
| $t_{BE2}$ | Block erase time for 64K bytes | | 16 | 25 | ms |
| $t_{CE}$ | Chip erase time | | 256 | 400 | ms |

Note:

1. tCH + tCL must be greater than or equal to 1/ Frequency.
2. Typical values given for TA=25°C. Not 100% tested.
3. Only applicable as a constraint for a WRSR instruction.
4. The value guaranteed by characterization, not 100% tested in production.
5. Latency time is required to complete Erase/Program Suspend operation.
6. Program operation may be interrupted as often as system request. The minimum timing of tPRS must be observed before issuing the next program suspend command. However, in order for a Program operation to make progress, the average tPRS in resume-to-suspend loop(s) must be more than 100us. Not 100% tested.
7. Erase operation may be interrupted as often as system request. The minimum timing of tERS must be observed before issuing the next erase suspend command. However, in order for an Erase operation to make progress, the average tPRS in resume-to-suspend loop(s) must be more than 100us. Not 100% tested.

**Figure 5-4a Serial Input Timing in non-DTR Mode**


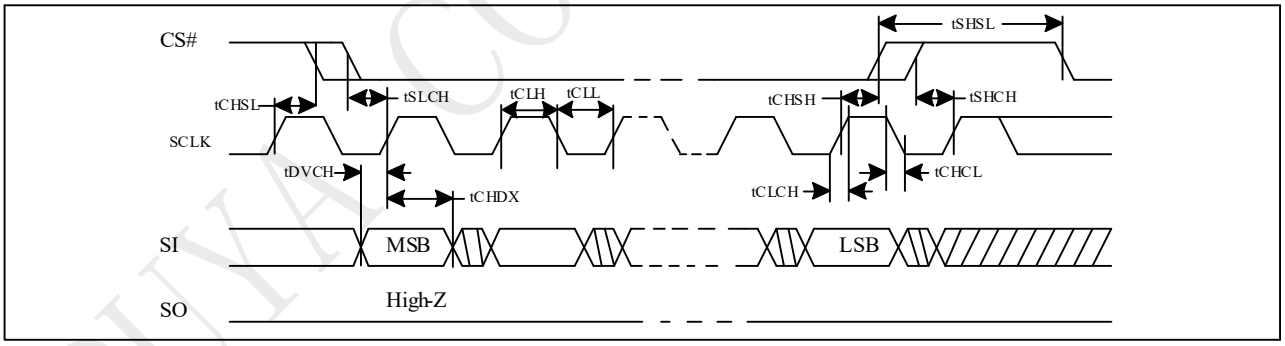



**Figure 5-4b Serial Input Timing in DTR Mode**

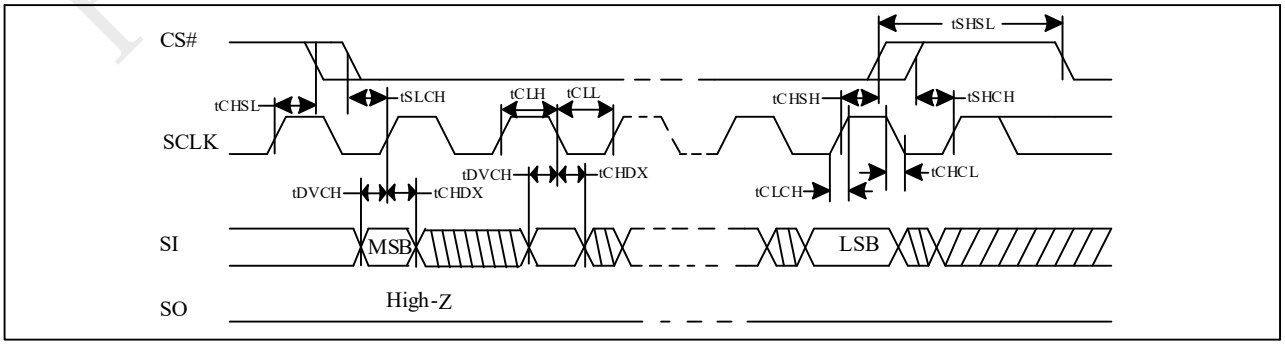


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

**Figure 5-5 Output Timing**

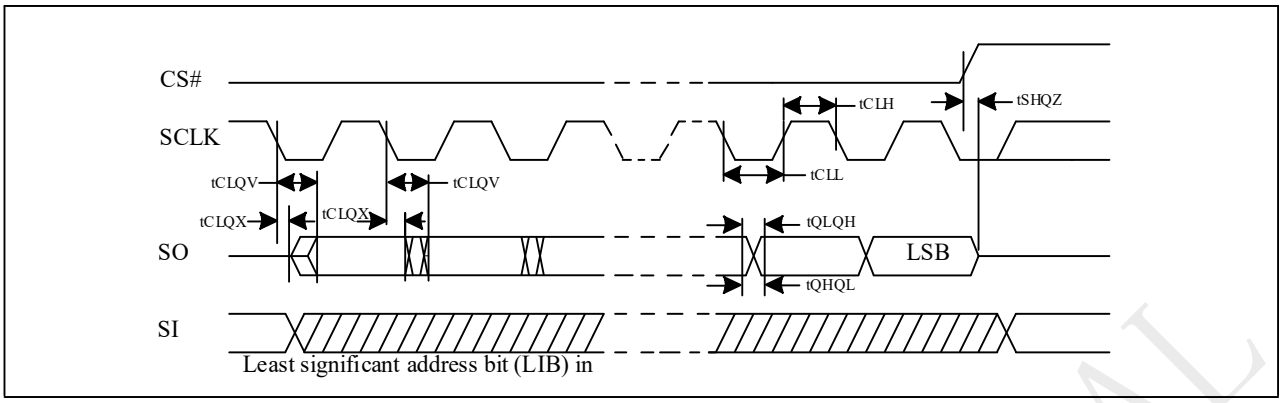



**Figure 5-6 Hold Timing**


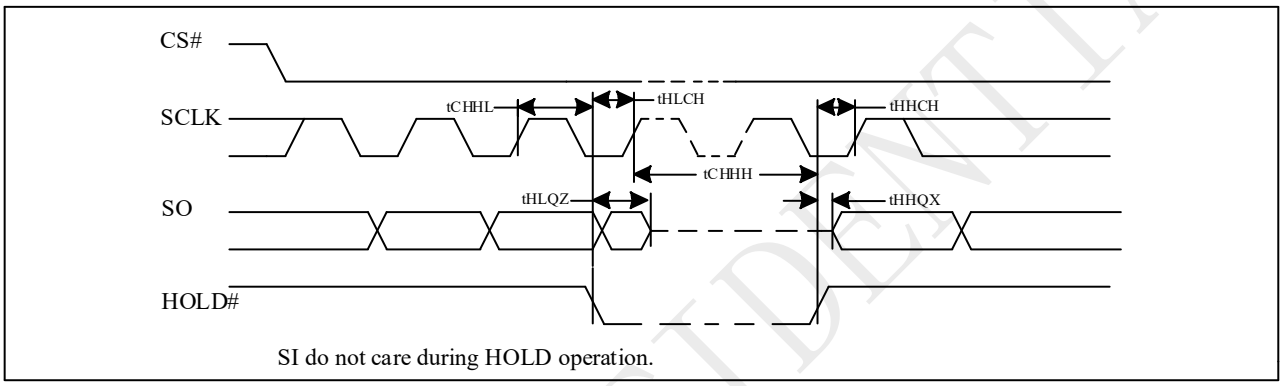



**Figure 5-7 WP Timing**

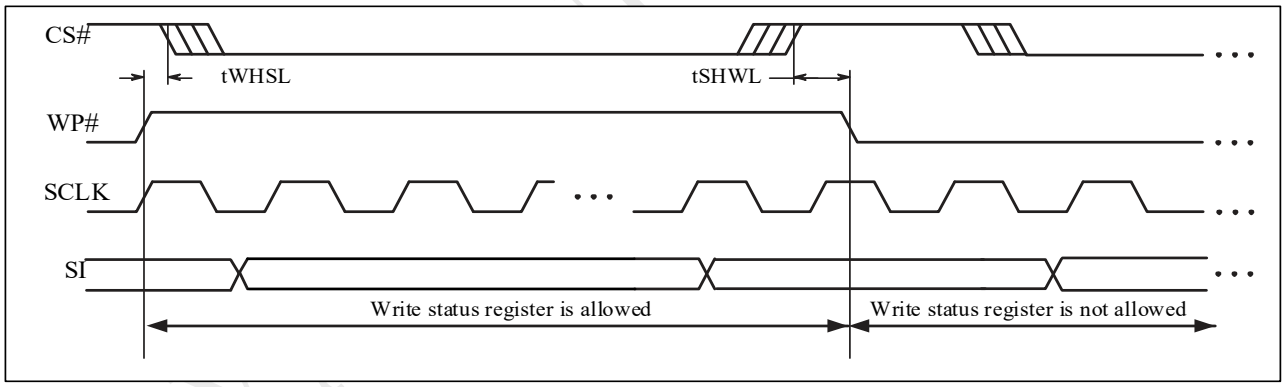


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 5.5 Operation Conditions

**At Device Power-Up and Power-Down**

AC timing illustrated in "Figure AC Timing at Device Power-Up" and "Figure Power-Down Sequence" are for the supply voltages and the control signals at device power-up and power-down. If the timing in the figures is ignored, the device will not operate correctly.

During power-up and power-down, CS# needs to follow the voltage applied on VCC to keep the device not to be selected. The CS# can be driven low when VCC reach Vcc(min.) and wait a period of tVSL.

**Figure 5-8 AC Timing at Device Power-Up**


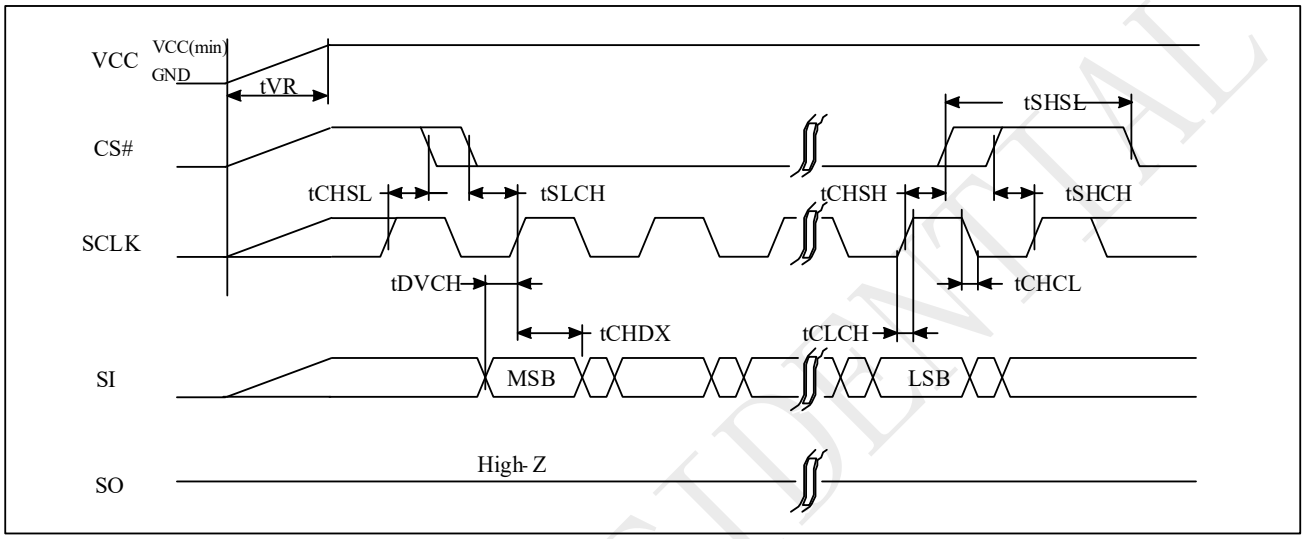



**Figure 5-9 Power-up Timing**

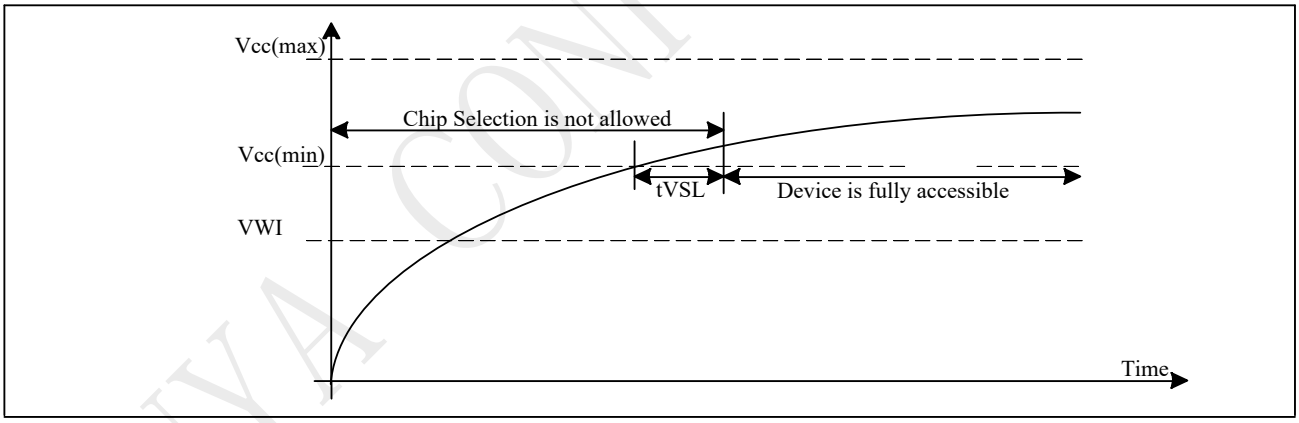



PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

### Power Up/Down and Voltage Drop

For Power-down to Power-up operation, the VCC of flash device must below VPWD for at least tPWD timing. Please check the table below for more detail.

**Figure 5-10 Power down-up Timing**

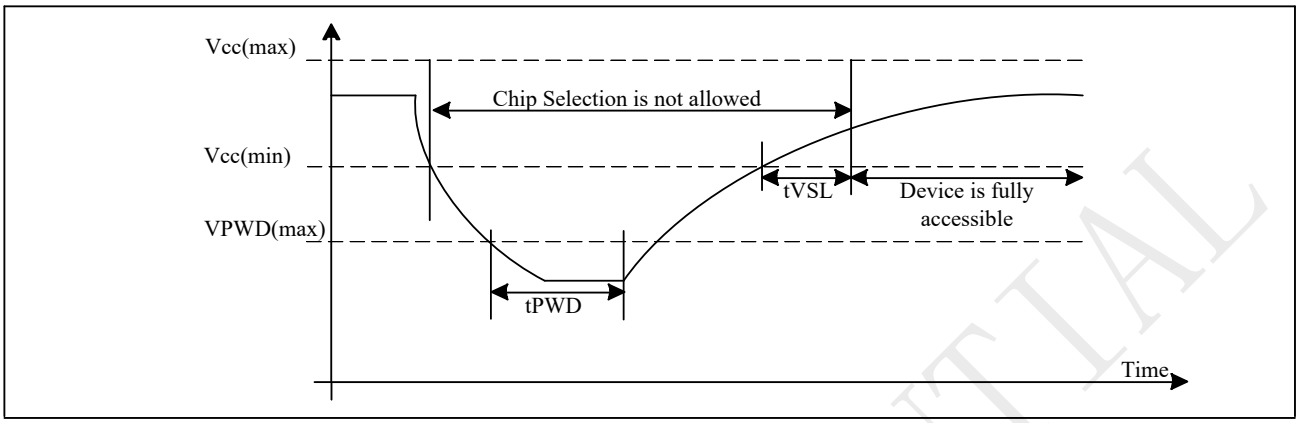


| Symbol | Parameter | Min | Max | Units |
|---|---|---|---|---|
| VPWD | VCC voltage needed to below VPWD for ensuring initialization will occur | | 1 | V |
| tPWD | The minimum duration for ensuring initialization will occur | 300 | | us |
| tVSL | VCC (min.) to device operation | 150 | | us |
| tVR | VCC Rise Time | 1 | 500000 | us/V |
| VWI | Write Inhibit Voltage | 1.2 | 1.55 | V |

### Initial Delivery State

The device is delivered with the memory array erased: all bits are set to 1 (each byte contains FFH). The Status Register contains 00H (all Status Register bits are 0), the Configure Register contains 40H, and the Nonvolatile/Volatile Configure Register2 contains FFH.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

# 6 Data Protection

During power transition, there may be some false system level signals which result in inadvertent erasure or programming. The device is designed to protect itself from these accidental write cycles.
The state machine will be reset as standby mode automatically during power up. In addition, the control register architecture of the device constrains that the memory contents can only be changed after specific command sequences have completed successfully.
In the following, there are several features to protect the system from the accidental write cycles during VCC power-up and power-down or from system noise.
• Power-on reset: to avoid sudden power switch by system power supply transition, the power-on reset may protect the Flash.
• Valid command length checking: The command length will be checked whether it is at byte base and completed on byte boundary.
• Write Enable (WREN) command: WREN command is required to set the Write Enable Latch bit (WEL) before issuing other commands to change data.
• Software Protection Mode: The Block Protect (BP4, BP3, BP2, BP1, and BP0) bits define the section of the memory array that can be read but not change.
• Hardware Protection Mode: WP# going low to protected the BP0~BP4bits and SRP0~1bits
• Deep Power-Down Mode: By entering deep power down mode, the flash device is under protected from writing all commands except the Release from Deep Power-Down Mode command.

**Protected Area Sizes**

**Table 6-1. P25Q64SH Protected Area Sizes (WPS=0, CMP bit = 0)**

| Status Register | | | | | Memory content | | | |
|---|---|---|---|---|---|---|---|---|
| BP4 | BP3 | BP2 | BP1 | BP0 | Blocks | Addresses | Density | Portion |
| X | X | 0 | 0 | 0 | NONE | NONE | NONE | NONE |
| 0 | 0 | 0 | 0 | 1 | 126 to 127 | 7E0000h – 7FFFFFh | 128KB | Upper 1/64 |
| 0 | 0 | 0 | 1 | 0 | 124 to 127 | 7C0000h – 7FFFFFh | 256KB | Upper 1/32 |
| 0 | 0 | 0 | 1 | 1 | 120 to 127 | 780000h – 7FFFFFh | 512KB | Upper 1/16 |
| 0 | 0 | 1 | 0 | 0 | 112 to 127 | 700000h – 7FFFFFh | 1MB | Upper 1/8 |
| 0 | 0 | 1 | 0 | 1 | 97 to 127 | 600000h – 7FFFFFh | 2MB | Upper 1/4 |
| 0 | 0 | 1 | 1 | 0 | 64 to 127 | 400000h – 7FFFFFh | 4MB | Upper 1/2 |
| 0 | 1 | 0 | 0 | 1 | 0 to 1 | 000000h – 01FFFFh | 128KB | Lower 1/64 |
| 0 | 1 | 0 | 1 | 0 | 0 to 3 | 000000h – 03FFFFh | 256KB | Lower 1/32 |
| 0 | 1 | 0 | 1 | 1 | 0 to 7 | 000000h – 07FFFFh | 512KB | Lower 1/16 |
| 0 | 1 | 1 | 0 | 0 | 0 to 15 | 000000h – 0FFFFFh | 1MB | Lower 1/8 |
| 0 | 1 | 1 | 0 | 1 | 0 to 31 | 000000h – 1FFFFFh | 2MB | Lower 1/4 |
| 0 | 1 | 1 | 1 | 0 | 0 to 63 | 000000h – 3FFFFFh | 4MB | Lower 1/2 |
| X | X | 1 | 1 | 1 | 0 to 127 | 000000h – 7FFFFFh | 8MB | ALL |
| 1 | 0 | 0 | 0 | 1 | 127 | 7FF000h – 7FFFFFh | 4KB | U - 1/2048 |
| 1 | 0 | 0 | 1 | 0 | 127 | 7FE000h – 7FFFFFh | 8KB | U - 1/1024 |
| 1 | 0 | 0 | 1 | 1 | 127 | 7FC000h – 7FFFFFh | 16KB | U - 1/512 |
| 1 | 0 | 1 | 0 | X | 127 | 7F8000h – 7FFFFFh | 32KB | U - 1/256 |

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 1 | 0 | 1 | 1 | 0 | 127 | 7F8000h – 7FFFFFh | 32KB | U - 1/256 |
| 1 | 1 | 0 | 0 | 1 | 0 | 000000h – 000FFFh | 4KB | L - 1/2048 |
| 1 | 1 | 0 | 1 | 0 | 0 | 000000h – 001FFFh | 8KB | L - 1/1024 |
| 1 | 1 | 0 | 1 | 1 | 0 | 000000h – 003FFFh | 16KB | L - 1/512 |
| 1 | 1 | 1 | 0 | X | 0 | 000000h – 007FFFh | 32KB | L - 1/256 |
| 1 | 1 | 1 | 1 | 0 | 0 | 000000h – 007FFFh | 32KB | L - 1/256 |

**Table 6-2. P25Q64SH Protected Area Sizes (WPS=0, CMP bit = 1)**

| Status Register | | | | | Memory content | | | |
|---|---|---|---|---|---|---|---|---|
| **BP4** | **BP3** | **BP2** | **BP1** | **BP0** | **Blocks** | **Addresses** | **Density** | **Portion** |
| X | X | 0 | 0 | 0 | 0 to127 | 000000h - 7FFFFFh | 8MB | ALL |
| 0 | 0 | 0 | 0 | 1 | 0 to125 | 000000h –7DFFFFh | 8064KB | Lower 63/64 |
| 0 | 0 | 0 | 1 | 0 | 0 to123 | 000000h – 7BFFFFh | 7936KB | Lower 31/32 |
| 0 | 0 | 0 | 1 | 1 | 0 to119 | 000000h –77FFFFh | 7680KB | Lower 15/16 |
| 0 | 0 | 1 | 0 | 0 | 0 to111 | 000000h –6FFFFFh | 7MB | Lower 7/8 |
| 0 | 0 | 1 | 0 | 1 | 0 to95 | 000000h –5FFFFFh | 6MB | Lower 3/4 |
| 0 | 0 | 1 | 1 | 0 | 0 to63 | 000000h - 3FFFFFh | 4MB | Lower 1/2 |
| 0 | 1 | 0 | 0 | 1 | 2to127 | 020000h - 7FFFFFh | 8064KB | Upper 63/64 |
| 0 | 1 | 0 | 1 | 0 | 4to127 | 040000h - 7FFFFFh | 7936KB | Upper 31/32 |
| 0 | 1 | 0 | 1 | 1 | 8to127 | 080000h - 7FFFFFh | 7680KB | Upper 15/16 |
| 0 | 1 | 1 | 0 | 0 | 16to127 | 100000h - 7FFFFFh | 7MB | Upper 7/8 |
| 0 | 1 | 1 | 0 | 1 | 32to127 | 200000h - 7FFFFFh | 6MB | Upper 3/4 |
| 0 | 1 | 1 | 1 | 0 | 64to127 | 400000h - 7FFFFFh | 4MB | Upper 1/2 |
| X | X | 1 | 1 | 1 | NONE | NONE | NONE | NONE |
| 1 | 0 | 0 | 0 | 1 | 0 to127 | 000000h – 7FEFFFh | 8188KB | L - 2047/2048 |
| 1 | 0 | 0 | 1 | 0 | 0 to 127 | 000000h – 7FDFFFh | 8184KB | L - 1023/1024 |
| 1 | 0 | 0 | 1 | 1 | 0 to127 | 000000h – 7FBFFFh | 8176KB | L - 511/512 |
| 1 | 0 | 1 | 0 | X | 0 to 127 | 000000h – 7F7FFFh | 8160KB | L – 255/256 |
| 1 | 0 | 1 | 1 | 0 | 0 to 127 | 000000h – 7F7FFFh | 8160KB | L - 255/256 |
| 1 | 1 | 0 | 0 | 1 | 0 to 127 | 001000h – 7FFFFFh | 8188KB | L - 2047/2048 |
| 1 | 1 | 0 | 1 | 0 | 0 to 127 | 002000h – 7FFFFFh | 8184KB | L - 1023/1024 |
| 1 | 1 | 0 | 1 | 1 | 0 to 127 | 004000h – 7FFFFFh | 8176KB | L - 511/512 |
| 1 | 1 | 1 | 0 | X | 0 to 127 | 008000h – 7FFFFFh | 8160KB | L – 255/256 |
| 1 | 1 | 1 | 1 | 0 | 0 to 127 | 008000h – 7FFFFFh | 8160KB | L - 255/256 |

Note:


1. X=don’t care

2. If any erase or program command specifies a memory that contains protected data portion, this command will be ignored.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

**Table 6-3. P25Q64SH Individual Block Protection (WPS=1)**

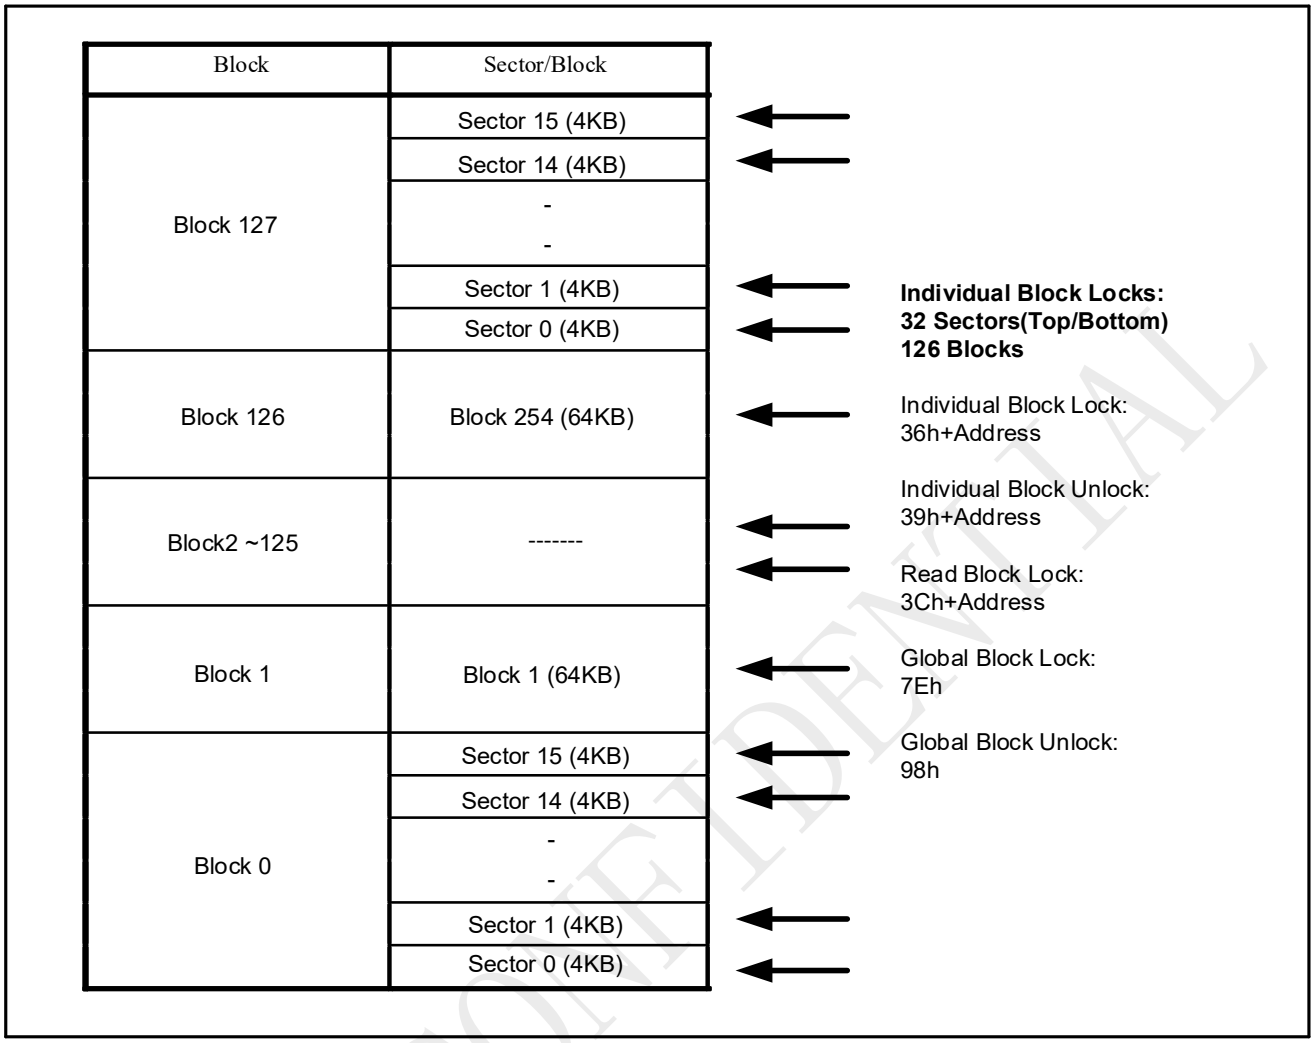


Notes:

1. Individual Block/Sector protection is only valid when WPS=1.
2. All individual block/sector lock bits are set to 1 by default after power up, all memory array is protected.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

# 7 Device Operation

Before a command is issued, status register should be checked to ensure device is ready for the intended operation.


When incorrect command is inputted to this LSI, this LSI becomes standby mode and keeps the standby mode until next CS# falling edge. In standby mode, SO pin of this LSI should be High-Z. When correct command is inputted to this LSI, this LSI becomes active mode and keeps the active mode until next CS# rising edge.

Input data is latched on the rising edge of Serial Clock (SCLK) and data shifts out on the falling edge of SCLK. The difference of serial peripheral interface mode 0 and mode 3 is shown as Figure 8-1.

For the following instructions: RDID, RDSR, RDSR2, RDCR2, VRDCR, RDSCUR, READ, FREAD, DREAD, 2READ, 4READ, QREAD, RDSFDP, RES, REMS, DREMS, QREMS, the shifted-in instruction sequence is followed by a data-out sequence. After any bit of data being shifted out, the CS# can be high. For the following instructions: WREN, WRDI, WRSR, WRCR, WRCR2, VWRCR, PE, SE, BE32K, BE, CE, PP, QPP, DP, ERSCUR, PRSCUR, SUSPEND, RESUME, RSTEN, RST, the CS# must go high exactly at the byte boundary; otherwise, the instruction will be rejected and not executed.

During the progress of Write Register, Program, Erase operation, to access the memory array is neglected and not affect the current operation of Write Register, Program, Erase.


**Figure 8-1 Serial Peripheral Interface Modes Supported**

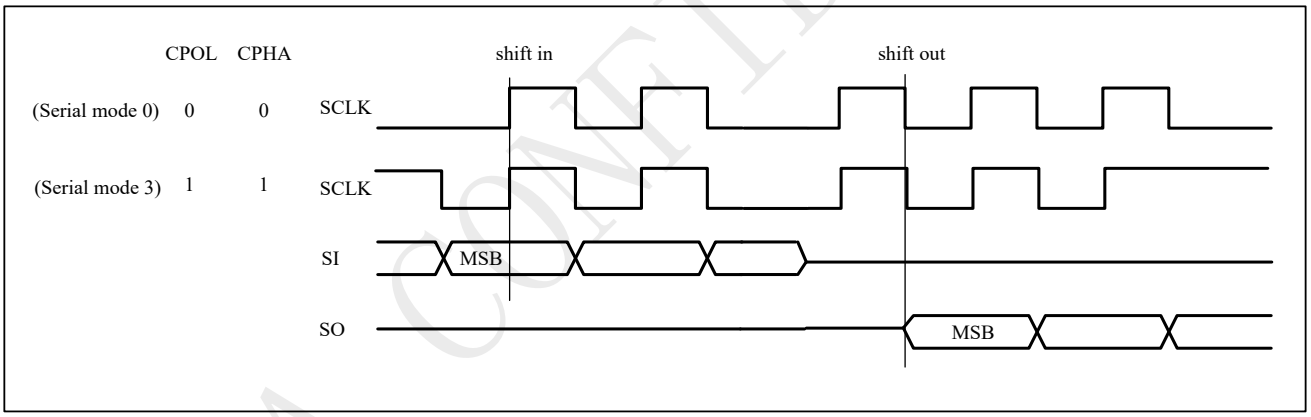


Note: CPOL indicates clock polarity of serial master, CPOL=1 for SCLK high while idle, CPOL=0 for SCLK low while not transmitting. CPHA indicates clock phase. The combination of CPOL bit and CPHA bit decides which serial mode is supported.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

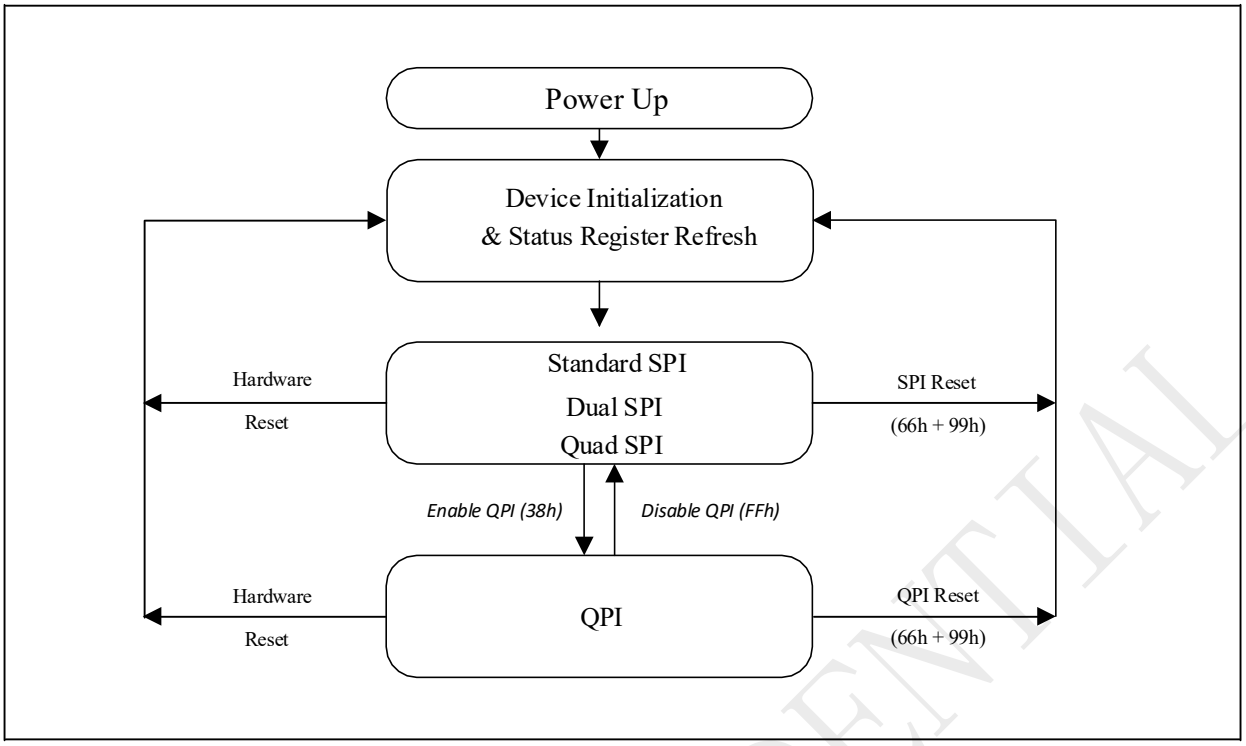


**Standard SPI**

The P25Q64SH features a serial peripheral interface on 4 signals bus: Serial Clock (SCLK), Chip Select (CS#), Serial Data Input (SI) and Serial Data Output (SO). Both SPI bus mode 0 and 3 are supported. Input data is latched on the rising edge of SCLK and data shifts out on the falling edge of SCLK.

**Dual SPI**

The P25Q64SH supports Dual SPI operation when using the “Dual Output Fast Read” and “Dual I/O Fast Read” (3BH, BBH, 92H) commands. These commands allow data to be transferred to or from the device at two times the rate of the standard SPI. When using the Dual SPI command, the SI and SO pins become bidirectional I/O pins: IO0 and IO1.

**Quad SPI**

The P25Q64SH supports Quad SPI operation when using the “Quad Output Fast Read”,” Quad I/O Fast Read” (6BH, EBH, 94H) commands. These commands allow data to be transferred to or from the device at four times the rate of the standard SPI. When using the Quad SPI command, the SI and SO pins become bi-directional I/O pins: IO0 and IO1, and WP# and HOLD# pins become SIO2 and SIO3. Quad SPI commands require the non-volatile Quad Enable bit (QE) in Status Register to be set.

**QPI**

The P25Q64SH supports Quad Peripheral Interface (QPI) operations only when the device is switched from Standard/Dual/Quad SPI mode to QPI mode using the “Enable the QPI (38H)” command. The QPI mode utilizes all four IO pins to input the command code. Standard/Dual/Quad SPI mode and QPI mode are exclusive. Only one mode can be active at any given times. “Enable the QPI (38H)”and “Disable the QPI(FFH)” commands are used to switch between these two modes. Upon power-up and after software reset using “Enable Reset (66H) and Reset (99H)” command, the default state of the device is Standard/Dual/Quad SPI mode. The QPI mode requires the non-volatile Quad Enable bit (QE) in Status Register to be set.

**SPI / QPI DTR Read Instructions**

To effectively improve the read operation throughput without increasing the serial clock frequency, P25Q64SH introduces multiple DTR (Double Transfer Rate) Read instructions that support Standard/Dual/Quad SPI and

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

QPI modes. The byte-long instruction code is still latched into the device on the rising edge of the serial clock similar to all other SPI/QPI instructions. Once a DTR instruction code is accepted by the device, the address input and data output will be latched on both rising and falling edges of the serial clock.

**Software Reset**

The P25Q64SH can be reset to the initial power-on state by a software Reset sequence, either in SPI mode or QPI mode. This sequence must include two consecutive commands: Enable Reset (66h) & Reset (99h). If the command sequence is successfully accepted, the device will take approximately 30uS (tReady) to reset. No command will be accepted during the reset period.

If QE bit is set to 1, the HOLD or RESET function will be disabled, the pin will become one of the four data I/O pins.

Note:

1. There is an internal pull-up resistor for the dedicated RESET# pin. If the reset function is not needed, this pin can be left floating in the system.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

# 8 Memory Address Mapping

The memory array can be erased in three levels of granularity including a full chip erase. The size of the erase blocks is optimized for both code and data storage applications, allowing both code and data segments to reside in their own erase regions.

| Each device has | Each block has | Each sector has | Each page has | |
|---|---|---|---|---|
| 8M | 64/32K | 4K | 256 | bytes |
| 32K | 256/128 | 16 | - | pages |
| 2048 | 16/8 | - | - | sectors |
| 128/256 | - | - | - | blocks |

P25Q64SH Memory Organization

| Block | Sector | Address range | |
|---|---|---|---|
| 127 | 2047 | 7FF000H | 7FFFFFH |
| | ..... | ..... | ..... |
| | 2032 | 7F0000H | 7F0FFFH |
| 126 | 2031 | 7EF000H | 7EFFFFH |
| | ..... | ..... | ..... |
| | 2016 | 7E0000H | 7E0FFFH |
| ..... | ..... | ..... | ..... |
| | ..... | ..... | ..... |
| | ..... | ..... | ..... |
| ..... | ..... | ..... | ..... |
| | ..... | ..... | ..... |
| | ..... | ..... | ..... |
| 2 | 47 | 02F000H | 02FFFFH |
| | ..... | ..... | ..... |
| | 32 | 020000H | 020FFFH |
| 1 | 31 | 01F000H | 01FFFFH |
| | ..... | ..... | ..... |
| | 16 | 010000H | 010FFFH |
| 0 | 15 | 00F000H | 00FFFFH |
| | ..... | ..... | ..... |
| | 0 | 000000H | 000FFFH |

PUYA CONFIDENTIAL



深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

# 9 Hold Feature

HOLD# pin signal goes low to hold any serial communications with the device. The HOLD feature will not stop the operation of write status register, programming, or erasing in progress.

The operation of HOLD requires Chip Select (CS#) keeping low and starts on falling edge of HOLD# pin signal while Serial Clock (SCLK) signal is being low (if Serial Clock signal is not being low, HOLD operation will not start until Serial Clock signal being low). The HOLD condition ends on the rising edge of HOLD# pin signal while Serial Clock (SCLK) signal is being low (if Serial Clock signal is not being low, HOLD operation will not end until Serial Clock being low).

**Figure 9-1 Hold Condition Operation**

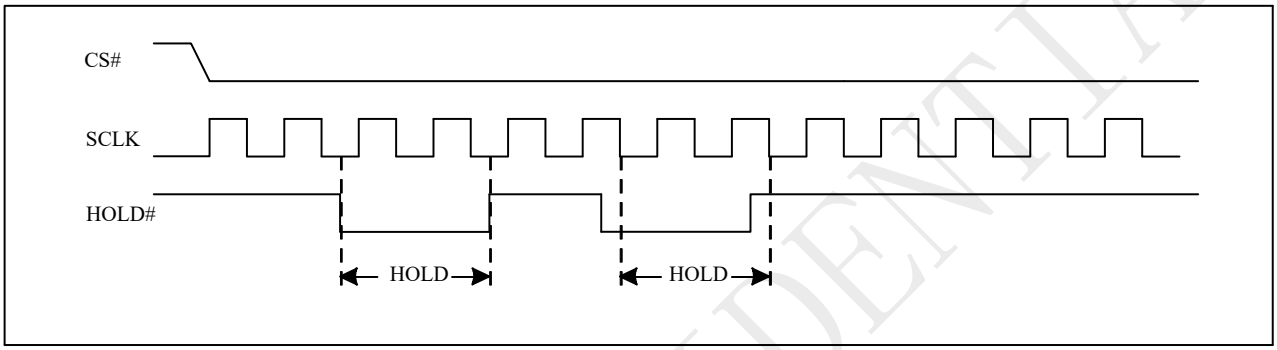


During the HOLD operation, the Serial Data Output (SO) is high impedance when Hold# pin goes low and will keep high impedance until Hold# pin goes high. The Serial Data Input (SI) is don't care if both Serial Clock (SCLK) and Hold# pin goes low and will keep the state until SCLK goes low and Hold# pin goes high. If Chip Select (CS#) drives high during HOLD operation, it will reset the internal logic of the device. To re-start communication with chip, the HOLD# must be at high and CS# must be at low.

**Note:** The HOLD feature is disabled during Quad I/O mode, QPI mode.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

# 10 Commands

## 10.1 Commands listing

**Figure 10-1 Command set (Standard/Dual/Quad SPI)**

| Commands | Abbr. | Code | ADR Bytes | DMY Cycles | Data Bytes | Function description |
|---|---|---|---|---|---|---|
| **Read** | | | | | | |
| Read Array (fast) | FREAD | 0BH | 3 | 8 | 1+ | n bytes read out until CS# goes high |
| Read Array (low power) | READ | 03H | 3 | 0 | 1+ | n bytes read out until CS# goes high |
| Read Dual Output | DREAD | 3BH | 3 | 8 | 1+ | n bytes read out by Dual output |
| Read 2IO | 2READ | BBH | 3 | 4(8) | 1+ | n bytes read out by 2IO |
| Read Quad Output | QREAD | 6BH | 3 | 8 | 1+ | n bytes read out by Quad output |
| Read 4IO | 4READ | EBH | 3 | 6(10) | 1+ | n bytes read out by 4IO |
| Read Word 4IO | WREAD | E7H | 3 | 4 | 1+ | n bytes word read out by 4IO |
| **Program and Erase** | | | | | | |
| Page Erase | PE | 81H | 3 | 0 | 0 | erase selected page |
| Sector Erase (4K bytes) | SE | 20H | 3 | 0 | 0 | erase selected sector |
| Block Erase (32K bytes) | BE32 | 52H | 3 | 0 | 0 | erase selected 32K block |
| Block Erase (64K bytes) | BE | D8H | 3 | 0 | 0 | erase selected 64K block |
| Chip Erase | CE | 60H/C7H | 0 | 0 | 0 | erase whole chip |
| Page Program | PP | 02H | 3 | 0 | 1+ | program selected page |
| Quad page program | QPP | 32H | 3 | 0 | 1+ | quad input to program selected page |
| Program/Erase Suspend | PES | 75H | 0 | 0 | 0 | suspend program/erase operation |
| Program/Erase Resume | PER | 7AH | 0 | 0 | 0 | continue program/erase operation |
| **Protection** | | | | | | |
| Write Enable | WREN | 06H | 0 | 0 | 0 | sets the write enable latch bit |
| Write Disable | WRDI | 04H | 0 | 0 | 0 | resets the write enable latch bit |
| Volatile SR Write Enable | VWREN | 50H | 0 | 0 | 0 | Write enable for volatile SR |
| Individual Block Lock | SBLK | 36H | 3 | 0 | 0 | Individual block lock |
| Individual Block Unlock | SBULK | 39H | 3 | 0 | 0 | Individual block unlocks |
| Read Block Lock Status | RDBLOCK | 3DH | 3 | 0 | 0 | Read individual block lock register |
| Global Block Lock | GBLK | 7EH | 0 | 0 | 0 | Whole chip block protects |
| Global Block Unlock | GBULK | 98H | 0 | 0 | 0 | Whole chip block unprotects |
| **Security** | | | | | | |
| Erase Security Registers | ERSCUR | 44H | 3 | 0 | 0 | Erase security registers |
| Program Security Registers | PRSCUR | 42H | 3 | 0 | 1+ | Program security registers |
| Read Security Registers | RDSCUR | 48H | 3 | 8 | 1+ | Read value of security register |

**Command set (Standard/Dual/Quad SPI)**

| Commands | Abbr. | Code | ADR Bytes | DMY cycle | Data Bytes | Function |
|---|---|---|---|---|---|---|
| **Status Register** | | | | | | |
| Read Status Register | RDSR | 05h | 0 | 0 | 1 | read out status register |
| Read Status Register-1 | RDSR1 | 35h | 0 | 0 | 1 | Read out status register-1 |
| Read Configure Register | RDCR | 15h | 0 | 0 | 1 | Read out configure register |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

| | | | | | | |
|---|---|---|---|---|---|---|
| Write Status Register | WRSR | 01h | 0 | 0 | 1-2 | Write data to status registers-0 and status registers-1 |
| Write Status Register-1 | WRSR1 | 31h | 0 | 0 | 1 | Write data to status registers-1 |
| Write Configure Register | WRCR | 11H | 0 | 0 | 1 | Write data to configure register |
| **Data Buffer** | | | | | | |
| Buffer Clear | BFCR | 9EH | 0 | 0 | 0 | Clear all buffer data |
| Buffer Load | BFLD | 9AH | 3 | 0 | 0 | Load data from main memory to buffer |
| Buffer Read | BFRD | 9BH | 3 | 8 | 1+ | Read data out from buffer |
| Buffer Write | BFWR | 9CH | 3 | 0 | 1+ | Write data to buffer |
| Buffer to Main Memory Page Program | BFPP | 9DH | 3 | 0 | 0 | Program buffer data to main memory |
| **Other Commands** | | | | | | |
| Reset Enable | RSTEN | 66H | 0 | 0 | 0 | Enable reset |
| Reset | RST | 99H | 0 | 0 | 0 | Reset |
| Enable QPI | QPIEN | 38H | 0 | 0 | 0 | Enable QPI mode |
| Read Manufacturer/device ID | RDID | 9FH | 0 | 0 | 1 to 3 | output JEDEC ID: 1-byte manufacturer ID & 2-byte device ID |
| Read Manufacture ID | REMS | 90H | 3 | 0 | 1+ | Read manufacturer ID/device ID data |
| Dual Read Manufacture ID | DREMS | 92H | 3 | 4 | 1+ | Dual output read manufacture/device ID |
| Quad Read Manufacture ID | QREMS | 94H | 3 | 8 | 1+ | Quad output read manufacture/device ID |
| Deep Power-down | DP | B9H | 0 | 0 | 0 | enters deep power-down mode |
| Release Deep Power-down/Read Electronic ID | RDP/RES | ABH | 3 | 0 | 1 | Read electronic ID data |
| Set burst length | SBL | 77H | 0 | 0 | 0 | Set burst length |
| Read SFDP | RDSFDP | 5AH | 3 | 8 | 1+ | Read SFDP parameter |
| Release read enhanced | RSEN | FFH | | | | Release from read enhanced |
| Read unique ID | RUID | 4BH | 3 | 8 | 1+ | Read unique ID |
| No Operation | NOP | 00H | 0 | 0 | 0 | |

**Command set (QPI Instructions)**

| Commands | Abbr. | Code | ADR Bytes | DMY cycles | Data Bytes | Function description |
|---|---|---|---|---|---|---|
| **Read** | | | | | | |
| Fast read | FREAD | 0BH | 3 | 10/4/6/8 | 1+ | n bytes read out until CS# goes high |
| Burst Read with Wrap | BRW | 0CH | 3 | 10/4/6/8 | 1+ | n bytes burst read with wrap by 4IO |
| Read Word 4x I/O | 4READ | EBH | 3 | 10/4/6/8 | 1+ | n bytes read out by 4IO |
| Read Word 4IO | WREAD | E7H | 3 | 4 | 1+ | n bytes word read out by 4IO |
| **Protection** | | | | | | |
| Write Enable | WREN | 06H | 0 | 0 | 0 | sets the write enable latch bit |
| Volatile SR Write Enable | VWREN | 50H | 0 | 0 | 0 | Write enable for volatile status register |
| Write Disable | WRDI | 04H | 0 | 0 | 0 | resets the write enable latch bit |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

| Commands | Abbr. | Code | ADR Bytes | DMY cycles | Data Bytes | Function description |
|---|---|---|---|---|---|---|
| Individual Block Lock | SBLK | 36H | 3 | 0 | 0 | Individual block lock |
| Individual Block Unlock | SBULK | 39H | 3 | 0 | 0 | Individual block unlocks |
| Read Block Lock Status | RDBLOCK | 3DH | 3 | 0 | 0 | Read individual block lock register |
| Global Block Lock | GBLK | 7EH | 0 | 0 | 0 | Whole chip block protects |
| Global Block Unlock | GBULK | 98H | 0 | 0 | 0 | Whole chip block unprotects |
| **Status Register** | | | | | | |
| Read Status Register | RDSR | 05h | 0 | 0 | 1 | read out status register |
| Read Status Register-1 | RDSR1 | 35h | 0 | 0 | 1 | Read out status register-1 |
| Read Configure Register | RDCR | 15h | 0 | 0 | 1 | Read out configure register |
| Write Status Register | WRSR | 01h | 0 | 0 | 1-2 | Write data to status registers-0 and status registers-1 |
| Write Status Register-1 | WRSR1 | 31h | 0 | 0 | 1 | Write data to status registers-1 |
| Write Configure Register | WRCR | 11H | 0 | 0 | 1 | Write data to configuration register |
| **Program and Erase** | | | | | | |
| Page Program | PP | 02H | 3 | 0 | 1+ | program selected page |
| Page Erase | PE | 81H | 3 | 0 | 0 | erase selected page |
| Sector Erase (4K bytes) | SE | 20H | 3 | 0 | 0 | erase selected sector |
| Block Erase (32K bytes) | BE32 | 52H | 3 | 0 | 0 | erase selected 32K block |
| Block Erase (64K bytes) | BE | D8H | 3 | 0 | 0 | erase selected 64K block |
| Chip Erase | CE | 60H/C7H | 0 | 0 | 0 | erase whole chip |
| Program/Erase Suspend | PES | 75H | 0 | 0 | 0 | suspend program/erase operation |
| Program/Erase Resume | PER | 7AH | 0 | 0 | 0 | continue program/erase operation |
| **Data Buffer** | | | | | | |
| Buffer Clear | BFCR | 9EH | 0 | 0 | 0 | Clear all buffer data |
| Buffer Load | BFLD | 9AH | 3 | 0 | 0 | Load data from memory to buffer |
| Buffer Read | BFRD | 9BH | 3 | 10/4/6/8 | 1+ | Read data out from buffer |
| Buffer Write | BFWR | 9CH | 3 | 0 | 1+ | Write data to buffer |
| Buffer to Main Memory Program | BFPP | 9DH | 3 | 0 | 0 | Program buffer data to main memory |
| **Other Commands** | | | | | | |
| Deep Power-down | DP | B9H | 0 | 0 | 0 | enters deep power-down mode |
| Release Deep Power-down/Read Electronic ID | RDP/RES | ABH | 3 | 0 | 1 | Read electronic ID data |
| Set Read Parameters | SRP | C0H | 0 | 0 | 1 | Set read dummy and wrap |
| Read Manufacture ID | REMS | 90H | 3 | | 1+ | Read manufacturer ID/device ID data |
| Read Manufacturer/device ID | RDID | 9FH | 0 | 0 | 1 to 3 | output JEDEC ID: 1-byte manufacturer ID & 2-byte device ID |
| Read SFDP | RDSFDP | 5AH | 3 | 10/4/6/8 | 1+ | Read SFDP parameter |
| Disable QPI | DSQPI | FFH | | | | Release from read enhanced |
| Reset Enable | RSTEN | 66H | 0 | 0 | 0 | Enable reset |
| Reset | RST | 99H | 0 | 0 | 0 | Reset |
| No Operation | NOP | 00H | 0 | 0 | 0 | |

DRAFT


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

**Command set (DTR Instructions for SPI mode)**

| Commands | Abbr. | Code | ADR Bytes | DMY cycles | Data Bytes | Function description |
|---|---|---|---|---|---|---|
| DTR Fast Read | DTRFRD | 0DH | 3 | 6 | 1+ | DTR n byte fast read out |
| DTR 2IO Read | 2DTRD | BDH | 3 | 6 | 1+ | DTR n byte read out by 2IO |
| DTR 4IO Read | 4DTRD | EDH | 3 | 8 | 1+ | DTR n byte read out by 4IO |

**Command set (DTR Instructions for QPI mode)**

| Commands | Abbr. | Code | ADR Bytes | DMY cycles | Data Bytes | Function description |
|---|---|---|---|---|---|---|
| DTR Burst Read with Wrap | DTRBRW | 0EH | 3 | 8 | 1+ | DTR n bytes burst read with wrap by 4IO |
| DTR Fast Read | DTRFRD | 0DH | 3 | 8 | 1+ | DTR n byte fast read out |
| DTR 4IO Read | 4DTRD | EDH | 3 | 8 | 1+ | DTR n byte fast read out |

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.2 Write Enable (06H)

The Write Enable (WREN) instruction is for setting Write Enable Latch (WEL)bit. For those instructions like PP, QPP, PE, SE, BE32K, BE, CE, BFPP, WRSR, WRSR1, WRCR, ERSCUR, PRSCUR and SBLK SBULK, GBLK, GBULK which are intended to change the device content, should be set every time after the WREN instruction setting the WEL bit.

The sequence of issuing WREN instruction is: CS# goes low→ sending WREN instruction code→ CS# goes high.

**Figure 10-2 Write Enable (WREN) Sequence (Command 06)**


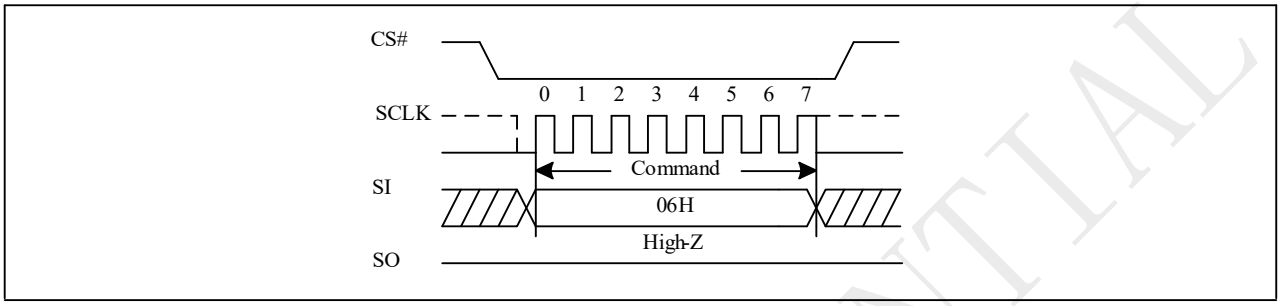



**Figure 10-2a Write Enable (WREN) Sequence (QPI)**

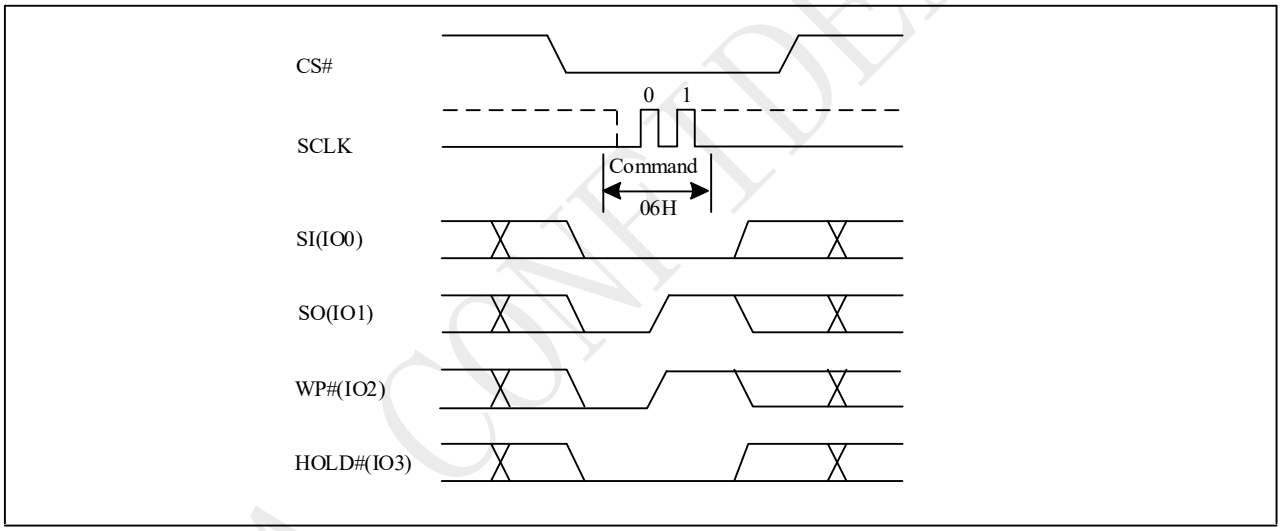


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 10.3 Write Disable (04H)

The Write Disable (WRDI) instruction is for resetting Write Enable Latch (WEL) bit.

The sequence of issuing WRDI instruction is: CS# goes low→ sending WRDI instruction code→ CS# goes high.

The WEL bit is reset by following situations:

- Power-up
- Write Disable (WRDI) instruction completion
- Write Register (WRSR/WRSR1/WRCR) instruction completion
- Page Program (PP) instruction completion
- Quad Page Program (QPP) instruction completion
- Page Erase (PE) instruction completion
- Sector Erase (SE) instruction completion
- Block Erase (BE32K, BE) instruction completion
- Chip Erase (CE) instruction completion
- Buffer to Main Memory Page Program (BFPP) instruction completion
- Erase Security Register (ERSCUR) instruction completion
- Program Security Register (PRSCUR) instruction completion
- SBLK SBULK, GBLK, GBULK instruction completion
- Reset (RST) instruction completion
- Suspend instruction completion

**Figure 10-3 Write Disable (WRDI) Sequence (Command 04)**


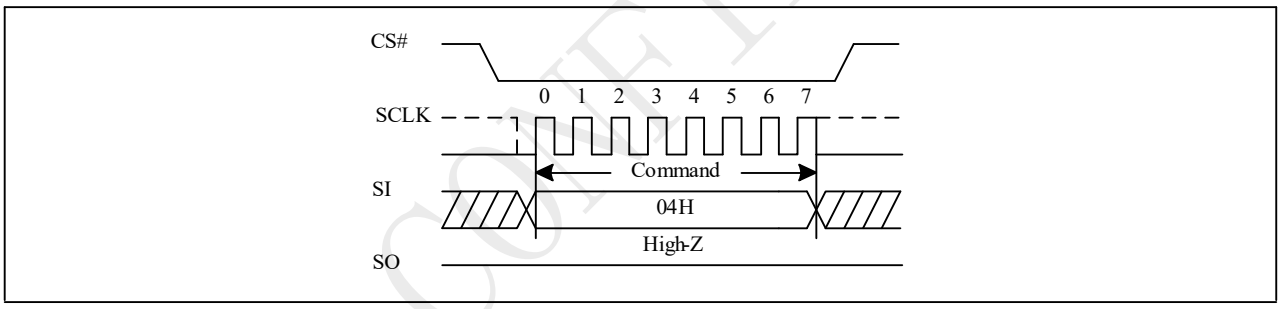



**Figure 10-3a Write Disable (WRDI) Sequence (QPI)**

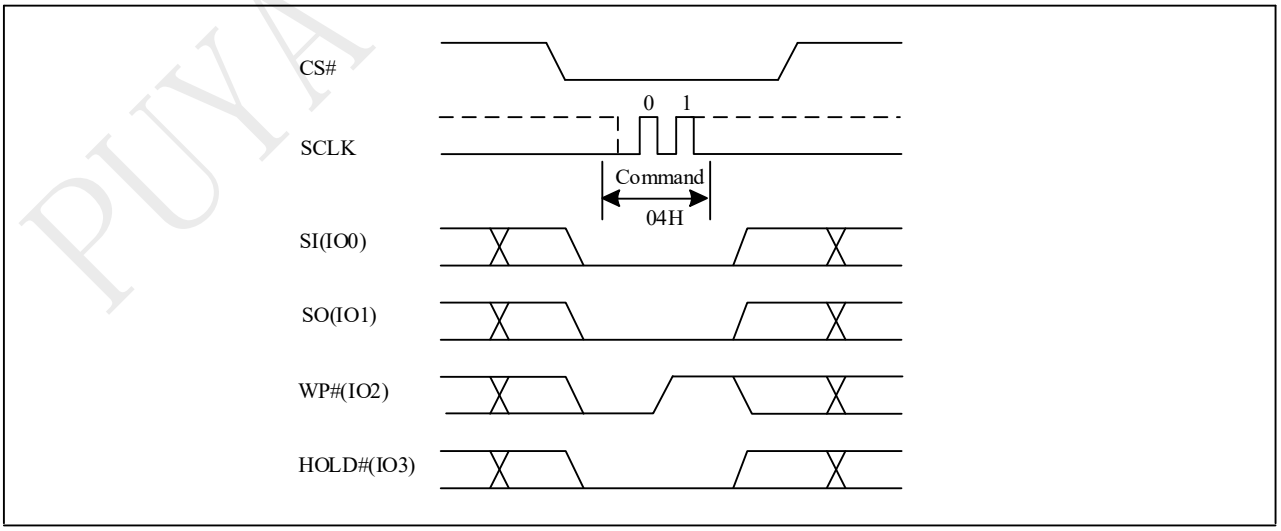


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.4 Write Enable for Volatile Status Register (50H)

The non-volatile Status Register bits can also be written to as volatile bits. This gives more flexibility to change the system configuration and memory protection schemes quickly without waiting for the typical non-volatile bit write cycles or affecting the endurance of the Status Register non-volatile bits. The Write Enable for Volatile Status Register command must be issued prior to a Write Status Register command. The Write Enable for Volatile Status Register command will not set the Write Enable Latch bit, it is only valid for the Write Status Register command to change the volatile Status Register bit values.

The sequence of issuing Write Enable for Volatile Status Register instruction is: CS# goes low→ sending Write Enable for Volatile Status Register instruction code→ CS# goes high.

**Figure 10-4 Write Enable for Volatile Status Register Sequence (Command 50h)**


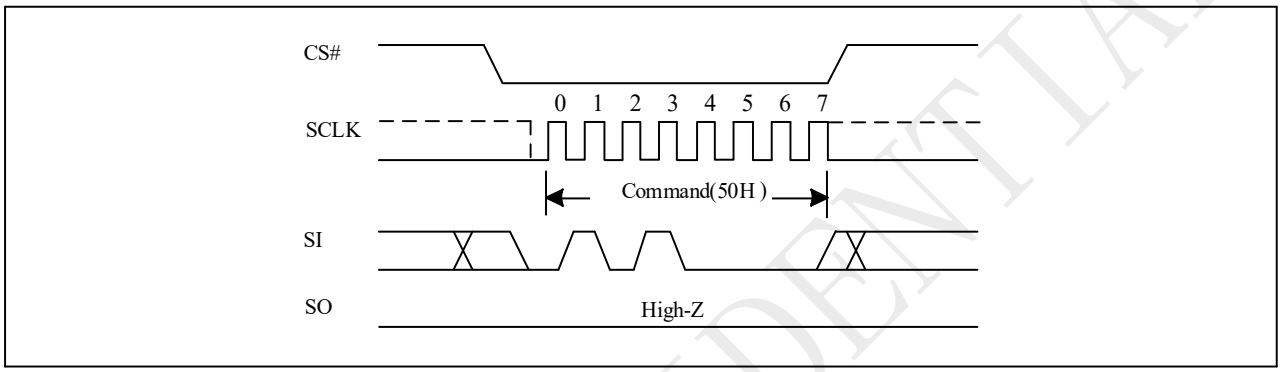



**Figure 10-4a Write Enable for Volatile Status Register Sequence (QPI)**

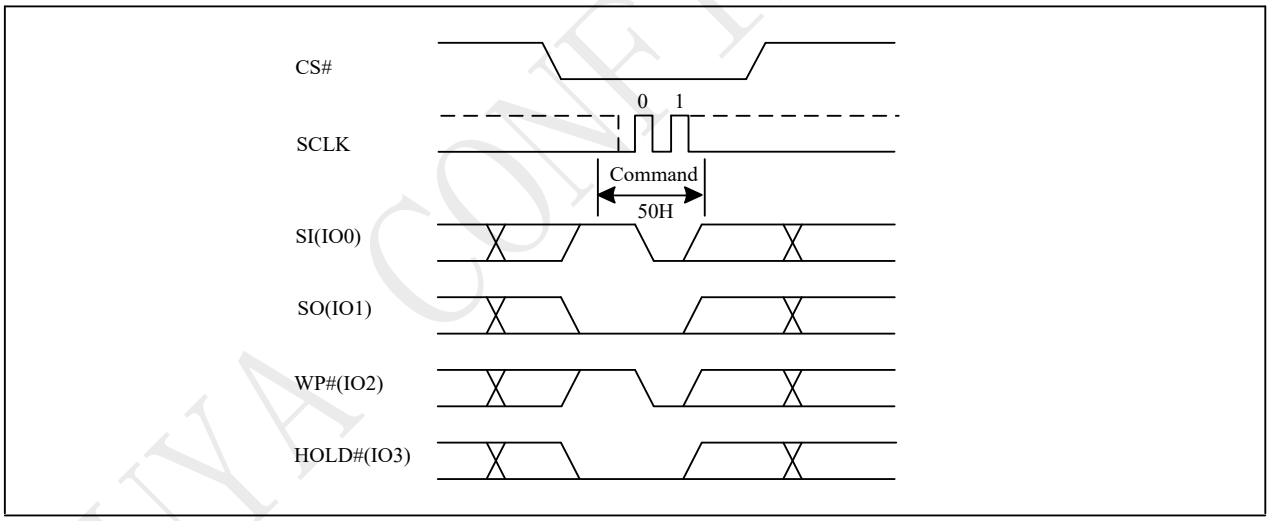


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 10.5 Read Status Register (05H/35H)

The RDSR instruction is for reading Status Register Bits. The Read Status Register can be read at any time (even in program/erase/write status register condition). It is recommended to check the Write in Progress (WIP) bit before sending a new instruction when a program, erase, or write status register operation is in progress. For command code “05H”, the SO will output Status Register-0 bits S7~S0. The command code “35H”, the SO will output Status Register-1 bits S15~S8.

The sequence of issuing RDSR instruction is: CS# goes low→ sending RDSR instruction code→ Status Register data out on SO. The SIO [3:1] are "don't care".

**Figure 10-5 Read Status Register (RDSR) Sequence (Command 05 or 35)**


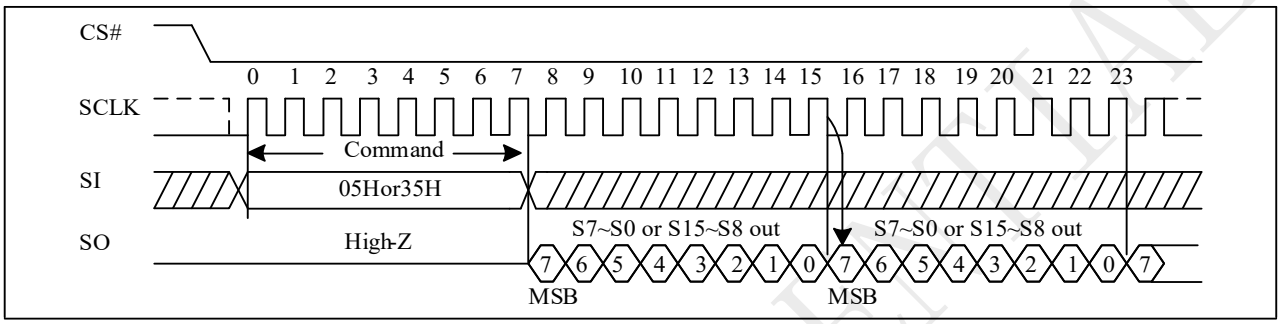



**Figure 10-5a Read Status Register (RDSR) Sequence (QPI)**

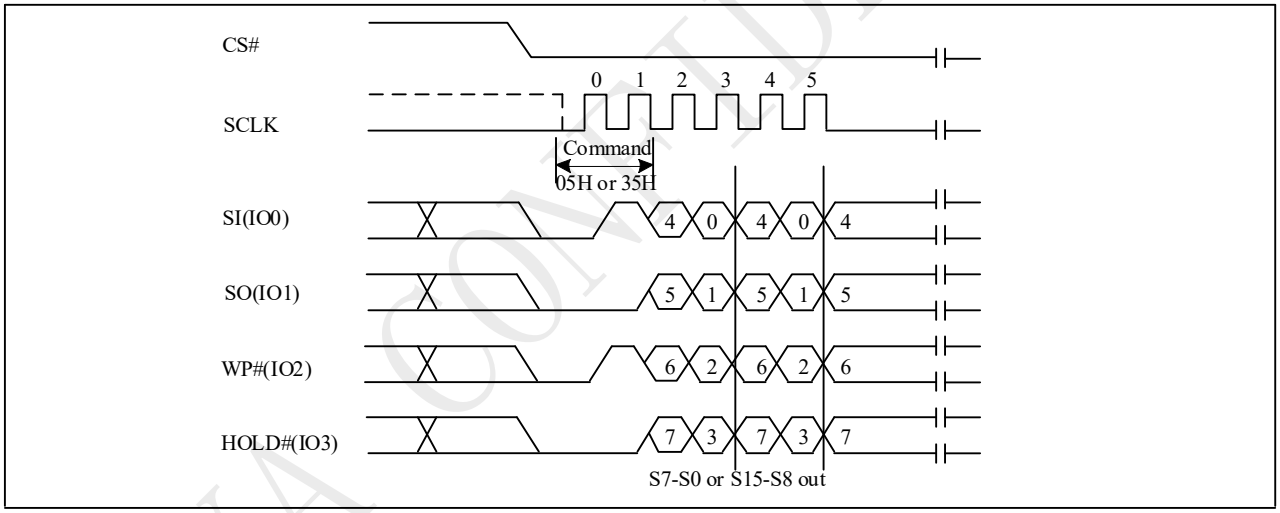


**Status Register-0**

| BIT | S7 | S6 | S5 | S4 | S3 | S2 | S1 | S0 |
|---|---|---|---|---|---|---|---|---|
| Definition | SRP0 | BP4 | BP3 | BP2 | BP1 | BP0 | WEL | WIP |
| Volatile | N | N | N | N | N | N | R | R |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

**Status Register-1**

| BIT | S15 | S14 | S13 | S12 | S11 | S10 | S9 | S8 |
|---|---|---|---|---|---|---|---|---|
| Definition | SUS | CMP | LB3 | LB2 | LB1 | EP_FAIL | QE | SRP1 |
| Volatile | R | N | O | O | O | R | N | N |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Note：V for volatile; N for Non-volatile; O for One Time Program; R for Read Only.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

The definition of the status register bits is as below:

**WIP bit.**

The Write in Progress (WIP) bit indicates whether the memory is busy in program/erase/write status register progress. When WIP bit sets to 1, means the device is busy in program/erase/write register progress, when WIP bit sets 0, means the device is not in program/erase/write status register progress.

**WEL bit.**

The Write Enable Latch (WEL) bit indicates the status of the internal Write Enable Latch. When set to 1 the internal Write Enable Latch is set, when set to 0 the internal Write Enable Latch is reset and no Write Register, Program or Erase command is accepted.

**BP4, BP3, BP2, BP1, BP0 bits.**

The Block Protect (BP4, BP3, BP2, BP1, and BP0) bits are non-volatile. They define the size of the area to be software protected against Program and Erase commands. These bits are written with the Write Status Register (WRSR) command. When the Block Protect (BP4, BP3, BP2, BP1, BP0) bits are set to 1, the relevant memory area (as defined in Table “Protected Area Sizes”) becomes protected against Page Program (PP), Page Erase (PE), Sector Erase (SE) and Block Erase (BE) commands. The Block Protect (BP4, BP3, BP2, BP1, and BP0) bits can be written provided that the Hardware Protected mode has not been set. The Chip Erase (CE) command is executed, only if the Block Protect (BP4, BP3, BP2, BP1 and BP0) are set to “None protected”.

**SRP1, SRP0 bits.**

The Status Register Protect (SRP1 and SRP0) bits are non-volatile Read/Write bits in the status register. The SRP bits control the method of write protection: software protection, hardware protection, power supply lock-down or one-time programmable protection

| SRP1 | SRP0 | WP# | Status Register | Description |
|---|---|---|---|---|
| 0 | 0 | x | Software Protected | The Status Register can be written to after a Write Enable command, WEL=1. (Default) |
| 0 | 1 | 0 | Hardware Protected | WP#=0, the Status Register locked and can’t be written to. |
| 0 | 1 | 1 | Hardware Unprotected | WP#=1, the Status Register is unlocked and can be written to after a Write Enable command, WEL=1. |
| 1 | 0 | x | Power Supply Lock-Down (1) | Status Register is protected and can’t be written to again until the next Power-Down, Power-Up cycle. |
| 1 | 1 | x | One Time Program (2) | Status Register is permanently protected and can’t be written to. |

NOTE:

1. When SRP1, SRP0= (1, 0), a Power-Down, Power-Up cycle will change SRP1, SRP0 to (0, 0) state.
2. This feature is available on special order. Please contact PUYA for details.

**QE bit.**

The Quad Enable (QE) bit is a non-volatile Read/Write bit in the Status Register that allows Quad operation. When the QE bit is set to 0 (Default) the WP# pin and HOLD# pin are enable. When the QE pin is set to 1, the Quad IO2 and IO3 pins are enabled. (The QE bit should never be set to 1 during standard SPI or Dual SPI operation if the WP# or HOLD# pins are tied directly to the power supply or ground)

**EP_FAIL bit.**

The Erase/Program Fail bit is a read only bit which shows the status of the last Program/Erase operation. The bit will be set to "1" if the program/erase operation failed or interrupted by reset or the program/erase region was protected. It will be automatically cleared to "0" if the next program/erase operation succeeds. Please note that it will not interrupt or stop any operation in the flash memory.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

**LB3, LB2, LB1, bits.**

The LB3, LB2, LB1, bits are non-volatile One Time Program (OTP) bits in Status Register (S13-S11) that provide the write protect control and status to the Security Registers. The default state of LB3-LB1are0, the security registers are unlocked. The LB3-LB1 bits can be set to 1 individually using the Write Register instruction. The LB3-LB1bits are One Time Programmable, once its set to 1, the Security Registers will become read-only permanently.

**CMP bit**

The CMP bit is a non-volatile Read/Write bit in the Status Register (S14). It is used in conjunction the BP4-BP0 bits to provide more flexibility for the array protection. Please see the table “Protected Area Size” for details. The default setting is CMP=0.

**SUS bit**

The SUS bit is read only bit in the status register (S15) that is set to 1 after executing a Program/Erase Suspend (75H) command. The SUS bit is cleared to 0 by Program/Erase Resume (7AH) command as well as a power-down, power-up cycle.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 10.6 Read Configure Register (15H)

The RDCR instruction is for reading Configure Register Bits. The Read Configure Register can be read at any time (even in program/erase/write status register condition). It is recommended to check the Write in Progress (WIP) bit before sending a new instruction when a program, erase, or write register operation is in progress.

The sequence of issuing RDCR instruction is: CS# goes low→ sending RDCR instruction code→ Configure Register data out on SO. The SIO [3:1] are "don't care".

**Figure 10-6 Read Status Register (RDCR) Sequence (Command 15h)**


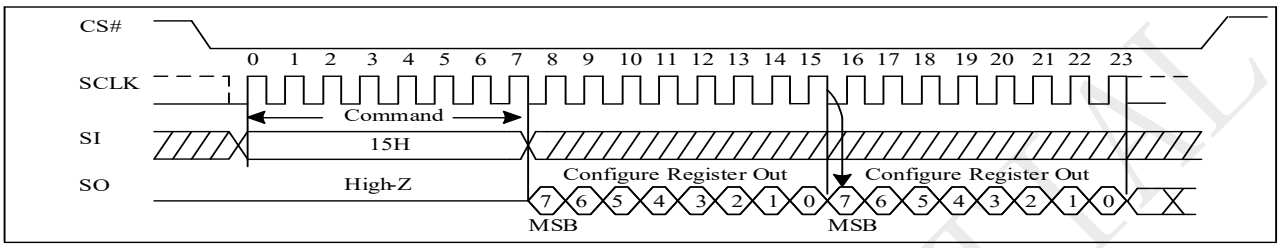



**Figure 10-6a Read Status Register (RDCR) Sequence (QPI)**

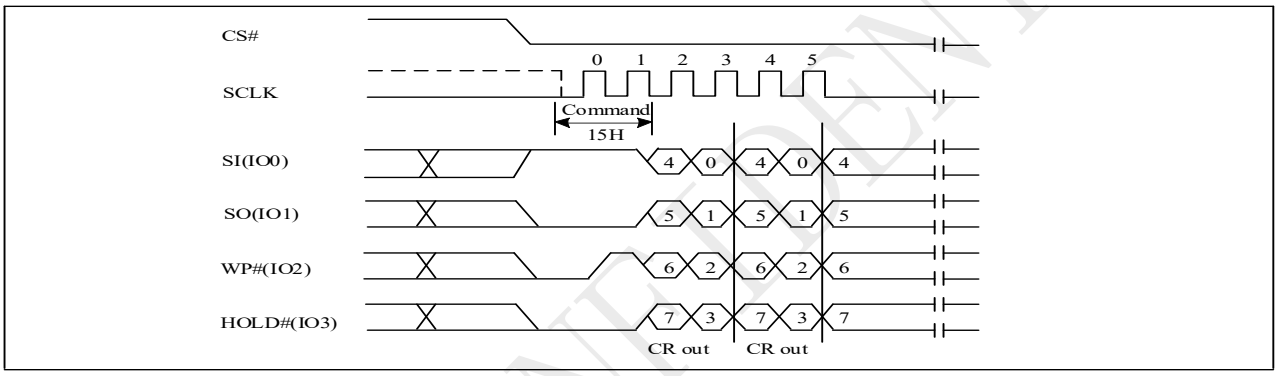


**Configure Register**

| BIT | Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|---|---|---|---|---|---|---|---|---|
| Definition | HOLD/RST | DRV1 | DRV0 | MPM1 | MPM0 | WPS | DC | DLP |
| Volatile | N | N | N | V | V | N | V | V |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Note：V for volatile; N for Non-volatile; R for Read Only.

**HOLD/RST bit.**

The HOLD/RST bit is a nonvolatile Read/Write bit in the Configure Register which is used to determine whether /HOLD or /RESET function should be implemented on the hardware pin for 8-pin packages. When HOLD/RST=0 (factory default), the pin acts as /HOLD; when HOLD/RST=1, the pin acts as /RESET. However, /HOLD or /RESET functions are only available when QE=0. If QE is set to 1, the /HOLD and /RESET functions are disabled, the pin acts as a dedicated data I/O pin.

**DRV1 & DRV0 bit.**

The DRV1 & DRV0 bits are nonvolatile Read/Write bits which are used to determine the output driver strength for the Read operations.

| DRV1,DRV0 | Drive Strength |
|---|---|
| 0,0 | 60% |
| 0,1(default) | 100% |
| 1,0 | 140% |
| 1,1 | 40% |

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

**MPM bit**

The Multi Page Mode (MPM) bits are volatile Read/Write bits which allows Quad/Dual Page operation.

| MPM1, MPM0 | Page Size |
|---|---|
| 0,0(default) | 256byte |
| 0,1 | 512byte |
| 1,0 | 1024byte |
| 1,1 | Reserved |

The page size is defined by MPM bits as above table.

When the MPM bits are set to (0,0) (Default) the page size is 256bytes. When the MPM bits are set to (0,1), the page size is 512bytes. When the MPM bits are set to (1,0), the page size is 1024bytes.

This bit controls the page programming buffer address wrap point. Legacy SPI devices generally have used a 256 Byte page programming buffer and defined that if data is loaded into the buffer beyond the 256 Byte locations, the address at which additional bytes are loaded would be wrapped to address zero of the buffers. The P25Q64SH provides a 512/1024 Byte page programming buffer that can increase programming performance. For legacy software compatibility, this configuration bit provides the option to continue the wrapping behavior at the 256 Byte boundary or to enable full use of the available 512/1024 Byte buffer by not wrapping the load address at the 256 Byte boundary. When the MPM bits are set to (0,1), the page erase instruction (81h) will erase the data of the chosen Dual Page to be "1". When the MPM bits are set to (1,0), the page erase instruction (81h) will erase the data of the chosen Quad Page to be "1".

When ERSCUR or PRSCUR, MPM1/MPM0 must be set to 00.

**WPS bit.**

The WPS bit is a nonvolatile Read/Write bit in the Configure Register which is used to select which Write Protect scheme should be used. When WPS=0(default), the device will use the combination of CMP, BP [4:0] bits to protect a specific area of the memory array. When WPS=1, the device will utilize the Individual Block Locks to protect any individual sector or blocks. The default value for all Individual Block Lock bits is 1 upon device power on or after reset.

**DC bit**

The Dummy Cycle (DC) bit is a volatile bit. The Dummy Cycle (DC) bit can be used to configure the number of dummy clocks for “SPI 2 X IO Read (BBH)” command, “SPI 4X I/O Read (EBH)” command.

**Dummy Cycle Table**

| Command | SPI | DC bit | Number of dummy cycles |
|---|---|---|---|
| SPI command | BBH SPI | 0(default) | 4 |
| | | 1 | 8 |
| | EBH SPI | 0(default) | 6 |
| | | 1 | 10 |

**DLP bit.**

The DLP bit is Data Learning Pattern Enable bit, which is volatile writable by 11H command. For DTR Read and some STR read commands, a pre-defined “Data Learning Pattern” can be used by the flash memory controller to determine the flash data output timing on I/O pins. When DLP=1, in dummy cycles, the flash will output “00110100” Data Learning Pattern sequence on each of the I/O pins. During this period, controller can fine tune the data latching timing for each I/O pins to achieve optimum system performance. DLP=0(default) will disable the Data Learning Pattern output.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 10.7 Write Status Register (01H/31H)

The Write Status Register (WRSR) and Write Status Register-1 (WRSR1) commands allow new values to be written to the Status Register-0 and Status Register-1. Before it can be accepted, a Write Enable (WREN) command must previously have been executed. After the Write Enable (WREN) command has been decoded and executed, the device sets the Write Enable Latch (WEL).

The WRSR and WRSR1 command has no effect on S15, S10, S1 and S0 of the Status Register. CS# must be driven high after the eighth bit or sixteen bit (just for WRSR command) of the data byte has been latched in. If not, the command is not executed. As soon as CS# is driven high, the self-timed Write Status Register cycle (whose duration is tW) is initiated. While the Write Status Register cycle is in progress, the Status Register may still be read to check the value of the Write in Progress (WIP) bit. The Write in Progress (WIP) bit is 1 during the self-timed Write Status Register cycle, and is 0 when it is completed. When the cycle is completed, the Write Enable Latch (WEL) is reset.

The WRSR command allows the user to change the values of the Block Protect (BP4, BP3, BP2, BP1, and BP0) bits, to define the size of the area that is to be treated as read-only, as defined in Table6-1 and Table6-2. The WRSR and WRSR1 commands also allow the user to set or reset the Status Register Protect (SRP0 and SRP1) bits respectively in accordance with the Write Protect (WP#) signal. The Status Register Protect (SRP0 and SRP1) bits and Write Protect (WP#) signal allow the device to be put in the Hardware Protected Mode. The Write Status Register (WRSR) command is not executed once the Hardware Protected Mode is entered.

The sequence of issuing WRSR instruction is: CS# goes low→ sending WRSR instruction code→ Status Register data on SI→CS# goes high.

**Figure 10-7Write Status Register (WRSR) Sequence (Command 01h or 31h)**


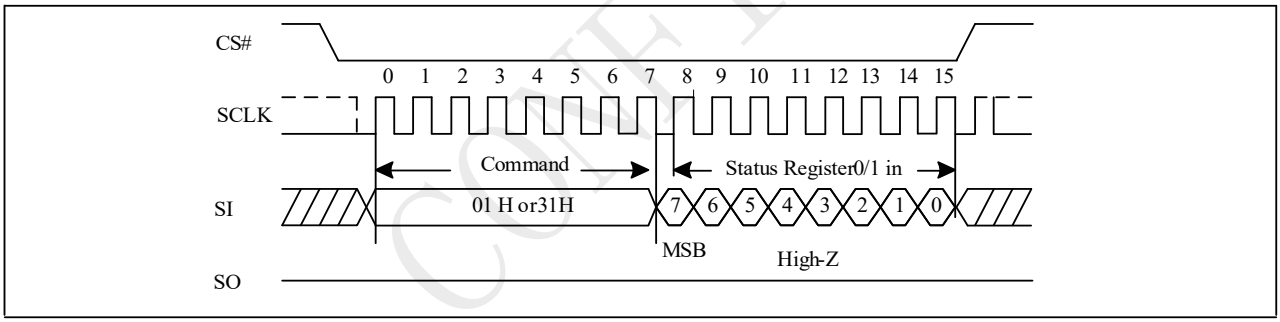



**Figure 10-7a Write Status Register (WRSR) Sequence (QPI)**

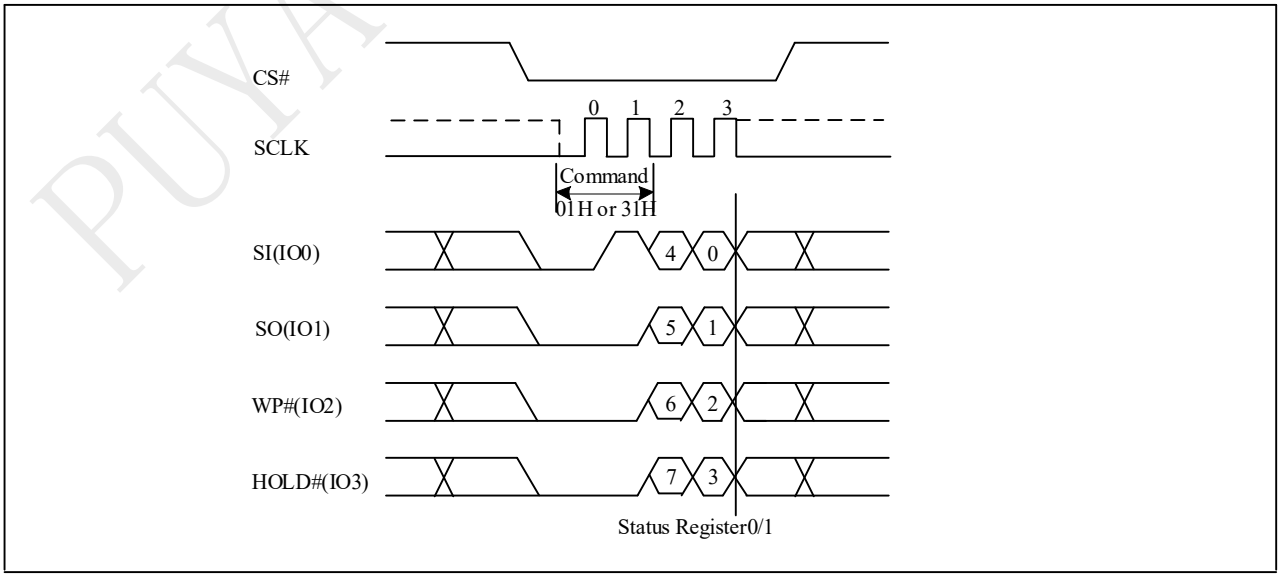


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

To be backward compatible to Puya's previous serial flash product, The Write Status Register (WRSR) command also support to write Status Register-0 and Status Register-1 in same time. To complete this function, CS# must be driven high after the sixteenth bit of the data byte has been latched in. If CS# is driven high after the eighth clock, the Write Status Register (01h) command will only program the Status Register-0, the Status Register-1 will not be affected (Previous product will clear CMP and QE bits).

**Figure 10-7b Write Status Register (WRSR) with 2 Byte data Sequence (SPI)**


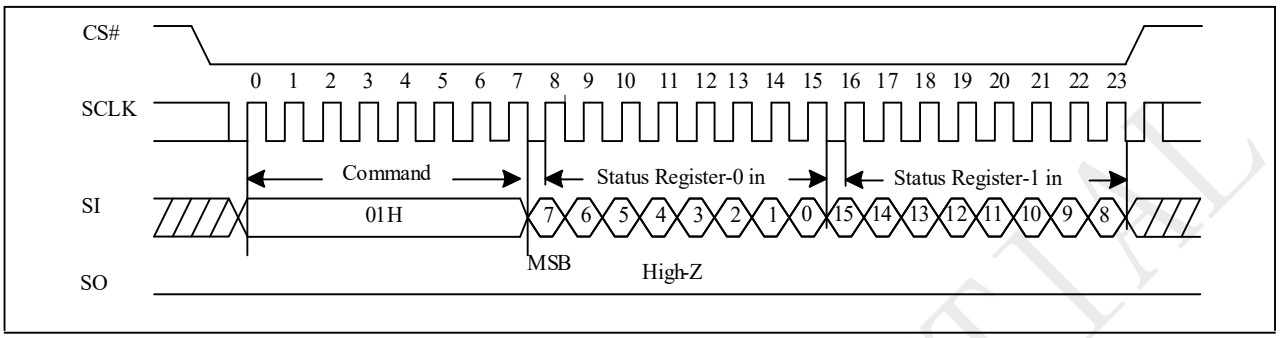



**Figure 10-7b Write Status Register (WRSR) with 2 Byte data Sequence (QPI)**

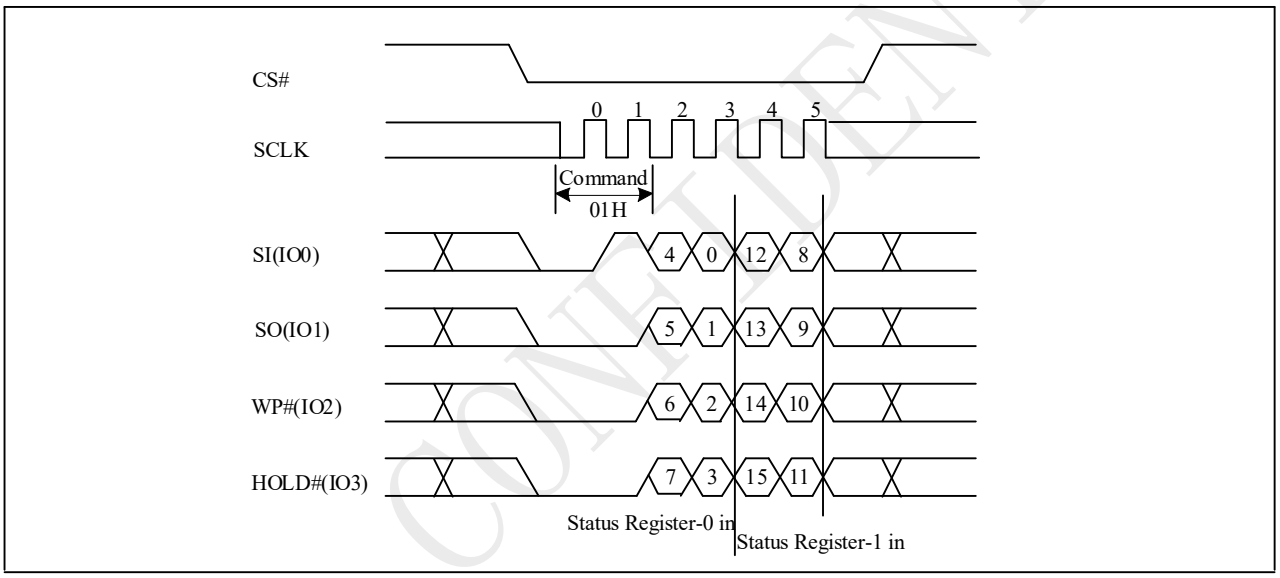


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.8 Write Configure Register (11H)

The Write Configure Register (WRCR) command allows new values to be written to the Configure Register. Before it can be accepted, a Write Enable (WREN) command must previously have been executed. After the Write Enable (WREN) command has been decoded and executed, the device sets the Write Enable Latch (WEL).

The sequence of issuing WRCR instruction is: CS# goes low→ sending WRCR instruction code→ Configure Register data on SI→CS# goes high.

The CS# must go high exactly at the 8 bits data boundary; otherwise, the instruction will be rejected and not executed. The self-timed Write Status Register cycle time (tW) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked during the Write Status Register cycle is in progress. The WIP sets 1 during the tW timing, and sets 0 when Write Configure Register Cycle is completed, and the Write Enable Latch (WEL) bit is reset.

**Figure 10-8 Write Configure Register (WRCR) Sequence (Command 11h)**


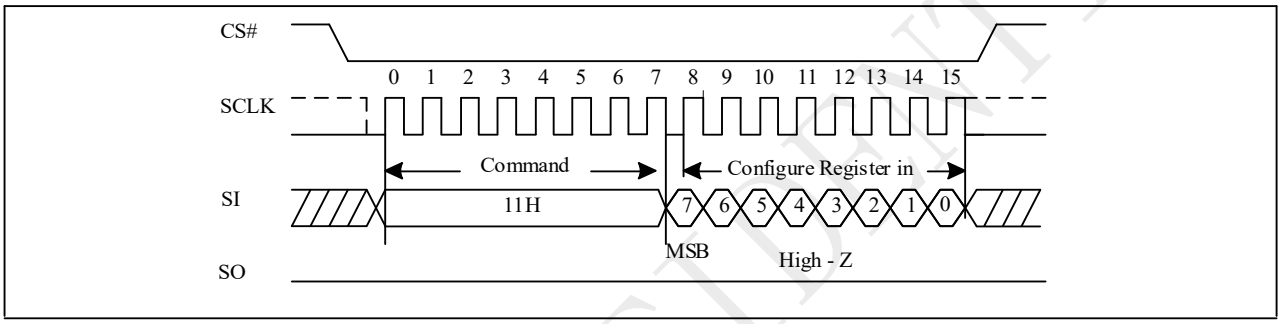



**Figure 10-8a Write Configure Register (WRCR) Sequence (QPI)**

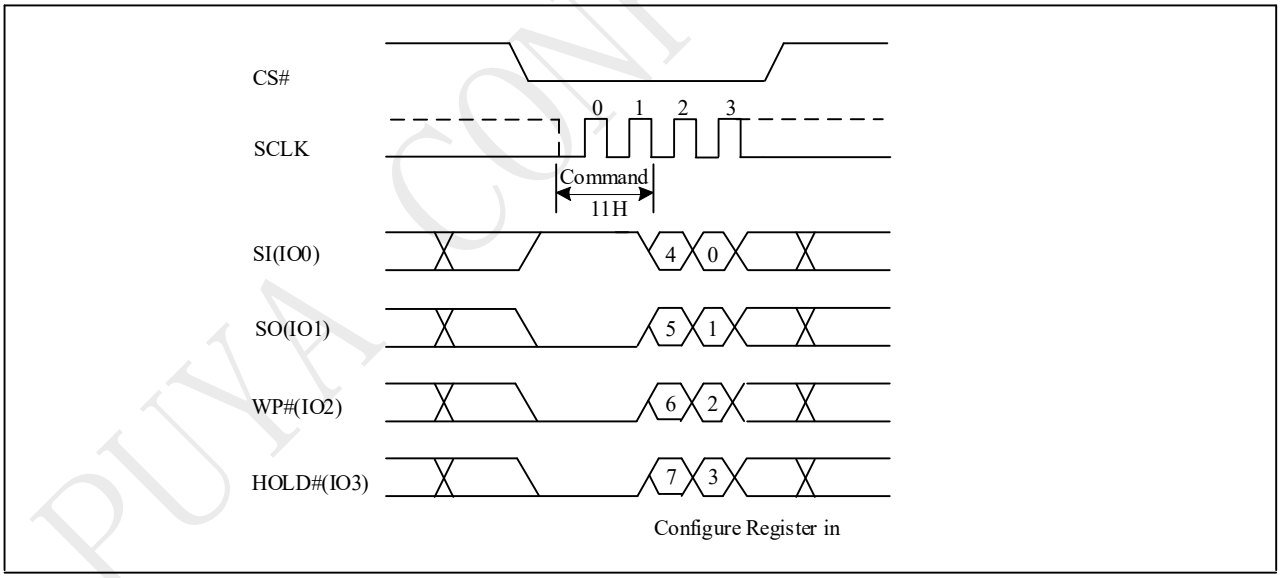



PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 10.9 Read Data Bytes (03H)

The read instruction is for reading data out. The address is latched on rising edge of SCLK, and data shifts out on the falling edge of SCLK at a maximum frequency fR. The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single READ instruction. The address counter rolls over to 0 when the highest address has been reached.

**Figure 10-9 Read Data Bytes (READ) Sequence (Command 03h)**

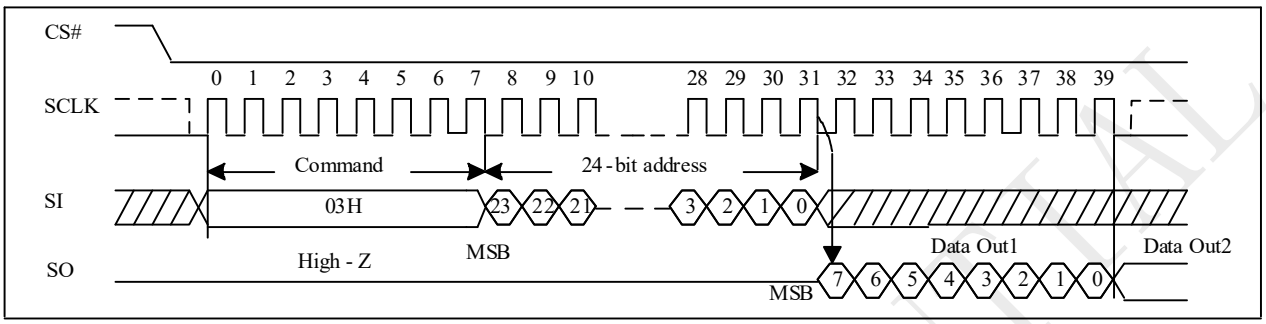


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 10.10 Fast Read (0BH)

The FAST READ instruction is for quickly reading data out. The address is latched on rising edge of SCLK, and data of each bit shifts out on the falling edge of SCLK at a maximum frequency fC. The first address byte can be at any location, but in DTR OPI mode, the starting address must be even byte (A0=0). The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single FREAD instruction. The address counter rolls over to 0 when the highest address has been reached.

While Program/Erase/Write Status Register cycle is in progress, FREAD instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

### Fast Read in QPI mode

The Fast Read command is also supported in QPI mode. In QPI mode, the number of dummy clocks is configured by the “Set Read Parameters (C0H)” command to accommodate a wide range application with different needs for either maximum Fast Read frequency or minimum data access latency. Depending on the Read Parameter Bits P [5:4] setting, the number of dummy clocks can be configured as either 4/6/8/10.

**Figure 10-10 Fast Read (FREAD) Sequence (Command 0Bh)**


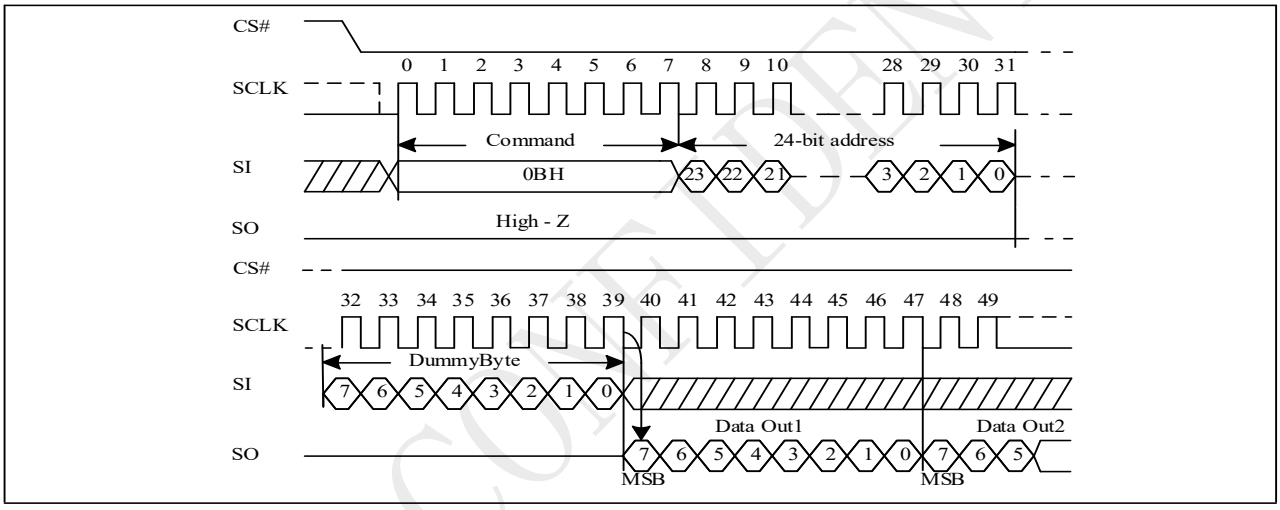



**Figure 10-10a Fast Read Sequence (QPI)**

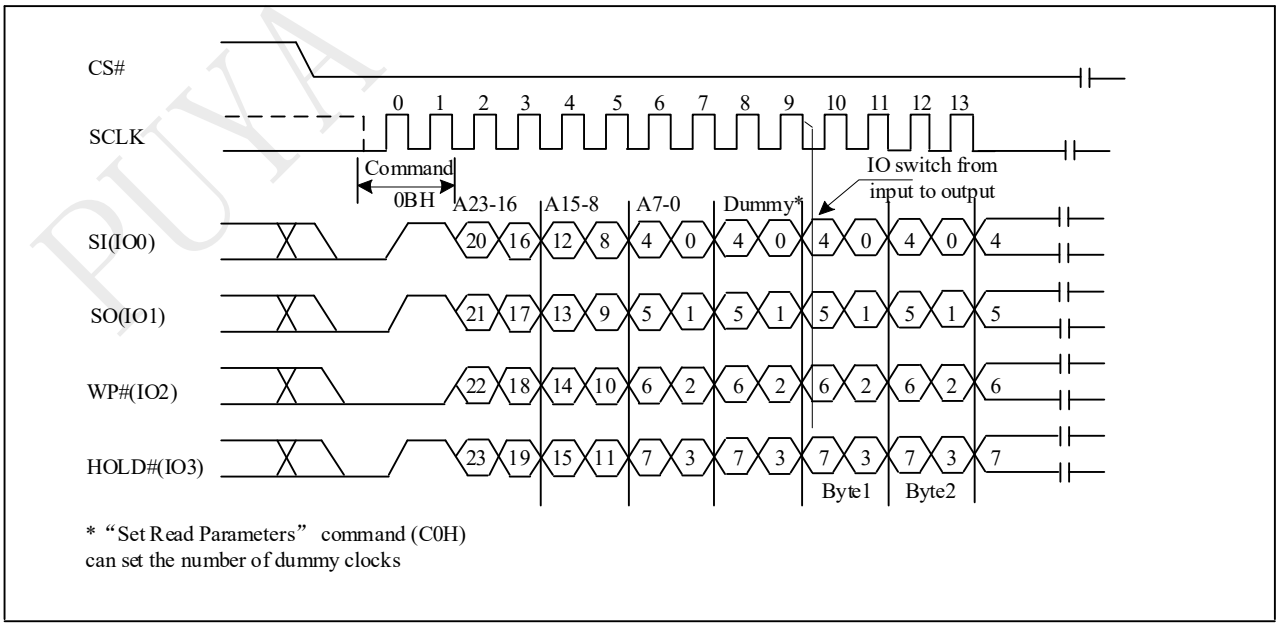



PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.11 DTR Fast Read (0DH)

The DTR Fast Read instruction is similar to the Fast Read instruction except that the 24-bit address input and the data output require DTR (Double Transfer Rate) operation. This is accomplished by adding six “dummy” clocks after the 24-bit address. The dummy clocks allow the devices internal circuits additional time for setting up the initial address. During the dummy clocks the data value on the DO pin is a “don’t care”.


**Figure 10-11 DTR Fast Read Sequence (Command 0Dh)**

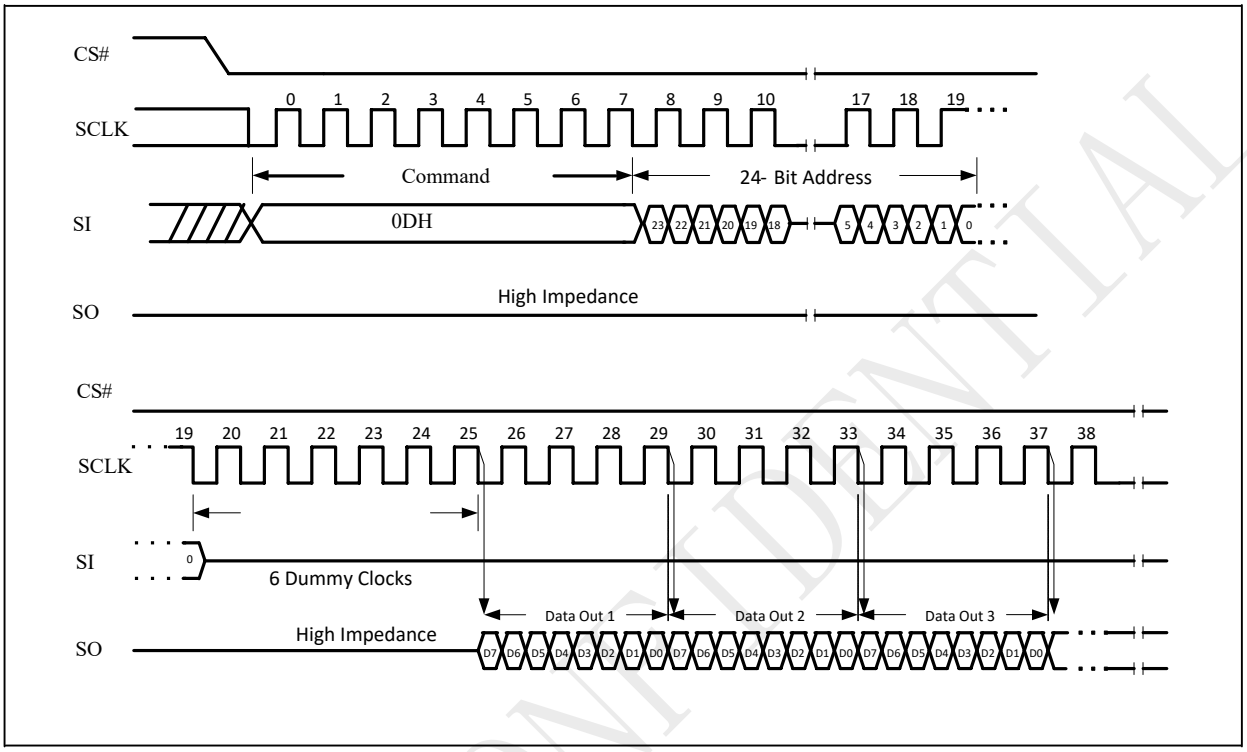


### DTR Fast Read in QPI Mode

The DTR Fast Read instruction is also supported in QPI mode.

**Figure 10-11a DTR Fast Read Sequence (QPI)**

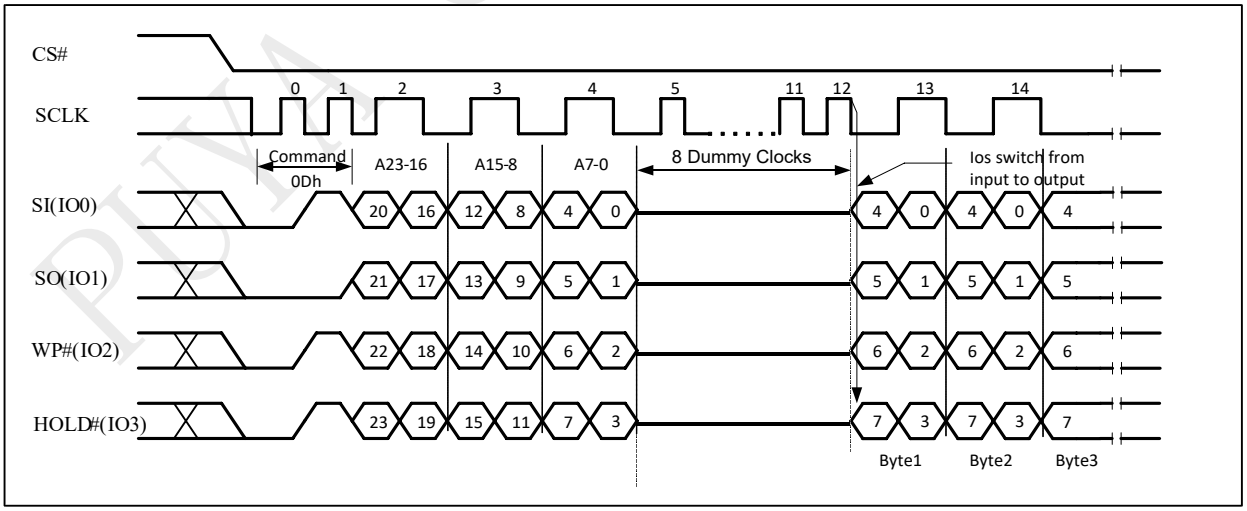


PUYA CONFIDENTIAL



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.12 Dual Read (3BH)

The DREAD instruction enables double throughput of Serial NOR Flash in read mode. The address is latched on rising edge of SCLK, and data of every two bits (interleave on 2 I/O pins) shift out on the falling edge of SCLK at a maximum frequency fT. The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single DREAD instruction. The address counter rolls over to 0 when the highest address has been reached. Once writing DREAD instruction, the following data out will perform as 2-bit instead of previous 1-bit.

While Program/Erase/Write Status Register cycle is in progress, DREAD instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

**Figure 10-12 Dual Read Mode Sequence (Command 3Bh)**

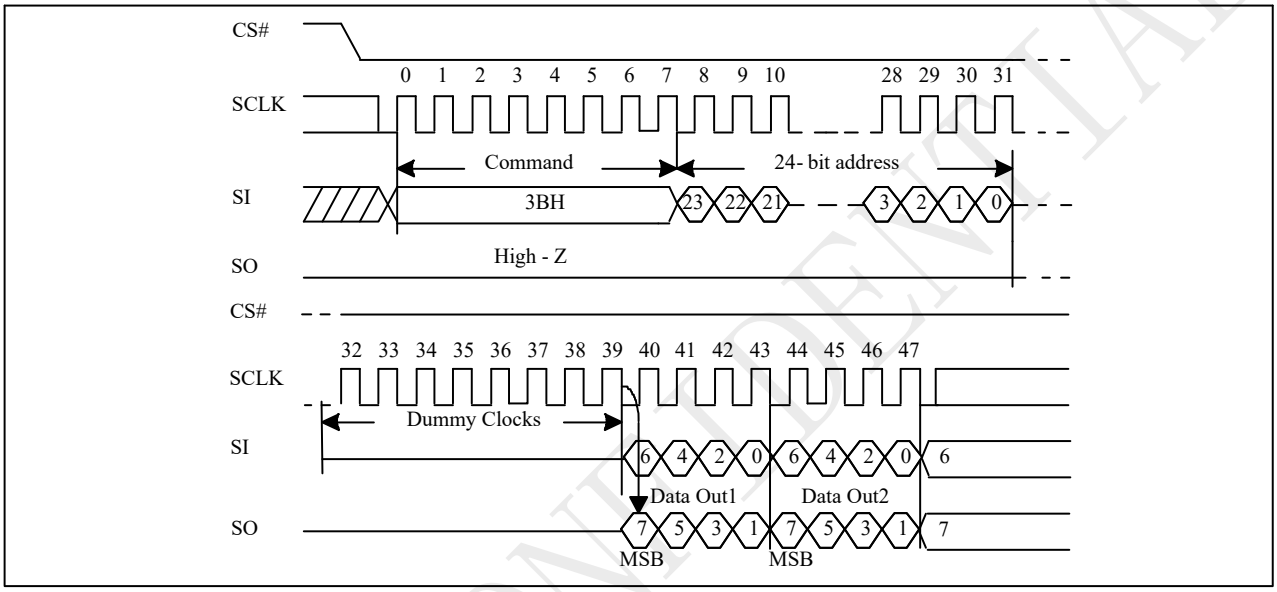


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com


## 10.13 2IO Read (BBH)

The 2READ instruction enables Double Transfer Rate of Serial NOR Flash in read mode. The address is latched on rising edge of SCLK, and data of every two bits (interleave on 2 I/O pins) shift out on the falling edge of SCLK at a maximum frequency fT. The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single 2READ instruction. The address counter rolls over to 0 when the highest address has been reached.

Once writing 2READ instruction, the following address/dummy/data out will perform as 2-bit instead of previous 1-bit.

While Program/Erase/Write Status Register cycle is in progress, 2READ instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

**Figure 10-13 2IO Read Sequence (Command BBM5-4 ≠ (1,0))**

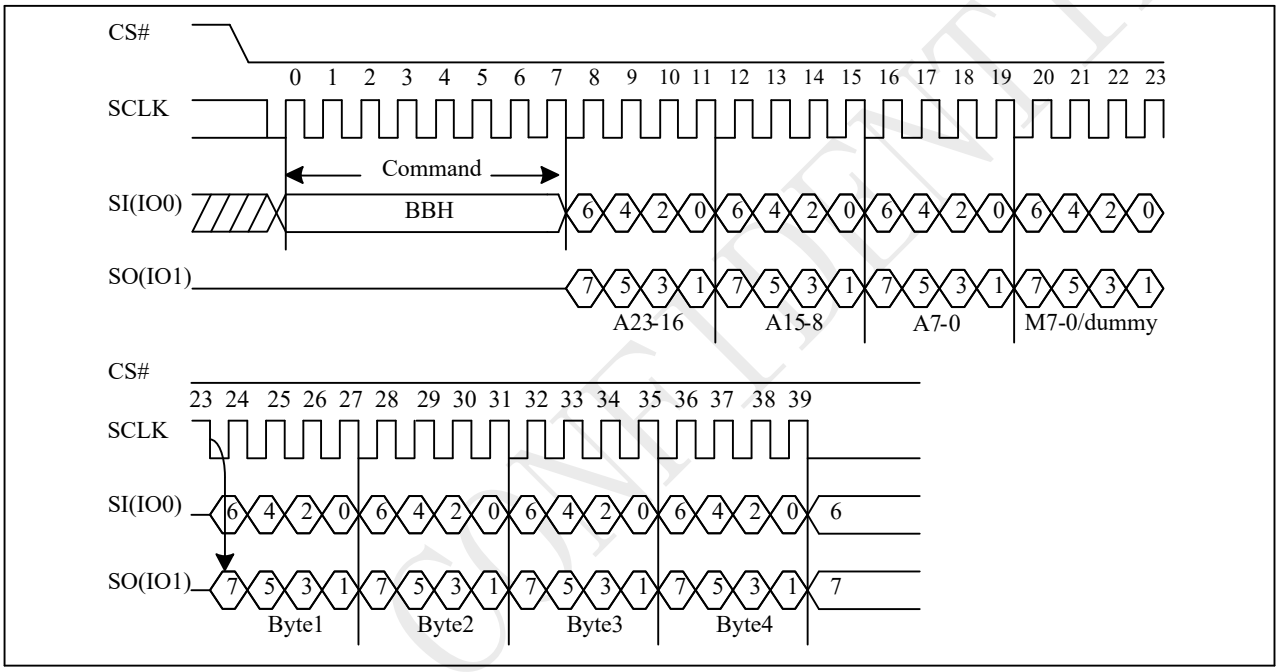


Note:
1. M [5-4] = (1,0) is inhibited.

### 2IO Continuous Read


"BBH" command supports 2IO Continuous Read which can further reduce command overhead through setting the "Continuous Read Mode" bits (M7-0) after the input 3-byte address (A23-A0). If the "Continuous Read Mode" bits (M5-4) = (1, 0), then the next 2IO Read command (after CS# is raised and then lowered) does not require the BBH command code.

If the "Continuous Read Mode" bits (M5-4) do not equal (1, 0), the next command requires the first BBH command code, thus returning to normal operation. A "Continuous Read Mode" Reset command can be used to reset (M5-4) before issuing normal command.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

**Figure 10-13a 2IO Continue Read (M5-4 = (1,0))**

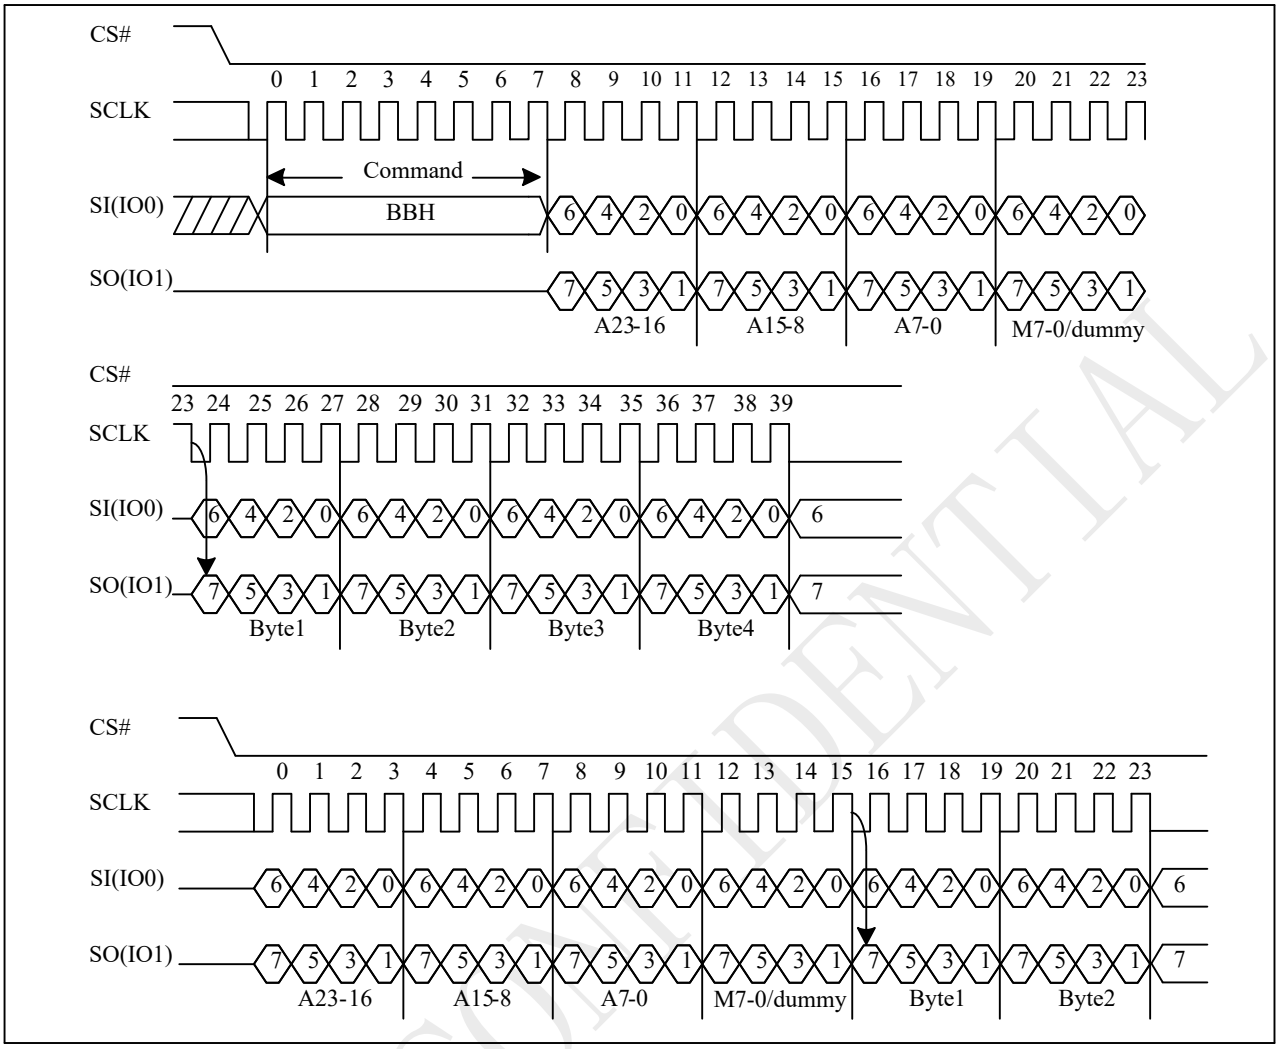


Note:

1. 2IO Continue Read, if M5-4 = 1, 0. If not using Continue Read recommend to set M5-4 ≠ 1, 0.


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 10.14 DTR 2IO Read (BDH)

The DTR 2IO Read (BDH) instruction allows for improved random access while maintaining two IO pins, IO0 and IO1. It is similar to the DREAD (3Bh) instruction but with the capability to input the Address bits (A23-0) two bits per clock. This reduced instruction overhead may allow for code execution (XIP) directly from the Dual SPI in some applications.

**Figure 10-14 DTR 2IO Read Sequence (Command BDM5-4 ≠ (1,0))**

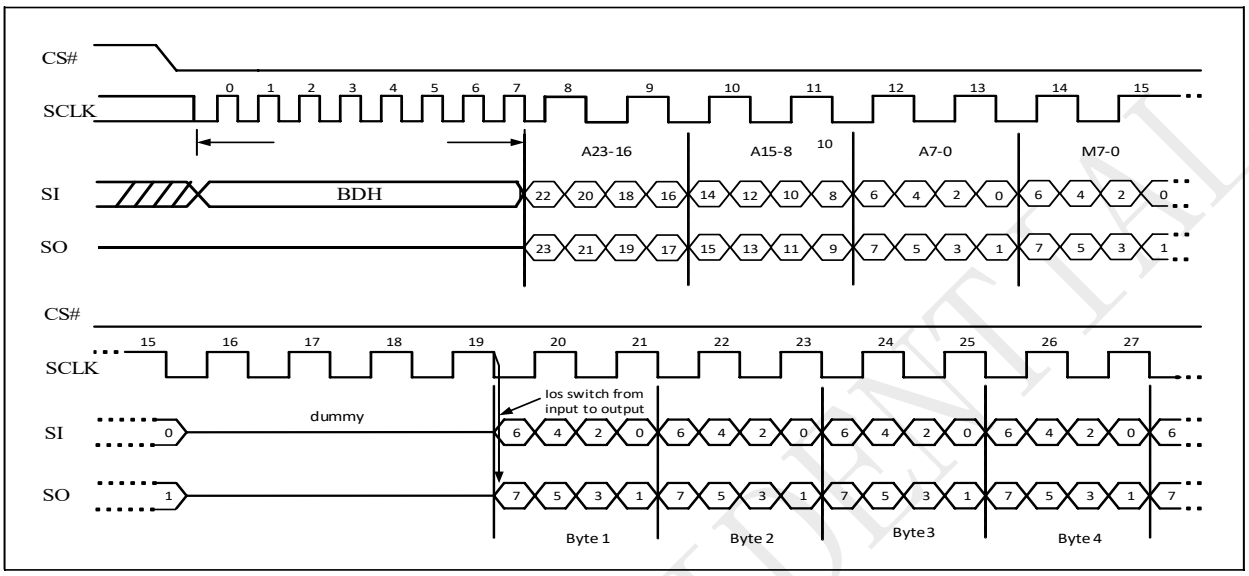



### DTR 2IO Continuous Read

The BDH instruction supports Continuous Read Mode which can further reduce overhead through setting the "continuous Read Mode" bits (M7-0) after the input 3-byte address (A23-A0). If the “Continuous Read Mode” bits (M5-4) = (1, 0), then the next Read command (after CS# is raised and then lowered) does not require the BDH command code.

If the “Continuous Read Mode” bits (M5-4) do not equal (1, 0), the next command requires the first BDH command code, thus returning to normal operation. It is recommended to input FFFFH on IO0 for the next instruction (16 clocks), to ensure M4 = 1 and return the device to normal operation.

**Figure 10-14a DTR 2IO Continuous Read Sequence (Command BDH M5-4 = (1,0))**

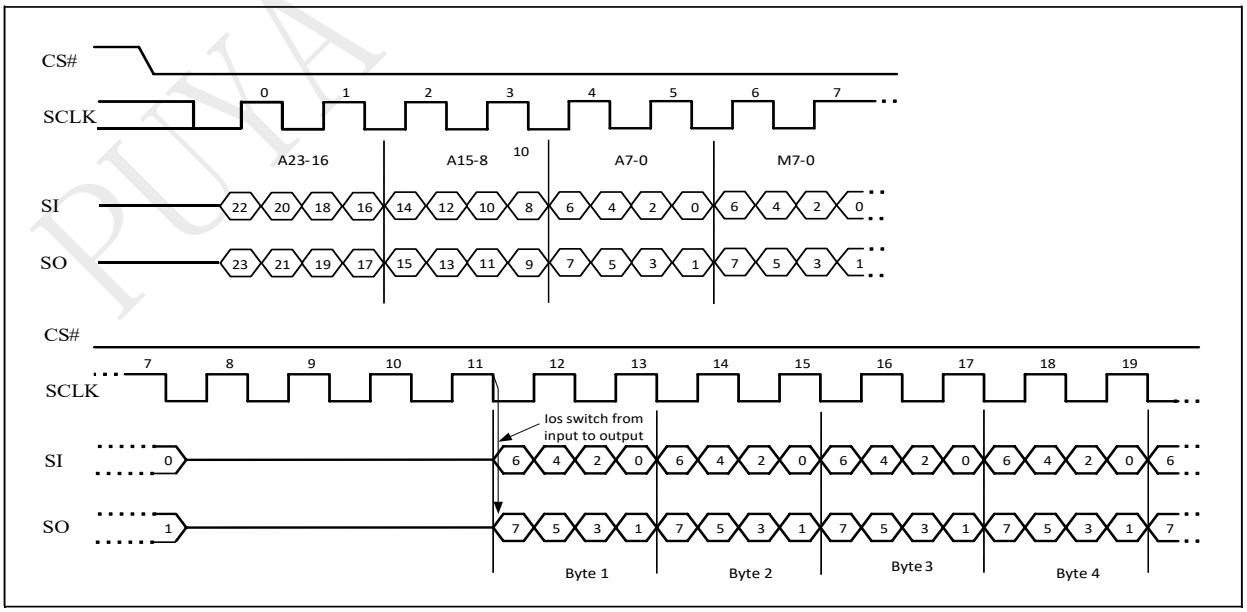


PUYA CONFIDENTIAL



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.15 Quad Read (6BH)

The QREAD instruction enable quad throughput of Serial NOR Flash in read mode. A Quad Enable (QE) bit of status Register must be set to "1" before sending the QREAD instruction. The address is latched on rising edge of SCLK, and data of every four bits (interleave on 4 I/O pins) shift out on the falling edge of SCLK at a maximum frequency fQ. The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single QREAD instruction. The address counter rolls over to 0 when the highest address has been reached. Once writing QREAD instruction, the following data out will perform as 4-bit instead of previous 1-bit.

While Program/Erase/Write Status Register cycle is in progress, QREAD instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

**Figure 10-15 Quad Read Sequence (Command 6Bh)**

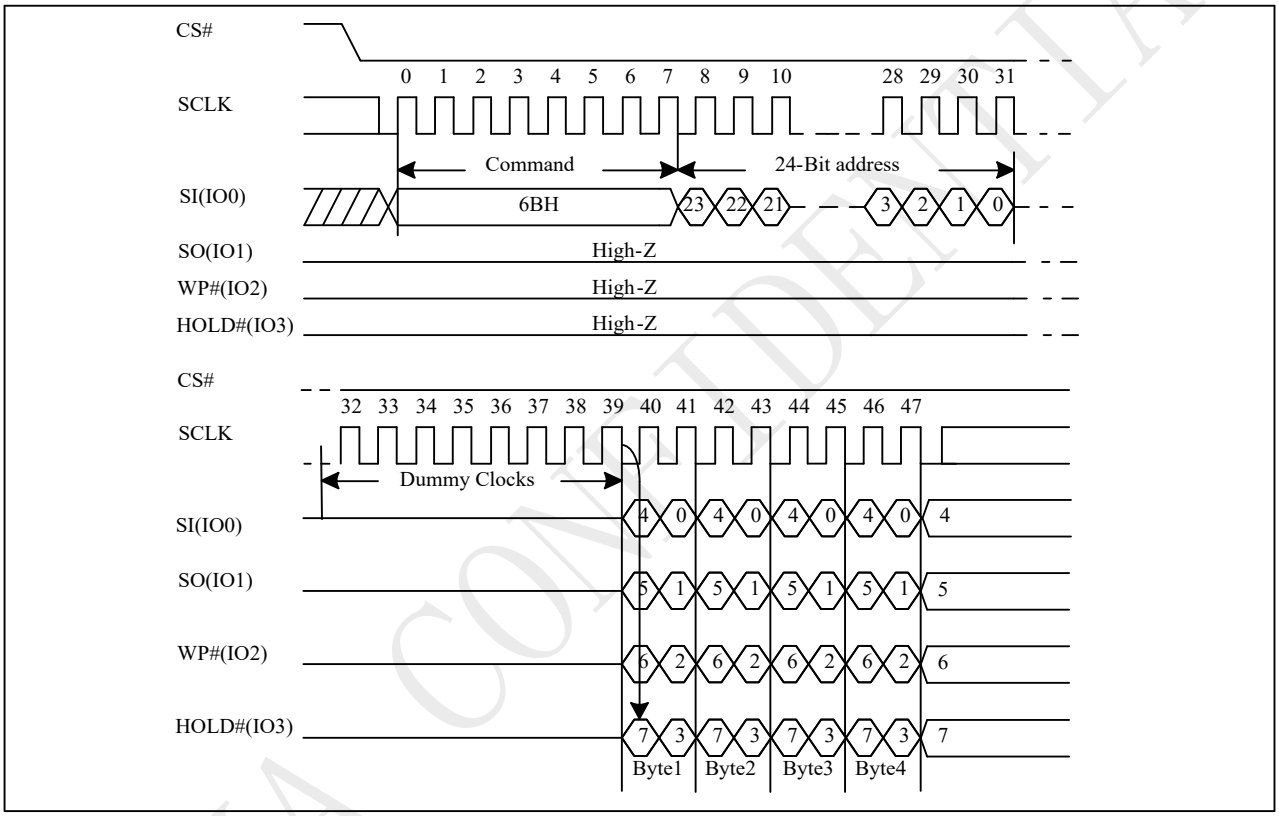


PUYA CONFIDENTIAL



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.16 4IO Read (EBH)

The 4READ instruction enable quad throughput of Serial NOR Flash in read mode. A Quad Enable (QE) bit of status Register must be set to "1" before sending the 4READ instruction. The address is latched on rising edge of SCLK, and data of every four bits (interleave on 4 I/O pins) shift out on the falling edge of SCLK at a maximum frequency fQ. The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single 4READ instruction. The address counter rolls over to 0 when the highest address has been reached. Once writing 4READ instruction, the following address/dummy/data out will perform as 4-bit instead of previous 1-bit.

While Program/Erase/Write Status Register cycle is in progress, 4READ instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

**Figure 10-16 4IO Read Sequence (Command EBM5-4 ≠ (1,0))**

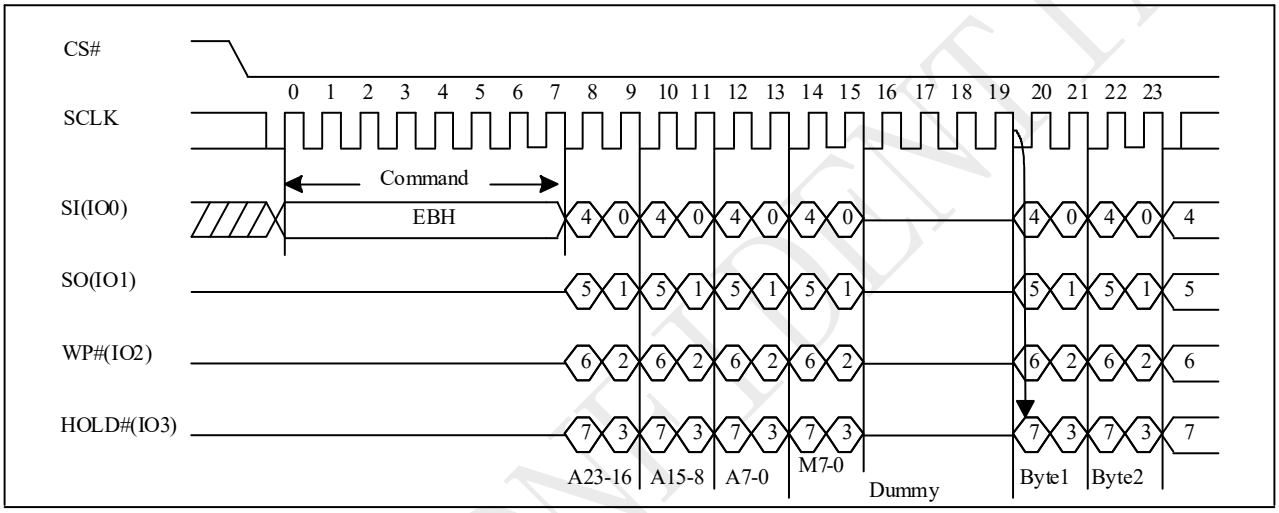


Note:
1. Hi-impedance is inhibited for the two clock cycles.
2. M [5-4] = (1,0) is inhibited.

### 4IO Read in QPI mode

The 4READ instruction is also supported in QPI mode. When QPI mode is enabled, the number of dummy clocks is configured by the “Set Read Parameters (C0h)” instruction to accommodate a wide range of applications with different needs for either maximum Fast Read frequency or minimum data access latency. Depending on the Read Parameter Bits P [5:4] setting, the number of dummy clocks can be configured as either 4,6, 8 or 10. The default number of dummy clocks upon power up or after a Reset instruction is 2. In QPI mode, the “Continuous Read Mode” bits M7- 0 are also considered as dummy clocks. In the default setting, the data output will follow the Continuous Read Mode bits immediately.


“Continuous Read Mode” feature is also available in QPI mode for 4IO Read instruction. Please refer to the description on next pages.

“Wrap Around” feature is not available in QPI mode for 4IO Read instruction. To perform a read operation with fixed data length, wrap around in QPI mode, a dedicated “Burst Read with Wrap” (0Ch) instruction must be used.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

**Figure 10-16a 4IO Read in QPI mode Sequence (QPI M5-4 ≠ (1,0))**

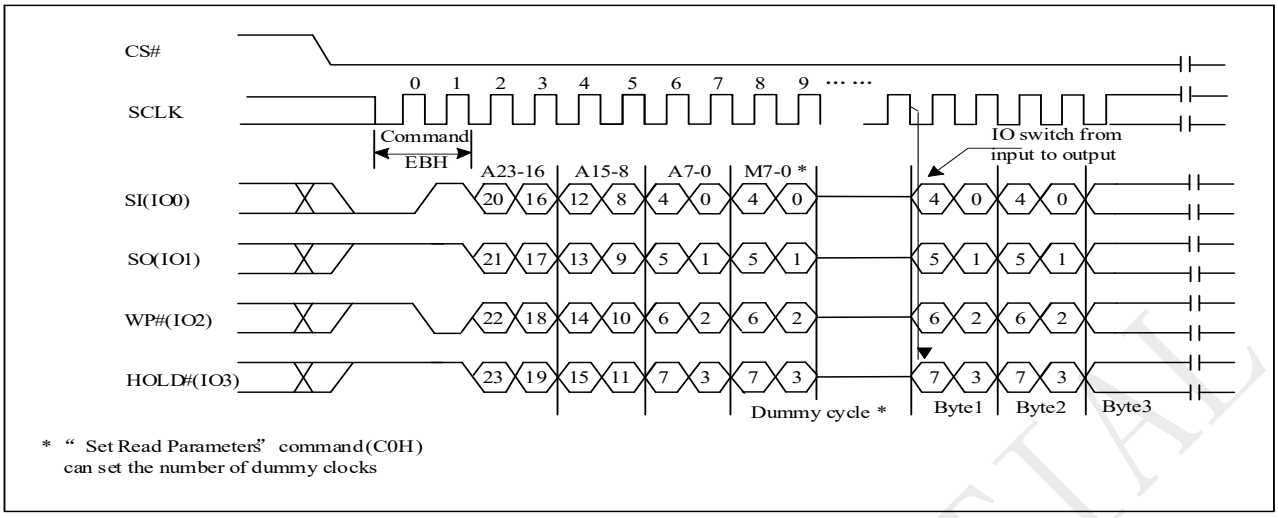


Note:


1. Hi-impedance is inhibited for the two clock cycles.
2. M [5-4] = (1,0) is inhibited.

### 4IO Continuous Read

"EBH" command supports 4IO Continuous Read which can further reduce command overhead through setting the "Continuous Read Mode" bits (M7-0) after the input 3-byte address (A23-A0). If the "Continuous Read Mode" bits (M5-4) = (1, 0), then the next 4IO Read command (after CS# is raised and then lowered) does not require the EBH command code.

If the "Continuous Read Mode" bits (M5-4) do not equal (1, 0), the next command requires the first EBH command code, thus returning to normal operation. A "Continuous Read Mode" Reset command can be used to reset (M5-4) before issuing normal command.

**Figure 10-16b 4IO Continuous Read Sequence (M5-4 = (1,0))**

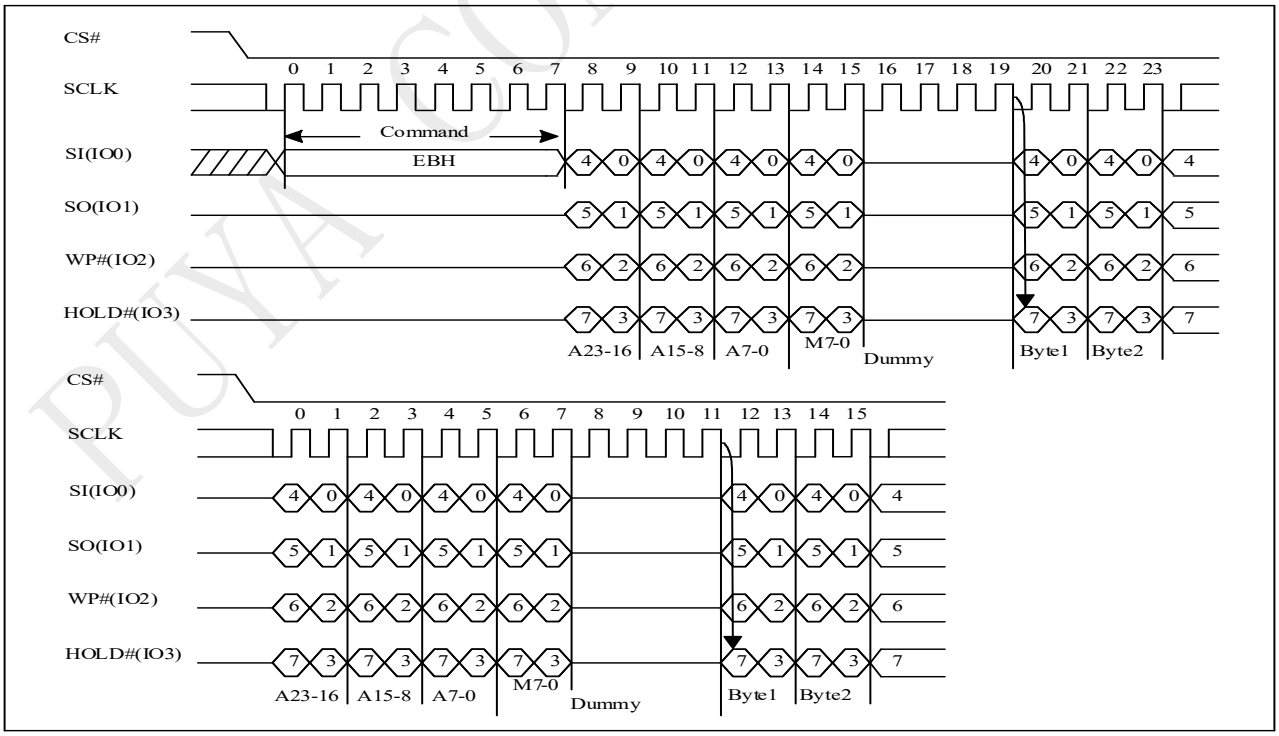


Note:4IO Continuous Read Mode, if M5-4 = 1, 0. If not using Continuous Read recommend to set M5-4 ≠ 1, 0.


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com
PUYA CONFIDENTIAL


## 10.17 Set Burst Read(77H)

The Set Burst with Wrap command is used in conjunction with “4IO Read” command to access a fixed length of 8/16/32/64-byte section within a 256-byte page, in standard SPI mode.

| W6,W5 | W4=0 | | W4=1 (default) | |
|---|---|---|---|---|
| | Wrap Around | Wrap Length | Wrap Around | Wrap Length |
| 0,0 | Yes | 8-byte | No | N/A |
| 0,1 | Yes | 16-byte | No | N/A |
| 1,0 | Yes | 32-byte | No | N/A |
| 1,1 | Yes | 64-byte | No | N/A |

If the W6-W4 bits are set by the Set Burst with Wrap command, all the following “4IO Read” command will use the W6-W4 setting to access the 8/16/32/64-byte section within any page. To exit the “Wrap Around” function and return to normal read operation, another Set Burst with Wrap command should be issued to set W4=1.

**Figure 10-17 Set Burst Read (SBL) Sequence (Command 77h)**

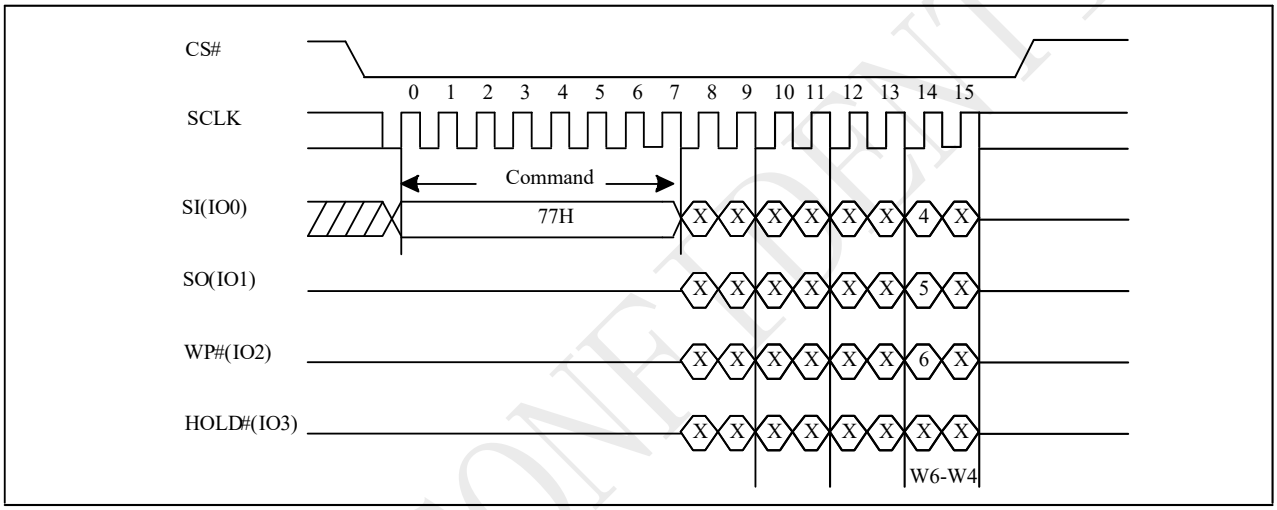



PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 10.18 DTR 4IO Read (EDH)

The DTR 4IO Read (EDH) instruction is similar to the DTR 2IO Read (BDH) instruction except that address and data bits are input and output through four pins IO0, IO1, IO2 and IO3 and four Dummy clocks are required in SPI mode prior to the data output. The Quad I/O dramatically reduces instruction overhead allowing faster random access for code execution (XIP) directly from the Quad SPI. The Quad Enable bit (QE) of Status Register-2 must be set to enable the DTR 4IO Read Instruction.

**Figure 10-18 DTR 4IO Read Mode Sequence (Command ED M5-4 ≠ (1,0))**

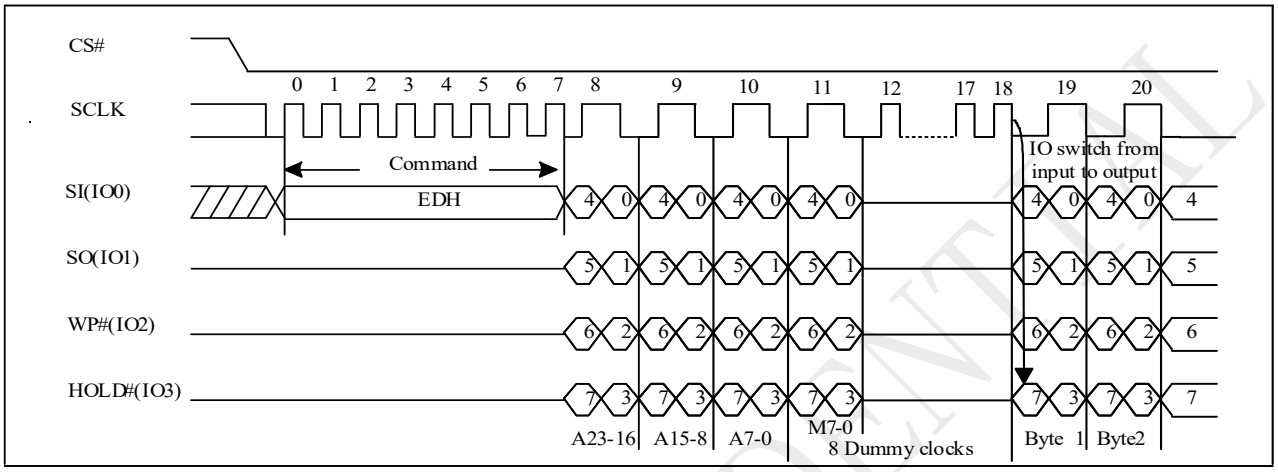


Note:1. Hi-impedance is inhibited for the mode clock cycles.2. M [5-4] = (1,0) is inhibited.


### DTR 4IO Continuous Read

The DTR 4IO Read instruction can further reduce instruction overhead through setting the “Continuous Read Mode” bits (M7-0) after the input Address bits (A23/A31-0). The upper nibble of the (M7-4) controls the length of the next DTR 4IO Read instruction through the inclusion or exclusion of the first byte instruction code. The lower nibble bits of the (M3-0) are don’t care (“x”). However, the IO pins should be high-impedance prior to the falling edge of the first data out clock.

If the “Continuous Read Mode” bits M5-4 = (1,0), then the next DTR 4IO Read instruction (after /CS is raised and then lowered) does not require the EDH instruction code. This reduces the instruction sequence by eight clocks and allows the Read address to be immediately entered after /CS is asserted low. If the “Continuous

Read Mode” bits M5-4 do not equal to (1,0), the next instruction (after /CS is raised and then lowered) requires the first byte instruction code, thus returning to normal operation.

**Figure 10-18a DTR 4IO Continuous Read Mode Sequence (Command ED M5-4 = (1,0))**

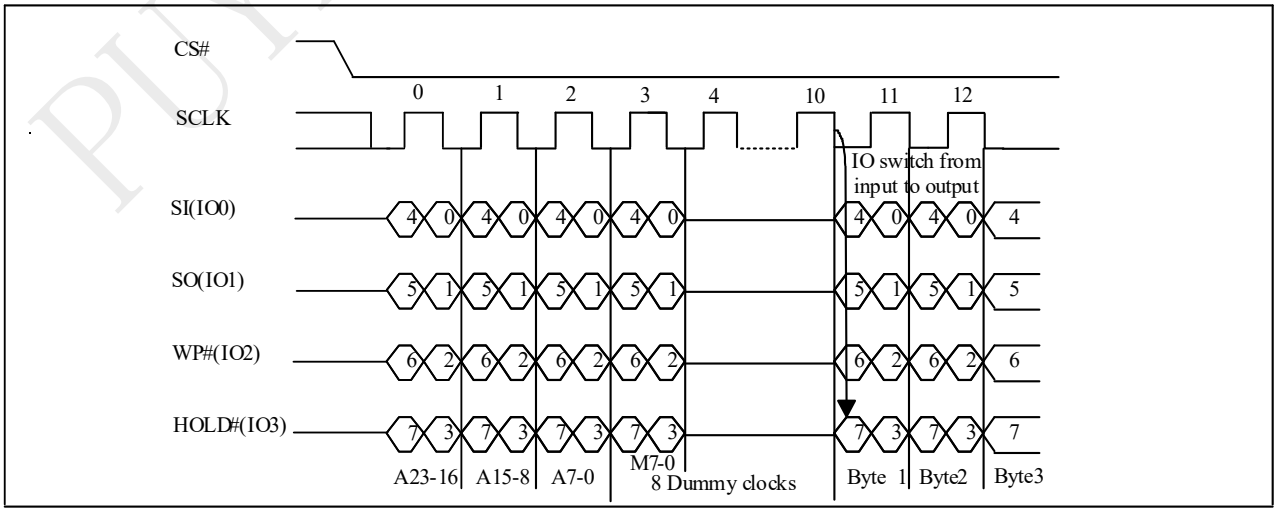


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Note:
1. Hi-impedance is inhibited for the mode clock cycles.
2. DTR 4IO Continuous Read Mode, if M5-4 = 1, 0. If not using Continuous Read recommend to set M5-4 ≠ 1, 0.

### DTR 4IO Read with "8/16/32/64-Byte Wrap Around" in Standard SPI mode

The DTR 4IO Read instruction can also be used to access a specific portion within a page by issuing a "Set Burst Read" (77h) command prior to EDH. The "Set Burst Read" (77h) command can either enable or disable the "Wrap Around" feature for the following EDH commands. When "Wrap Around" is enabled, the data being accessed can be limited to either an 8, 16, 32 or 64-byte section of a 256-byte page. The output data starts at the initial address specified in the instruction, once it reaches the ending boundary of the 8/16/32/64-byte section, the output will wrap around to the beginning boundary automatically until /CS is pulled high to terminate the command.


The Burst with Wrap feature allows applications that use cache to quickly fetch a critical address and then fill the cache afterwards within a fixed length (8/16/32/64-byte) of data without issuing multiple read commands. The "Set Burst Read" instruction allows three "Wrap Bits", W6-4 to be set. The W4 bit is used to enable or disable the "Wrap Around" operation while W6-5 are used to specify the length of the wrap around section within a page.

### DTR 4IO Read (EDH) in QPI Mode

The DTR 4IO Read instruction is also supported in QPI mode. In QPI mode, the "Continuous Read Mode" bits M7-0 are also considered as dummy clocks. In the default setting, the data output will follow the Continuous Read Mode bits immediately.
"Continuous Read Mode" feature is also available in QPI mode for Fast Read Quad I/O instruction.

"Wrap Around" feature is not available in QPI mode for DTR 4IO Read instruction. To perform a read operation with fixed data length, wrap around in QPI mode, a dedicated "Burst Read with Wrap" (0Ch) instruction must be used.

**Figure 10-18b DTR 4IO Read Mode Sequence (QPI EDH M5-4 ≠ (1,0))**

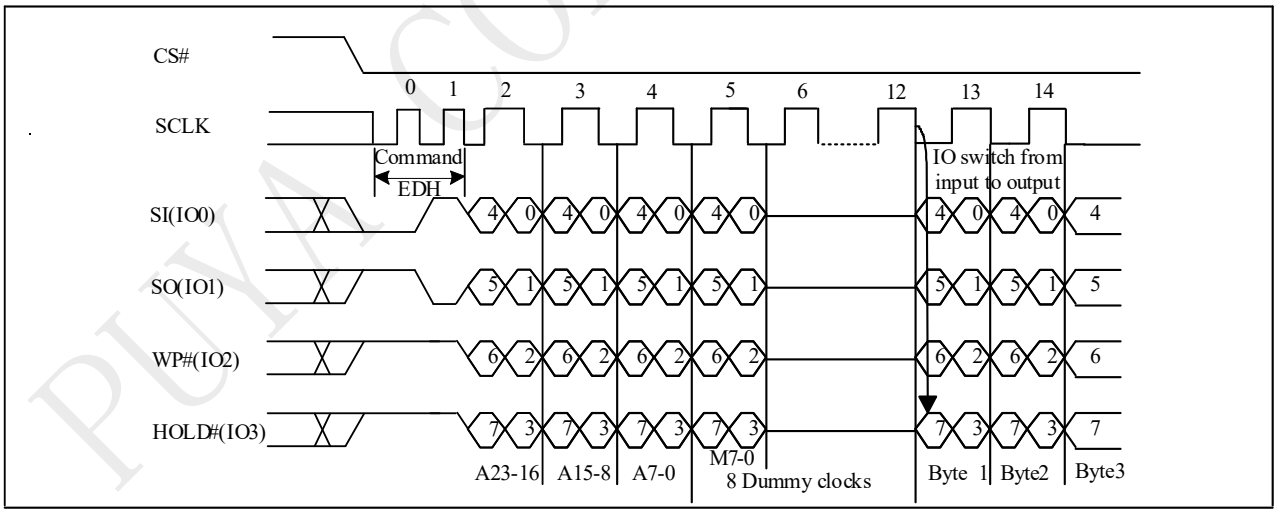


Note:
1. Hi-impedance is inhibited for the two clock cycles.
2. M [5-4] = (1,0) is inhibited.


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.19 4IO Word Read (E7h)

The 4IO Word Read command is similar to the 4 IO Read command except that the lowest address bit (A0) must equal 0 and only 8-dummy clock. The first byte addressed can be at any location. The address is automatically incremented to the next higher address after each byte of data is shifted out. The Quad Enable bit (QE) of Status Register (S9) must be set to enable for the 4IO Word read command.

**Figure 10-19 4IO Word Read Sequence (M5-4 ≠ (1,0))**

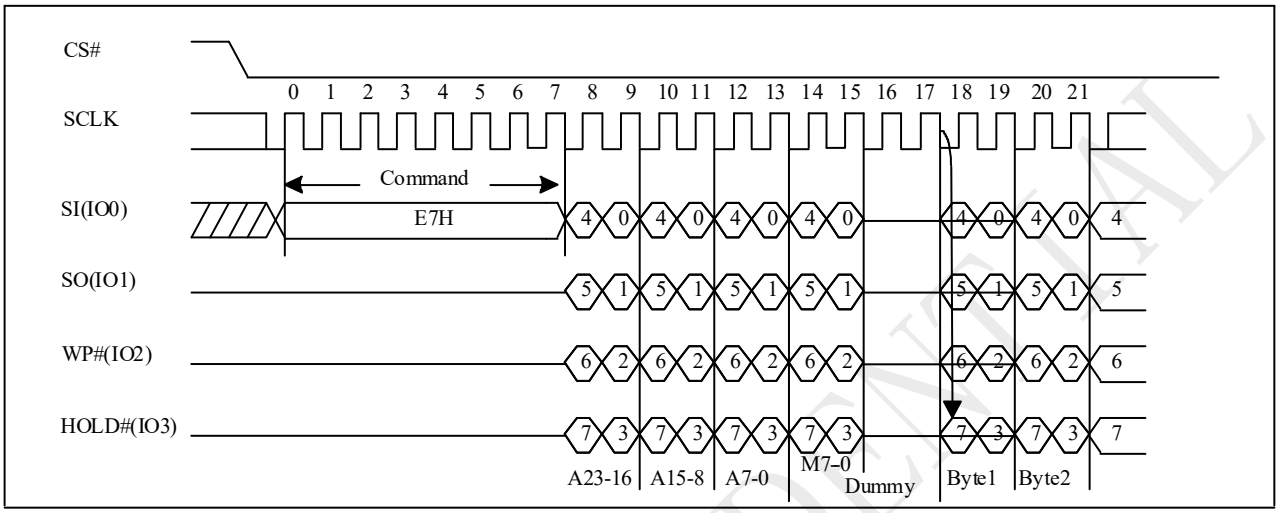



**4IO Word Read with "Continuous Read Mode"**

The 4IO Word Read command can further reduce command overhead through setting the "Continuous Read Mode" bits (M7-0) after the input 3-byte address (A23-A0). If the "Continuous Read Mode" bits (M5-4) = (1, 0), then the next 4IO Word Read command (after CS# is raised and then lowered) does not require the E7H command code. If the "Continuous Read Mode" bits (M5-4) do not equal to (1, 0), the next command requires the first E7H command code, thus returning to normal operation. A "Continuous Read Mode" Reset command can be used to reset (M5-4) before issuing normal command.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

**Figure 10-19a 4IO Word Read Sequence (M5-4 = (1,0))**

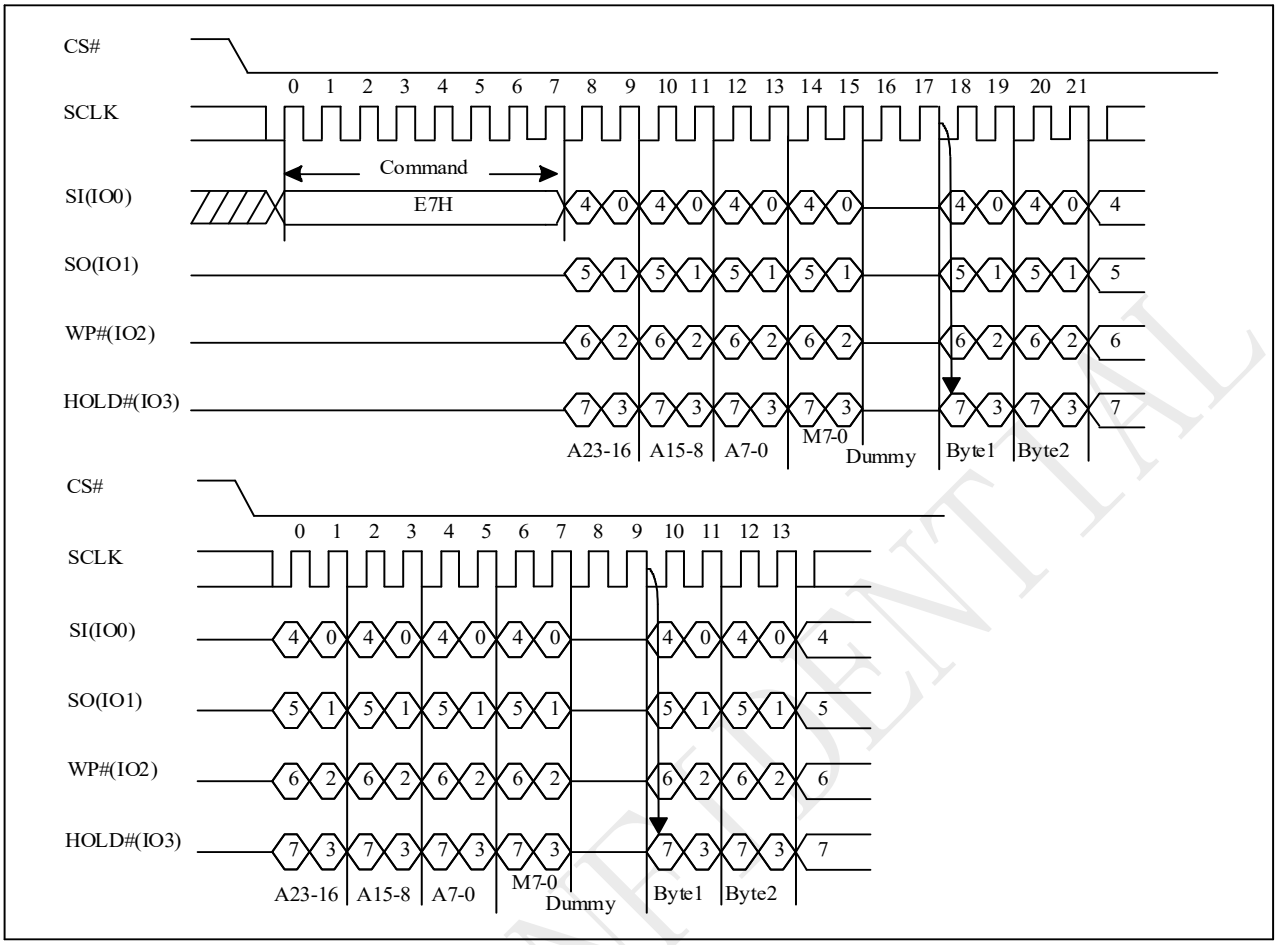


## 4IO Word Read with "8/16/32/64-Byte Wrap Around" in Standard SPI mode

The 4IO Word Read command can be used to access a specific portion within a page by issuing "Set Burst with Wrap" (77H) commands prior to E7H. The "Set Burst with Wrap" (77H) command can either enable or disable the "Wrap Around" feature for the following E7H commands. When "Wrap Around" is enabled, the data being accessed can be limited to either an 8/16/32/64-byte section of a 256-byte page. The output data starts at the initial address specified in the command, once it reaches the ending boundary of the 8/16/32/64-byte section, the output will wrap around the beginning boundary automatically until CS# is pulled high to terminate the command.

The Burst with Wrap feature allows applications that use cache to quickly fetch a critical address and then fill the cache afterwards within a fixed length (8/16/32/64-byte) of data without issuing multiple read commands. The "Set Burst with Wrap" command allows three "Wrap Bits" W6-W4 to be set. The W4 bit is used to enable or disable the "Wrap Around" operation while W6-W5 is used to specify the length of the wrap around section within a page.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.20 Set Read Parameters (C0h)

In QPI STR mode, to accommodate a wide range of applications with different needs for either maximum read frequency or minimum data access latency, “Set Read Parameters (C0h)” instruction can be used to configure the number of dummy clocks for “Fast Read (0Bh)”, “4IO Read (EBH)” , “Burst Read with Wrap (0Ch)” , “Buffer Read (9Bh)”&“Read SFDP Mode (5Ah)”instructions, and to configure the number of bytes of “Wrap Length” for the “Burst Read with Wrap (0Ch)” instruction.

In QPI DTR mode, to accommodate a wide range of applications with different needs for minimum data access latency, “Set Read Parameters (C0h)” instruction to configure the number of bytes of “Wrap Length” for the “DTR Burst Read with Wrap(0Eh)” instruction. But for QPI DTR read command, “DTR Fast Read (0Dh)”, “DTR 4IO Read (EDH)”, “DTR Burst Read with Wrap (0Eh)”, their dummy cycles are fixed.

In Standard SPI mode, the “Set Read Parameters (C0h)” instruction is not accepted. The “Wrap Length” is set by W5-4 bit in the “Set Burst with Wrap (77h)” instruction. This setting will remain unchanged when the device is switched from Standard SPI mode to QPI mode.

The default “Wrap Length” after a power up or a Reset instruction is 8 bytes, the default number of dummy clocks is 10 for QPI STR read command. Whenever the device is switched from SPI mode to QPI mode the number of dummy clocks or Wrap Length should be set again, prior to any read instructions (QPI STR read command: 0Bh, EBH, 0Ch, 9Bh,5Ah; QPI DTR read command: 0Eh).

Summary for QPI read command dummy cycles


| QPI/OPI | STR/DTR | Read Command | Parameter P7-P4 | Dummy cycles |
|---|---|---|---|---|
| QPI | STR | 0BH/EBH/0CH/ 9BH/ 5AH | X, X, 0, 0 | 10(Default) |
| | | | X, X, 0, 1 | 4 |
| | | | X, X, 1, 0 | 6 |
| | | | X, X, 1, 1 | 8 |
| QPI | DTR | 0DH/0EH | X, X, X, X | 8 |
| | | EDH | X, X, X, X | 8 |

Summary for QPI read command Wrap Length

| QPI/OPI | STR/DTR | Read command | P1-P0 | Wrap Length |
|---|---|---|---|---|
| QPI | STR | 0CH | 0,0 | 8-byte |
| | | | 0,1 | 16-byte |
| | | | 1,0 | 32-byte |
| | | | 1,1 | 64-byte |
| QPI | DTR | 0EH | 0,0 | 8-byte |
| | | | 0,1 | 16-byte |
| | | | 1,0 | 32-byte |
| | | | 1,1 | 64-byte |


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com


**Figure 10-20 Set Read Parameters Sequence (QPI)**

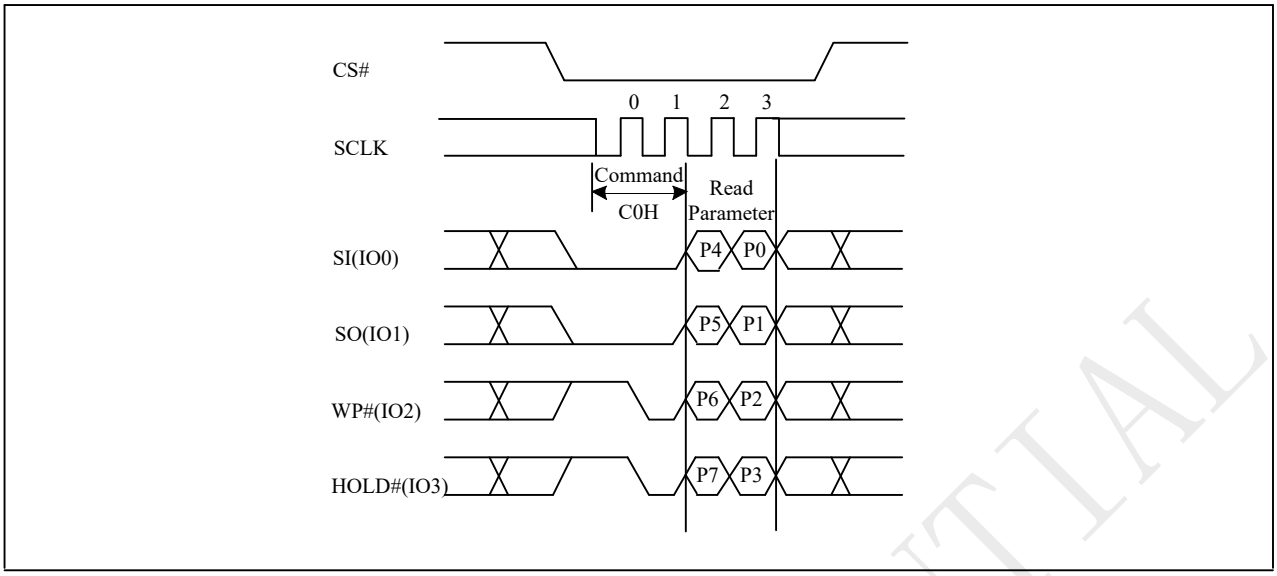


## 10.21 Burst Read with Wrap (0Ch)

The “Burst Read with Wrap (0CH)” command provides an alternative way to perform the read operation with “Wrap Around” in QPI mode. This command is similar to the “Fast Read (0BH)” command in QPI mode, except the addressing of the read operation will “Wrap Around” to the beginning boundary of the “Wrap Around” once the ending boundary is reached. The “Wrap Length” and the number of dummy clocks can be configured by the “Set Read Parameters (C0H)” command.

**Figure 10-21 Burst Read with Wrap Sequence (QPI)**

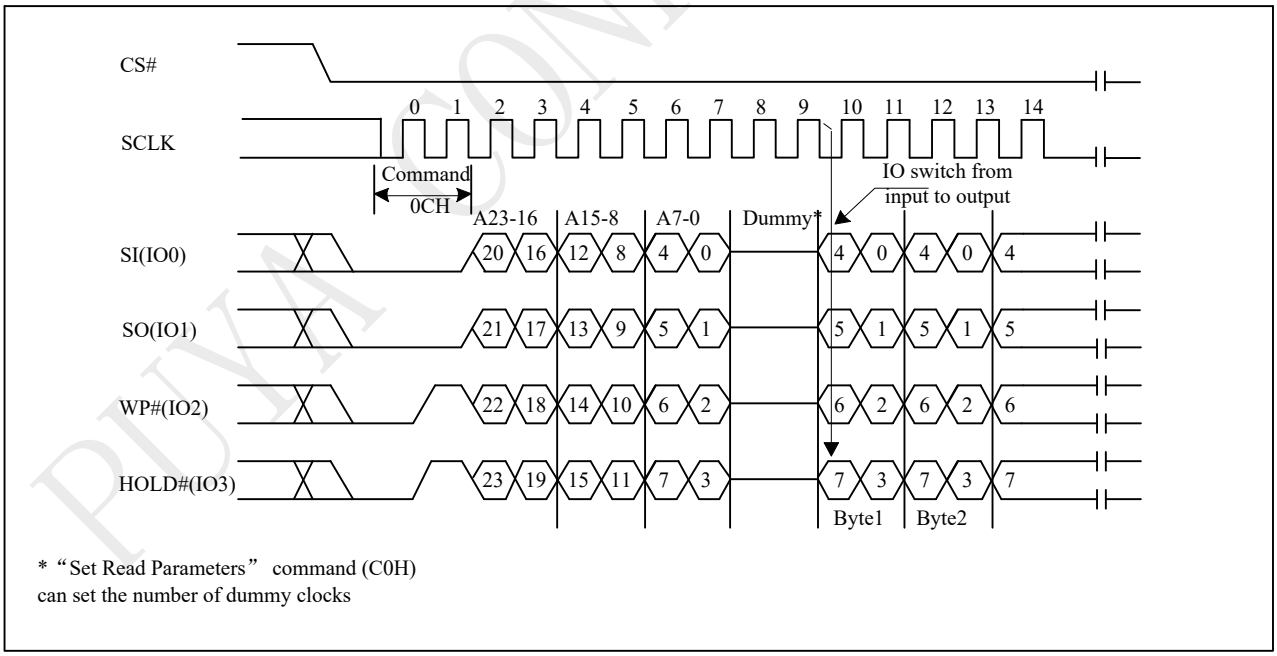



PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.22 DTR Burst Read with Wrap (0Eh)

The “DTR Burst Read with Wrap (0EH)” command provides an alternative way to perform the read operation with “Wrap Around” in QPI mode. This command is similar to the “Fast Read (0BH)” command in QPI mode, except the addressing of the read operation will “Wrap Around” to the beginning boundary of the “Wrap Around” once the ending boundary is reached. The “Wrap Length” and the number of dummy clocks can be configured by the “Set Read Parameters (C0H)” command.

**Figure 10-22 Burst Read with Wrap Sequence (QPI)**

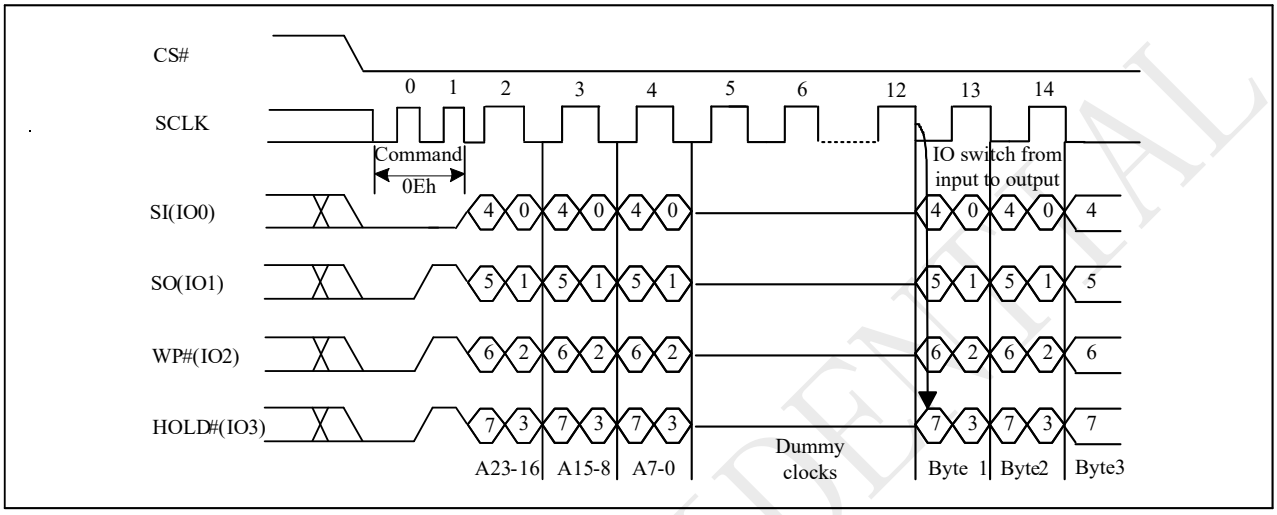


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.23 Data Learning Pattern

The data learning pattern supports system/memory controller determine valid window of data output more easily and improve data capture reliability while the flash memory is running in high frequency.

Data learning pattern can be enabled or disabled by setting the bit0 of Configure Register (data learning pattern enable bit). Once the DLP bit is set, the data learning pattern is inputted into dummy cycles.

Enabling data learning pattern bit (DLP bit) will not affect the function of continue read mode bit. In dummy cycles, continuous mode bit still operates with the same function. Data learning pattern will output after continuous mode bit.

The data learning pattern is a fixed 8-bit data pattern (00110100). For STR (single transfer rate) instructions, the complete 8 bits will start to output right after the continuous mode bit. While dummy cycle is not sufficient of 8 cycles, the rest of the DLP bits will be cut. For STR QPI read instructions, DLP function is not valid for 4 dummy cycle. For DTR (double transfer rate) instructions, the complete 8 bits will start to output during the last 4 dummy cycle.

**Figure 10-23 Fast Read with DLP bits output Sequence**


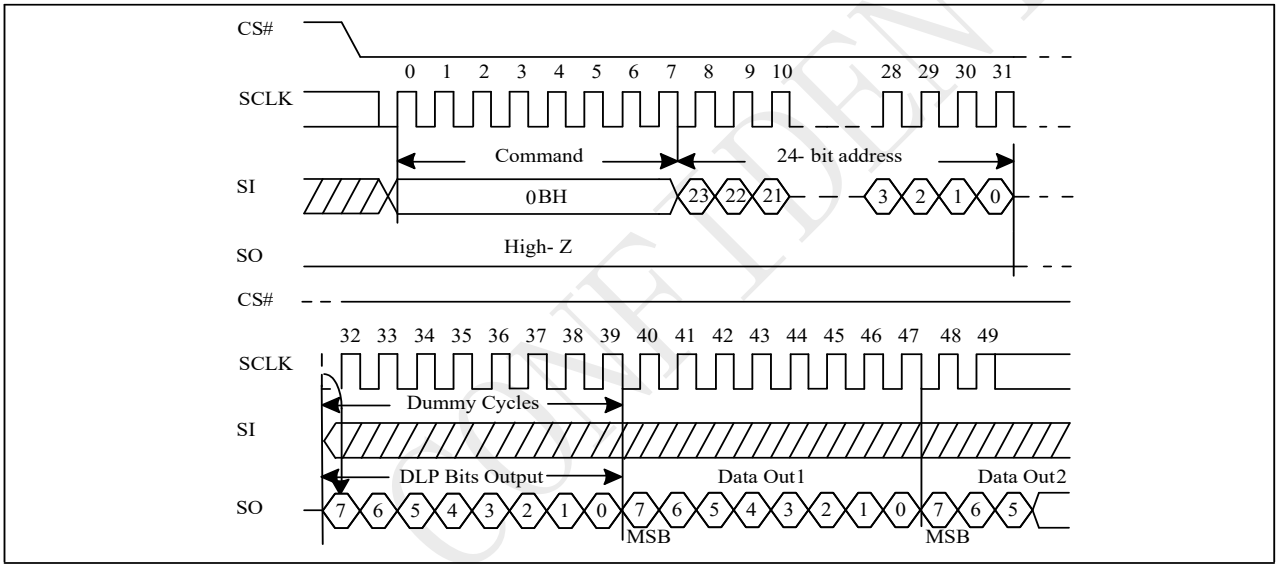



**Figure 10-23a Dual Read with DLP bits output Sequence**

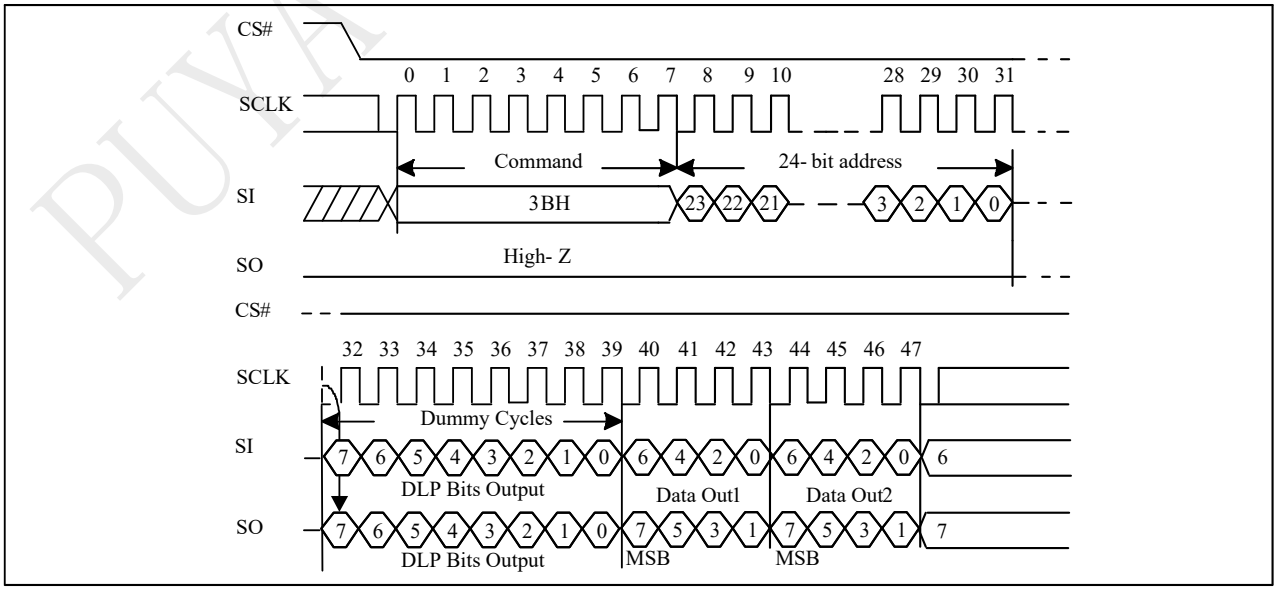


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

**Figure 10-23b Quad Read with DLP bits output Sequence**


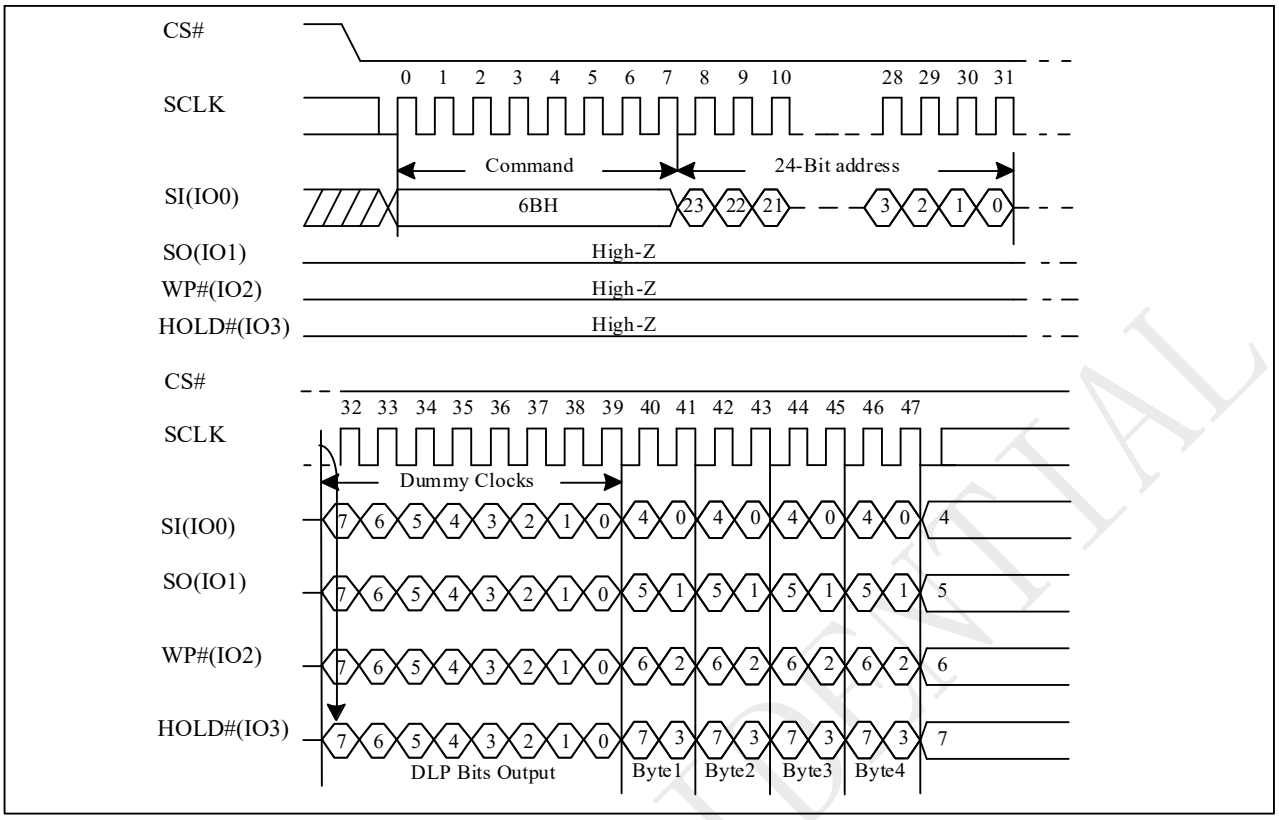



**Figure 10-23c 4IO Read with DLP bits output Sequence**

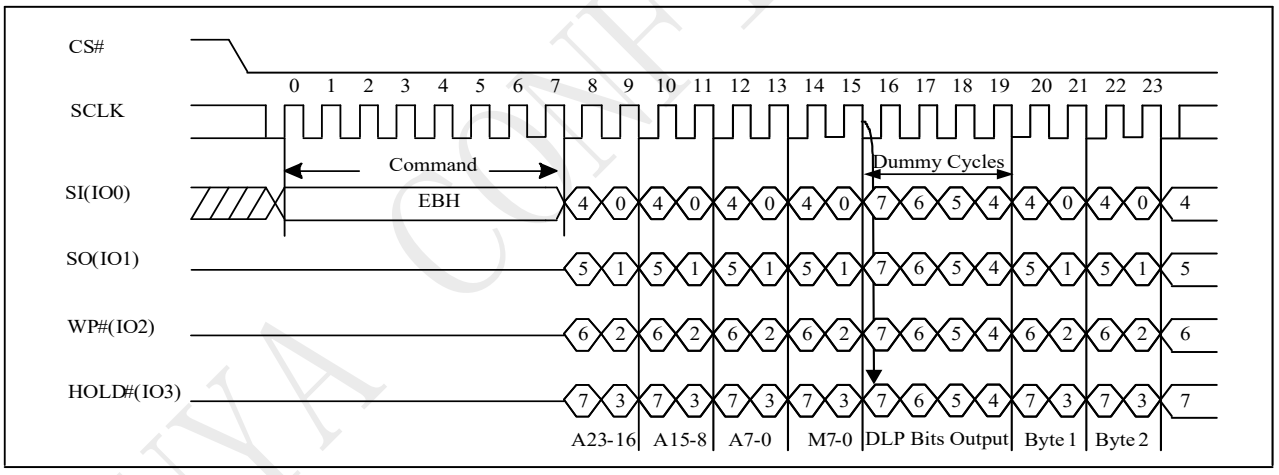


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

**Figure 10-23d QPI Read instructions with DLP bits output Sequence**


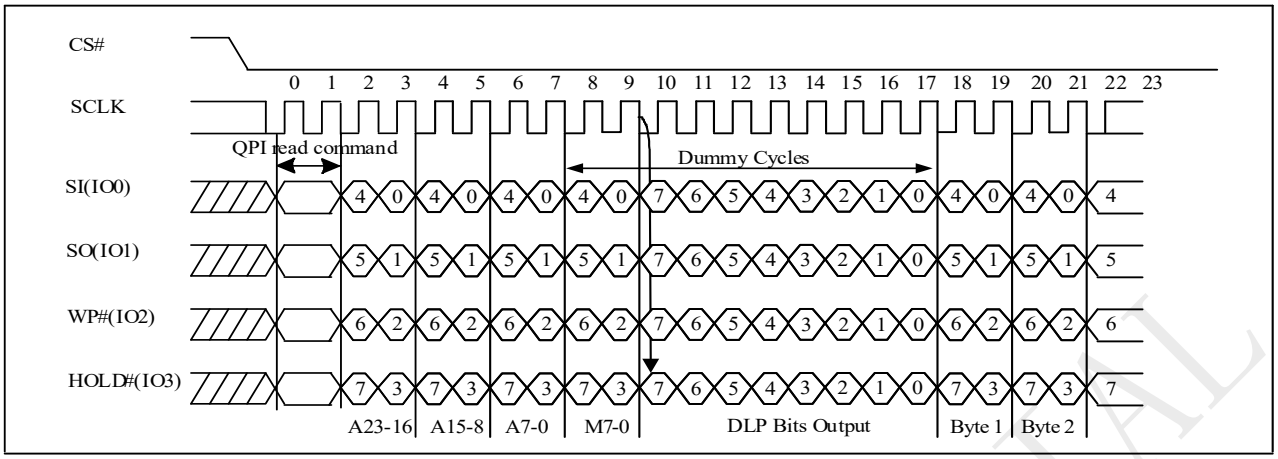



**Figure 10-23e DTR 1IO Read with DLP bits output Sequence**

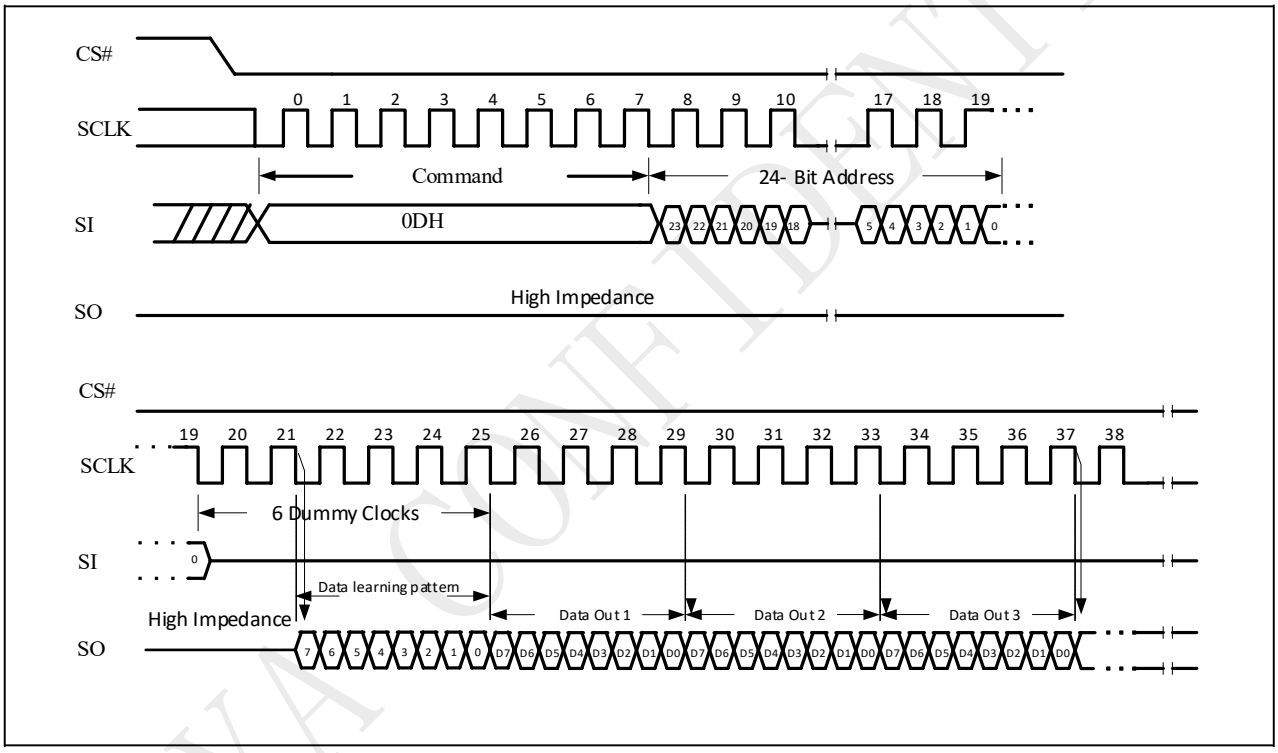


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

**Figure 10-23f DTR 2IO Read with DLP bits output Sequence**


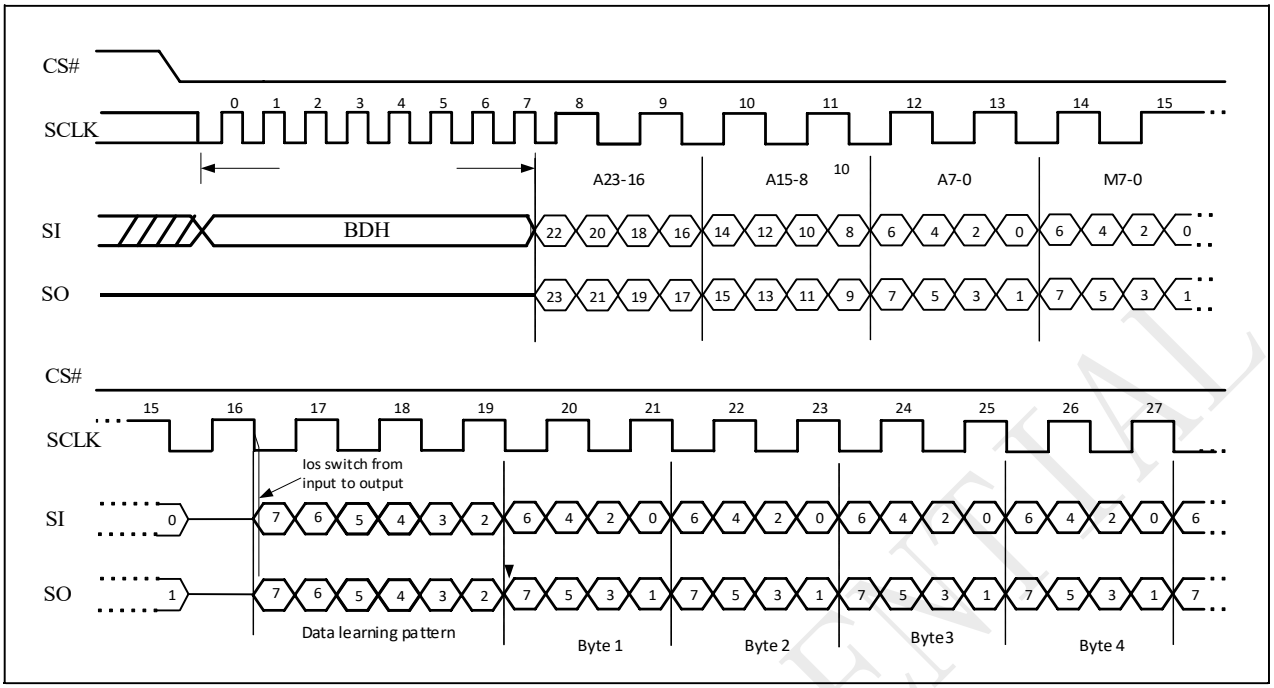



**Figure 10-23g DTR 4IO Read with DLP bits output Sequence**

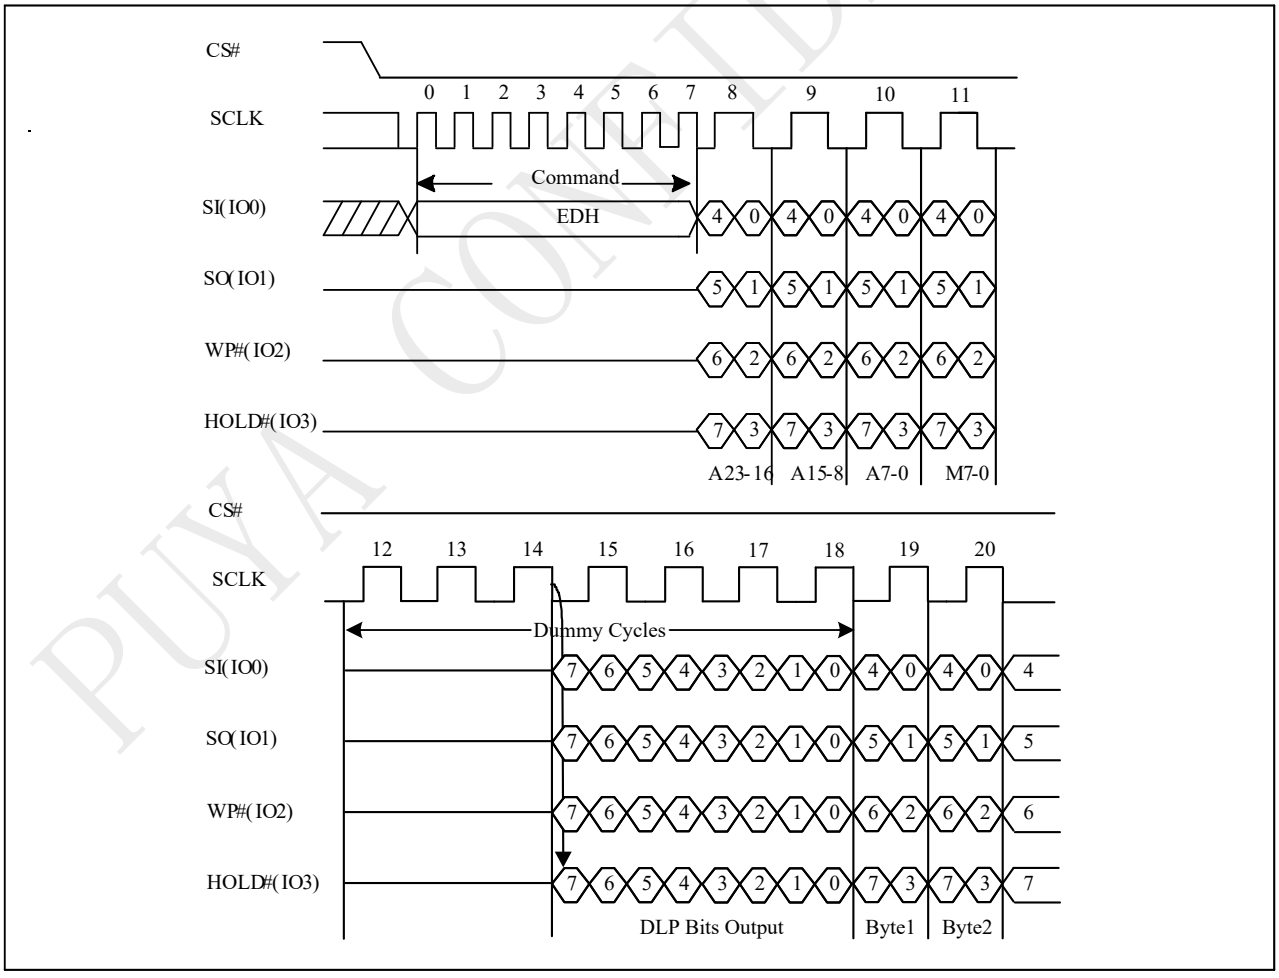



PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.24 Enable QPI (38H)

The device support both Standard/Dual/Quad SPI and QPI. The “Enable QPI (38H)” command can switch the device from SPI mode to QPI mode. See the command Table 2a for all support QPI commands. In order to switch the device to QPI mode, the Quad Enable (QE) bit in Status Register-1 must be set to 1 first, and “Enable QPI (38H)” command must be issued. If the QE bit is 0, the “Enable QPI (38H)” command will be ignored and the device will remain in SPI mode. When the device is switched from SPI mode to QPI mode, the existing Write Enable Latch and Program/Erase Suspend status, and the Wrap Length setting will remain unchanged.


**Figure 10-24 Enable QPI Sequence (38H)**

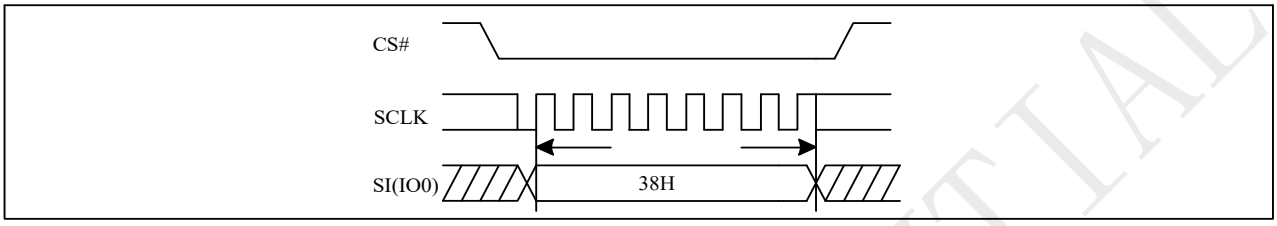


## 10.25 Disable QPI (FFH)

To exit the QPI mode and return to Standard/Dual/Quad SPI mode, the “Disable QPI (FFH)” command must be issued. When the device is switched from QPI mode to SPI mode, the existing Write Enable Latch and Program/Erase Suspend status, and the Wrap Length setting will remain unchanged.

**Figure 10-25a Disable QPI Sequence (QPI)**

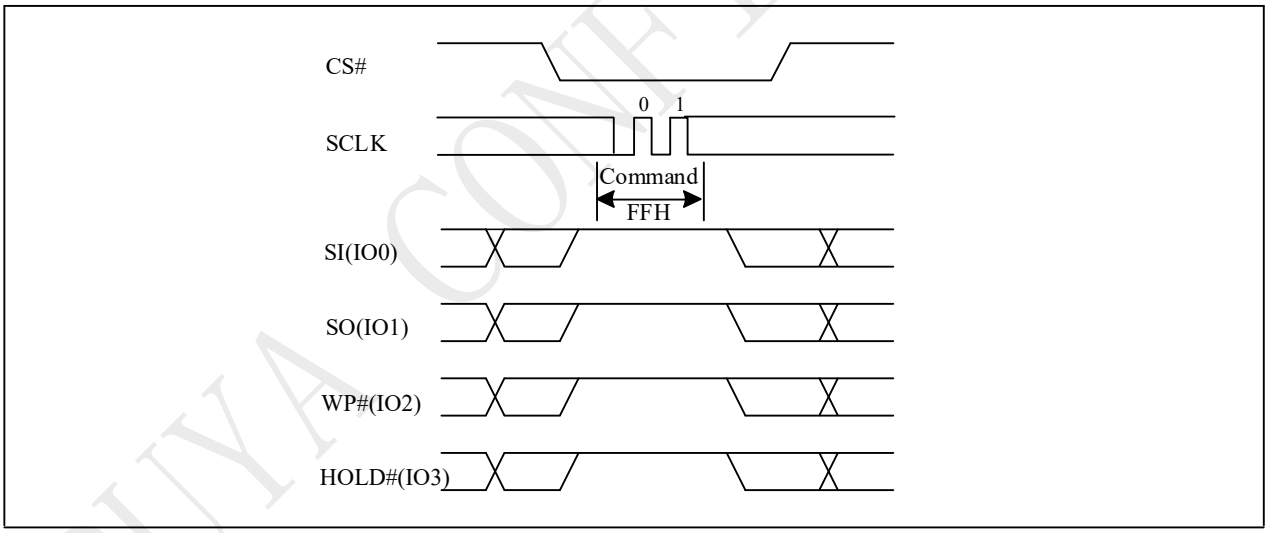


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 10.26 Page Erase (81H)

The Page Erase (PE) instruction is for erasing the data of the chosen Page to be "1". A Write Enable (WREN) instruction must execute to set the Write Enable Latch (WEL) bit before sending the Page Erase (PE). The self-timed Page Erase Cycle time (tPE) is initiated as soon as Chip Select (CS#) goes high. The Write in progress (WIP) bit still can be check out during the Page Erase cycle is in progress. The WIP sets 1 during the tPE timing, and sets 0 when Page Erase Cycle is completed, and the Write Enable Latch (WEL) bit is reset.

To perform a Page Erase with the standard page size (256 bytes), an instruction of 81h must be clocked into the device followed by three address bytes comprised of 2-page address bytes that specify the page in the main memory to be erased, and 1 dummy byte.

The sequence of issuing PE instruction is: CS# goes low→ sending PE instruction code→3-byte address on SI→ CS# goes high.

**Figure 10-26 Page Erase Sequence (Command 81h)**


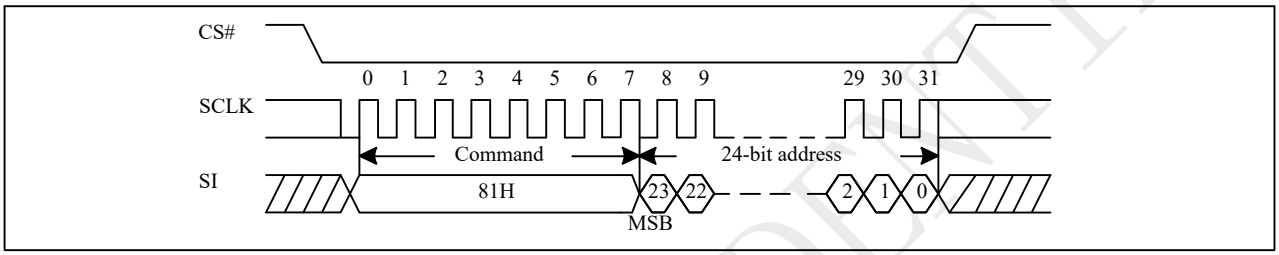



**Figure 10-26a Page Erase Sequence (QPI)**

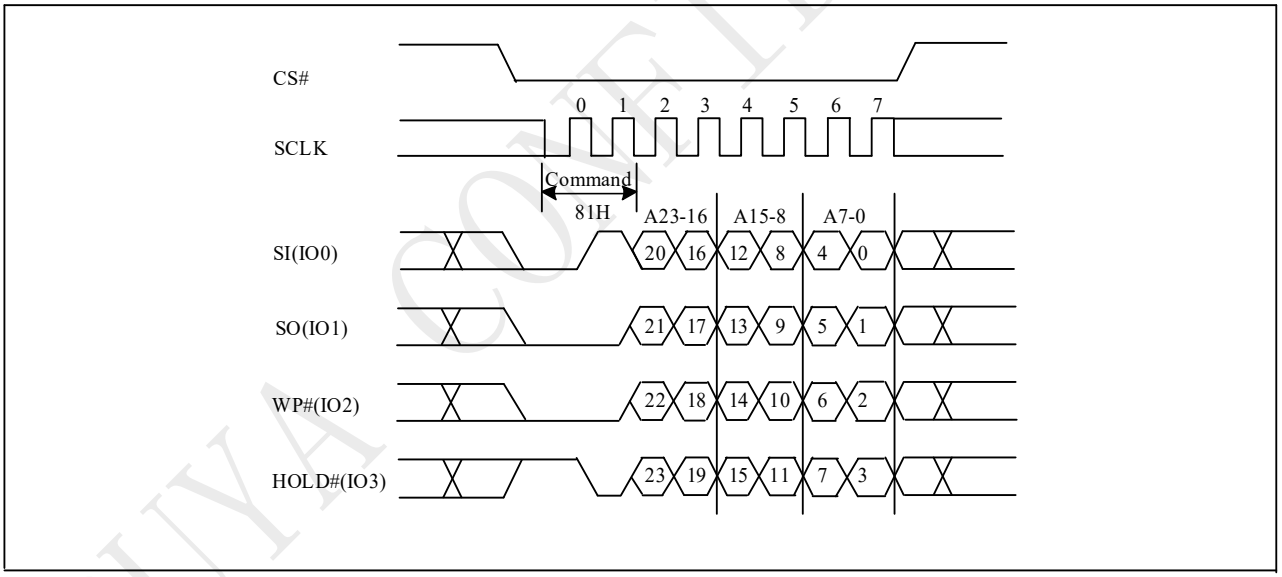


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 10.27 Sector Erase (20H)

The Sector Erase (SE) instruction is for erasing the data of the chosen sector to be "1". A Write Enable (WREN) instruction must execute to set the Write Enable Latch (WEL)bit before sending the Sector Erase (SE).

The self-timed Sector Erase Cycle time (tSE) is initiated as soon as Chip Select (CS#) goes high. The Write in progress (WIP) bit still can be check out during the Sector Erase cycle is in progress. The WIP sets 1 during the tSE timing, and sets 0 when Sector Erase Cycle is completed, and the Write Enable Latch (WEL) bit is reset. If the sector is protected by BP4, BP3, BP2, BP1, BP0 bits, the Sector Erase (SE) instruction will not be executed on the sector.

Any address of the sector is a valid address for Sector Erase (SE) instruction. The CS# must go high exactly at the byte boundary (the latest eighth of address byte been latched-in); otherwise, the instruction will be rejected and not executed.

Address bits [Am-A12] (Am is the most significant address) select the sector address.

**Figure 10-27 Sector Erase (SE) Sequence (Command 20h)**


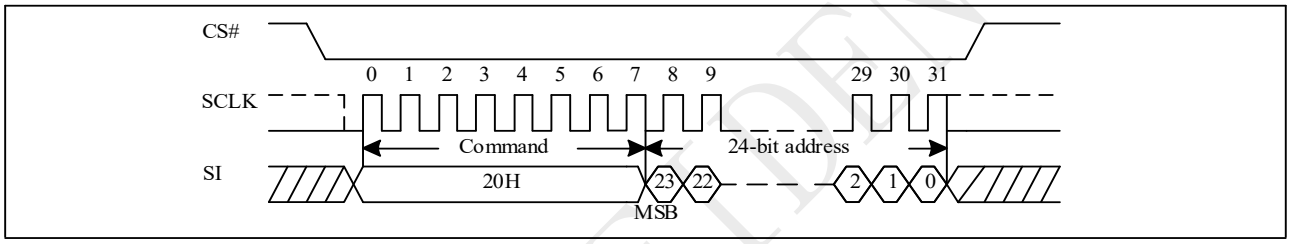



**Figure 10-27c Sector Erase (SE) Sequence (QPI)**

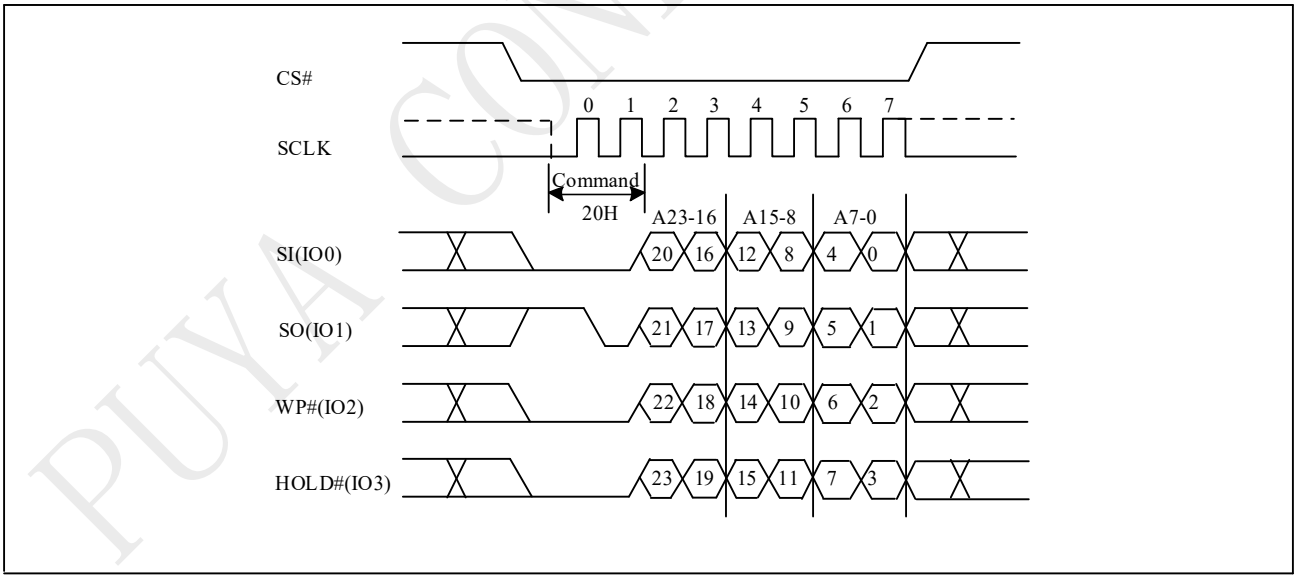


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.28 Block Erase (52H)

The Block Erase (BE32K) instruction is for erasing the data of the chosen block to be "1". The instruction is used for 32K-byte block erase operation. A Write Enable (WREN) instruction must be executed to set the Write Enable Latch (WEL) bit before sending the Block Erase (BE32K).

The self-timed Block Erase Cycle time (tBE1) is initiated as soon as Chip Select (CS#) goes high. The Write in progress (WIP) bit still can be check out during the Block Erase cycle is in progress. The WIP sets 1 during the tBE timing, and sets 0 when Block Erase Cycle is completed, and the Write Enable Latch (WEL) bit is reset.

Any address of the block is a valid address for Block Erase (BE32K) instruction. The CS# must go high exactly at the byte boundary (the least significant bit of address byte has been latched-in); otherwise, the instruction will be rejected and not executed.

The self-timed Block Erase Cycle time (tBE32K) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked while the Block Erase cycle is in progress. The WIP sets during the tBE32K timing, and clears when Block Erase Cycle is completed, and the Write Enable Latch (WEL) bit is cleared. If the block is protected by BP4, BP3, BP2, BP1, BP0 bits, the array data will be protected (no change) and the WEL bit still be reset.

**Figure 10-28 Block Erase 32K(BE32K) Sequence (Command 52h)**


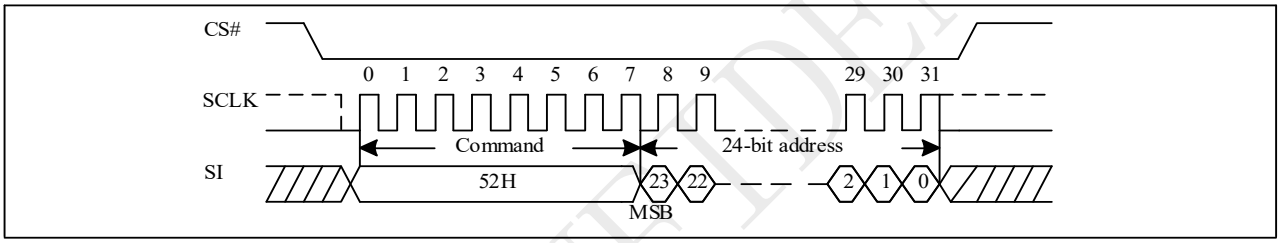



**Figure 10-28a Block Erase 32K (BE32K) Sequence (QPI)**

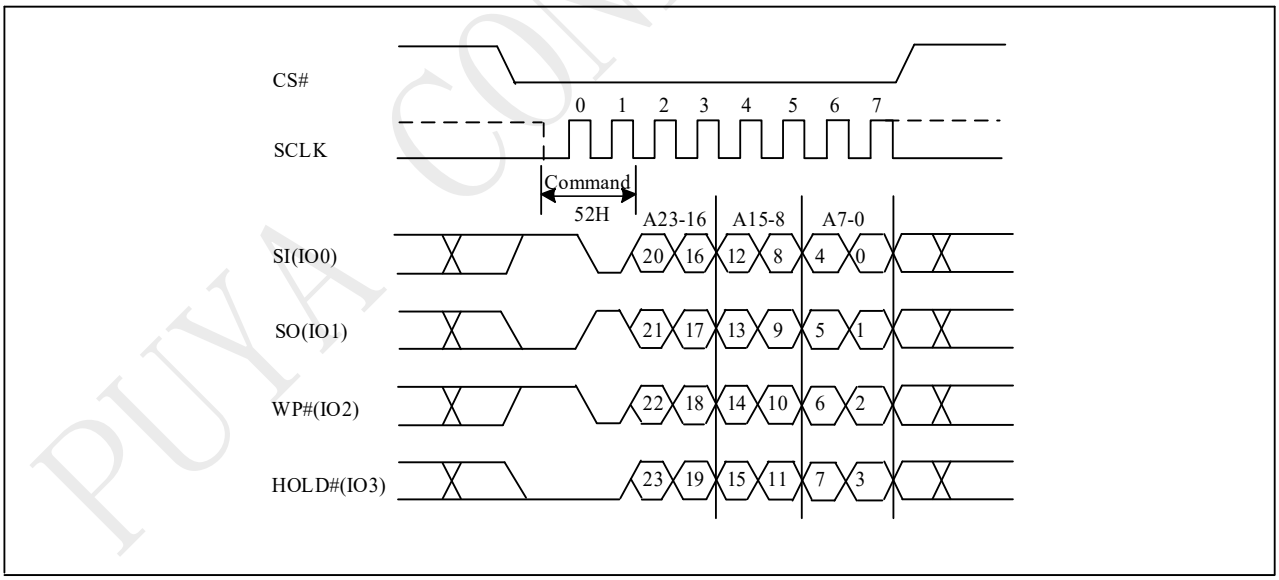


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.29 Block Erase (D8H)

The Block Erase (BE) instruction is for erasing the data of the chosen block to be "1". The instruction is used for 64K-byte block erase operation. A Write Enable (WREN) instruction must execute to set the Write Enable Latch (WEL) bit before sending the Block Erase (BE).

The self-timed Block Erase Cycle time (tBE) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked during the Block Erase cycle is in progress. The WIP sets 1 during the tBE timing, and sets 0 when Block Erase Cycle is completed, and the Write Enable Latch (WEL) bit is reset. If the block is protected by BP4, BP3, BP2, BP1, BP0 bits, the Block Erase (BE) instruction will not be executed on the block.

Any address of the block is a valid address for Block Erase (BE) instruction. The CS# must go high exactly at the byte boundary (the latest eighth of address byte been latched-in); otherwise, the instruction will be rejected and not executed.

**Figure 10-29 Block Erase (BE) Sequence (Command D8h)**


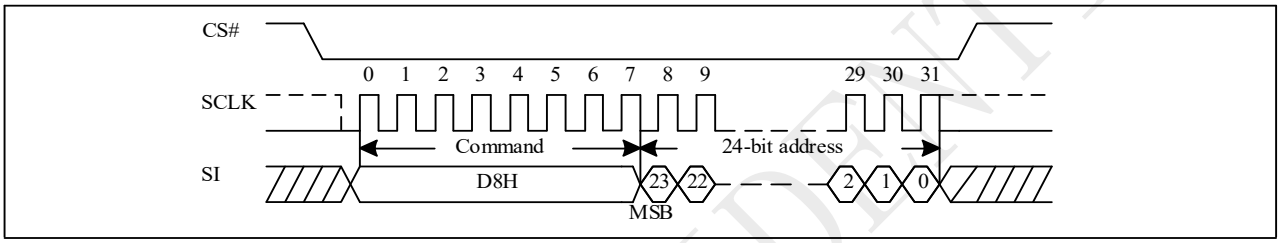



**Figure 10-29a Block Erase (BE) Sequence (QPI)**

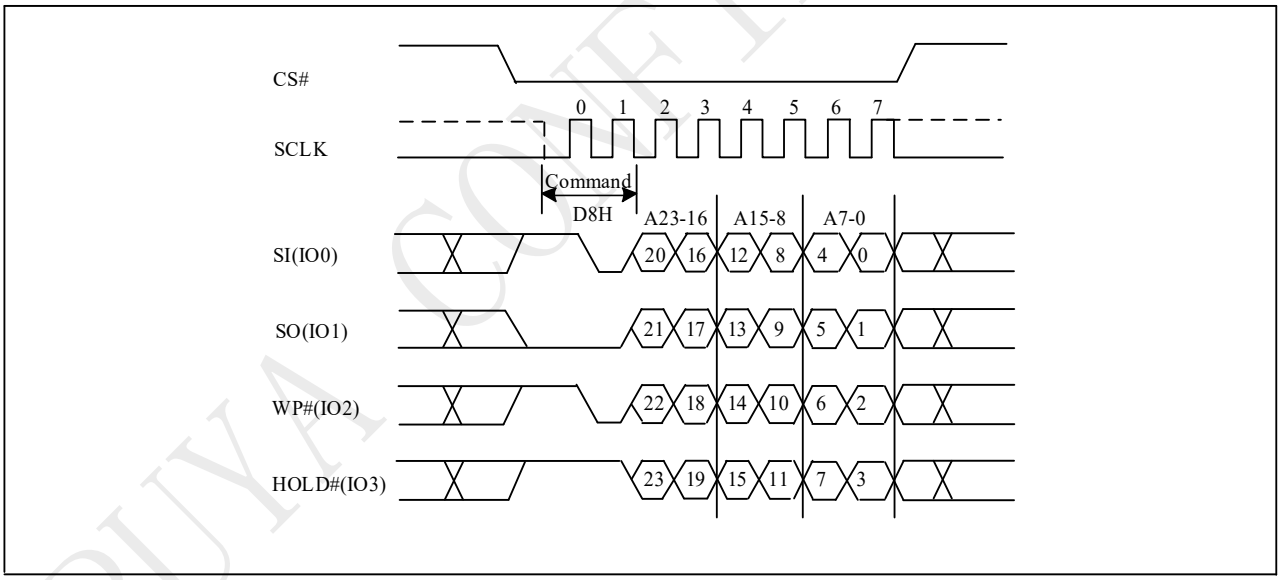


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 10.30 Chip Erase (60H/C7H)

The Chip Erase (CE) instruction is for erasingthedataofthewholechiptobe"1". A Write Enable (WREN) instruction must execute to set the Write Enable Latch (WEL) bit before sending the Chip Erase (CE). The CS# must go high exactly at the byte boundary (the latest eighth of address byte been latched-in); otherwise, the instruction will be rejected and not executed.

The self-timed Chip Erase Cycle time (tCE) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked during the Chip Erase cycle is in progress. The WIP sets 1 during the tCE timing, and sets 0 when Chip Erase Cycle is completed, and the Write Enable Latch (WEL) bit is reset. If the chip is protected by BP4, BP3, BP2, BP1, BP0 bits, the Chip Erase (CE) instruction will not be executed. It will be only executed when all Block Protect (BP4, BP3, BP2, BP1, BP0) are set to “None protected”.

**Figure 10-30 Chip Erase (CE) Sequence (Command 60 or C7)**


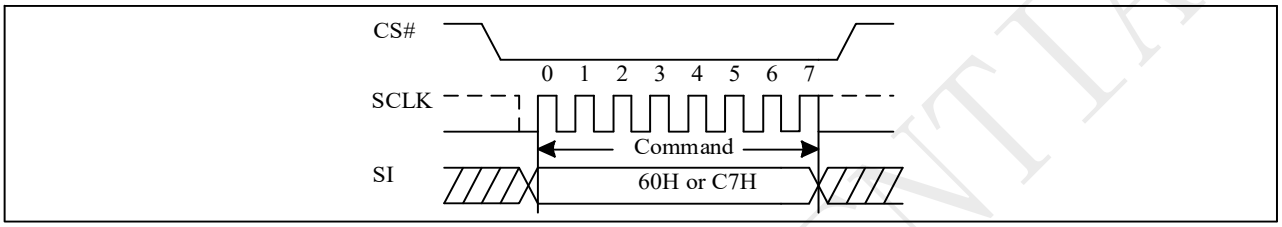



**Figure 10-30a Chip Erase (CE) Sequence (QPI)**

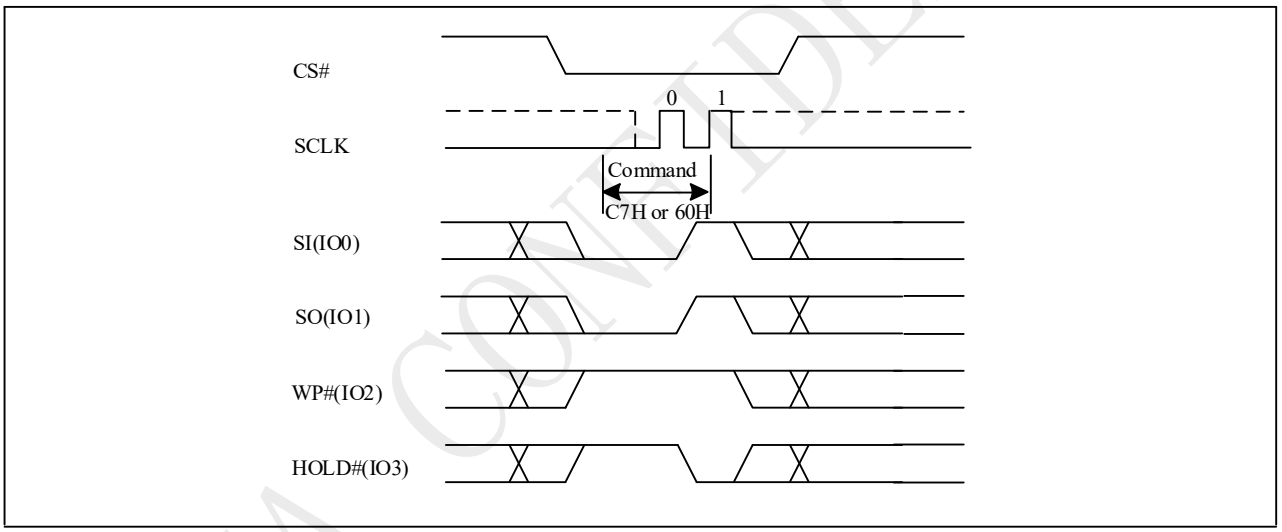


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 10.31 Page Program (02H)

The Page Program (PP) instruction is for programming the memory to be "0". A Write Enable (WREN) instruction must execute to set the Write Enable Latch (WEL) bit before sending the Page Program (PP). The device programs only the last 256 data bytes sent to the device. If the entire 256 data bytes are going to be programmed, A7-A0(The eight least significant address bits) should be set to 0.If the eight least significant address bits(A7-A0) are not all 0,all transmitted data going beyond the end of the current page are programmed from the start address of the same page(from the address A7-A0 are all 0). If more than 256 bytes are sent to the device, the data of the last 256-byte is programmed at the request page and previous data will be disregarded. If less than 256 bytes are sent to the device, the data is programmed at the requested address of the page without effect on other address of the same page.

The self-timed Page Program Cycle time (tPP) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked during the Page Program cycle is in progress. The WIP sets 1 during the tPP timing, and sets 0 when Page Program Cycle is completed, and the Write Enable Latch (WEL) bit is reset. If the page is protected by BP4, BP3, BP2, BP1, BP0 bits, the Page Program (PP) instruction will not be executed. The SIO [3:1] are "don't care".

The CS# must be kept low during the whole Page Program cycle; The CS# must go high exactly at the byte boundary (the latest eighth bit of data being latched in), otherwise the instruction will be rejected and will not be executed.

**Figure 10-31 Page Program (PP) Sequence (Command 02h)**


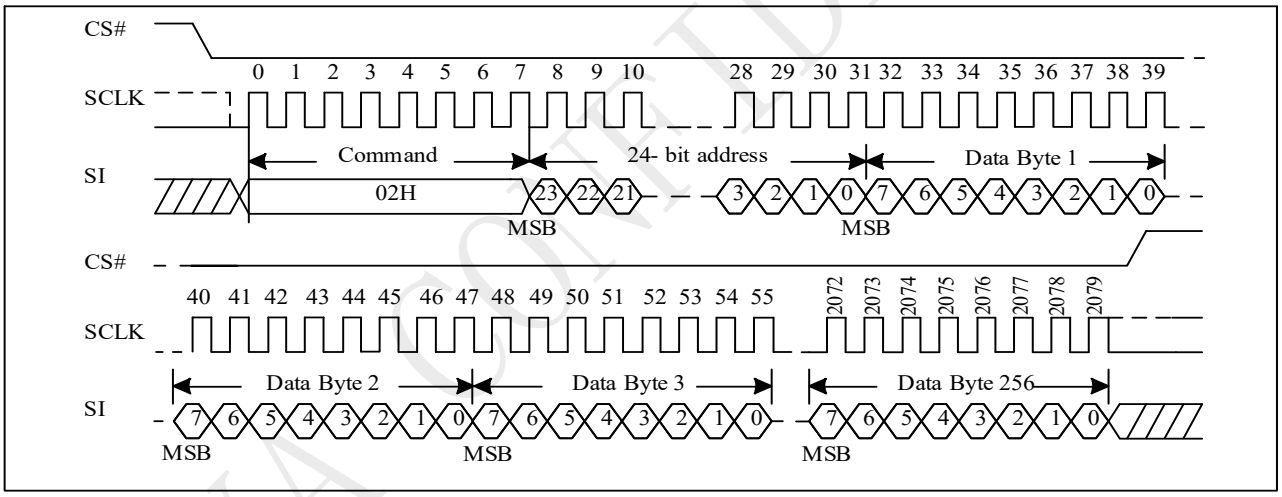



**Figure 10-31a Page Program (PP) Sequence (QPI)**

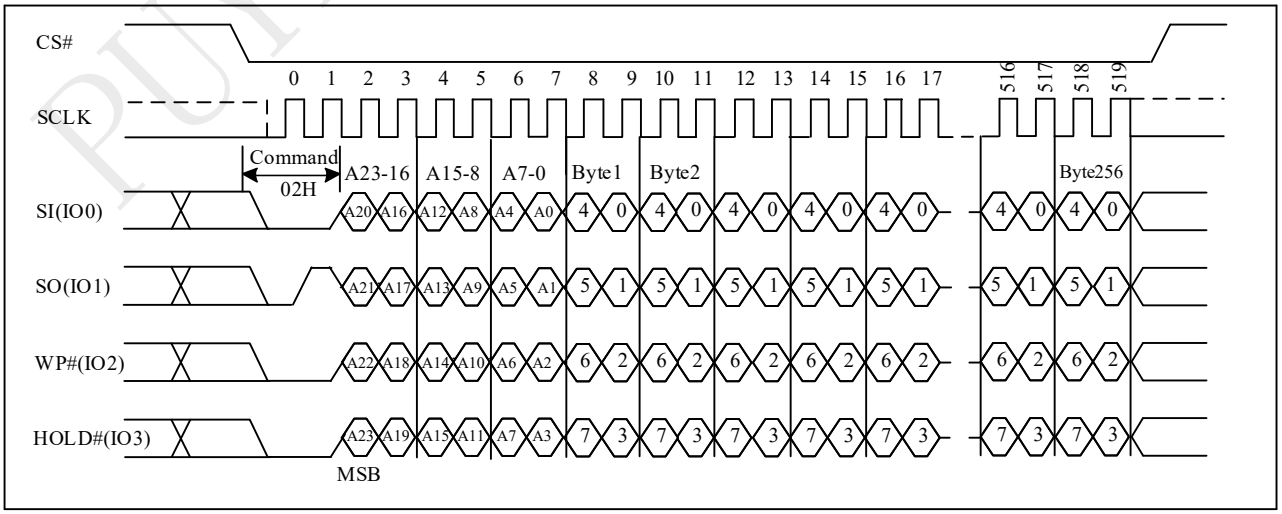


PUYA CONFIDENTIAL



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.32 Quad Page Program (32H)

The Quad Page Program (QPP) instruction is for programming the memory to be "0". A Write Enable (WREN) instruction must execute to set the Write Enable Latch (WEL) bit and Quad Enable (QE) bit must be set to "1" before sending the Quad Page Program (QPP). The Quad Page Programming takes four pins: SIO0, SIO1, SIO2, and SIO3 as data input, which can improve programmer performance and the effectiveness of application. The QPP operation frequency supports as fast as fQPP. The other function descriptions are as same as standard page program.

The sequence of issuing QPP instruction is: CS# goes low→ sending QPP instruction code→ 3-byte address on SIO0 → at least 1-byte on data on SIO [3:0] →CS# goes high.

**Figure 10-32 Quad Page Program (QPP) Sequence (Command 32h)**

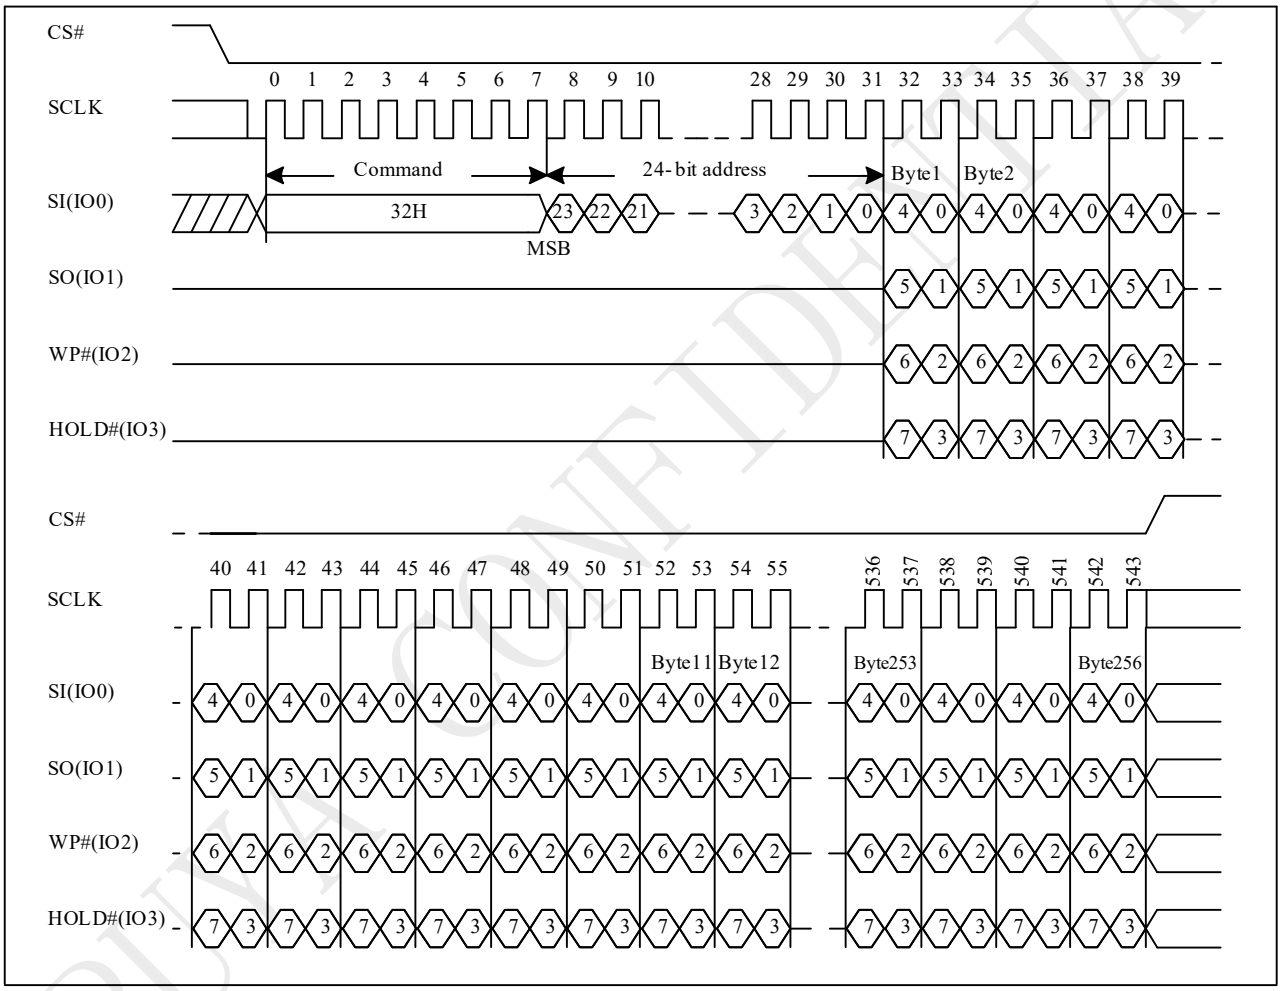


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.33 Buffer Clear (9EH)

The Buffer Clear instruction is for reset all buffer data to "FF". The data buffer will be 256 bytes (normal mode) or 512bytes (dual page mode) or 1024 bytes (quad page mode).

The Buffer data reset will begin when the CS# pin goes high. There is a latency of tBC, after which the device is ready to accept the next instruction.

**Figure 10-33 Buffer Clear Sequence (Command 9Eh)**


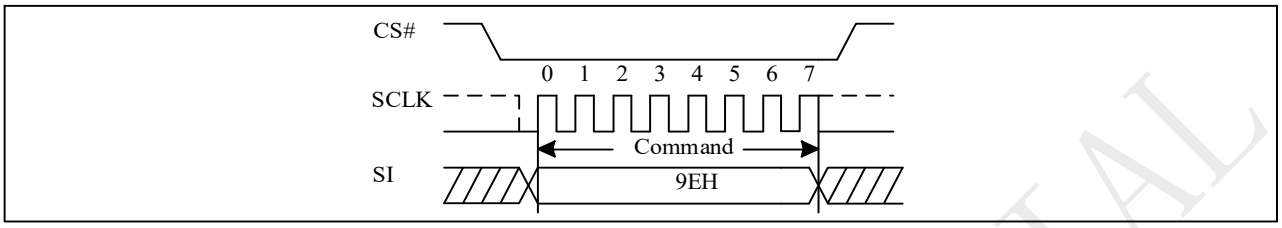



**Figure 10-33a Buffer Clear Sequence (QPI)**

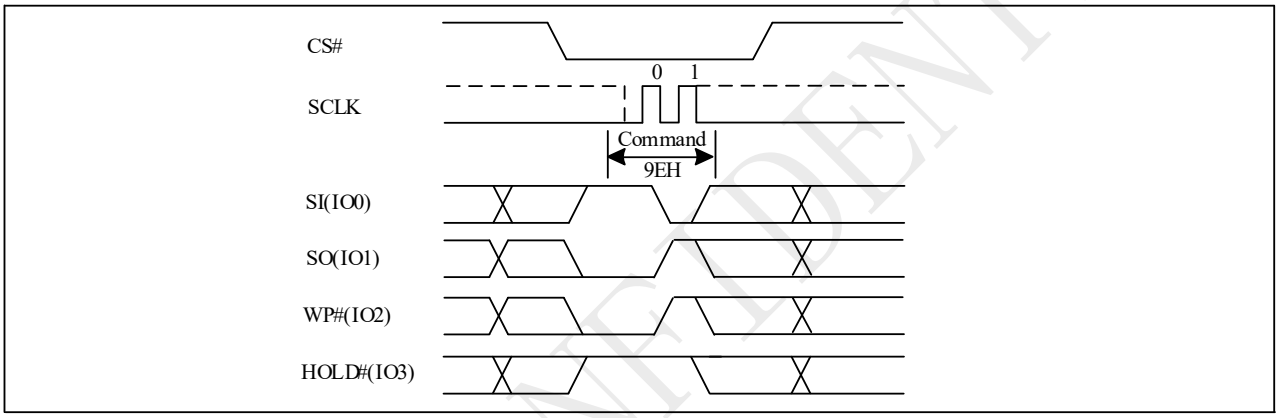


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 10.34 Buffer Load (9AH)

The Buffer Load instruction is for load main memory data to the data buffer. The data buffer will be 256 bytes (normal mode) or 512bytes (dual page mode) or 1024 bytes (quad page mode). The address Am-A8(normal mode) or Am-A9(dual page mode) or Am-A10(quad page mode) which specify the page in main memory to be load data to buffer.

The transfer of the page of data from the main memory to the buffer will begin when the CS# pin goes high. During the page transfer time (tBL), the WIP bit in the Status Register can be read to determine whether or not the transfer has been completed.

**Figure 10-34 Buffer Load Sequence (Command 9Ah)**


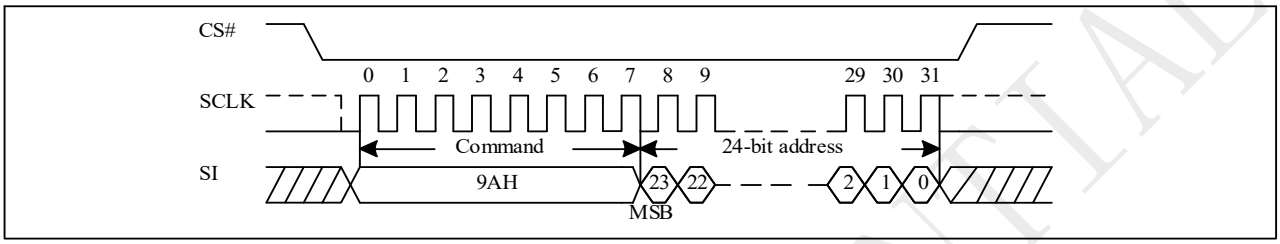



**Figure 10-35a Buffer Load Sequence (QPI)**

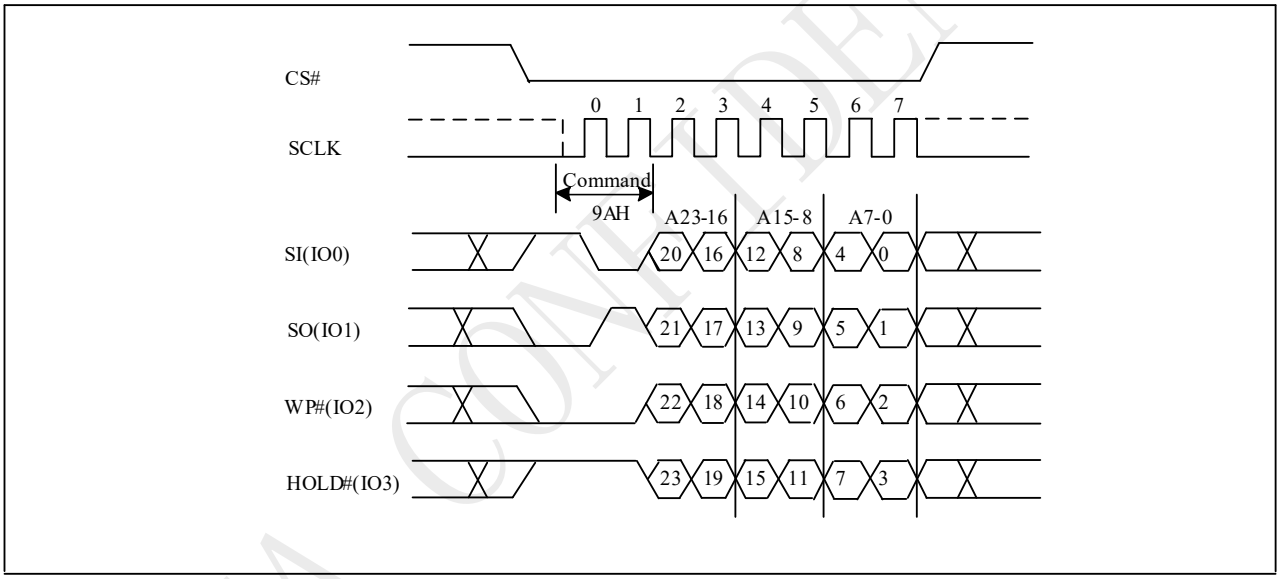


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.35 Buffer Read (9BH)

The Buffer Read instruction is for reading data out from the data buffer. The data buffer will be 256 bytes (normal mode) or 512bytes (dual page mode) or 1024 bytes (quad page mode). The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole data buffer can be read out at a single Buffer Read instruction. The address counter rolls over to 0 when the highest address (FFH for normal mode /1FFH for dual page mode / 3FFH for quad page mode) has been reached.

While Program/Erase /Write Status Register cycle is in progress, Buffer Read instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

**Figure 10-35 Buffer Read Sequence (Command 9Bh)**


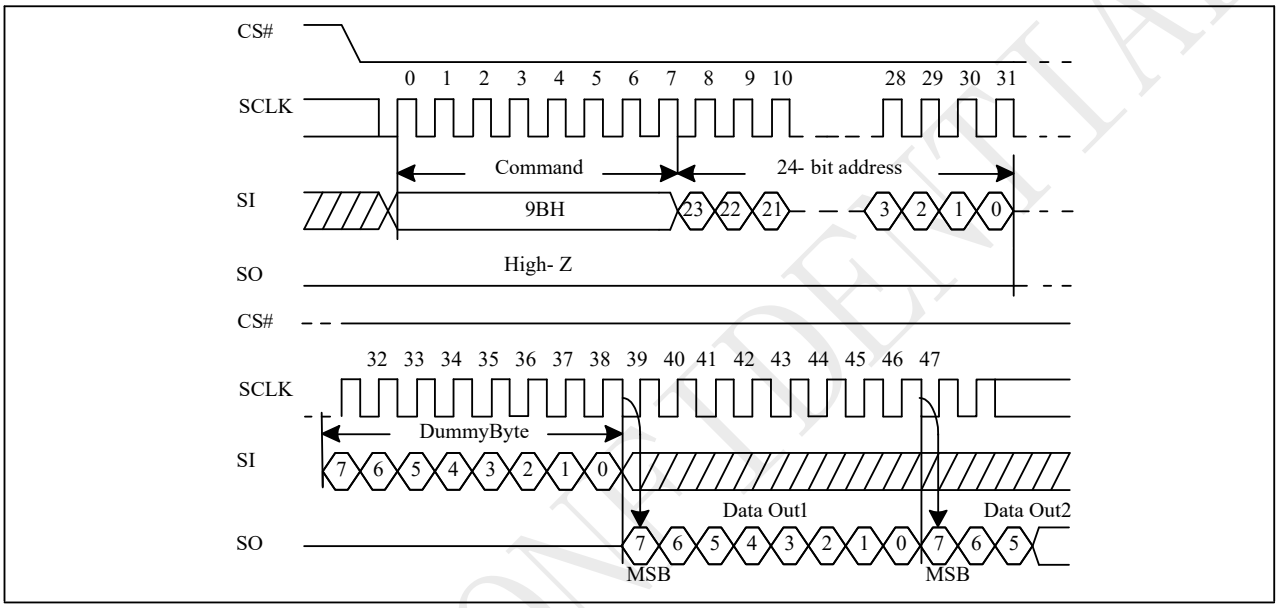



**Figure 10-35a Buffer Read Sequence (QPI)**

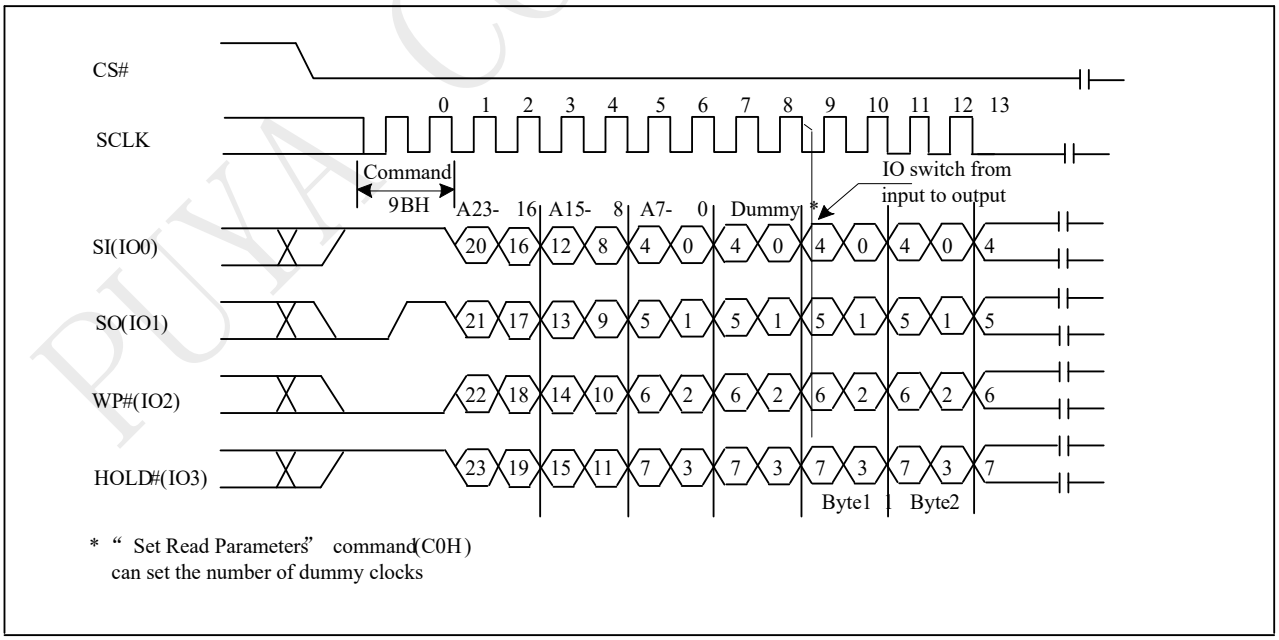


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.36 Buffer Write (9CH)

The Buffer Write instruction is for send data to data buffer. The data buffer size will be 256 bytes (normal mode) or 512bytes (dual page mode) or 1024 bytes (quad page mode). The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted in.

If the end of the data buffer is reached, the device will wrap around back to the beginning of the buffer. Data will continue to be loaded into the data buffer until CS Pin goes to high.

**Figure 10-36 Buffer Write Sequence (Command 9Ch)**


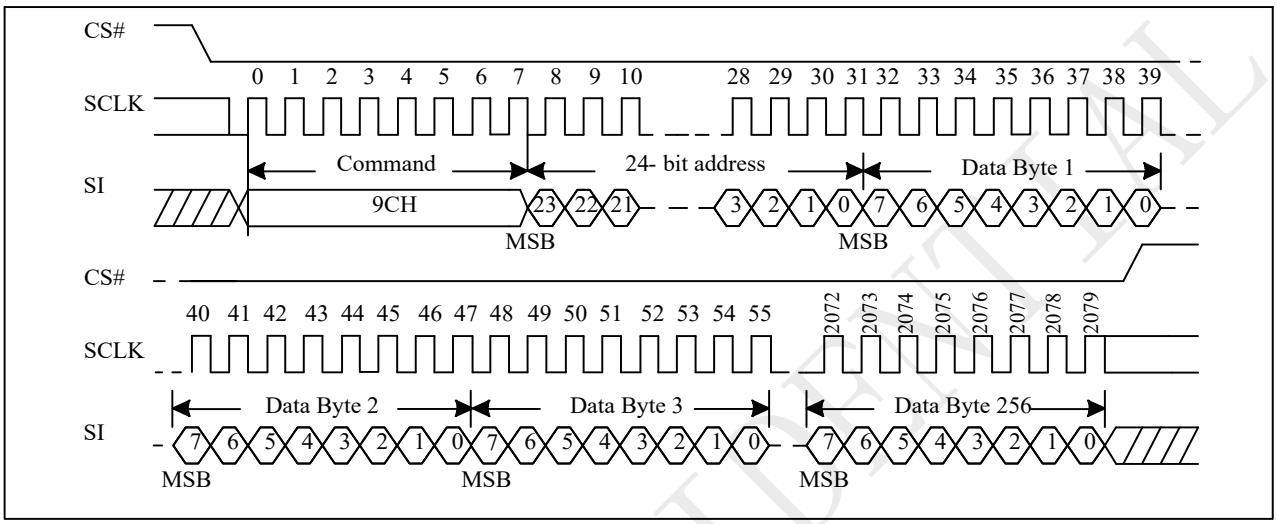



**Figure 10-36a Buffer Write Sequence (QPI)**

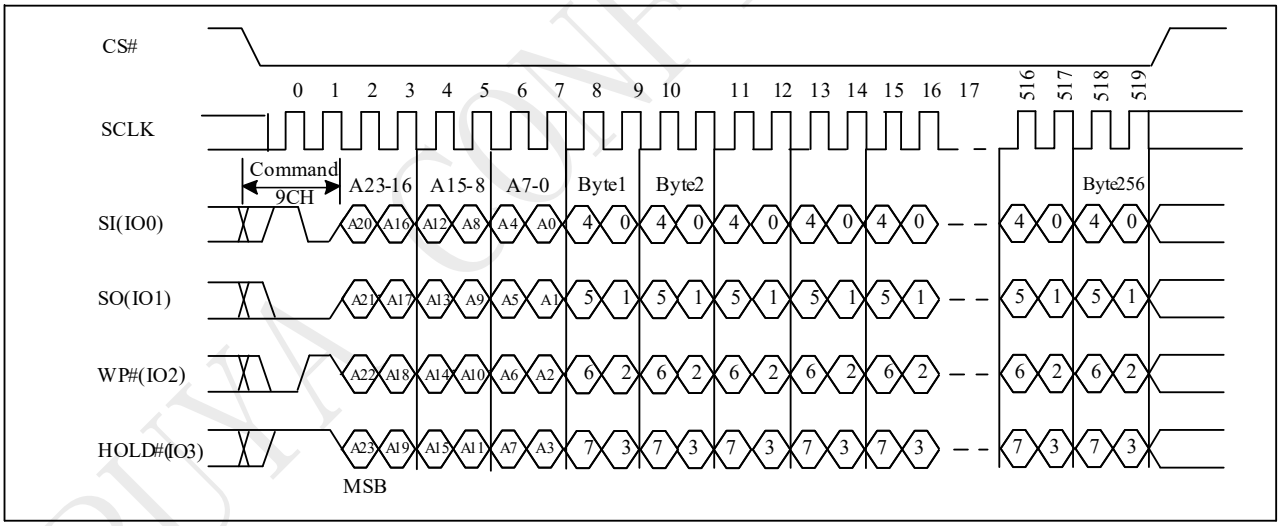


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.37 Buffer to Main Memory Page Program (9DH)

The Buffer to Main Memory Page Program instruction allows data that is stored in the data buffers to be written into a pre-erased page in the main memory array. It is necessary that the page in main memory to be written be previously erased in order to avoid programming errors. A Write Enable (WREN) instruction must execute to set the Write Enable Latch (WEL) bit before sending the Buffer to Main Memory Page Program instruction. The data buffer will be 256 bytes (normal mode) or 512bytes (dual page mode) or 1024 bytes (quad page mode). The address Am-A8(normal mode) or Am-A9(dual page mode) or Am-A10(quad page mode) which specify the page in main memory to be programmed.

The sequence of issuing Buffer to Main Memory Page Program instruction is: CS# goes low→ sending Buffer to Main Memory Page Program instruction code→3-byteaddressonSI→CS# goes high.

The self-timed Page Program Cycle time (tPP) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked during the Buffer to Main Memory Page Program cycle is in progress. The WIP sets 1 during the tPP timing, and sets 0 when Page Program Cycle is completed, and the Write Enable Latch (WEL) bit is reset. If the page is protected by BP4, BP3, BP2, BP1, BP0 bits, the Buffer to Main Memory Page Program instruction will not be executed.

**Figure 10-37 Buffer to Main Memory Page Program Sequence (Command 9Dh)**


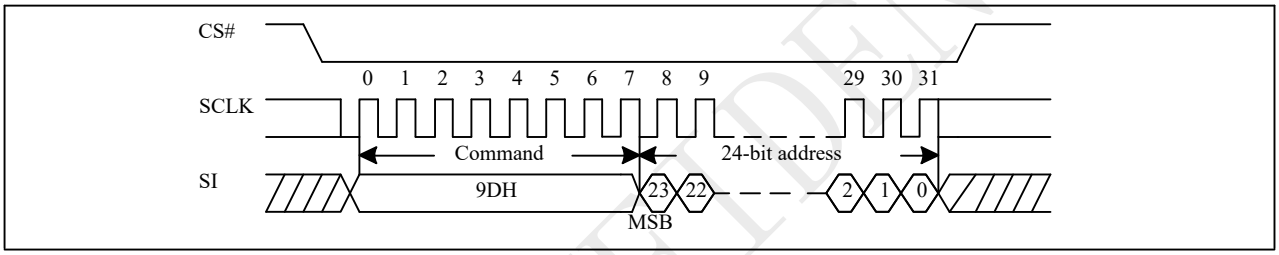



**Figure 10-37a Buffer to Main Memory Page Program Sequence (QPI)**

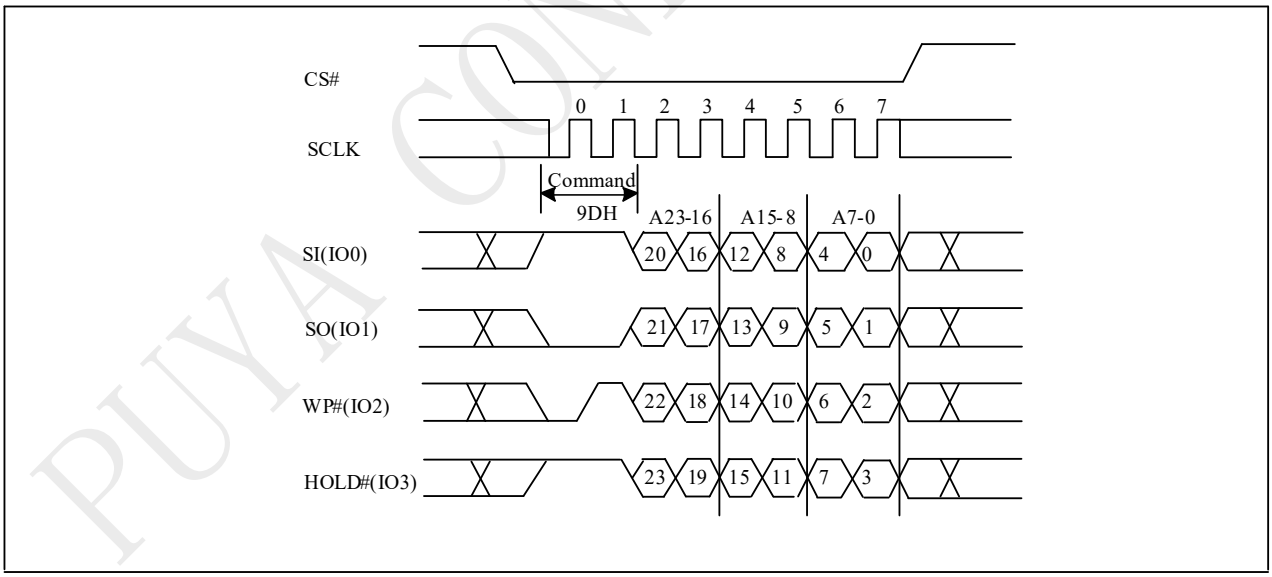


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.38 Erase Security Registers (44H)

The product provides three 1024-byte Security Registers which can be erased and programmed individually. These registers may be used by the system manufacturers to store security and other important information separately from the main memory array.


The Erase Security Registers command is similar to Sector/Block Erase command. A Write Enable (WREN) command must previously have been executed to set the Write Enable Latch (WEL) bit.

CS# must be driven high after the eighth bit of the command code has been latched in; otherwise the Erase Security Registers command is not executed. As soon as CS# is driven high, the self-timed Erase Security Registers cycle (whose duration is tSE) is initiated. While the Erase Security Registers cycle is in progress, the Status Register may be read to check the value of the Write in Progress (WIP) bit. The Write in Progress (WIP) bit is 1 during the self-timed Erase Security Registers cycle, and is 0 when it is completed. The Security Registers Lock Bit (LB3-1) in the Status Register can be used to OTP protect the security registers.

Once the LB bit is set to 1, the Security Registers will be permanently locked; the Erase Security Registers command will be ignored.

| Address | A23-16 | A15-12 | A11-10 | A9-0 |
|---|---|---|---|---|
| Security Register #1 | 00H | 0001 | 00 | Don't care |
| Security Register #2 | 00H | 0010 | 00 | Don't care |
| Security Register #3 | 00H | 0011 | 00 | Don't care |

**Figure 10-38 Erase Security Registers (ERSCUR) Sequence (Command 44)**

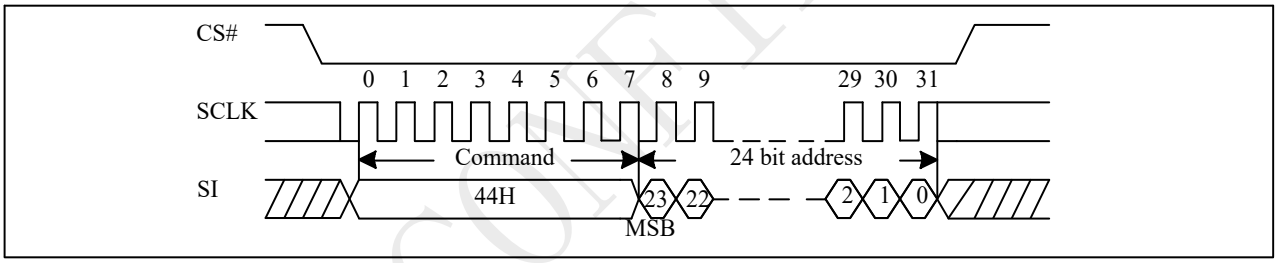


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 10.39 Program Security Registers (42H)


The Program Security Registers command is similar to the Page Program command. It allows from 1 to 1024 bytes Security Registers data to be programmed. A Write Enable (WREN) command must previously have been executed to set the Write Enable Latch (WEL) bit before sending the Program Security Registers command.

As soon as CS# is driven high, the self-timed Program Security Registers cycle (whose duration is tPP) is initiated. While the Program Security Registers cycle is in progress, the Status Register may be read to check the value of the Write in Progress (WIP) bit. The Write in Progress (WIP) bit is 1 during the self-timed Program Security Registers cycle, and is 0 when it is completed.

If the Security Registers Lock Bit (LB3-1) is set to 1, the Security Registers will be permanently locked. Program Security Registers command will be ignored.

| Address | A23-16 | A15-12 | A11-10 | A9-0 |
|---|---|---|---|---|
| Security Register #1 | 00H | 0001 | 00 | Byte Address |
| Security Register #2 | 00H | 0010 | 00 | Byte Address |
| Security Register #3 | 00H | 0011 | 00 | Byte Address |

**Figure 10-39 Program Security Registers (PRSCUR) Sequence (Command 42h)**

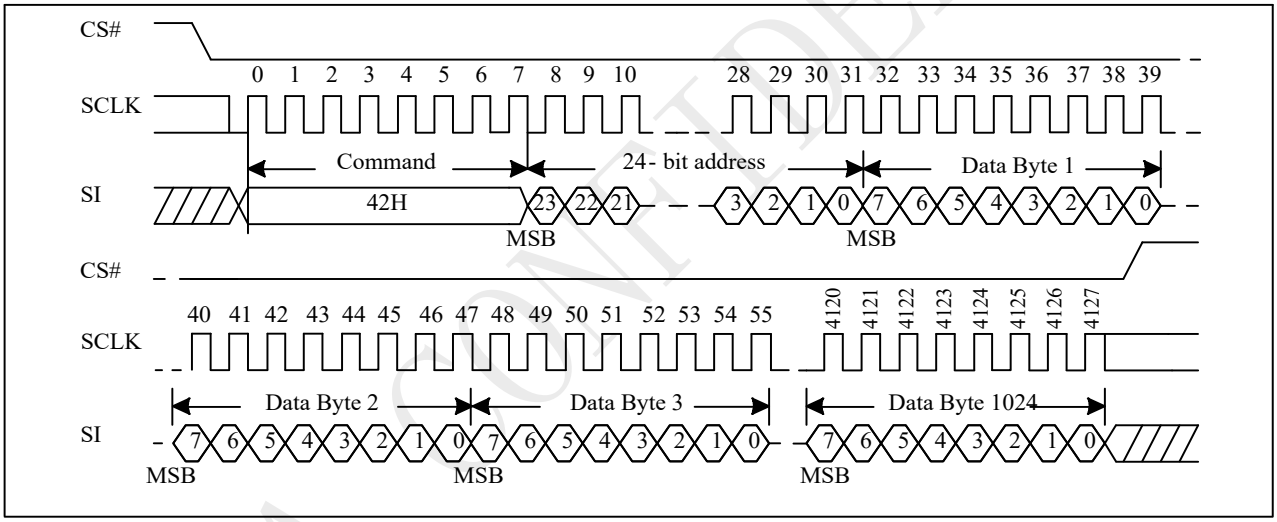


PUYA CONFIDENTIAL



深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 10.40 Read Security Registers (48H)

The Read Security Registers command is similar to Fast Read command. The command is followed by address bytes and dummy cycles, each bit being latched-in during the rising edge of SCLK. Then the memory content, at that address, is shifted out, each bit being shifted out, at a Max frequency fC, during the falling edge of SCLK. The first byte addressed can be at any location. The address is automatically incremented to the next higher address after each byte of data is shifted out. Once the A9-A0 address reaches the last byte of the register (Byte 3FFH), it will reset to 000H, the command is completed by driving CS# high.

| Address | A23-16 | A15-12 | A11-10 | A9-0 |
|---|---|---|---|---|
| Security Register #1 | 00H | 0001 | 00 | Byte Address |
| Security Register #2 | 00H | 0010 | 00 | Byte Address |
| Security Register #3 | 00H | 0011 | 00 | Byte Address |

**Figure 10-40 Read Security Registers(RDSCUR) Sequence (Command 48)**

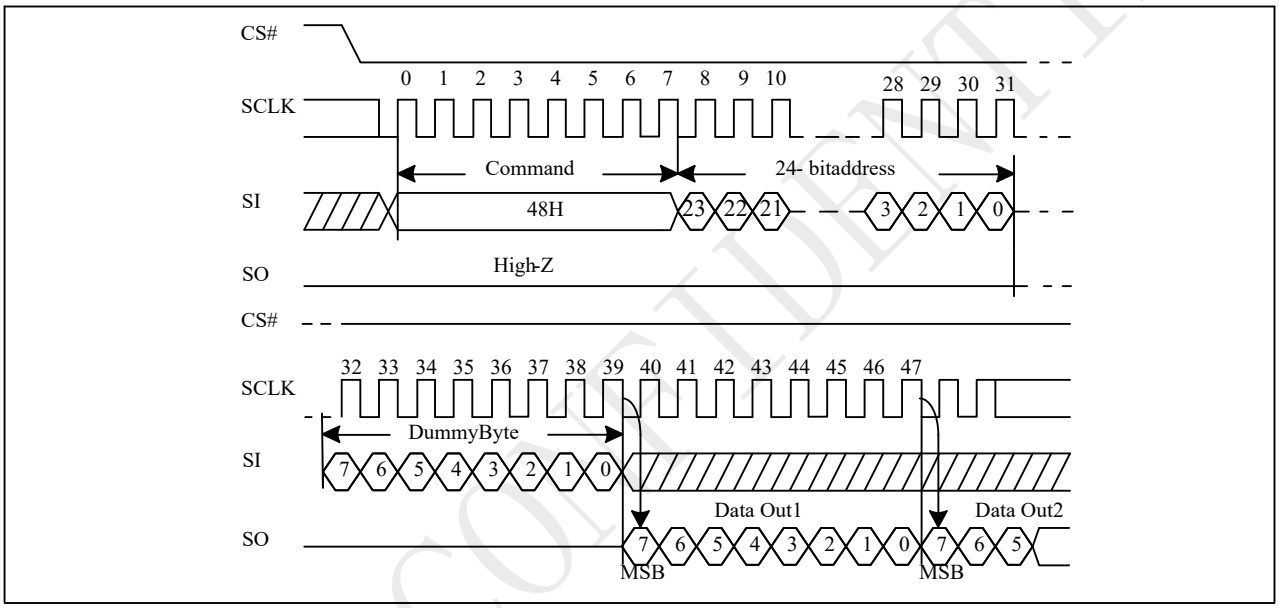


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.41 Deep Power-down (B9H)

The Deep Power-down (DP) instruction is for setting the device on the minimizing the power consumption (to entering the Deep Power-down mode), the standby current is reduced from ISB1 to ISB2). The Deep Power-down mode requires the Deep Power-down (DP) instruction to enter, during the Deep Power-down mode, the device is not active and all Write/Program/Erase instruction are ignored. When CS# goes high, it's only in standby mode not deep power-down mode. It's different from Standby mode.

The sequence of issuing DP instructions: CS# goes low → sending DP instruction code → CS# goes high.

Once the DP instruction is set, all instruction will be ignored except the Release from Deep Power-down mode (RDP), Read Electronic Signature (RES) instruction and reset instruction. (RES instruction to allow the ID been read out). When Power- down, the deep power-down mode automatically stops, and when power-up, the device automatically is in standby mode. For RDP instruction the CS# must go high exactly at the byte boundary (the latest eighth bit of instruction code been latched-in); otherwise, the instruction will not be executed. As soon as Chip Select (CS#) goes high, a delay of tDP is required before entering the Deep Power-down mode and reducing the current to ISB2.

**Figure 10-41 Deep Power-down (DP) Sequence (Command B9h)**


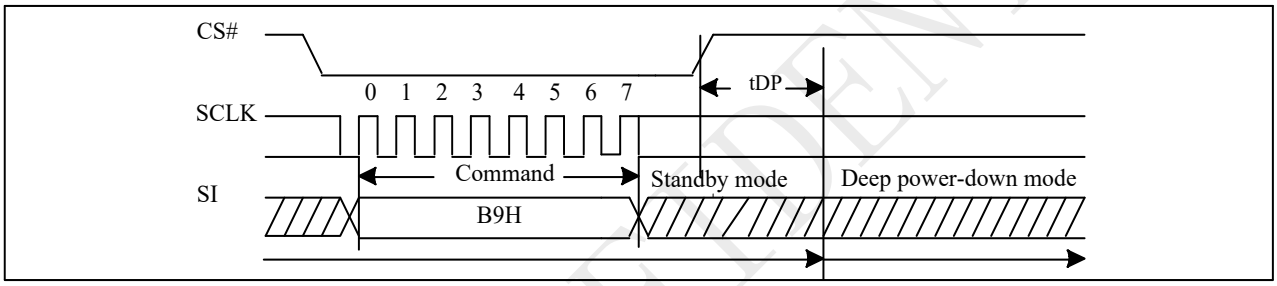



**Figure 10-41a Deep Power-down (DP) Sequence (QPI)**

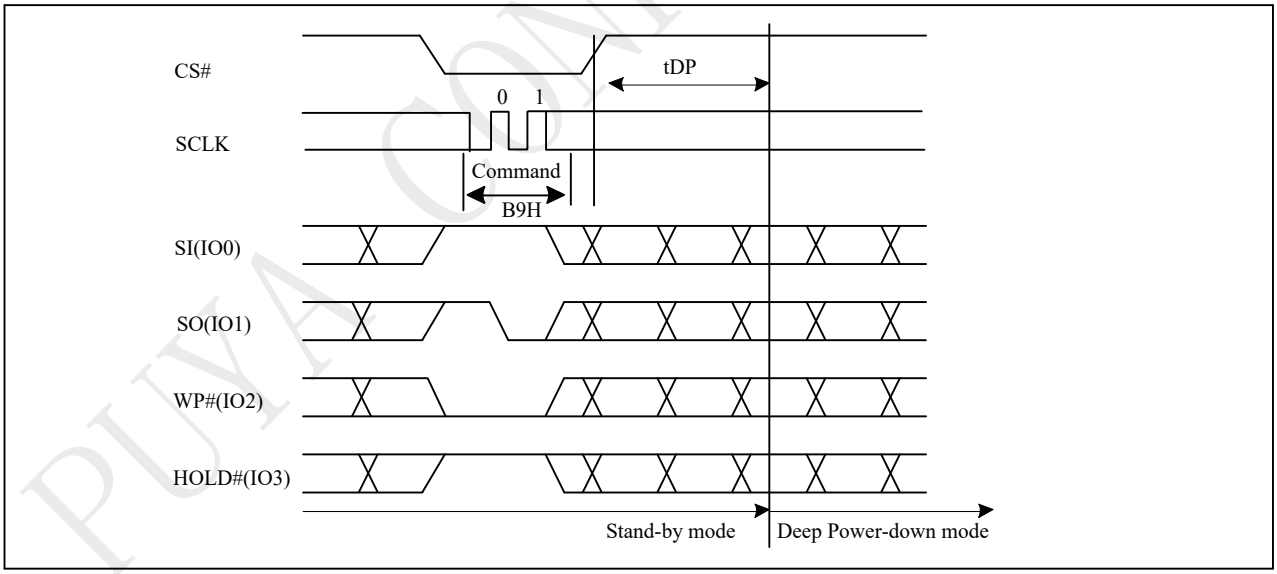


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.42 Release from Deep Power-Down (ABH), Read Electronic Signature (ABH)


The Release from Deep Power-down (RDP) instruction is terminated by driving Chip Select (CS#) High. When Chip Select (CS#) is driven high, the device is put in the Stand-by Power mode. If the device was not previously int he Deep Power-down mode, the transition to the Stand-by Power mode is immediate. If the device was previously in the Deep Power-down mode, though, the transition to the Stand-by Power mode is delayed by tRES2, and Chip Select (CS#) must remain High for at least tRES2(max). Once in the Stand-by Power mode, the device waits to be selected, so that it can receive, decode and execute instructions.

RES instruction is for reading out the old style of 8-bit Electronic Signature, whose values are shown as table of ID Definitions. This is not the same as RDID instruction. It is not recommended to use for new design. For new design, please use RDID instruction. Even in Deep power-down mode, the RDP and RES are also allowed to be executed, only except the device is in progress of program/erase/write cycle; there's no effect on the current program/erase/ write cycle in progress.

The RES instruction is ended by CS# goes high after the ID been read out at least once. The ID outputs repeatedly if continuously send the additional clock cycles on SCLK while CS# is at low. If the device was not previously in Deep Power-down mode, the device transition to standby mode is immediate. If the device was previously in Deep Power-down mode, there's a delay of tRES2 to transit to standby mode, and CS# must remain to high at least tRES2 (max). Once in the standby mode, the device waits to be selected, so it can be receiving, decode, and execute instruction.

The RDP instruction is for releasing from Deep Power-Down Mode.

**Figure 10-42 Read Electronic Signature (RES) Sequence (Command ABh)**

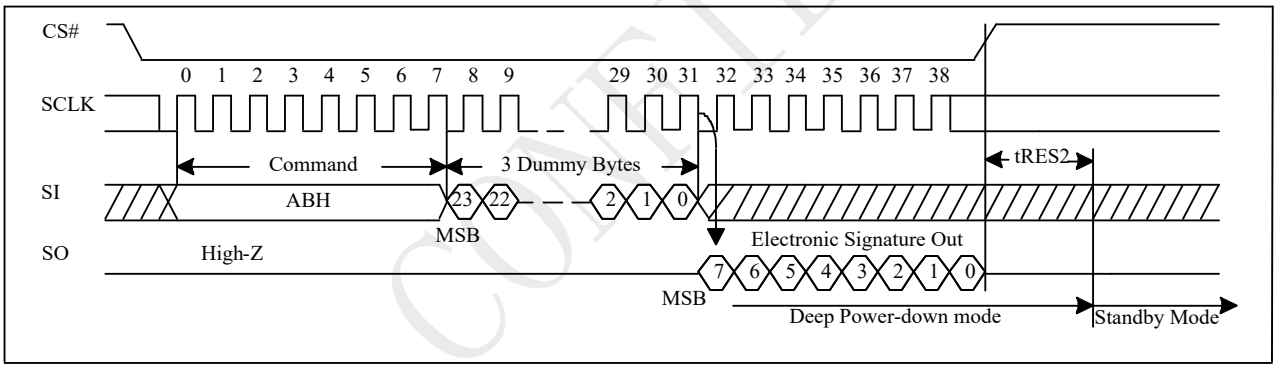


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

**Figure 10-42a Read Electronic Signature (RES) Sequence (QPI)**

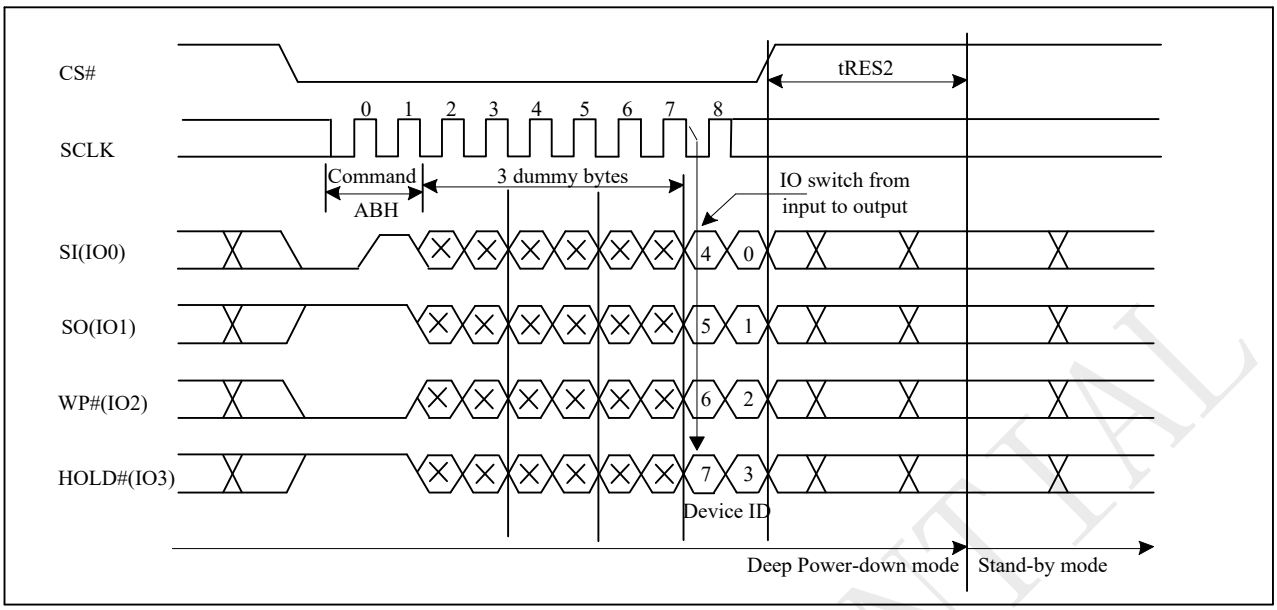



**Figure 10-42b Release from Deep Power-down (RDP) Sequence (Command ABH)**


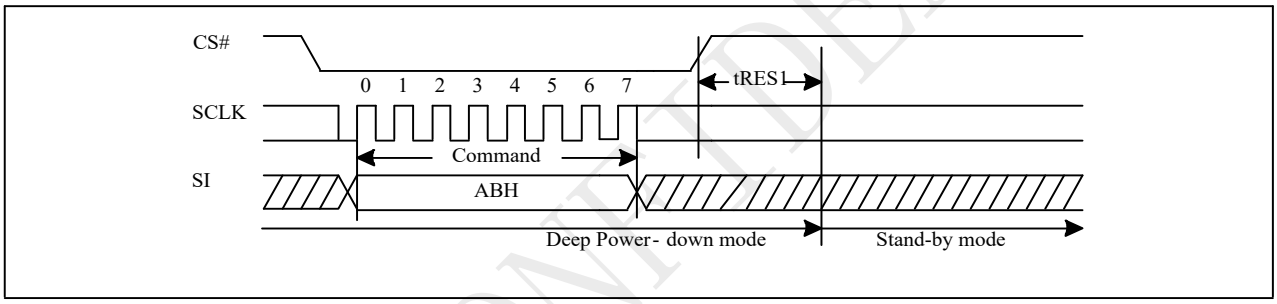



**Figure 10-42c Release from Deep Power-down (RDP) Sequence (QPI)**

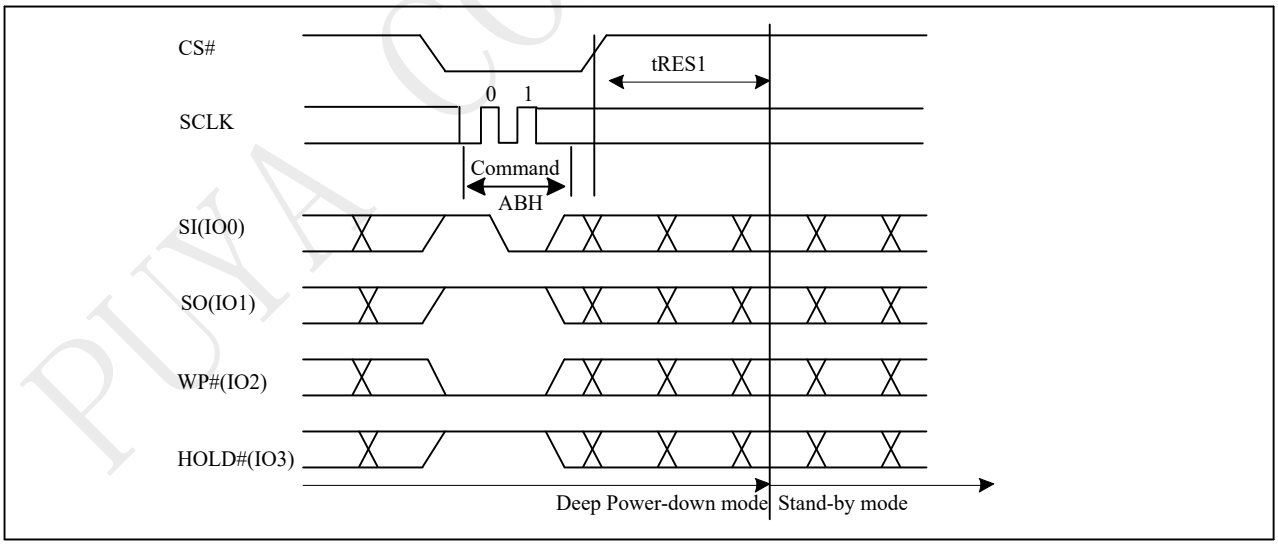


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 10.43 Read Electronic Manufacturer ID & Device ID (90H)

The REMS instruction returns both the JEDEC assigned manufacturer ID and the device ID. The Device ID values are listed in "Table ID Definitions".

The REMS instruction is initiated by driving the CS# pin low and sending the instruction code "90h" followed by two dummy bytes and one address byte (A7~A0). After which the manufacturer ID for PUYA (85h) and the device ID are shifted out on the falling edge of SCLK with the most significant bit (MSB) first. If the address byte is 00h, the manufacturer ID will be output first, followed by the device ID. If the address byte is 01h, then the device ID will be output first, followed by the manufacturer ID. While CS# is low, the manufacturer and device IDs can be read continuously, alternating from one to the other. The instruction is completed by driving CS# high.

**Figure 10-43 Read Electronic Manufacturer & Device ID (REMS) Sequence (Command 90h)**


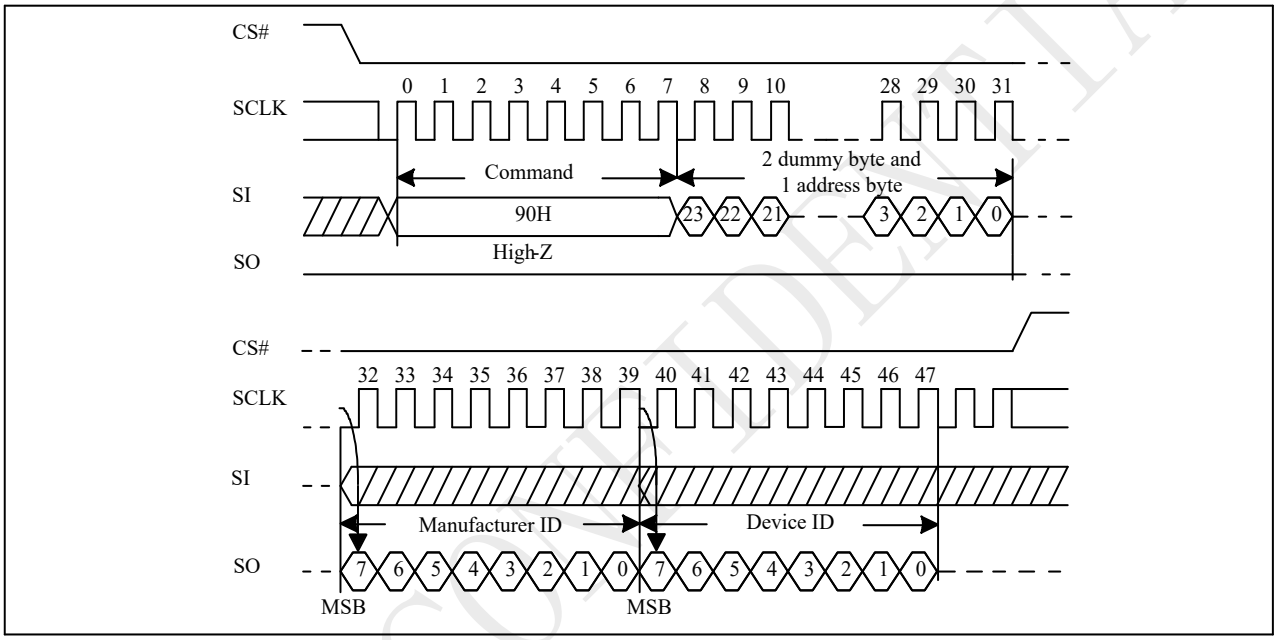



**Figure 10-43a Read Electronic Manufacturer & Device ID (REMS) Sequence (QPI)**

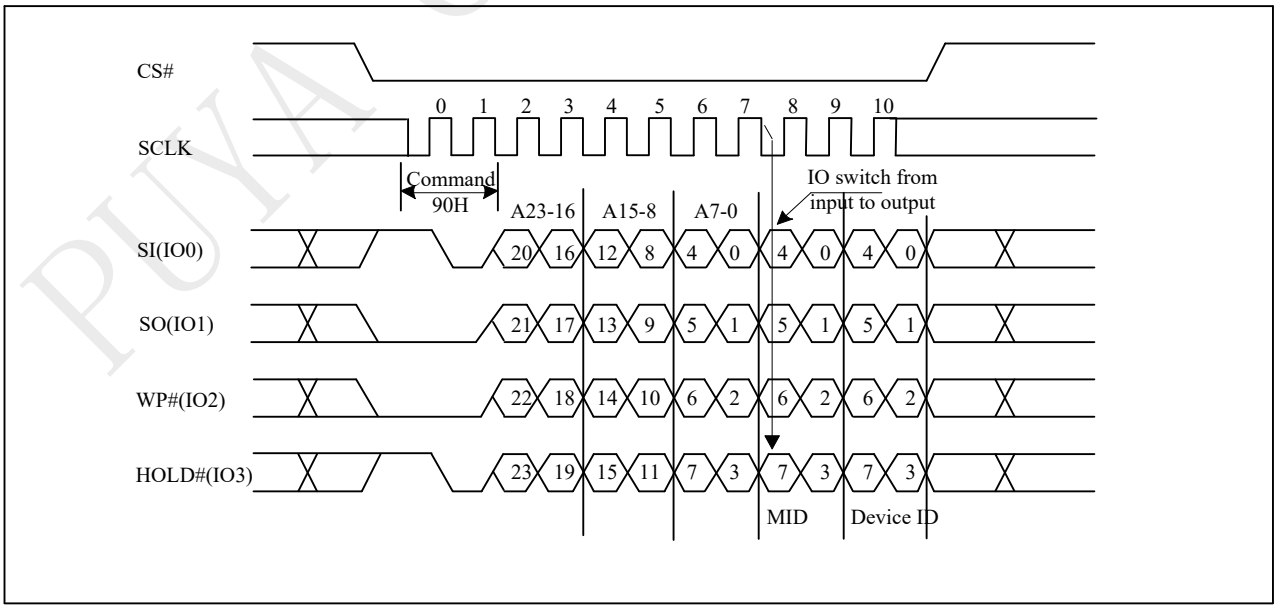


PUYA CONFIDENTIAL



深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 10.44 Dual I/O Read Electronic Manufacturer ID & Device ID (92H)

The DREMS instruction is similar to the REMS command and returns the JEDEC assigned manufacturer ID which takes two pins: SIO0, SIO1 as address input and ID output I/O

The instruction is initiated by driving the CS# pin low and shift the instruction code "92h "followed by two dummy bytes and one byte's address(A7~A0). After which, the Manufacturer ID for PUYA (85h) and the Device ID are shifted out on the falling edge of SCLK with most significant bit (MSB) first. If the one-byte address is initially set to 01h, then the device ID will be read first and then followed by the Manufacturer ID. The Manufacturer and Device IDs can be read continuously, alternating from one to the other. The instruction is completed by driving CS# high

**Figure 10-44 DUAL I/O Read Electronic Manufacturer & Device ID (DREMS) Sequence (Command 92h)**

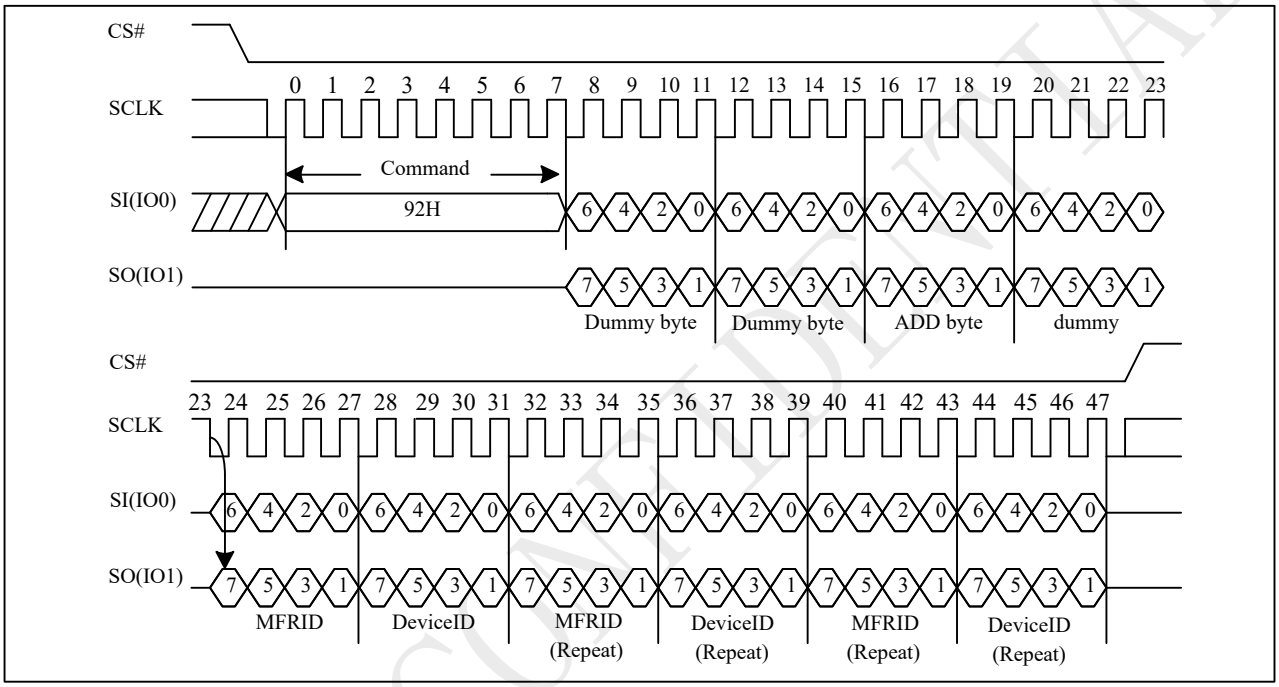


PUYA CONFIDENTIAL



深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 10.45 Quad I/O Read Electronic Manufacturer ID & Device ID (94H)

The QREMS instruction is similar to the REMS command and returns the JEDEC assigned manufacturer ID which takes four pins: SIO0, SIO1, SIO2, SIO3 as address input and ID output I/O

The instruction is initiated by driving the CS# pin low and shift the instruction code "94h" followed by two dummy bytes and one byte's address(A7~A0). After which, the Manufacturer ID for PUYA (85h) and the Device ID are shifted out on the falling edge of SCLK with most significant bit (MSB) first. If the one-byte address is initially set to 01h, then the device ID will be read first and then followed by the Manufacturer ID. The Manufacturer and Device IDs can be read continuously, alternating from one to the other. The instruction is completed by driving CS# high.

**Figure 10-45 QUAD I/O Read Electronic Manufacturer & Device ID (QREMS) Sequence (Command 94h)**

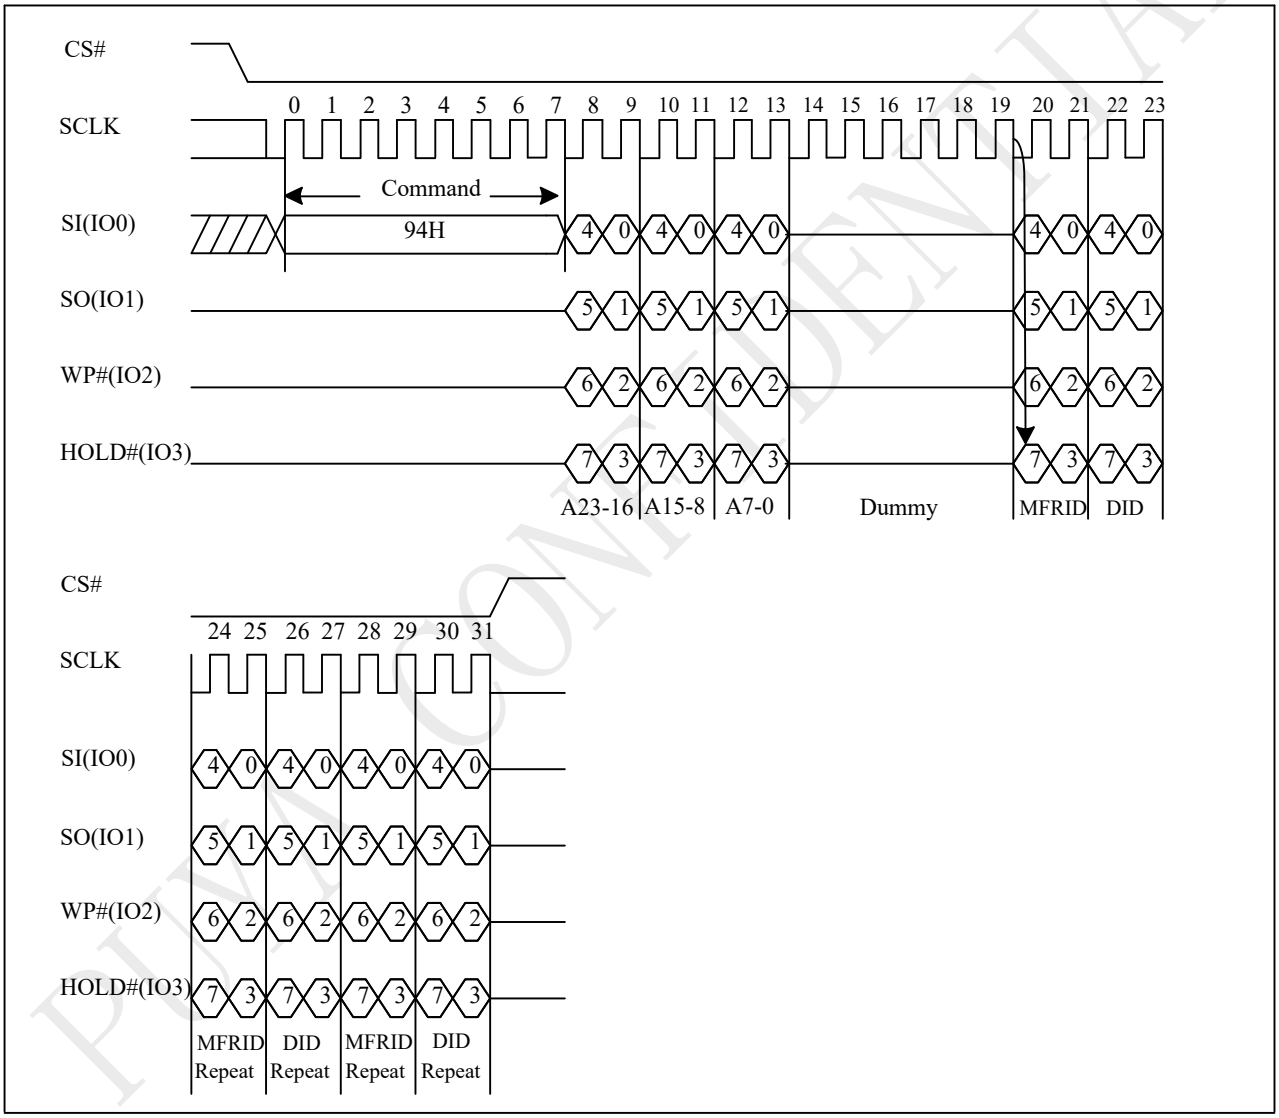


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.46 Read Identification (9FH)

The RDID instruction is for reading the manufacturer ID of 1-byte and followed by Device ID of 2-byte. The PUYA Manufacturer ID and Device ID are list as "Table. ID Definitions".

While Program/Erase operation is in progress, it will not decode the RDID instruction, so there's no effect on the cycle of program/erase operation which is currently in progress. When CS# goes high, the device is at standby stage.

**Figure 10-46 Read Identification (RDID) Sequence (Command 9Fh)**

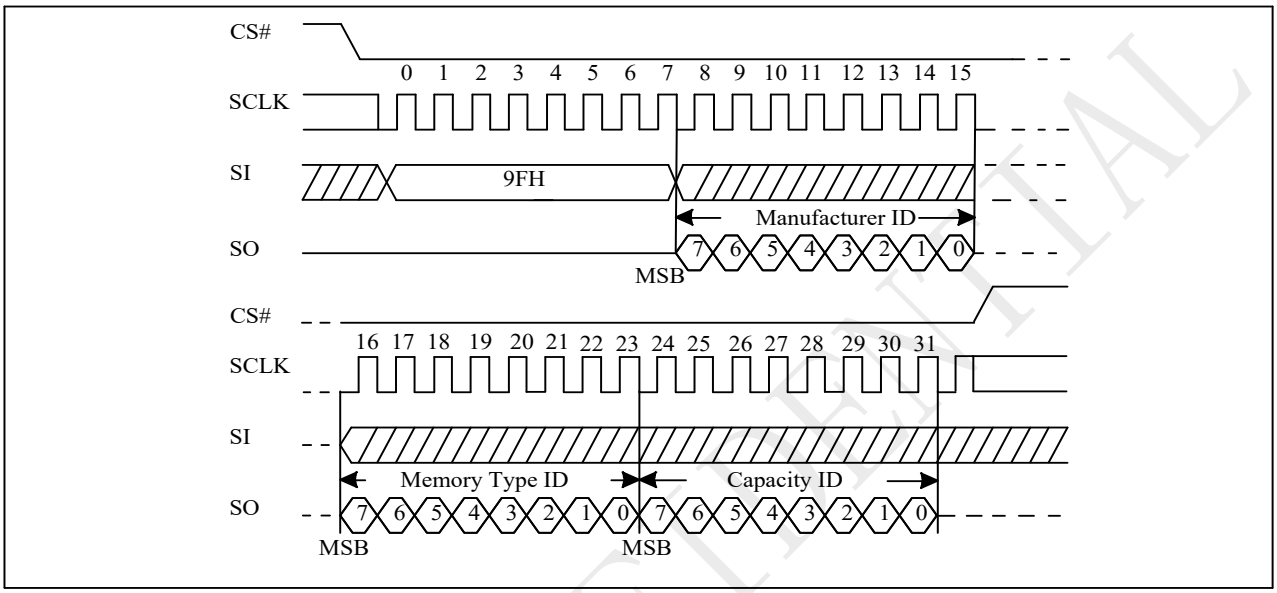



**Figure 10-46a Read Identification (RDID) Sequence (QPI)**

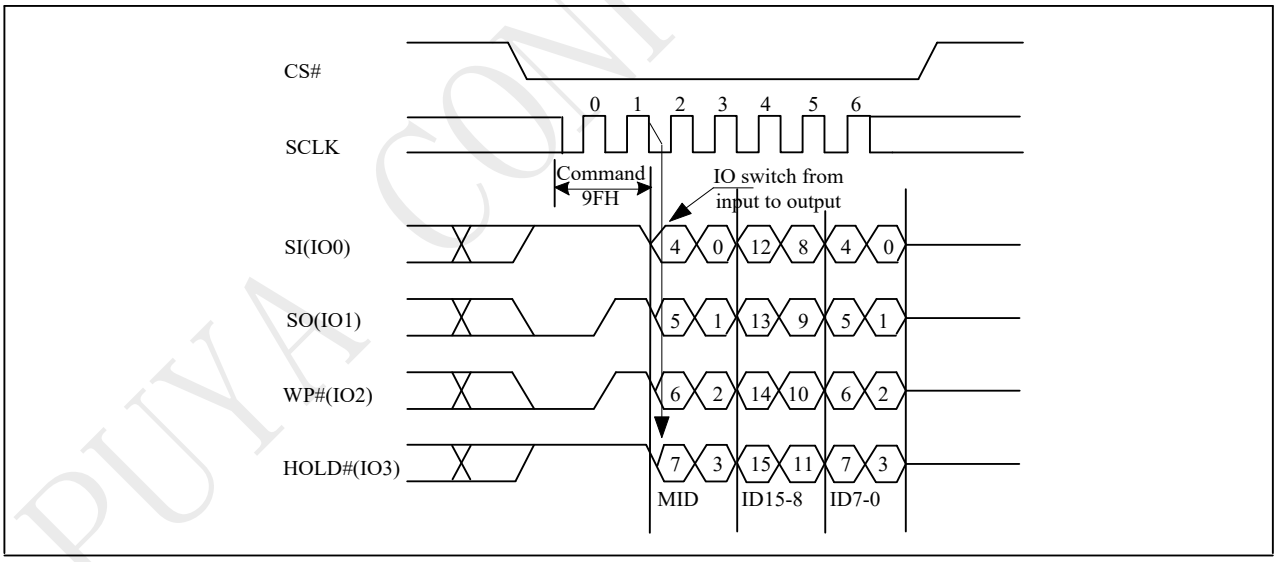



**Table ID Definitions**

| | | | | |
|---|---|---|---|---|
| P25Q64SH | RDID command | manufacturer ID | memory type | memory density |
| | | 85 | 60 | 17 |
| | RES command | electronic ID | | |
| | | 16 | | |
| | REMS command | manufacturer ID | | device ID |
| | | 85 | | 16 |

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.47 Program/Erase Suspend (75H)/Resume(7AH)

The Suspend instruction interrupts a Page Program, Page Erase, Sector Erase, or Block Erase operation to allow access to the memory array. After the program or erase operation has entered the suspended state, the memory array can be read except for the page being programmed or the sector or block being erased.

**Readable Area of Memory While a Program or Erase Operation are Suspended**

| Suspended Operation | Readable Region of Memory Array |
|---|---|
| Page Program | All but the Page being programmed |
| Page Erase | All but the Page being erased |
| Sector Erase(4KB) | All but the 4KB Sector being erased |
| Block Erase(32KB) | All but the 32KB Block being erased |
| Block Erase(64KB) | All but the 64KB Block being erased |

When the Serial NOR Flash receives the Suspend instruction, there is a latency of tPSL or tESL before the Write Enable Latch (WEL) bit clears to “0” and the SUS sets to “1”, after which the device is ready to accept one of the commands listed in "Table Acceptable Commands During Program/Erase Suspend after tPSL/tESL" (e.g. FAST READ). Refer to " AC Characteristics" for tPSL and tESL timings. "Table Acceptable Commands During Suspend (tPSL/tESL not required)" lists the commands for which the tPSL and tESL latencies do not apply. For example, RDSR, RDSCUR, RSTEN, and RST can be issued at any time after the Suspend instruction.

Status Register bit 15 (SUS) can be read to check the suspend status. The SUS (Suspend Bit) sets to “1” when a program or erase operation is suspended. The SUS clears to “0” when the program or erase operation is resumed.

**Acceptable Commands During Program/Erase Suspend after tPSL/tESL**

| Command name | Command Code | Program Suspend | Erase Suspend |
|---|---|---|---|
| READ | 03H | • | • |
| FAST READ | 0BH | • | • |
| DTRFRD | 0DH | • | • |
| DREAD | 3BH | • | • |
| QREAD | 6BH | • | • |
| 2READ | BBH | • | • |
| 2DTRD | BDH | • | • |
| 4READ | EBH | • | • |
| 4DTRD | EDH | • | • |
| Burst Read with Wrap | 0CH | • | • |
| DTR Burst Read with Wrap | 0EH | • | • |
| QPIEN | 38H | • | • |
| Disable QPI | FFH | • | • |
| RDSFDP | 5AH | • | • |
| RDID | 9FH | • | • |
| REMS | 90H | • | • |
| DREMS | 92H | • | • |
| QREMS | 94H | • | • |
| RDSCUR | 48H | • | • |
| SBL | 77H | • | • |
| Set Read Parameter | C0H | • | • |
| WREN | 06H | | • |

PRELIMINARY



深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

| Command name | Command Code | Program Suspend | Erase Suspend |
|---|---|---|---|
| RESUME | 7AH | • | • |
| PP | 02H | | • |
| QPP | 32H | | • |
| Buffer clear | 9EH | | • |
| Buffer load | 9AH | | • |
| Buffer read | 9BH | • | • |
| Buffer write | 9CH | | • |
| Buffer to memory program | 9DH | | • |
| Individual Block Lock | 36H | | |
| Individual Block Unlock | 39H | | • |
| Read Block Lock Status | 3DH | • | • |
| Global Block Lock | 7EH | | |

**Acceptable Commands During Suspend（tPSL/tESL not required）**

| Command name | Command Code | Program Suspend | Erase Suspend |
|---|---|---|---|
| WRDI | 04H | • | • |
| RDSR | 05H | • | • |
| RDSR2 | 35H | • | • |
| RES | ABH | • | • |
| RSTEN | 66H | • | • |
| RST | 99H | • | • |
| NOP | 00H | • | • |

**Figure 10-47Resume to Suspend Latency**

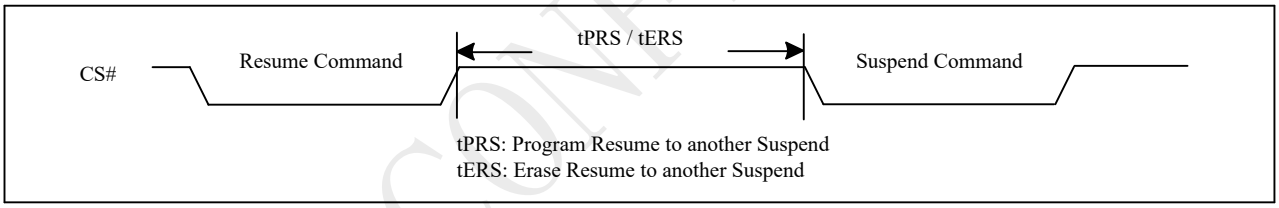


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.48 Erase Suspend to Program

The “Erase Suspend to Program” feature allows Page Programming while an erase operation is suspended. Page Programming is permitted in any unprotected memory except within the sector of a suspended Sector Erase operation or within the block of a suspended Block Erase operation. The Write Enable (WREN) instruction must be issued before any Page Program instruction.

A Page Program operation initiated within a suspended erase cannot itself be suspended and must be allowed to finish before the suspended erase can be resumed. The Status Register can be polled to determine the status of the Page Program operation. The WEL and WIP bits of the Status Register will remain “1” while the Page Program operation is in progress and will both clear to “0” when the Page Program operation completes.

**Figure 10-48 Suspend to Read/Program Latency**


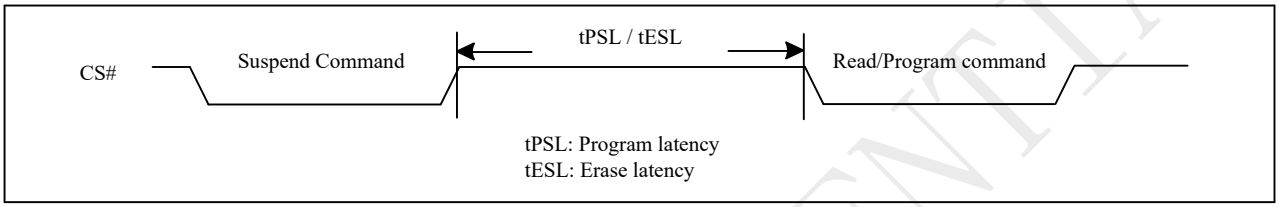



**Figure 10-48aSuspend to Read/Program Latency (QPI)**

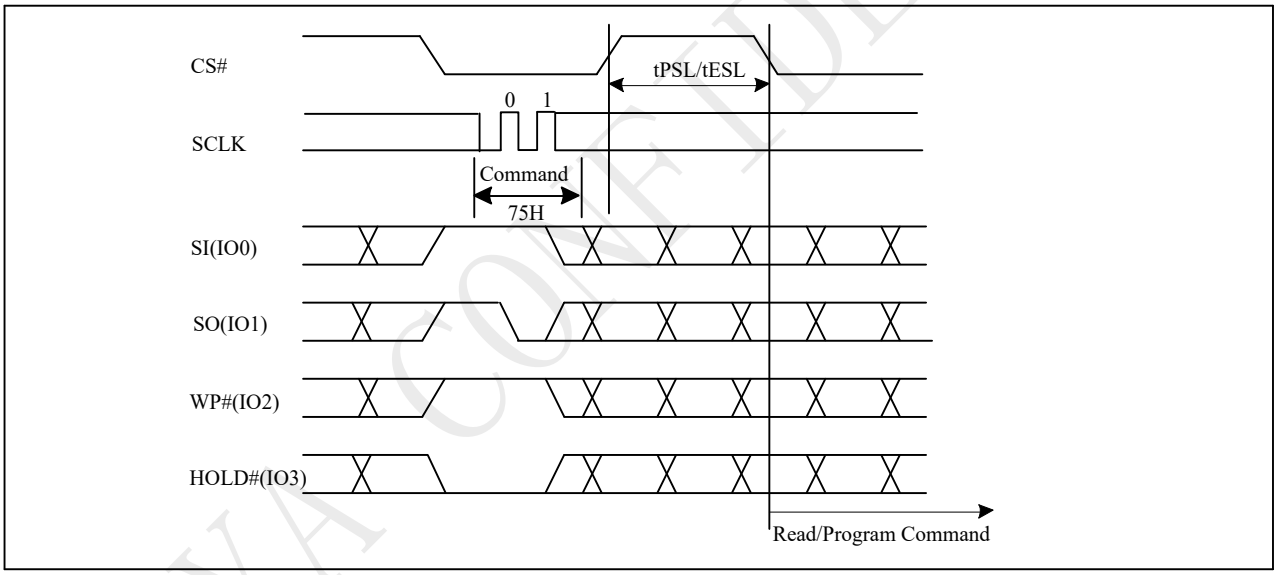


Notes:
1. Please note that Program only available after the Erase-Suspend operation
2. To check suspend ready information, please read status register bit15 (SUS)

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 10.49 Program Resume and Erase Resume(7AH)

The Resume instruction resumes a suspended Page Program, Page Erase, Sector Erase, or Block Erase operation. Before issuing the Resume instruction to restart a suspended erase operation, make sure that there is no Page Program operation in progress.

Immediately after the Serial NOR Flash receives the Resume instruction, the WEL and WIP bits are set to “1” and the SUS is cleared to “0”. The program or erase operation will continue until finished ("Resume to Read Latency") or until another Suspend instruction is received. A resume-to-suspend latency of tPRS or tERS must be observed before issuing another Suspend instruction ("Resume to Suspend Latency").

**Figure 10-49 Resume to Read Latency**


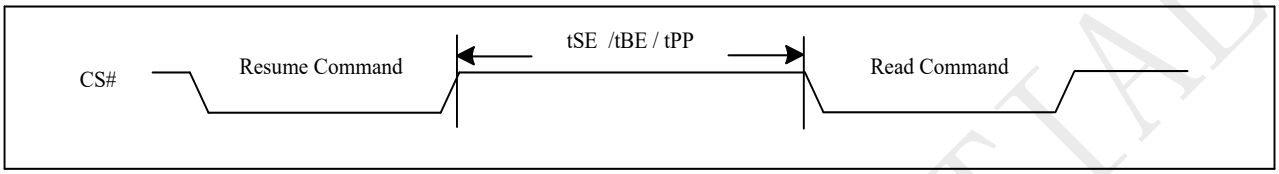



**Figure 10-49a Resume to Read Latency (QPI)**

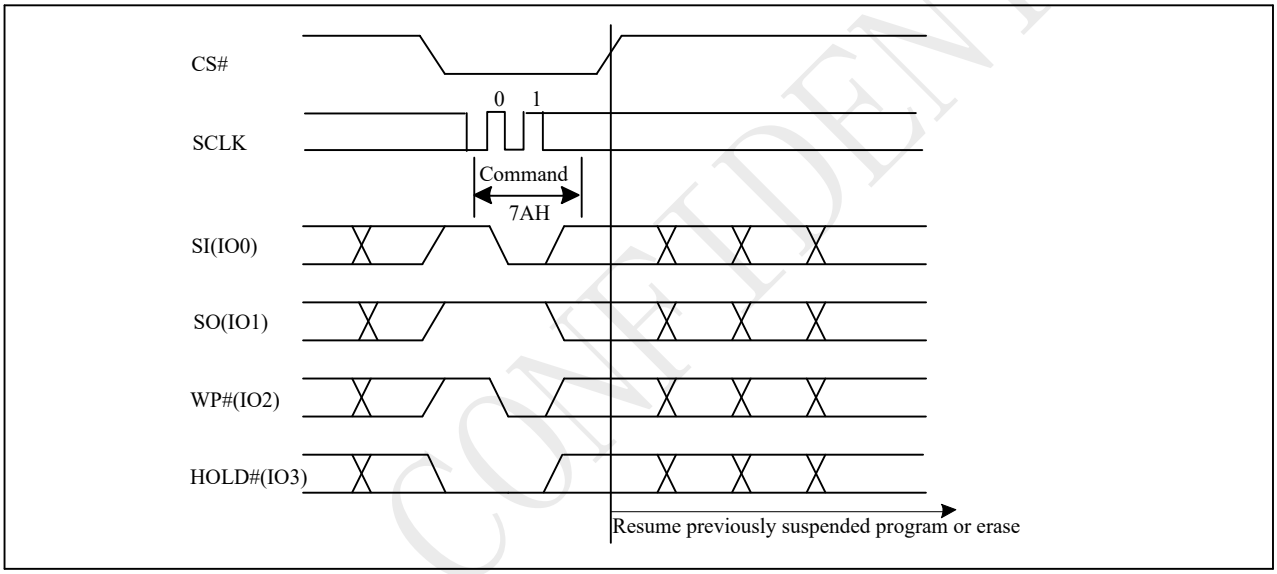


## 10.50 No Operation (NOP)

The "No Operation" command is only able to terminate the Reset Enable (RSTEN) command and will not affect any other command.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 10.51 Individual Block Lock (36H)

The Individual Block Lock provides an alternative way to protect the memory array from adverse Erase/Program. In order to use the Individual Block Locks, the WPS bit in Configure Register must be set to 1. If WPS=0, the write protection will be determined by the combination of CMP, BP [4:0] bits in the Status Registers. The Individual Block Lock bits are volatile bits. The default values after device power up or after a Reset are 1, so the entire memory array is being protected.

The SBLK instruction is for write protection a specified block (or sector) of memory, using Am-A16 or (Am-A12) address bits to assign a 64Kbyte block (or 4K bytes sector) to be protected as read only.

The WREN (Write Enable) instruction is required before issuing SBLK instruction.

**Figure 10-51 Individual Block Lock (Command 36h)**


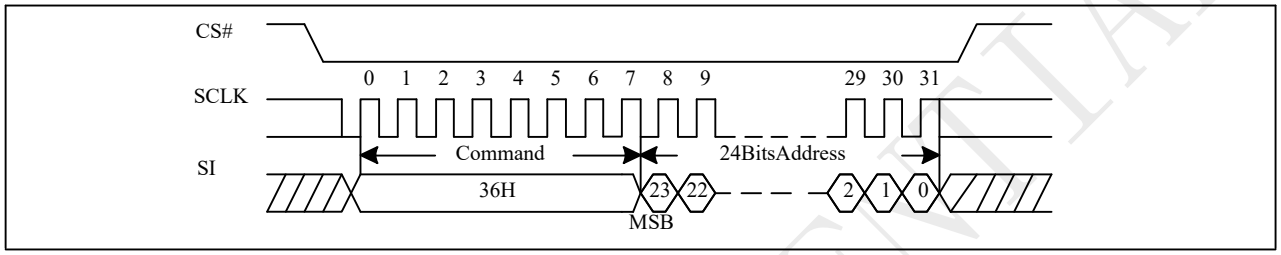



**Figure 10-51a Individual Block Lock (QPI)**

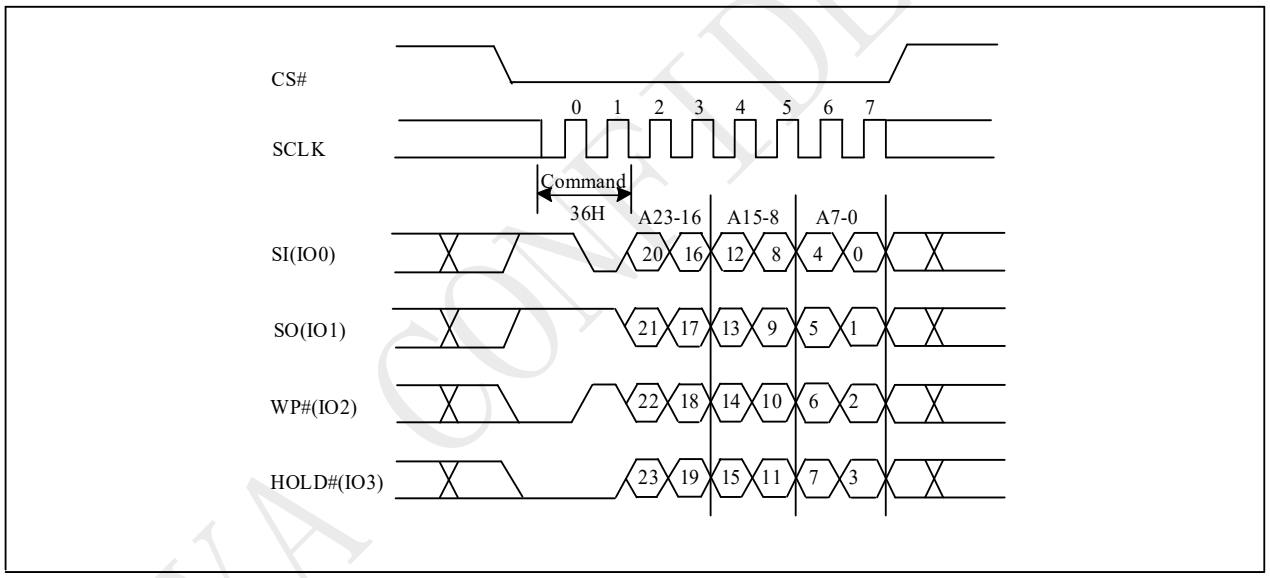


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.52 Individual Block Unlock (39H)

The Individual Block Lock provides an alternative way to protect the memory array from adverse Erase/Program. In order to use the Individual Block Locks, the WPS bit in Configure Register must be set to 1. If WPS=0, the write protection will be determined by the combination of CMP, BP [4:0] bits in the Status Registers. The Individual Block Lock bits are volatile bits. The default values after device power up or after a Reset are 1, so the entire memory array is being protected.

The SBULK instruction will cancel the block (or sector) write protection state using Am-A16 or (Am-A12) address bits to assign a 64Kbyte block (or 4K bytes sector) to be unprotected.

The WREN (Write Enable) instruction is required before issuing SBULK instruction.

**Figure 10-52 Individual Block Unlock (Command 39h)**


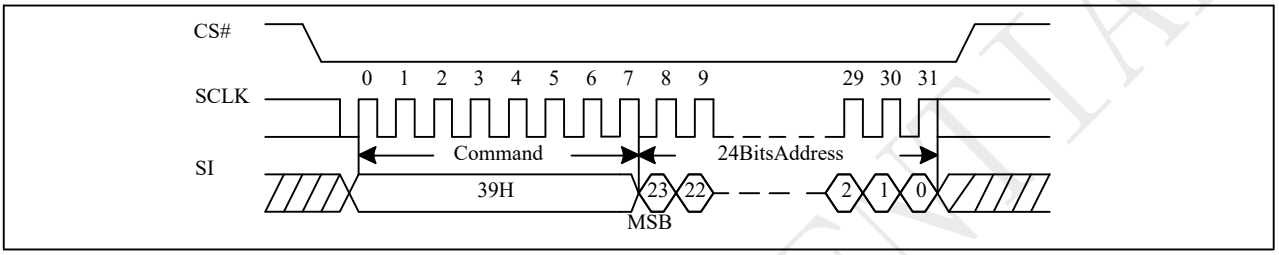



**Figure 10-52a Individual Block Unlock (QPI)**

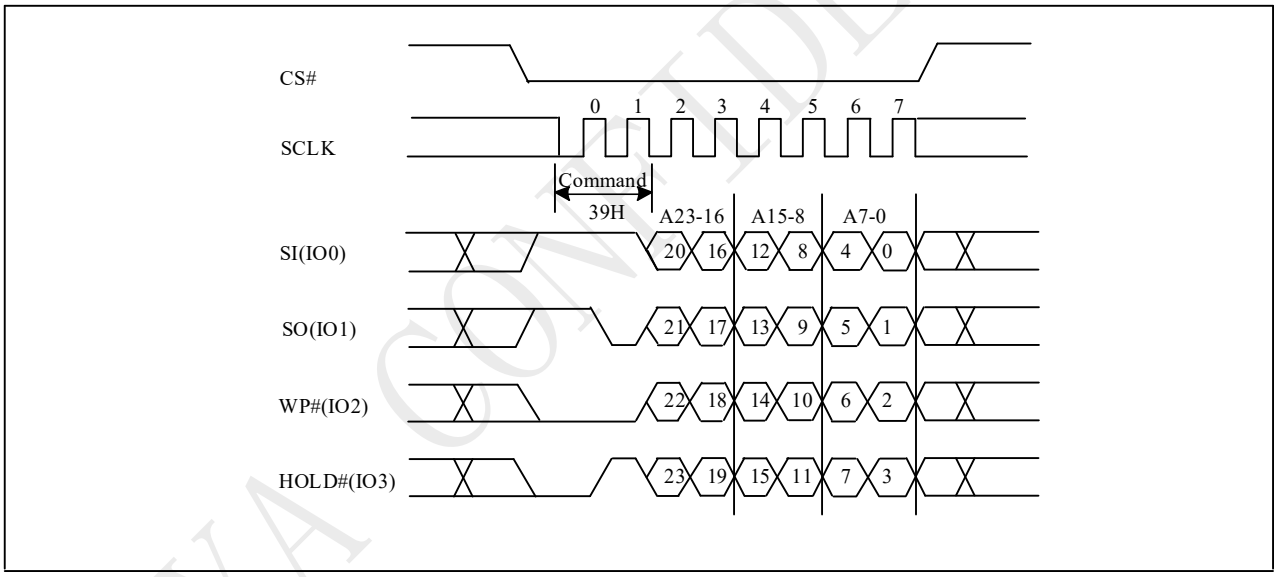


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.53 Read Block Lock Status (3DH)

The Individual Block Lock provides an alternative way to protect the memory array from adverse Erase/Program. In order to use the Individual Block Locks, the WPS bit in Configure Register must be set to 1. If WPS=0, the write protection will be determined by the combination of CMP, BP [4:0] bits in the Status Registers. The Individual Block Lock bits are volatile bits. The default values after device power up or after a Reset are 1, so the entire memory array is being protected.

The RDBLOCK instruction is for reading the status of protection lock of a specified block (or sector), using Am-A16 (or Am-A12) address bits to assign a 64K bytes block (4K bytes sector) and read protection lock status bit which the first byte of Read-out cycle. The status bit is"1" to indicate that this block has be protected, that user can read only but cannot write/program /erase this block. The status bit is "0" to indicate that this block hasn't be protected, and user can read and write this block.

SPI and QPI command cycle can accept by this instruction.

**Figure 10-53 Read Block Lock Status (Command 3DH)**


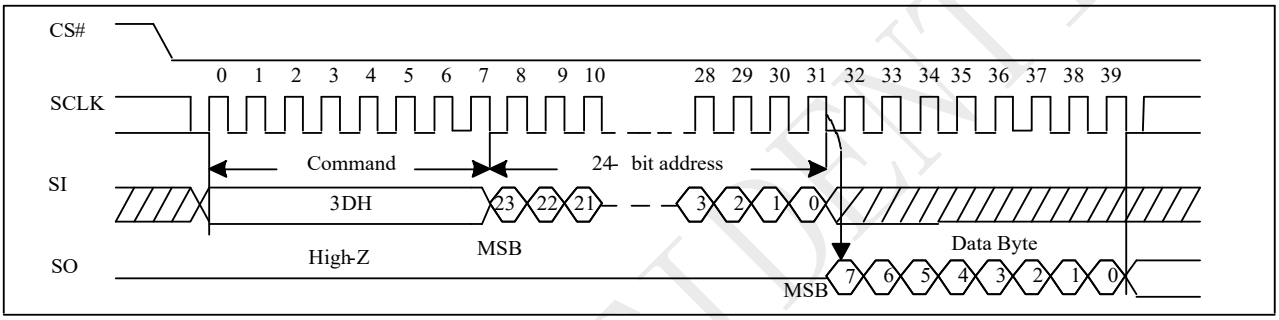



**Figure 10-53a Read Block Lock Status (QPI)**

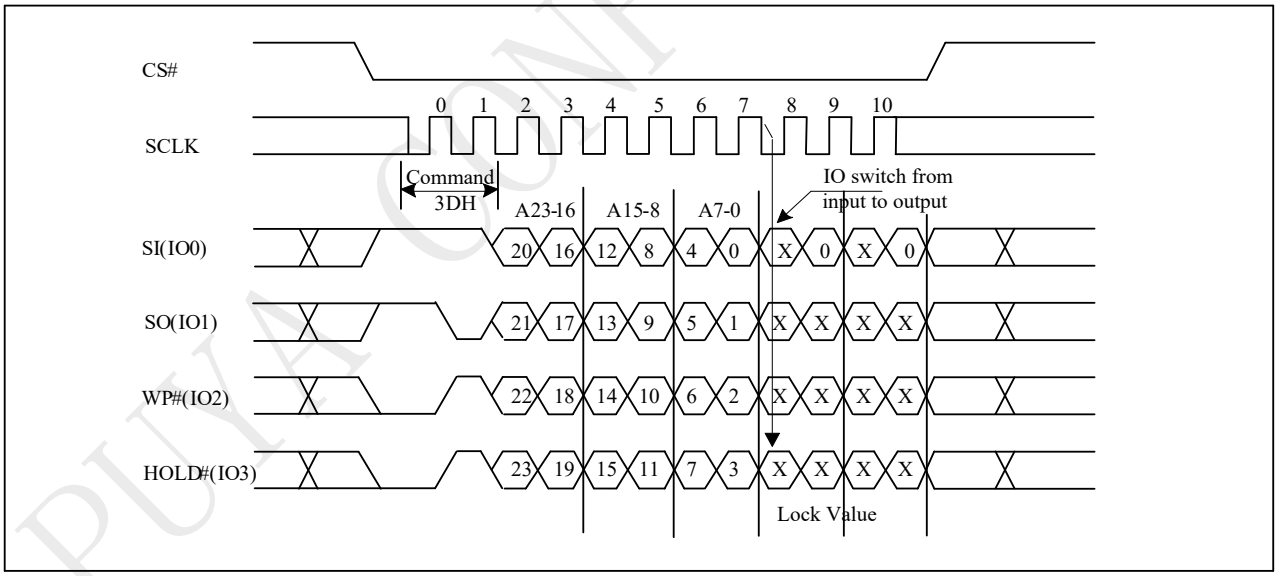


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 10.54 Global Block Lock (7EH)

The GBLK instruction is for enable the lock protection block of the whole chip. The WREN (Write Enable) instruction is required before issuing GBLK instruction.

The sequence of issuing GBLK instruction is: CS# goes low → send GBLK (7Eh) instruction →CS# goes high.

SPI and QPI command cycle can accept by this instruction. The SIO [3:1] are "don't care" in SPI mode. The CS# must go high exactly at the byte boundary, otherwise, the instruction will be rejected and not be executed.

**Figure 10-54Global Block Lock (Command 7Eh)**


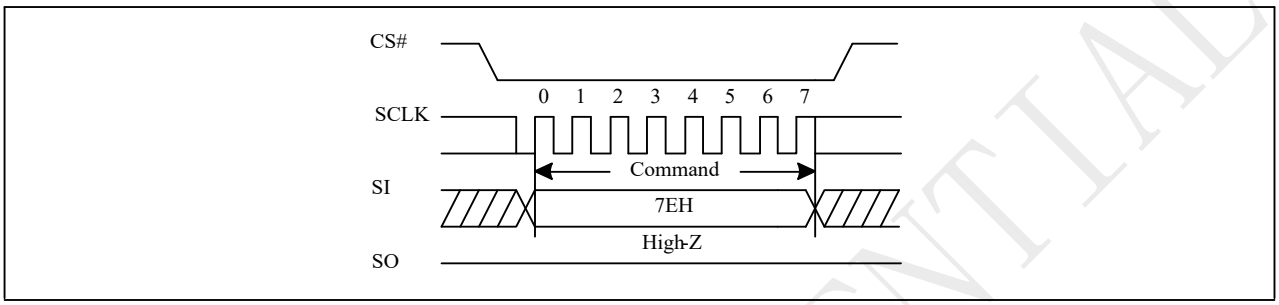



**Figure 10-54a Global Block Lock (QPI)**

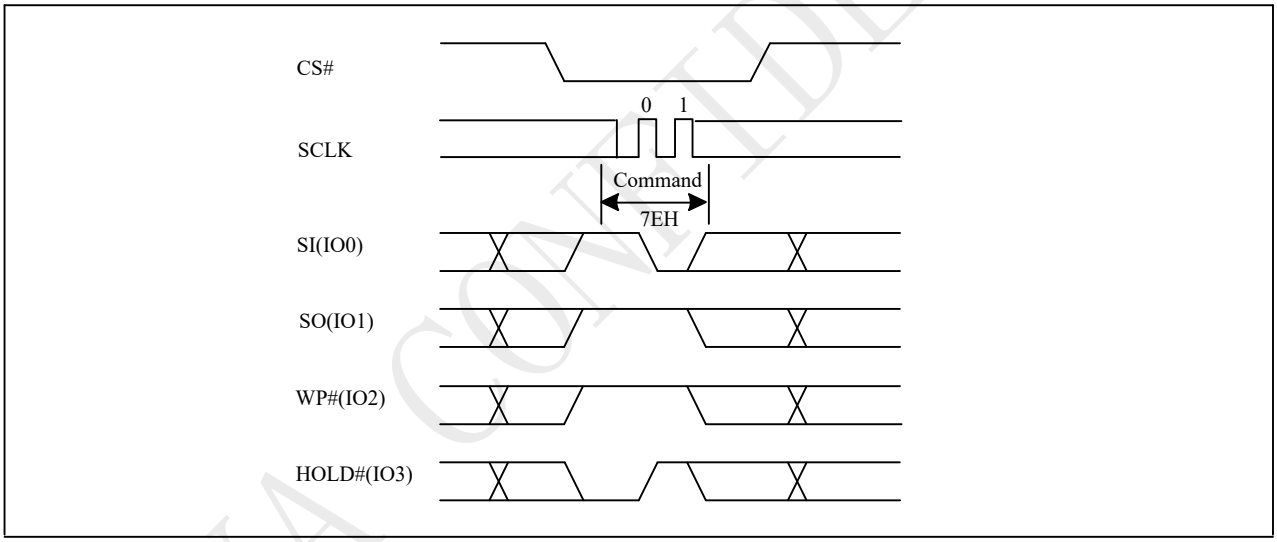


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 10.55 Global Block Unlock (98H)

The GBULK instruction is for disable the lock protection block of the whole chip. The WREN (Write Enable) instruction is required before issuing GBULK instruction.

The sequence of issuing GBULK instruction is: CS# goes low → send GBULK (98h) instruction →CS# goes high. SPI and QPI command cycle can accept by this instruction. The SIO [3:1] are "don't care" in SPI mode. The CS# must go high exactly at the byte boundary, otherwise, the instruction will be rejected and not be executed.

**Figure 10-55 Global Block Unlock (Command 98h)**


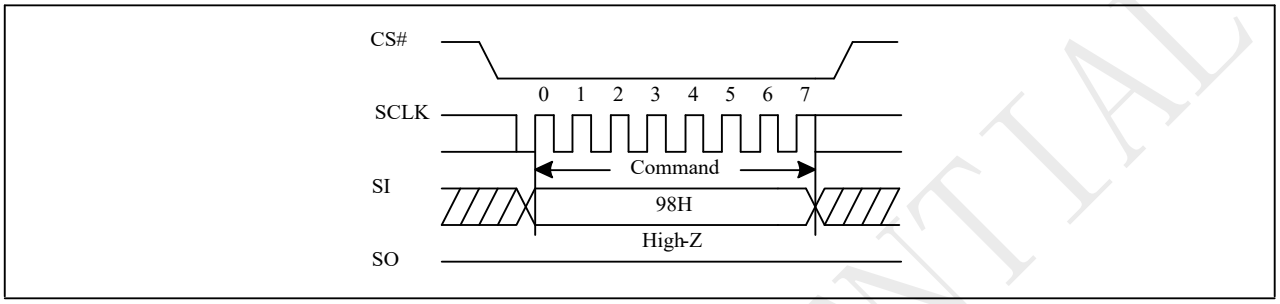



**Figure 10-55a Global Block Unlock (QPI)**

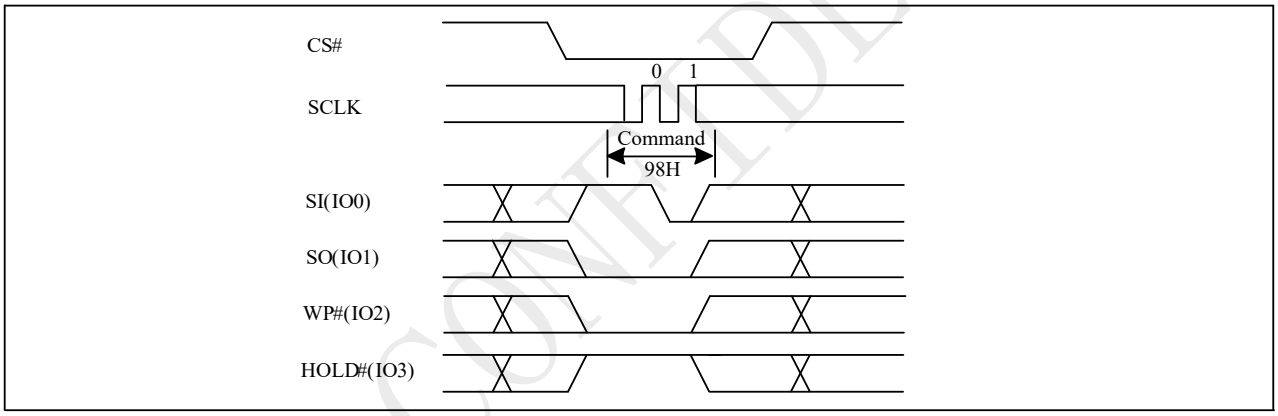


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 10.56 Software Reset (66H/99H)

The Software Reset operation combines two instructions: Reset-Enable (RSTEN) command and Reset (RST) command. It returns the device to a standby mode. All the volatile bits and settings will be cleared then, which makes the device return to the default status as power on.

To execute Reset command (RST), the Reset-Enable (RSTEN) command must be executed first to perform the Reset operation. If there is any other command to interrupt after the Reset-Enable command, the Reset-Enable will be invalid.

The SIO [3:1] are "don't care".

If the Reset command is executed during program or erase operation, the operation will be disabled, the data under processing could be damaged or lost.

**Figure 10-56Software Reset Recovery**

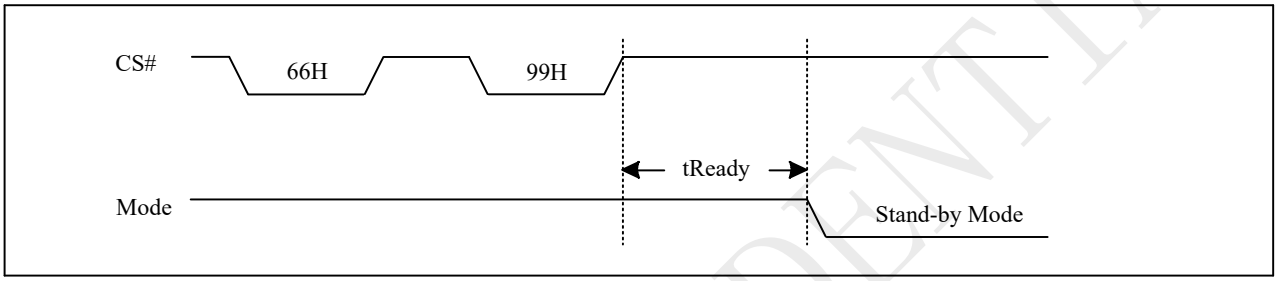



**Figure 10-56a Reset Sequence**


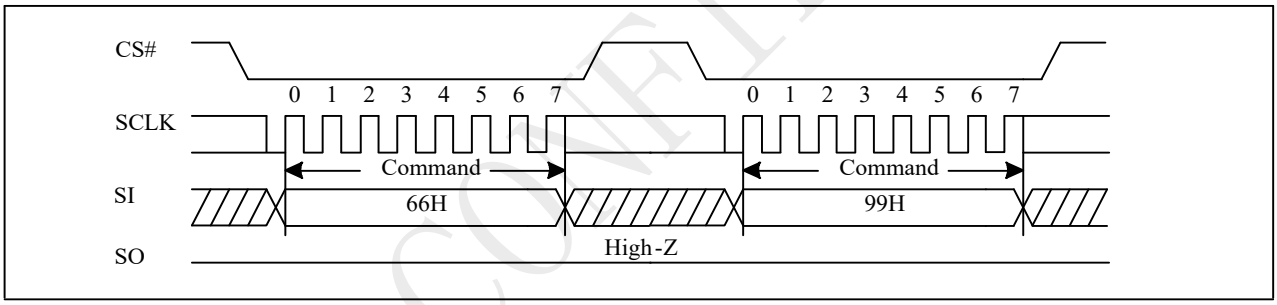



**Figure 10-56b Reset Sequence (QPI)**

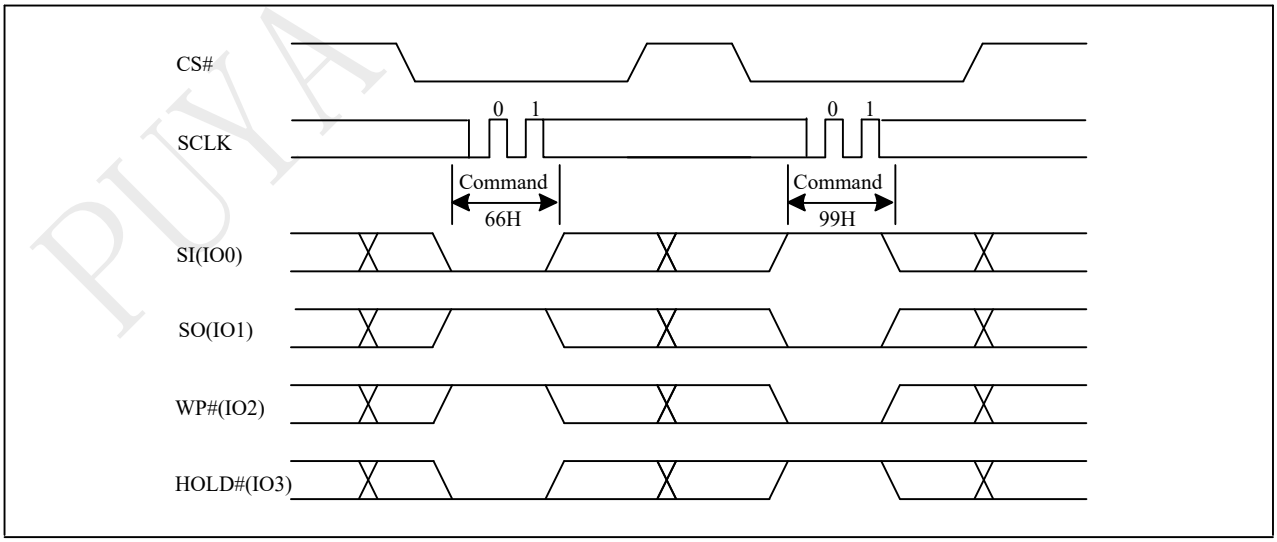


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com


## 10.57 RESET

Driving the RESET# pin low for a period of tRLRH or longer will reset the device. After reset cycle, the device is at the following states:

- Standby mode
- All the volatile bits such as WEL/WIP/SRAM lock bit will return to the default status as power on.

If the device is under programming or erasing, driving the RESET# pin low will also terminate the operation and data could be lost. During the resetting cycle, the SO data becomes high impedance and the current will be reduced to minimum.

**Figure 10-57 RESET Timing**

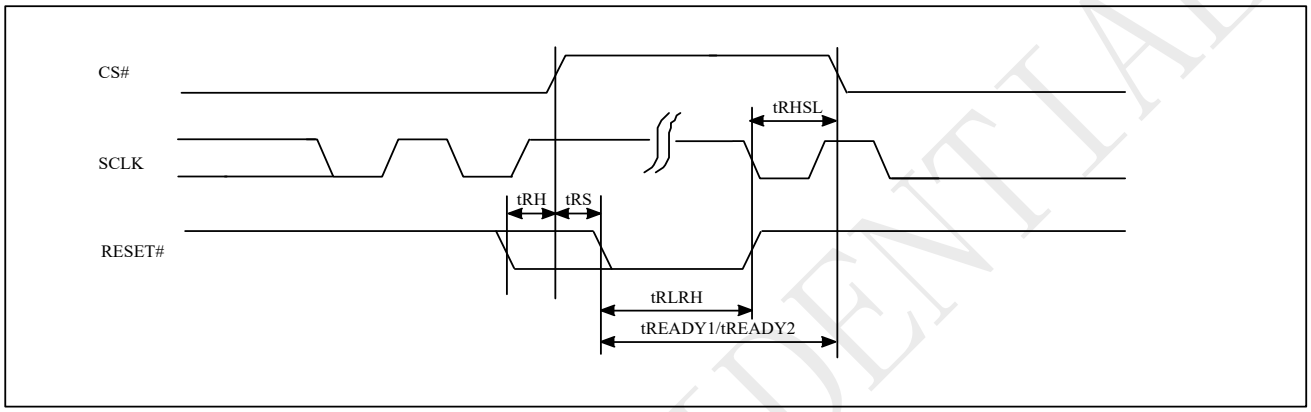


**RESET Timing (Power On)**

| Symbol | Parameter | Min. | Typ. | Max. | Unit |
|---|---|---|---|---|---|
| tRHSL | Reset# high before CS# low | 1 | | | us |
| tRS | Reset# setup time | 15 | | | ns |
| tRH | Reset# hold time | 15 | | | ns |
| tRLRH | Reset# low pulse width | 1 | | | us |
| tREADY1 | Reset Recovery time | 30 | | | us |

**RESET Timing (Other Operation)**

| Symbol | Parameter | Min. | Typ. | Max. | Unit |
|---|---|---|---|---|---|
| tRHSL | Reset# high before CS# low | 1 | | | us |
| tRS | Reset# setup time | 15 | | | ns |
| tRH | Reset# hold time | 15 | | | ns |
| tRLRH | Reset# low pulse width | 1 | | | us |
| tREADY2 | Reset Recovery time (except WRSR/WRCR) | 30 | | | us |
| | Reset Recovery time (for WRSR/WRCR) | | 8 | 12 | ms |

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com


## 10.58 Read Unique ID (4BH)

The Read Unique ID command accesses a factory-set read-only 128bit number that is unique to each P25Qxx device. The Unique ID can be used in conjunction with user software methods to help prevent copying or cloning of a system.

The Read Unique ID command sequence: CS# goes low →sending Read Unique ID command →Dummy Byte1 →Dummy Byte2 →Dummy Byte3 →Dummy Byte4→128bit Unique ID Out →CS# goes high.

The command sequence is show below.

**Figure 10-58 Read Unique ID (RUID) Sequence (Command 4BH)**

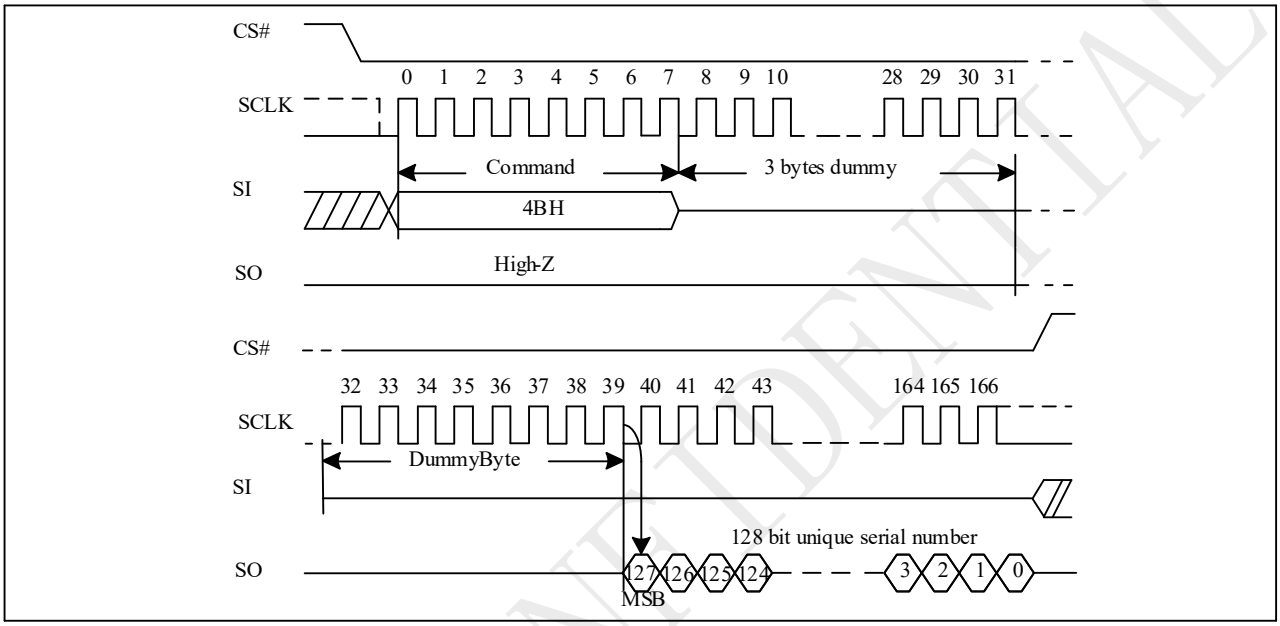


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 10.59 Read SFDP Mode (5AH)

The Serial Flash Discoverable Parameter (SFDP) standard provides a consistent method of describing the functional and feature capabilities of serial flash devices in a standard set of internal parameter tables. These parameter tables can be interrogated by host system software to enable adjustments needed to accommodate divergent features from multiple vendors. The concept is similar to the one found in the Introduction of JEDEC Standard, JESD68 on CFI.

Detail SFDP data please contact Puya.

**Figure 10-59Read Serial Flash Discoverable Parameter (RDSFDP) Sequence**


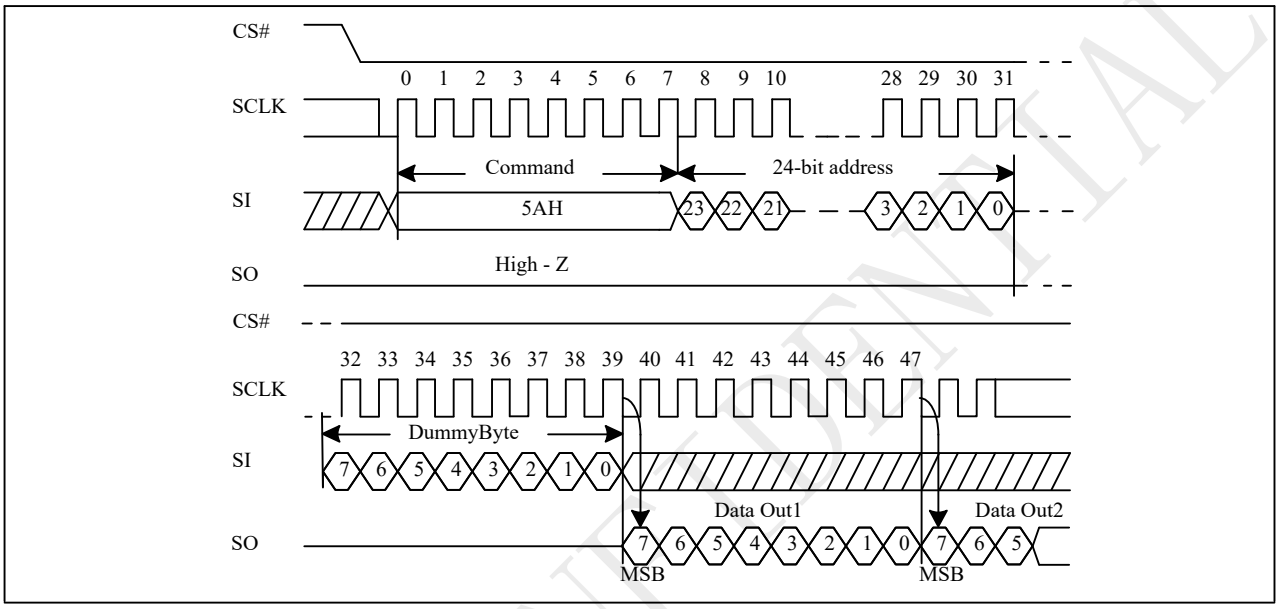




**Figure 10-59a Read Serial Flash Discoverable Parameter (RDSFDP) Sequence (QPI)**

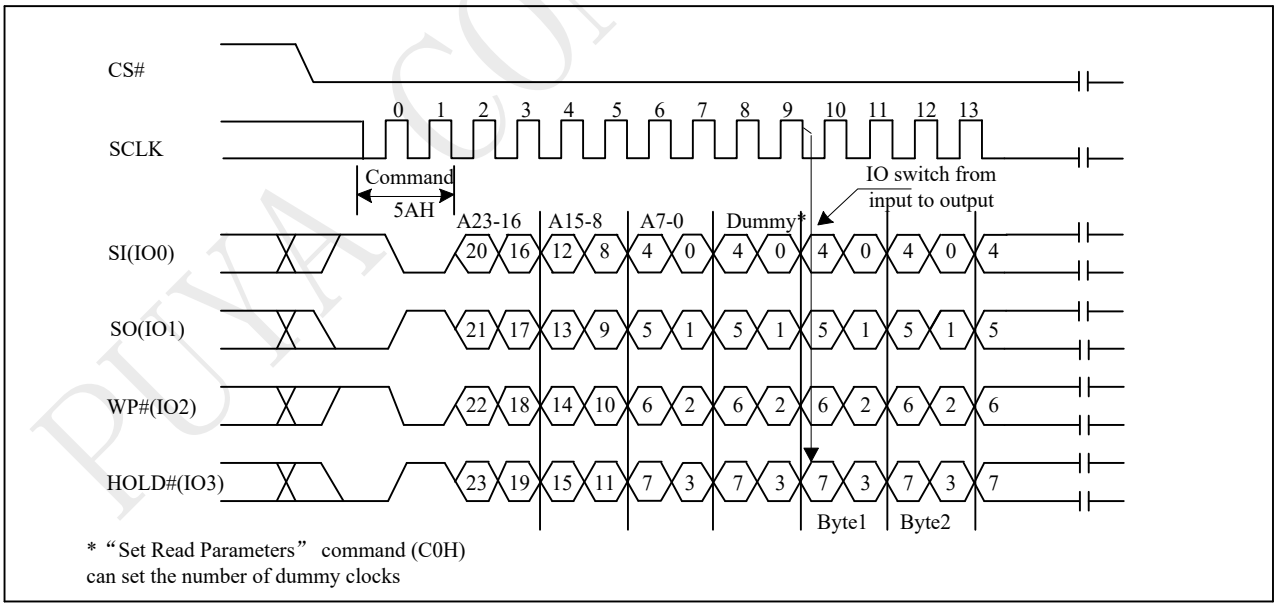


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

# 11 Ordering Information

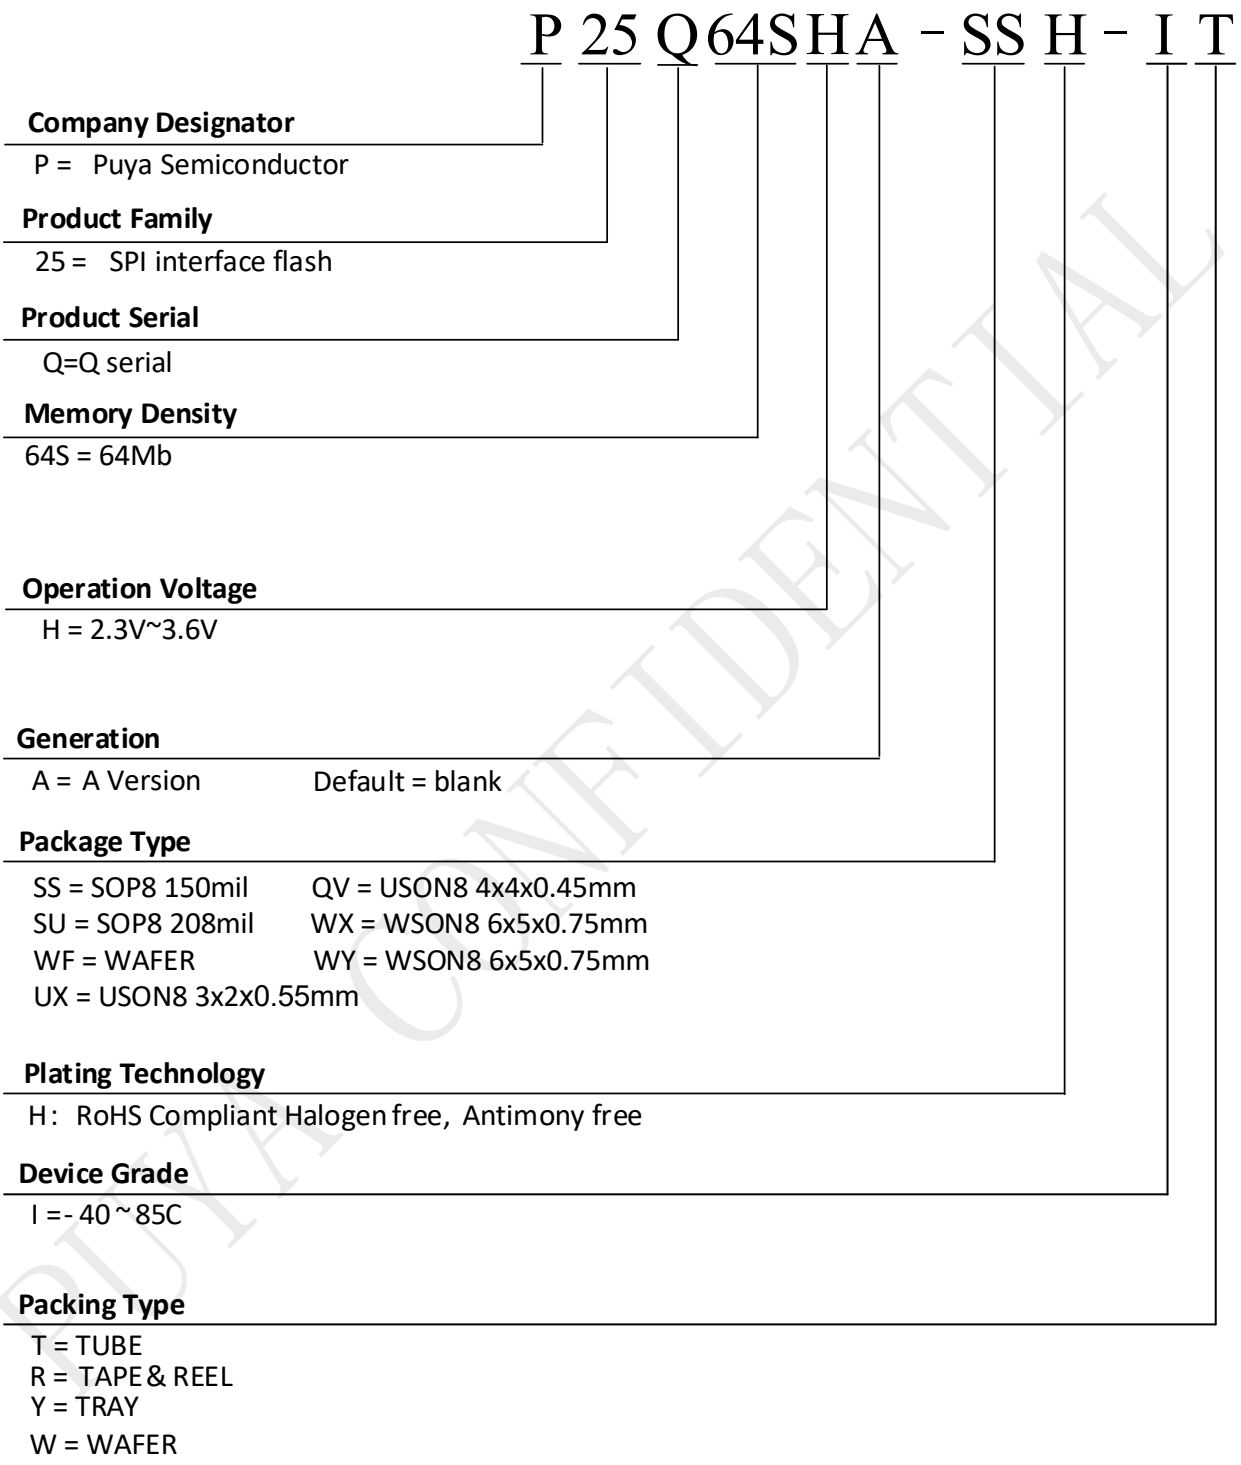


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

# 12 Valid Part Numbers and Top Marking

The following table provides the valid part numbers for the P25Q64SH Flash Memory. Please contact PUYA for specific availability by density and package type. PUYA Flash memories use a 14-digit Product Number for ordering.

| Package Type | Product Number | Density | Top Side Marking | Temp. | Packing Type |
|---|---|---|---|---|---|
| SS<br>SOP8 150mil | P25Q64SH-SSH-IT | 64M-bit | P25Q64SH<br>xxxxxxx | 85C | Tube |
| SS<br>SOP8 150mil | P25Q64SH-SSH-IR | 64M-bit | P25Q64SH<br>xxxxxxx | 85C | Reel |
| SU<br>SOP8 208mil | P25Q64SH-SUH-IT | 64M-bit | P25Q64SH<br>xxxxxxx | 85C | Tube |
| SU<br>SOP8 208mil | P25Q64SH-SUH-IR | 64M-bit | P25Q64SH<br>xxxxxxx | 85C | Reel |
| QV<br>USON8 4x4mm | P25Q64SH-QVH-IR | 64M-bit | PQ64S<br>Hxxx | 85C | Reel |
| WX<br>WSON8 6x5mm | P25Q64SH-WXH-IR | 64M-bit | P25Q64SH<br>xxxxxxx | 85C | Reel |
| WY<br>WSON8 6x5mm | P25Q64SH-WYH-IR | 64M-bit | P25Q64SH<br>xxxxxxx | 85C | Reel |
| UX<br>USON8 3x2mm | P25Q64SH-UXH-IR | 64M-bit | PQ64S<br>Hxxx | 85C | Reel |


Note: The package marked with "*", if necessary, please contact Puya sales.


PUYA CONFIDENTIAL



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

# 13 Package Information

## 13.1 8-Lead SOP(150mil)

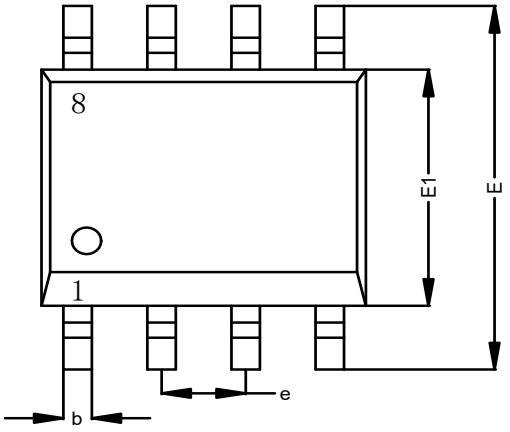

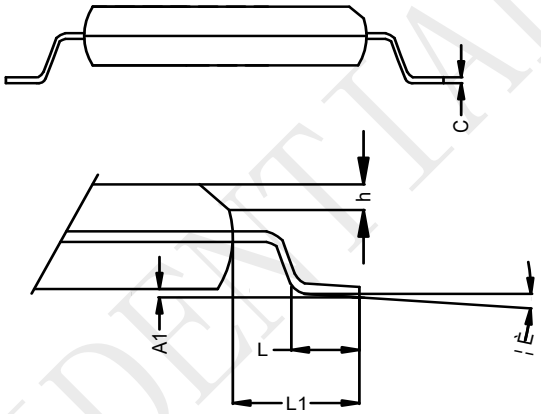
Common Dimensions
(Unit of Measure=millimeters)
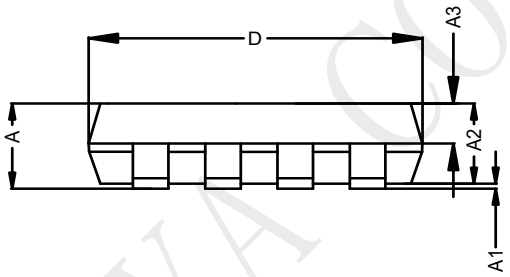
| Symbol | Min | Typ | Max |
|---|---|---|---|
| A | - | - | 1.750 |
| A1 | 0.100 | - | 0.250 |
| A2 | 1.250 | - | - |
| b | 0.310 | - | 0.510 |
| c | 0.170 | - | 0.250 |
| D | 4.800 | 4.900 | 5.000 |
| E | 5.800 | 6.000 | 6.200 |
| E1 | 3.800 | 3.900 | 4.000 |
| e | - | 1.270 | - |
| L | 0.400 | - | 1.270 |
| L1 | - | 1.050 | - |
| ¦È | 0 | - | 8¡ã |
| h | 0.25 | - | 0.50 |


Note：1. Dimensions are not to scale


| | TITLE | DRAWING NO. | REV |
|---|---|---|---|
| PUYA | Puya SOP8（150mil）POD | QRPD-0004 | 1.0 |


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 13.2 8-Lead SOP(208mil)

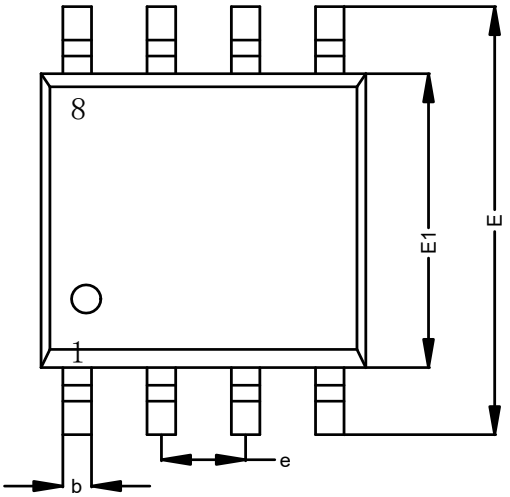

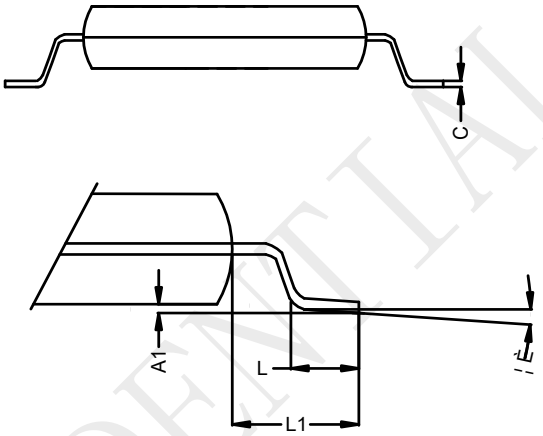
Common Dimensions
(Unit of Measure=millimeters)
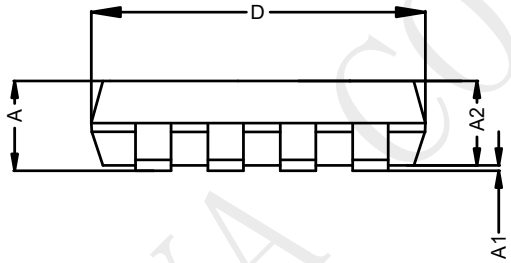
| Symbol | Min | Typ | Max |
|---|---|---|---|
| A | - | - | 2.150 |
| A1 | 0.050 | - | 0.250 |
| A2 | 1.700 | - | 1.900 |
| b | 0.310 | - | 0.510 |
| c | 0.150 | - | 0.250 |
| D | 5.130 | 5.230 | 5.330 |
| E | 7.800 | 7.900 | 8.000 |
| E1 | 5.180 | 5.280 | 5.380 |
| e | - | 1.270 | - |
| L | 0.500 | - | 0.800 |
| L1 | - | 1.310 | - |
| ¦È | 0 | - | 8¡ã |

Note：1. Dimensions are not to scale


| | TITLE | DRAWING NO. | REV |
|---|---|---|---|
| PUYA | Puya SOP8(208MIL) POD | QRPD-0005 | 1.0 |

PUYA CONFIDENTIAL



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com


## 13.3 8-Land WSON(6x5x0.75mm)-WX

TOP VIEW

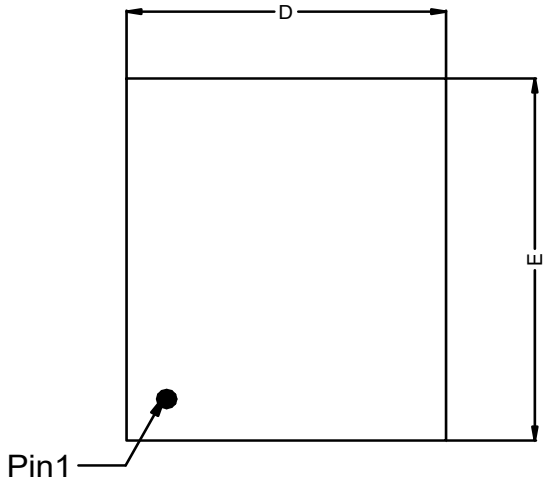



BOTTOM VIEW

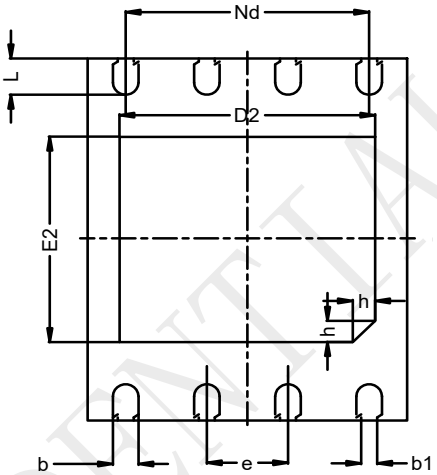


SIDE VIEW



Common Dimensions
(Unit of Measure=millimeters)

| Symbol | Min | Typ | Max |
|---|---|---|---|
| A | 0.700 | 0.750 | 0.800 |
| A1 | 0.000 | 0.020 | 0.050 |
| b | 0.350 | 0.400 | 0.450 |
| D | 4.900 | 5.000 | 5.100 |
| D2 | 3.900 | 4.000 | 4.100 |
| E | 5.900 | 6.000 | 6.100 |
| E2 | 3.300 | 3.400 | 3.500 |
| e | - | 1.27BSC | - |
| L | 0.550 | 0.600 | 0.650 |
| c | 0.180 | 0.203 | 0.250 |
| Nd | - | 3.81BSC | - |
| b1 | 0.250REF | | |
| h | 0.300 | 0.350 | 0.400 |

Note：1. Dimensions are not to scale


| | TITLE | DRAWING NO. | REV |
|---|---|---|---|
| PUYA | Puya WSON8L 6x5X0.75-1.27PITCH POD | QRPD-0015 | 1.0 |

PUYA CONFIDENTIAL



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com


## 13.4 8-Land WSON(6x5x0.75mm)-WY

TOP VIEW

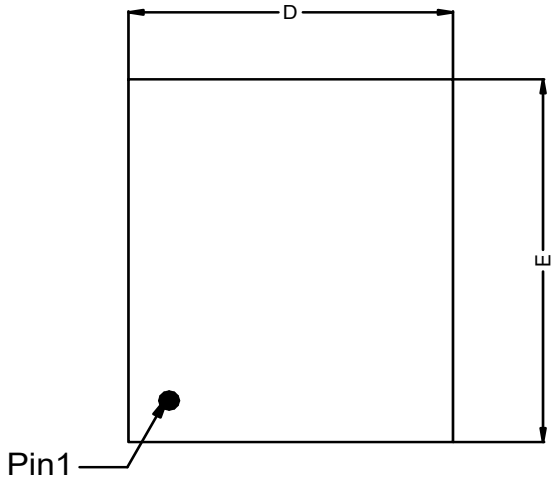


BOTTOM VIEW

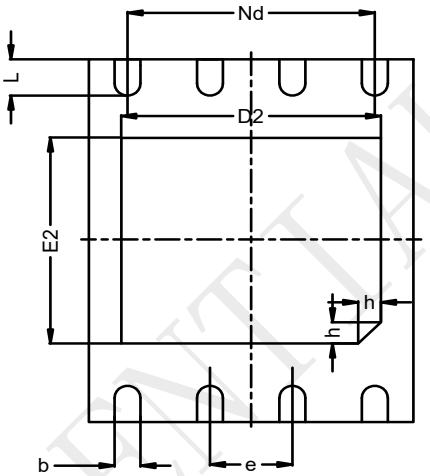

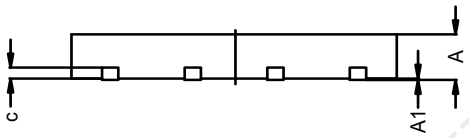
SIDE VIEW



Common Dimensions
(Unit of Measure=millimeters)

| Symbol | Min | Typ | Max |
|---|---|---|---|
| A | 0.700 | 0.750 | 0.800 |
| A1 | 0.000 | 0.020 | 0.050 |
| b | 0.350 | 0.400 | 0.450 |
| D | 4.900 | 5.000 | 5.100 |
| D2 | 3.900 | 4.000 | 4.100 |
| E | 5.900 | 6.000 | 6.100 |
| E2 | 3.300 | 3.400 | 3.500 |
| e | - | 1.27BSC | - |
| L | 0.550 | 0.600 | 0.650 |
| c | - | 0.203REF | - |
| Nd | - | 3.81BSC | - |
| h | 0.300 | 0.350 | 0.400 |

Note：1. Dimensions are not to scale


| | TITLE | DRAWING NO. | REV |
|---|---|---|---|
| PUYA | Puya WSON8L 6x5X0.75-1.27PITCH POD | QRPD-0016 | 1.0 |

PUYA CONFIDENTIAL



深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com


## 13.5 8-Land USON(4x4x0.45mm)

TOP VIEW

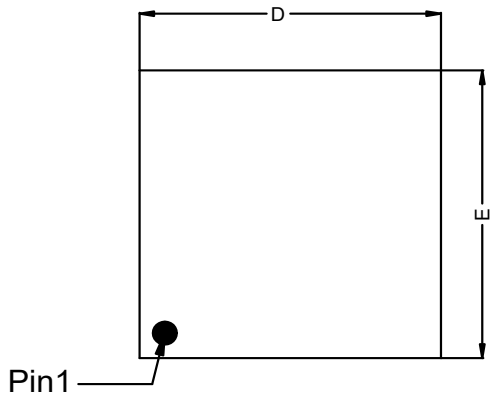



BOTTOM VIEW

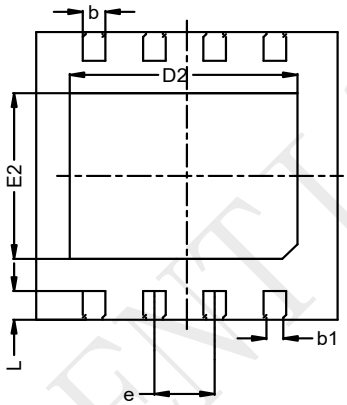

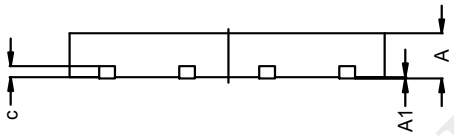
SIDE VIEW



Common Dimensions
(Unit of Measure=millimeters)

| Symbol | Min | Typ | Max |
|---|---|---|---|
| A | 0.400 | 0.450 | 0.500 |
| A1 | 0.000 | 0.020 | 0.050 |
| c | 0.100 | 0.150 | 0.250 |
| b | 0.250 | 0.300 | 0.350 |
| b1 | 0.150 | 0.200 | 0.250 |
| D | 3.900 | 4.000 | 4.100 |
| E | 3.900 | 4.000 | 4.100 |
| e | 0.800BSC | | |
| L | 0.350 | 0.400 | 0.450 |
| E2 | 2.200 | 2.300 | 2.400 |
| D2 | 2.900 | 3.000 | 3.100 |


Note：1. Dimensions are not to scale

PUYA CONFIDENTIAL


| PUYA | TITLE<br>Puya USON8L 4x4X0.45-0.8PITCH POD | DRAWING NO.<br>QRPD-0014 | REV<br>1.0 |
|---|---|---|---|



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 13.6 8-Land USON(3x2x0.55mm)

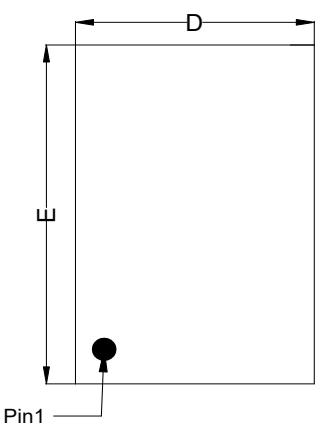



TOP VIEW



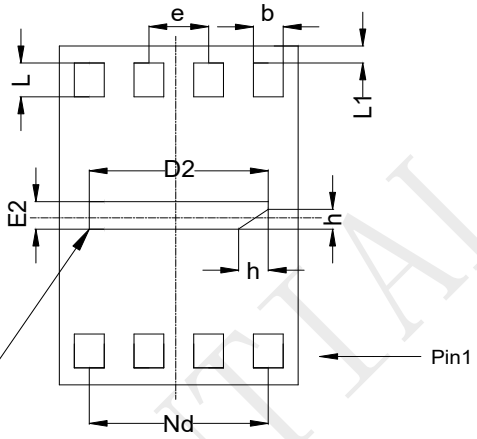
BOTTOM VIEW




SIDE VIEW

### Common Dimensions
(Unit of Measure=millimeters)

| Symbol | Min | Typ | Max |
|---|---|---|---|
| A | 0.50 | 0.55 | 0.60 |
| A1 | 0.00 | 0.02 | 0.05 |
| b | 0.18 | 0.25 | 0.30 |
| D | 1.90 | 2.00 | 2.10 |
| D2 | 1.50 | 1.60 | 1.70 |
| E | 2.90 | 3.00 | 3.10 |
| E2 | 0.10 | 0.20 | 0.30 |
| e | | 0.50BSC | |
| L | 0.30 | 0.35 | 0.40 |
| h | 0.05 | 0.15 | 0.25 |
| Nd | | 1.50BSC | |
| L1 | 0.05 | 0.10 | 0.15 |
| c | 0.10 | 0.15 | 0.20 |

Note：1. Dimensions are not to scale

| | TITLE | DRAWING NO. | REV |
|---|---|---|---|
| PUYA | Puya USON8L 2x3x0.55-0.5PITCH POD | QRPD-0009 | 1.0 |

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

# 14 Revision History

| Rev. | Date | Description | Note |
|---|---|---|---|
| 1.0 | 2021-11-22 | Initial Release | - |
| 1.1 | 2021-12-09 | Add DRV0&DRV1 Option | - |
| 1.2 | 2021-12-28 | Add WY(WSON8 6x5xmm) POD | - |
| 1.3 | 2022-8-16 | Add USON8 3x2x0.55mm package type<br>Update SOP8(150mil/208mmil), USON8 4x4x0.45mm, WSON8 6x5x0.75mm POD | - |
| 1.4 | 2022-10-26 | Update Ultra Low Power Consumption<br>Update Absolute Maximum Ratings<br>Add VIL Min and VIH Max value | - |
| 1.5 | 2024-07-25 | 1. Update default Drive Strength<br>2. Delete duplicate description for Max Read Freq<br>3. Correct timing chart typo<br>4. Delete SFDP table<br>5. Update format: delete date at the homepage; delete directory; update IMPORTANT NOTICE at last page | - |

CONFIDENTIAL

**IMPORTANT NOTICE**

Puya reserve the right to make changes,corrections,enhancements,modifications to Puya products and/or to this document at any time with -out notice.Purchasers should obtain the latest relevant information of Puya products before placing orders.

Puya products are sold pursuant to terms and conditions of sale in place at the time of order acknowedgement.

Purchasers are solely responsible for the choice and use of Puya products.Puya does not provide service support and assumes no responsibility when products that are used on its own or designated third party products.

Puya hereby disclaims any license to any intellectual property rights,express or implied.

Resale of Puya products with provisions inconsistent with the information set forth herein shal void any warranty granted by Puya.

Any with Puya or Puya logo are trademarks of Puya.All other product or service names are the property of their respective owners.

The information in this document supersedes and replaces the information in the previous version.

Puya Semiconductor Co..Ltd.-All rights reserved



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com