Double-Data-Rate Octal SPI PSRAM

Specifications

- Single Supply Voltage:
  - V_{DD} =1.62 to 1.98V
  - V_{DDQ} =1.62 to 1.98V
- Interface: Octal SPI with DDR mode, two bytes transfers per one clock cycle
- Performance: Clock rate up to 200MHz, (400MBps read/write throughput)
- Organization: 512Mb in X8 mode
  - 64M x 8bits with 2048 bytes per page
  - Column address: AY0 to AY10
  - Row address: AX0 to AX14
- Refresh: Self-managed
- Operating temperature range
  - Tc = -40°C to +85°C (standard range)*
  - Tc = -40°C to +105°C (extended range)*
- Typical mean Room Standby Current:
  - 40µA @ 25°C (Halfsleep™ Mode with data retained)
- Maximum Standby Current:
  - 1100µA @ 105°C
  - 680µA @ 85°C

Features

- Low Power Features:
  - Partial Array Self-Refresh (PASR)
  - Auto Temperature Compensated Self-Refresh (ATCSR) self-managed by a built-in temperature sensor
  - Ultra Low Power Halfsleep™ mode with data retention.
- Software reset
- Reset pin available
- Output driver LVCMOS with programmable drive strength
- Data mask (DM) for write operation
- Data strobe (DQS) for high speed read operation
- Write burst length, maximum 2048 Byte, minimum 2 Byte.
- Wrap & hybrid burst in 16/32/64/2K lengths.
- Linear Burst Command
- Row Boundary Crossing (RBX) read operations enabled via Mode Register

AP Memory reserves the right to change products and/or specifications without notice
深圳市满度科技有限公司
Web:www.manduic.com
微信扫码咨询客服
Tel:150-1290-5940
Email:sales@manduic.com

Table of Contents

1 Table of Contents

1 Table of Contents 2

2 Package Information 4

2.1 Package Types : BGA 24B X8 (BD) 4

2.2 Package Outline Drawing 5

2.2.1 BGA 24 B , package code BD 5

3 Ordering Information 6

4 Signal Table 7

5 Block diagram 8

6 Power-Up Initialization 9

6.1 Power-Up Initialization Method 1 (via. RESET# pin) 9

6.2 Power-Up Initialization Method 2 (via. Global Reset) 10

7 Interface Description 11

7.1 Address Space 11

7.2 Burst Type & Length 11

7.3 Command/Address Latching 11

7.4 Command Truth Table 11

7.5 Read Operation 12

7.6 Write Operation 15

7.7 Control Registers 16

7.8 Halfsleep™ Mode 22

7.9 Deep Power Down Mode 23

8 Electrical Specifications: 24

8.1 Absolute Maximum Ratings 24

8.2 Pin Capacitance 24

8.3 Decoupling Capacitor Requirement 25

8.3.1 Low ESR cap C1: 25

8.3.2 Large cap C2: 25

8.4 Operating Conditions 25

8.5 DC Characteristics 26

8.6 ISB Partial Array Refresh Current 27

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved

深圳市满度科技有限公司 Tel:150-1290-5940
Web:www.manduic.com Email:sales@manduic.com

8.7 AC Characteristics 28
9 Change Log 30

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

2 Package Information

2.1 Package Types : BGA 24B X8 (BD)

The APS51208N-OBRx is available in mini-BGA 24B package 6 x 8 x 1.2mm, ball pitch 1.0mm, ball size 0.4mm, package code “BD”.

- Ball Assignment for MINI-BGA 24B

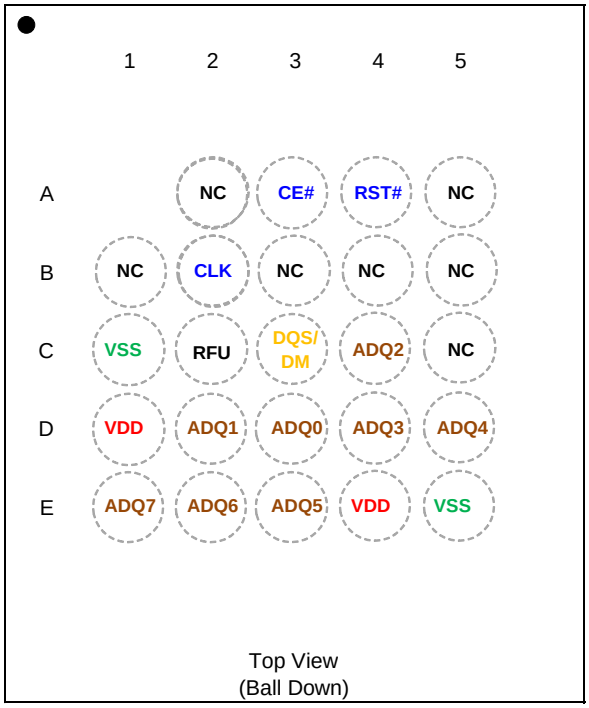

(6x8x1.2mm)(P1.0)(B0.4)

Note:

1. Part Number APS51208N-OBRx-BD for 512Mb.

2. RFU: Reserved for Future Use, which is reserved for 2nd CE#.


3. NC: No Internal connection

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved
深圳市满度科技有限公司 Tel:150-1290-5940
Web:www.manduic.com Email:sales@manduic.com


2.2 Package Outline Drawing

2.2.1 BGA 24B , package code BD

TOP VIEW

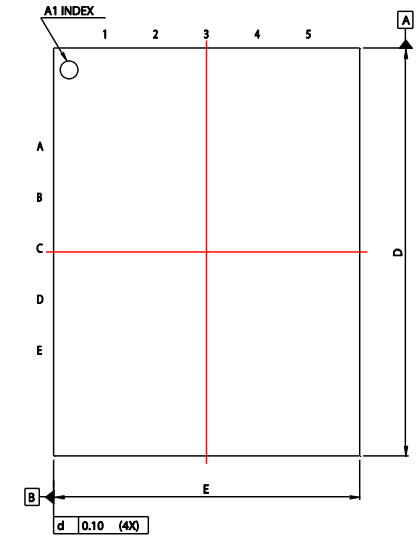


BOTTOM VIEW

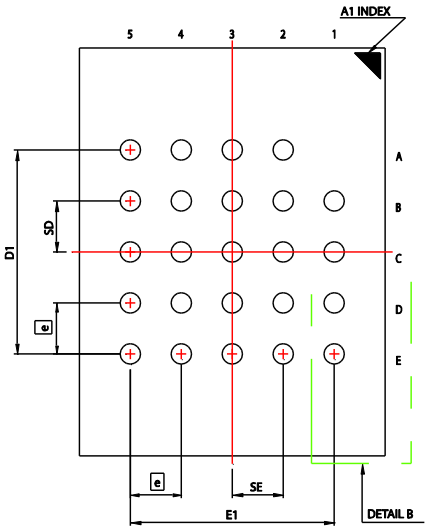


SYM.	DIMENSION (mm)		
	MIN.	NOM.	MAX.
A	-	-	1.20
A1	0.25	0.30	0.35
A2	-	0.79	-
b	0.35	0.40	0.45
D	7.90	8.00	8.10
D1	4.00 BSC		
E	5.90	6.00	6.10
E1	4.00 BSC		
SE	1.00 TYP		
SD	1.00 TYP		
e	1.00 BSC		


NOTE:
1. CONTROLLING DIMENSION : MILLIMETER.
2. REFERENCE DOCUMENT : JEDEC MO-207.
3. THE DIAMETER OF PRE-REFLOW SOLDER BALL IS Ø0.40mm.(0.35mm SMO)

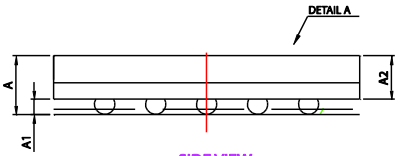

SIDE VIEW



DETAIL A



DETAIL B

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved
深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com


3 Ordering Information

Table 1: Ordering Information

Part Number	*IO*	*Temperature Range*	*Max Frequency*	*Note*
APS51208N-OBR-BD	X8	Tc=-40°C to +85°C	200 MHz	BGA 24B
APS51208N-OBRX-BD	X8	Tc=-40°C to +105°C	200 MHz	BGA 24B

Note for “x”

- -OBR is standard part. PN example of 24b BGA is APS51208N-OBR-BD for normal temperature grade.

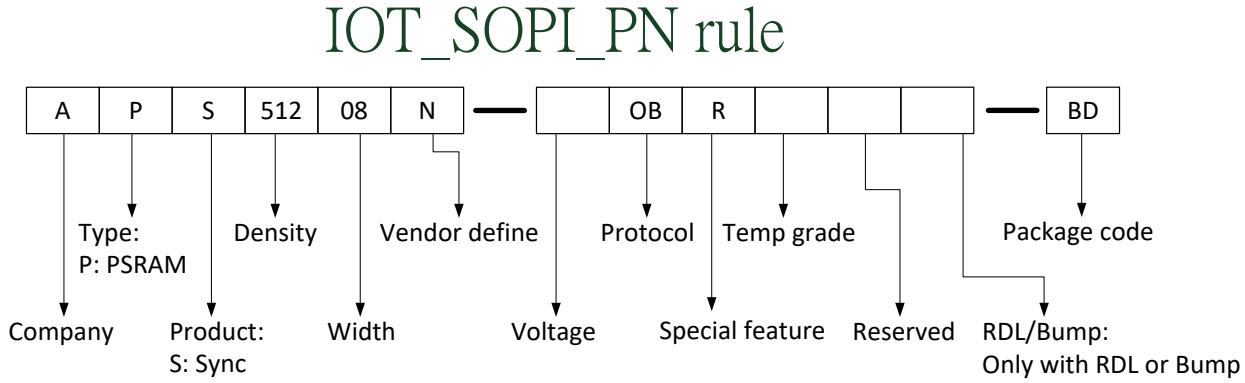

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved
深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

4 Signal Table


All signals are listed in Table 2.

Table 2: Signals Table

Symbol	*Type*	*Description*	*Comments*
V_{DD}	Power	Core & IO supply 1.8V	V_{DDQ} short to V_{DD} internally.
V_{SS}	Ground	Core& IO supply ground	
A/DQ[7:0]	IO	Address/Data bus [7:0]	
DQS/DM	IO	DQ strobe clock for DQ[7:0] during all reads, Data mask for DQ[7:0] during memory writes. DM is active high. DM=1 means “do not write”.	
CE#	Input	Chip select, active low. When CE#=1, chip is in standby state.	
CLK	Input	Input clock	
RESET#	Input	Reset signal, active low. Optional, as the pad is internally tied to a weak pull-up and can be left floating.	May not be available for all package types

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved
深圳市满度科技有限公司 Tel:150-1290-5940
Web:www.manduic.com Email:sales@manduic.com

5 Block diagram

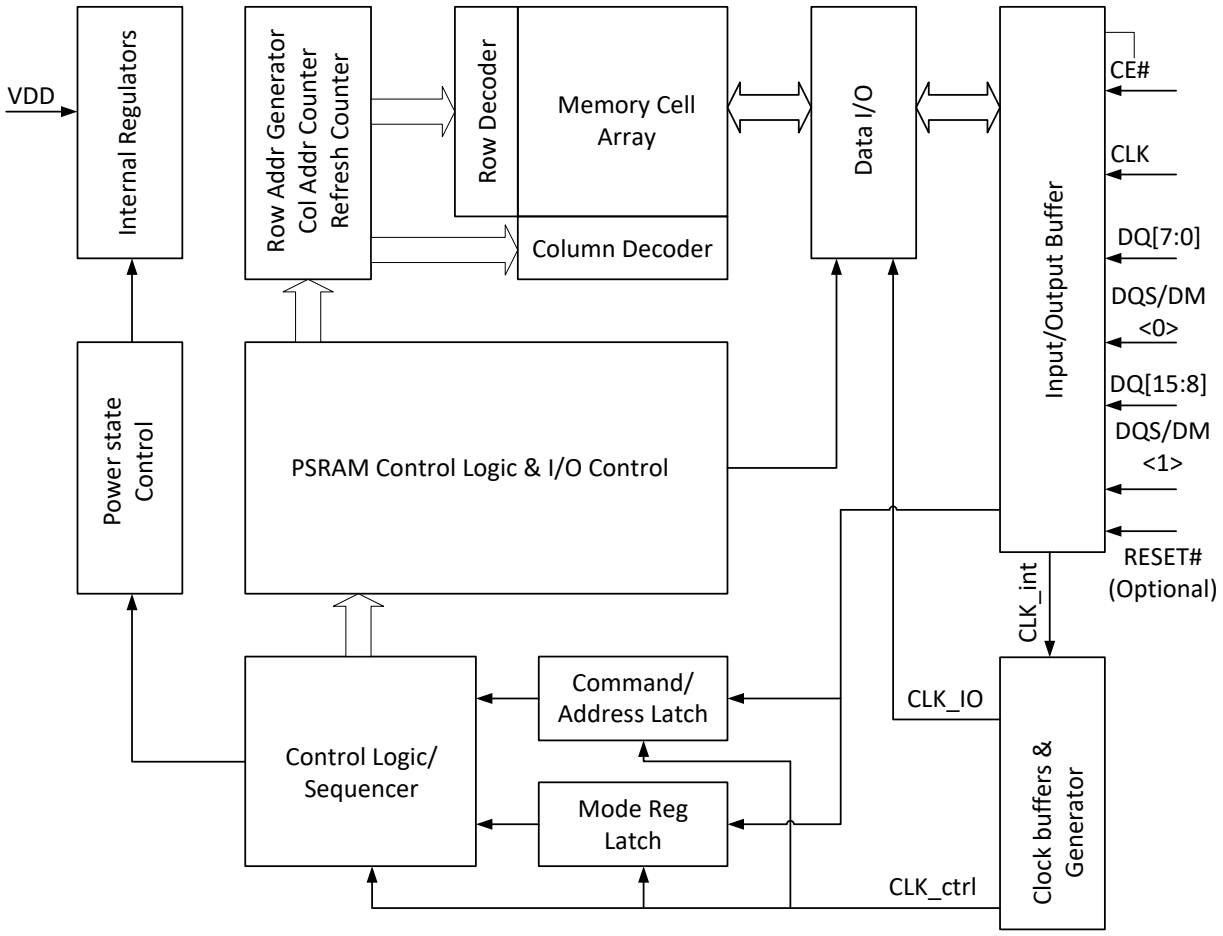

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved
深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

6 Power-Up Initialization

Octal DDR products include an on-chip voltage sensor used to start the self-initialization process. V_{DD} and V_{DDQ} must be applied simultaneously. When they reach a stable level at or above minimum V_{DD}, the device is in Phase 1 and it requires 150µs to complete its self-initialization process. System host can then proceed to Phase 2 of the initialization described in section 6.1.

During Phase 1 CE# should remain HIGH (track V_{DD} within 200mV); CLK should remain LOW.

After Phase 2 is complete the device is ready for operation, however Halfsleep™ entry and Deep Power Down (DPD) entry are not available until Halfsleep™ Power Up (tHSPU) or DPD Power Up (tDPDp) durations are observed.

6.1 Power-Up Initialization Method 1 (via. RESET# pin)

The RESET# pin can be used to initialize the device during Phase 2 as follows:

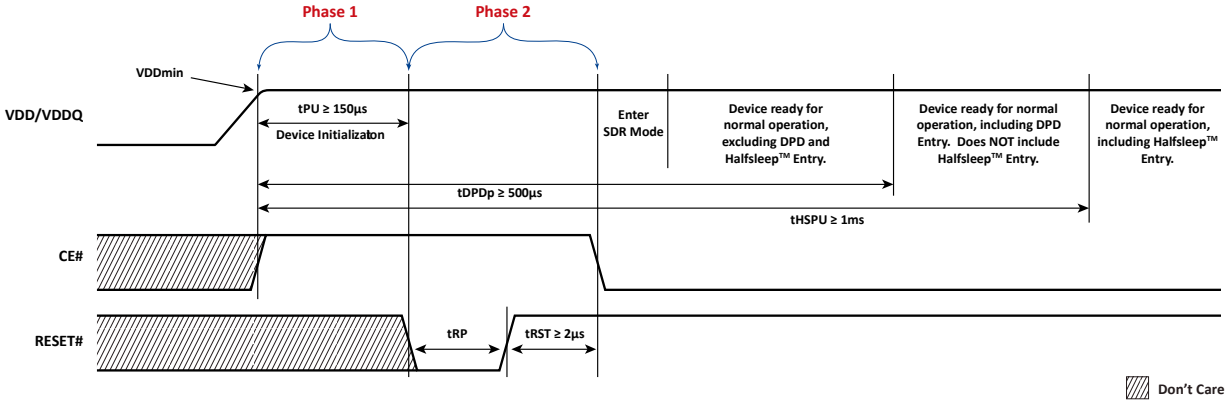


Figure 1: Power-Up Initialization Method 1 RESET#

The RESET# pin can also be used when CE#=high at any time after the device is initialized to reset all register contents. Memory content is not guaranteed. Timing requirements for RESET# usage are shown below.

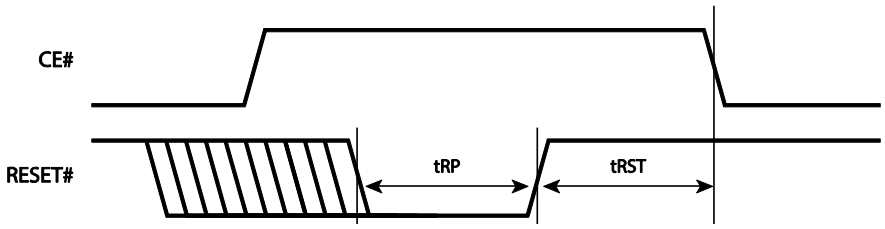


Figure 2: RESET# Timing

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved
深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

6.2 Power-Up Initialization Method 2 (via. Global Reset)

As an alternate power-up initialization method, after the Phase 1 150µs period the Global Reset command can also be used to reset the device in Phase 2 as follows:

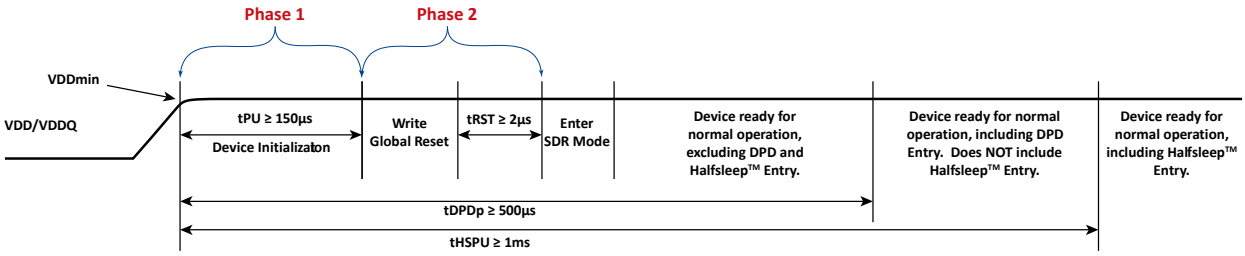


Figure 3. Power-Up Initialization Method 2 Timing with Global Reset

The Global Reset command resets all register contents. Memory content is not guaranteed. The command frame is made of 4 clocked CE# lows. Clocking is optional during tRST. The Global Reset command sequence is shown below.

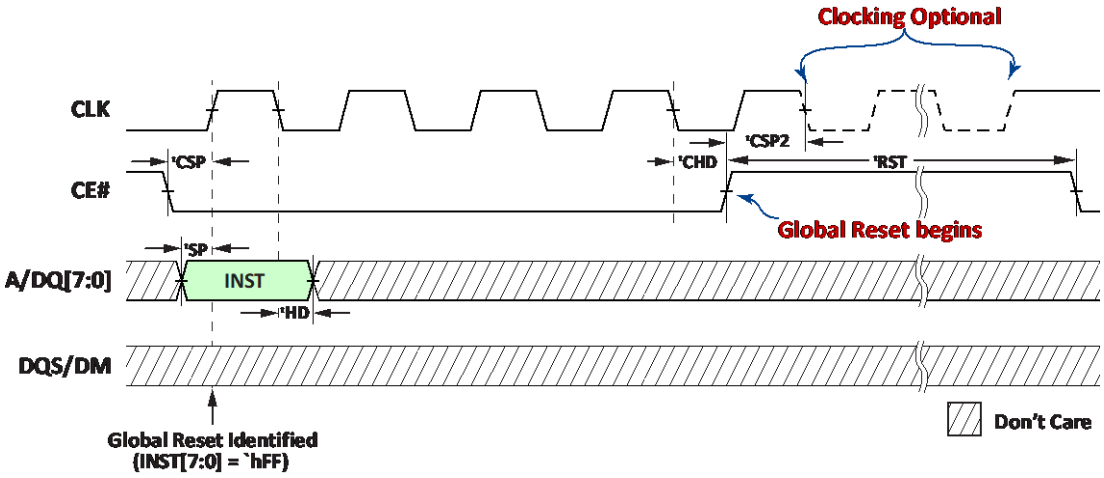


Figure 4: Global Reset

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved
深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

7 Interface Description

7.1 Address Space

Octal DDR PSRAM device is byte-addressable. Memory accesses must start on even addresses (A[0]='0). Mode Register accesses can start on even or odd address.

7.2 Burst Type & Length

Read and write operations are default Hybrid Wrap 32 mode. Other burst lengths of 16, 32, 64 or 2K bytes in standard or Hybrid wrap modes are register configurable (see Table 19). The device also includes command burst options for Linear Bursting. Bursts can start on any even address. Write burst length requires a minimum of 2 bytes. Read has no minimum length. Both write and read have no restriction on maximum burst length as long as tCEM is met.

7.3 Command/Address Latching

After CE# goes LOW, instruction code is latched on 1st CLK rising edge. Access address is latched on the 3rd, 4th, 5th & 6th CLK edges (2nd CLK rising edge, 2nd CLK falling edge, 3rd CLK rising edge, 3rd CLK falling edge).

7.4 Command Truth Table

The Octal DDR PSRAM recognizes commands listed in the following table. Instruction and address are input through A/DQ[7:0] pins. Host must send correct instruction and address format according to the following table.

Note that Linear Burst commands, 20h and A0h, ignore burst setting defined by MR8[2:0].
Note that only Linear Burst Read command is capable of performing row boundary crossing (RBX) read function.

	1st CLK		2nd CLK		3rd CLK	
Command	↑	↓	↑	↓	↑	↓
Sync Read	00h		A3	A2	A1	A0
Sync Write	80h		A3	A2	A1	A0
Linear Burst Read	20h		A3	A2	A1	A0
Linear Burst Write	A0h		A3	A2	A1	A0
Mode Register Read	40h		×			MA
Mode Register Write	C0h		×			MA
Global Reset	FFh		×			

Remarks: × = don't care (V_{IH}/V_{IL})
A3 = 7'bx, RA[13] {unused address bits are reserved}
A2 = RA[12:5]
A1 = RA[4:0],CA[10:8]
A0 = CA[7:0]
MA = Mode Register Address

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved
深圳市满度科技有限公司 Tel:150-1290-5940
Web:www.manduic.com Email:sales@manduic.com

7.5 Read Operation

After address latching, the device initializes DQS/DM to '0 from CLK rising edge of the 3rd clock cycle (A1). See Figure 5 below.

Output data is available after LC latency cycles, as shown in Figure 7 & Figure 8. LC is latency configuration code defined in Table 5 and Table 6. When data is valid, A/DQ[7:0] and DQS/DM follow the timing specified in Figure 9. Synchronous timing parameters are shown in Table 28 & Table 29.

In case of internal refresh insertion, variable latency output data may be delayed by **up to** (LCx2) latency cycles as shown in Figure 7. True variable refresh pushout latency can be anywhere **between** LC to LCx2. The 1st DQS/DM rising edge after read pre-amble indicates the beginning of valid data.

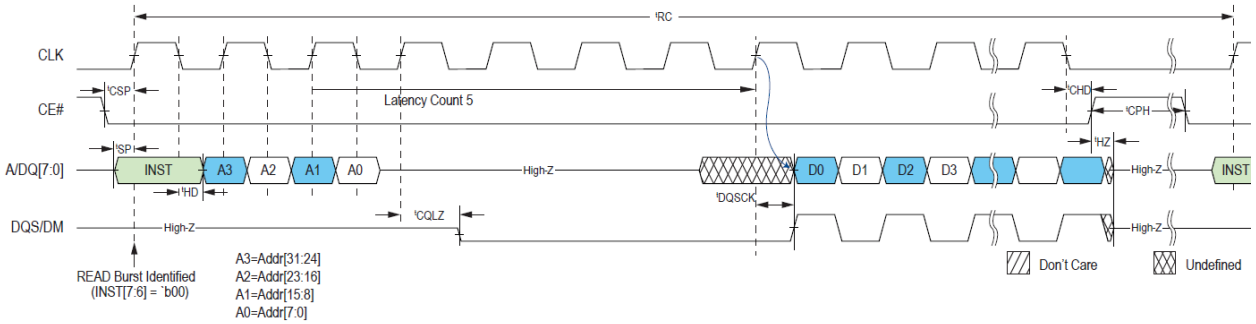


Figure 5: Synchronous Read

If RBX is enabled (MR8[3] written to 1) and a Linear Burst Read Command ('h20) is issued, read operation may cross row boundaries as shown in Figure 6.

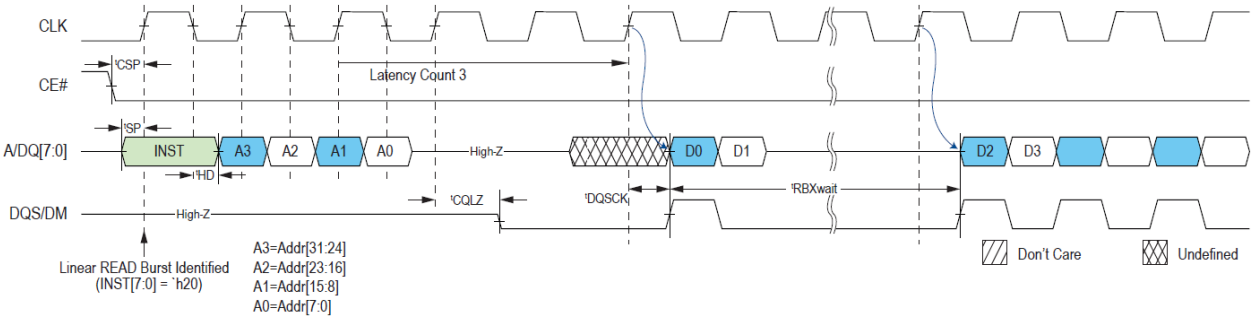


Figure 6: Linear Burst Read with RBX (Starting address '7FE)

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved
深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

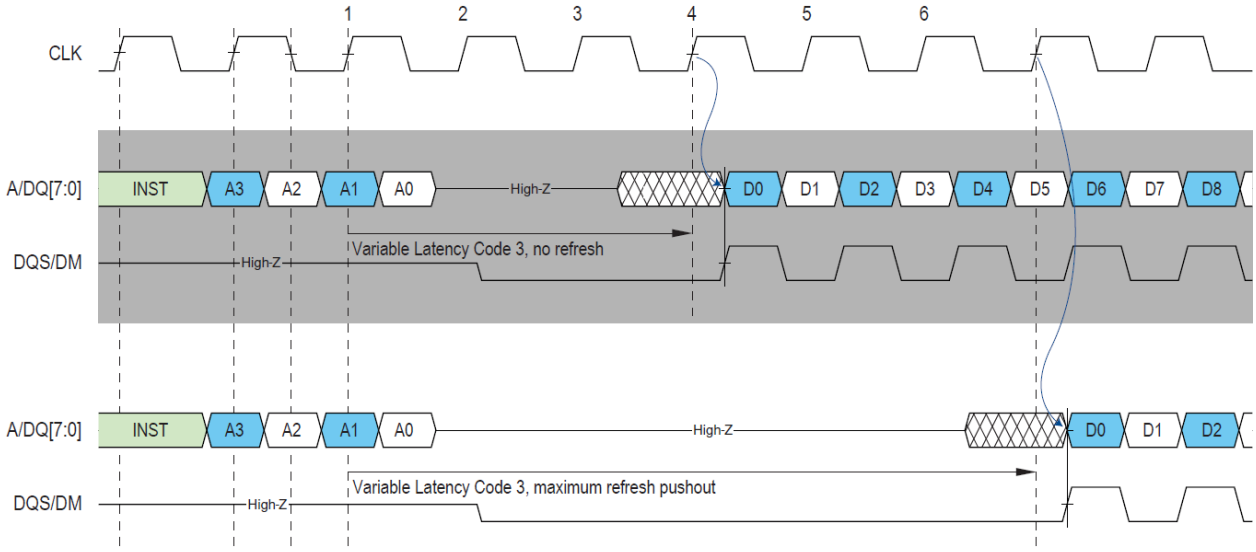


Figure 7: Variable Read Latency Refresh Pushout

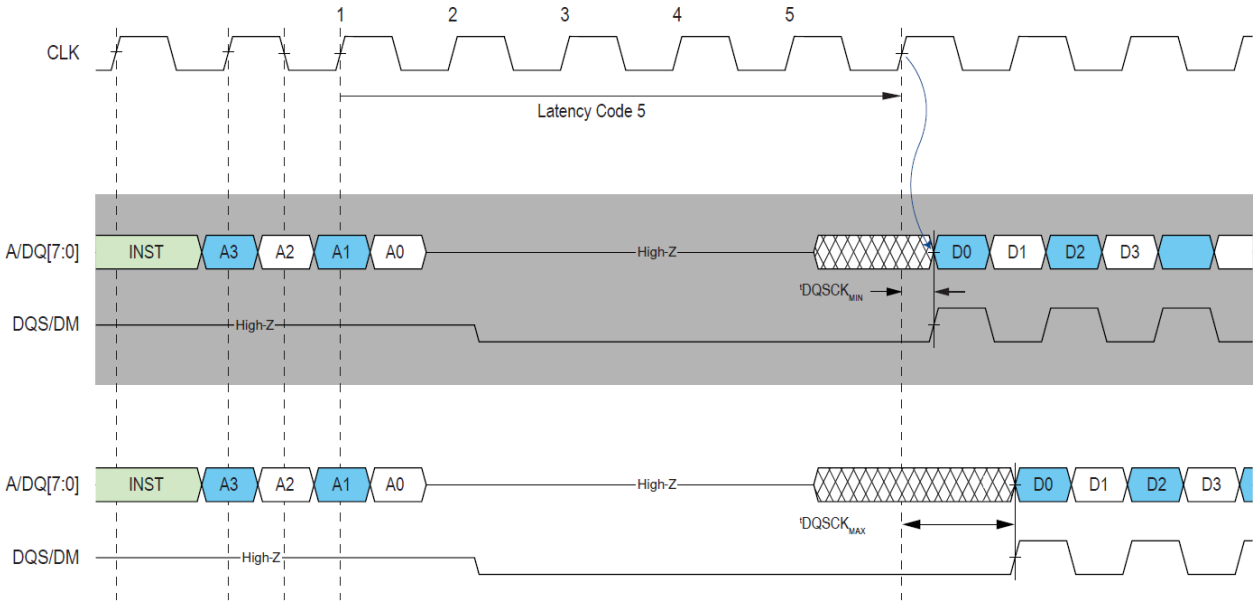


Figure 8: Read Latency & tDQSCK

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

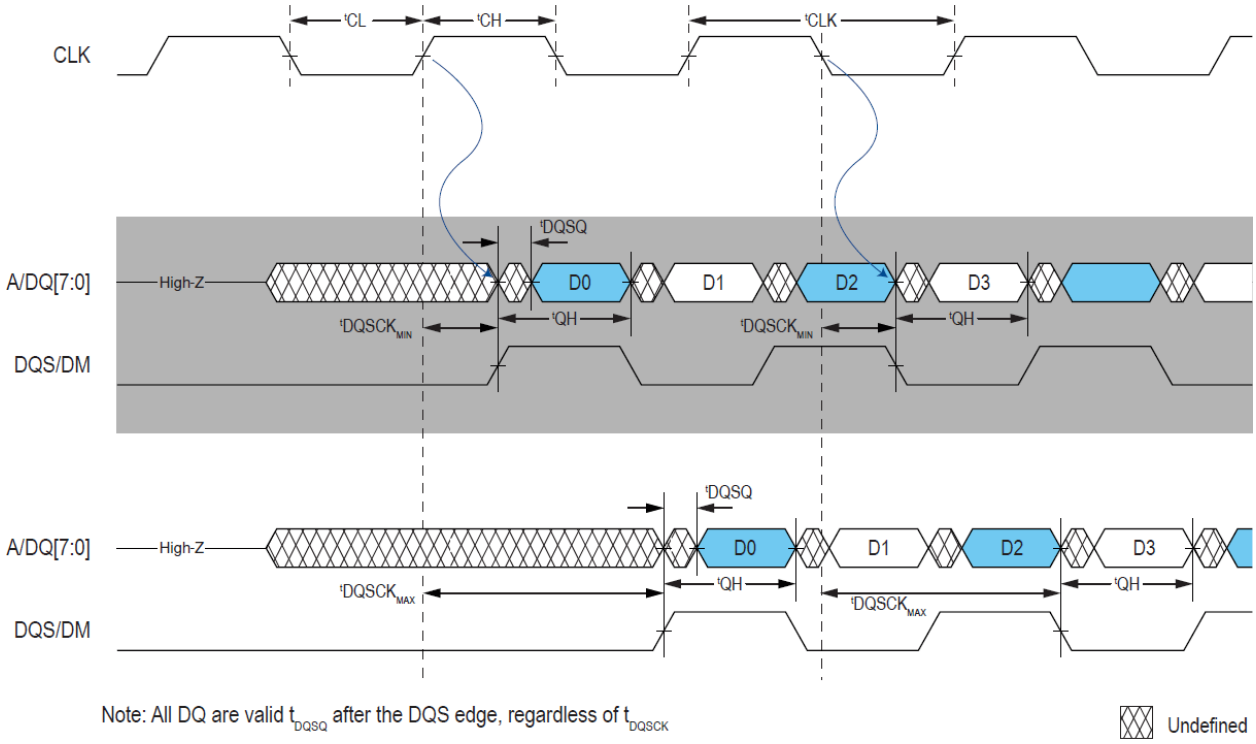


Figure 9: Read DQS/DM & DQ timing

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved
深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

7.6 Write Operation

A minimum of 2 bytes of data must be input in a write operation. In the case of consecutive short burst writes, tRC must be met by issuing additional CE# high time between operations. Single-byte write operations can be done by masking through DQS/DM pin as shown in Figure 10.

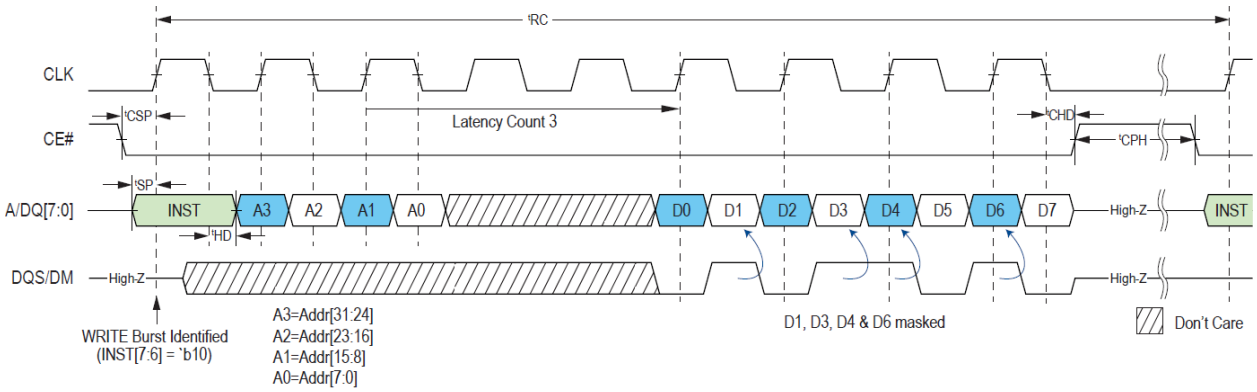


Figure 10: Synchronous Write followed by any Operation


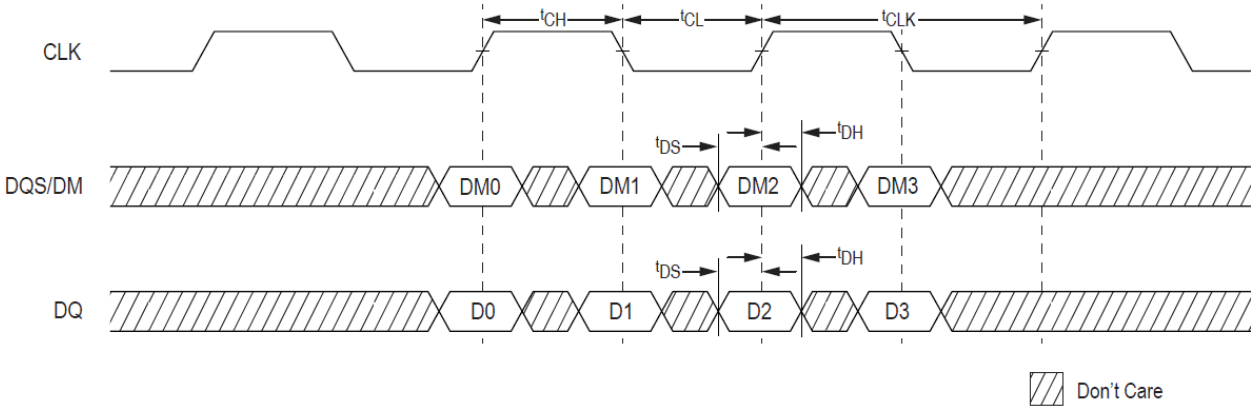


Figure 11: Write DQS/DM & DQ Timing

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved
深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

7.7 Control Registers

Register Read is shown below. Mode Address in command determines which Mode Register is read from as Data0 (see chart in the Figure below).

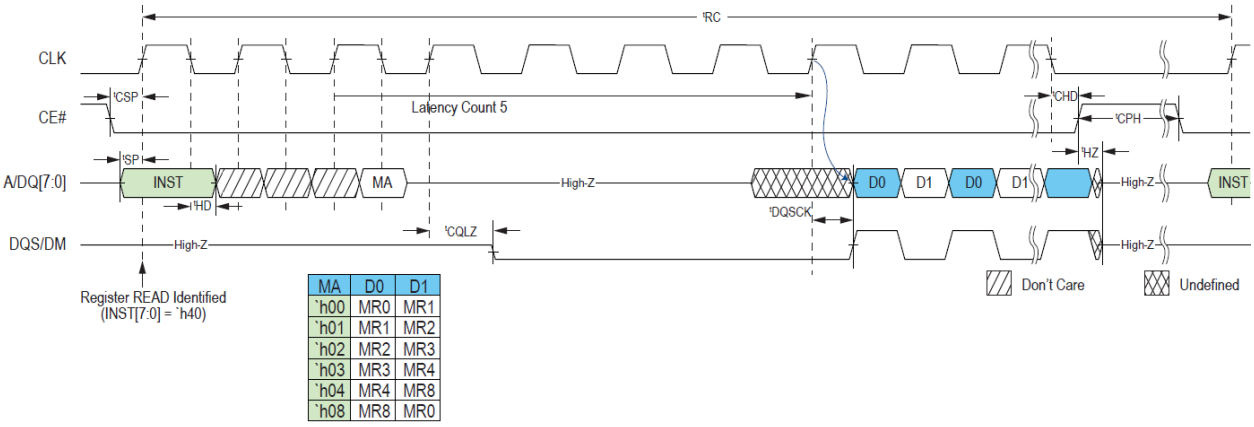

MA	D0	D1
`h00	MR0	MR1
`h01	MR1	MR2
`h02	MR2	MR3
`h03	MR3	MR4
`h04	MR4	MR8
`h08	MR8	MR0

Figure 12: Register Read

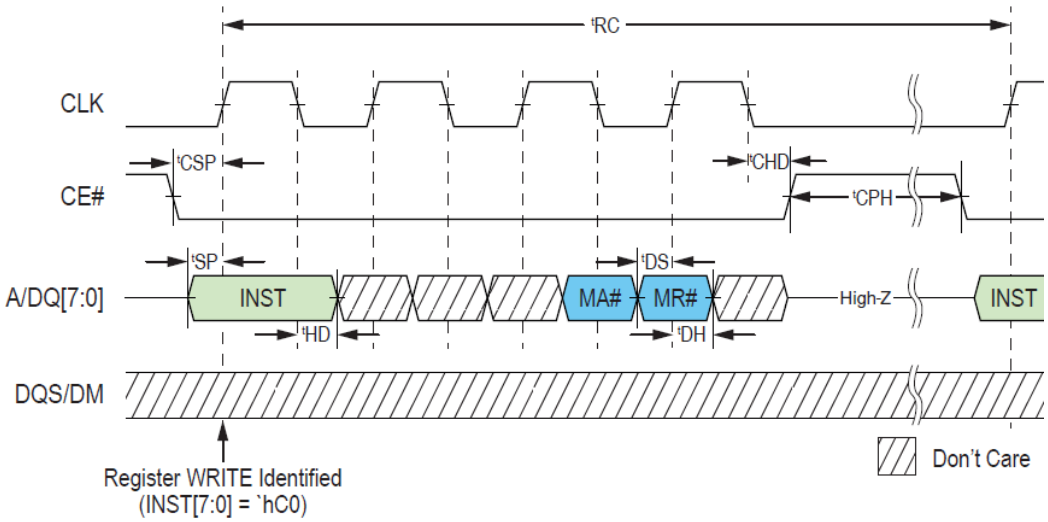


Figure 13: Register Write

Register Writes are always latency 1. Write Latency Code, MR4[7:5] does not apply to Register writes. Register Reads follow the same read latency settings, defined in MR0[4:2] (see Table 6).

Registers 0, 4 & 8 are read and writable. Registers 1, 2 and 3 are read-only. Register 6 is write-only.

Register mapping is shown in Table 3. All MR0 or MR8 writes must have MR0[7:6] or MR8[7:6] written to `0(s).

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved
深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Table 3: Mode Register Table

MR No.	MA[7:0]	Access	OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0
0	`h00	R/W	'00'		LT	Read Latency Code			Drive Str.	
1	`h01	R	ULP	rsvd.		Vendor ID				
2	`h02	R	KGD			Dev ID		Density		
3	`h03	R	RBXen	0	SRF			rsvd.		
4	`h04	R/W	Write Latency Code			RF rate		PASR		
6	`h06	W	Halfsleep™					rsvd.		
8	`h08	R/W	'0'	'0'	rsvd		RBX	BT	BL	

Table 4: Read Latency Type MR0[5]

Latency Type	
MR0[5]	LT
0	Variable (default)
1	Fixed

Table 5: Read Latency Codes MR0[5:2]

	VL Codes (MR0[5]=0)		FL Codes (MR0[5]=1)	Max Input CLK Freq (MHz)	
MR0[4:2]	Latency (LC)	Max push out (LCx2)	Latency (LCx2)	Standard	Extended
000	3	6	6	66	66
001	4	8	8	109	109
010	5 (default)	10	10	133	133
011	6	12	12	166	166
100	7	14	14	200	200
others	reserved			-	-

Table 6: Operation Latency Code Table

Type	Operation	VL (default)		FL
		No Refresh	Refresh	
Memory	Read	LC	Up to LCx2	LCx2
	Write	WLC		WLC
Register	Read	LC		LC
	Write	1		1

*Note: see Table 15 for WLC settings.

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved
深圳市满度科技有限公司 Tel:150-1290-5940
Web:www.manduic.com Email:sales@manduic.com

Table 7: Drive Strength Codes MR0[1:0]

Codes	*Drive Strength*
‘00	Full (25Ω default)
‘01	Half (50Ω)
‘10	1/4 (100Ω)
‘11	1/8 (200Ω)

Table 8: Ultra Low Power Device mapping MR1[7]

ULP	
‘0	Non-ULP (no Halfsleep™)
‘1	ULP (Halfsleep™ supported)

Table 9: Vendor ID mapping MR1[4:0]

Vendor ID
01101: APM

Table 10: Good-Die Bit MR2[7:5]*

Codes	*Good Die ID*
‘110	PASS
others	FAIL

*Note: Default is FAIL die, and only mark PASS after all tests passed.

Table 11: Device ID MR2[4:3]

Codes	*Device ID*
‘00	Generation 1
‘01	Generation 2
‘10	Generation 3
‘11	Generation 4 (default)

Table 12: Device Density mapping MR2[2:0]

MR2[2:0]	*Density*
‘001	32Mb
‘011	64Mb
‘101	128Mb
‘111	256Mb
‘110	512Mb (default)
others	reserved

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved
深圳市满度科技有限公司 Tel:150-1290-5940
Web:www.manduic.com Email:sales@manduic.com

Table 13: Row Boundary Crossing Enable MR3[7]

MR3[7] (read-only)	*RBXen*
0	RBX not supported
1	RBX supported via MR8[3]=1

Table 14: Self Refresh Flag MR3[5:4]

MR3[5:4] indicates current device refresh rate. Refresh rate depends on temperature and refresh frequency configuration, set by MR4[4:3].

MR3[5:4] (read-only)	*Self Refresh Flag*
01	0.5x Refresh
00	1x Refresh
10	4x Refresh
11	reserved

Table 15: Write Latency MR4[7:5]

Write latency, WLC, is default to 5 after power up. Use MR Write to set write latencies according to write latency table. When operating frequency exceeding Fmax listed in the table will result in write data corruption.

MR4[7:5]	*Write Latency Codes (WLC)*	*Fmax (MHz)*
000	3	66
100	4	109
010	5 (default)	133
110	6	166
001	7	200
Others	reserved	-

Table 16: Refresh Frequency setting MR4[4:3]

MR4[4:3]	*Refresh Frequency*
x0	Always 4x Refresh (default)
01	Enables 1x Refresh when temperature allows
11	Enable 0.5x Refresh when temperature allows

Note: x= don't care

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved
深圳市满度科技有限公司 Tel:150-1290-5940
Web:www.manduic.com Email:sales@manduic.com

Table 17: PASR MR4[2:0]

The PASR bits restrict refresh operation to a portion of the total memory array. This feature allows the device to reduce standby current by refreshing only that part of the memory array required by the host system. The refresh options are full array, one-half array, one-quarter array, one-eighth array, or none of the array. The mapping of these partitions can start at either the beginning or the end of the address map.

512Mb X8				
Codes	***Refresh Coverage***	***Address Space***	***Size***	***Density***
‘000	Full array (default)	0000000h-3FFFFFFh	64M X8	512Mb
‘001	Bottom 1/2 array	0000000h-1FFFFFFh	32M X8	256Mb
‘010	Bottom 1/4 array	0000000h-0FFFFFFh	16M X8	128Mb
‘011	Bottom 1/8 array	0000000h-07FFFFFh	8M X8	64Mb
‘100	None	0	0M	0Mb
‘101	Top 1/2 array	2000000h-3FFFFFFh	32M X8	256Mb
‘110	Top 1/4 array	3000000h-3FFFFFFh	16M X8	128Mb
‘111	Top 1/8 array	3800000h-3FFFFFFh	8M X8	64Mb

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved
深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Table 18: Halfsleep™ MR6[7:0]

MR6[7:0]	*ULP Modes*
'hF0	Halfsleep™
'hC0	Deep Power Down
others	reserved

Note: see 7.8 HalfsleepTM Mode; 7.9 Deep Power Down Mode for more information.

Table 19: Burst Type MR8[2], Burst Length MR8[1:0]

By default the device powers up in 32 Byte Hybrid Wrap. In non-Hybrid burst (MR8[2]=0), MR8[1:0] sets the burst address space in which the device will continually wrap within. If Hybrid burst wrap is selected (MR8[2]=1), the device will burst through the initial wrapped burst length once, then continue to burst incrementally up to maximum column address (2K) before wrapping around within the entire column address space. Burst length (MR8[1:0]) can be set to 16,32,64 & 2K Lengths.

MR8[2]	*MR8[1:0]*	*Burst Length*	*Example of Sequence of Bytes During Wrap*	
			Starting Address	*Burst Address Sequence*
'0	'00	16 Byte Wrap	4	[4,5,6,…15,0,1,2,…]
'0	'01	32 Byte Wrap	4	[4,5,6,…31,0,1,2,…]
'0	'10	64 Byte Wrap	4	[4,5,6,…63,0,1,2,…]
'0	'11	2K Byte Wrap	4	[4,5,6,…2047,0,1,2,…]
'1	'00	16 Byte Hybrid Wrap	2	[2,3,4,…15,0,1],16,17,18,…2047,0,1,…
'1	'01	32 Byte Hybrid Wrap (default)	2	[2,3,4,…31,0,1],32,33,34,…2047,0,1,…
'1	'10	64 Byte Hybrid Wrap	2	[2,3,4,…63,0,1],64,65,66,…2047,0,1,…
'1	'11	2K Byte Wrap	2	[2,3,4,…2047,0,1,2,…]

The Linear Burst Commands (INST[5:0]=6'b10_0000) forces the current array read or write command to do 2K Byte Wrap (equivalent to having MR8[1:0] set to 2'b11). For non-RBX Enabled devices the burst command read/writes linearly from the starting address and wraps back to the beginning of the page upon reaching the end of the page. To access a different page, host must issue a new command.

Table 20: Row Boundary Crossing Read Enable MR8[3]

This register setting applies to Linear Burst reads only on RBX enabled devices (MR3[7]=1). Default write and read burst behavior is limited within 2K page (row) address space (CA='h000 -> 'h7FF). Setting this bit high will allow Linear Burst Read command to cross over into the next Row (RA+1).

MR8[3]	*RBX Read*
0	Reads stay within page (row) boundary
1	Allow reads cross page (row) boundary

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved
深圳市满度科技有限公司 Tel:150-1290-5940
Web:www.manduic.com Email:sales@manduic.com

7.8 Halfsleep™ Mode

Halfsleep™ Mode puts the device in an ultra-low power state, while the stored data is retained. Halfsleep™ Mode Entry is entered by writing 8'hF0 into MR6. CE# going high initiates the Halfsleep™ mode and must be maintained for the minimum duration of Halfsleep™ time, tHS. The Halfsleep™ Entry command sequence is shown below.

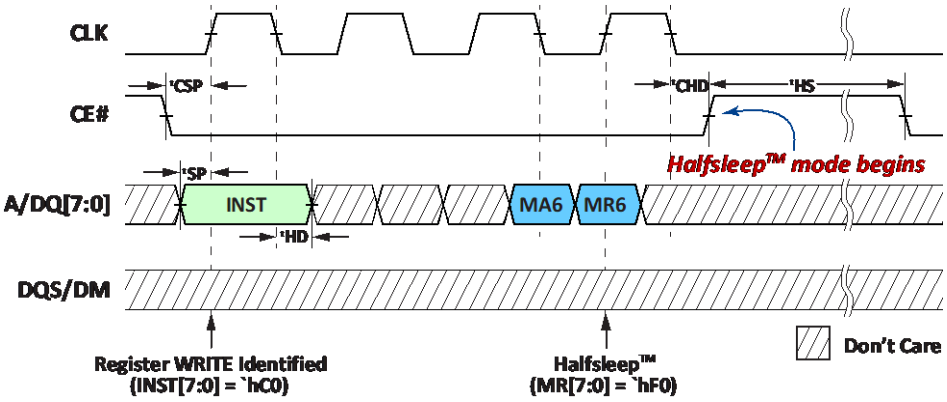


Figure 14: Halfsleep™ Entry Write (latency same as Register Writes, WL1)

Halfsleep™ Exit is initiated by a low pulsed CE#. Afterwards, CE# can be held high with or without clock toggling until the first operation begins (observing minimum Halfsleep™ Exit time, tXHS).

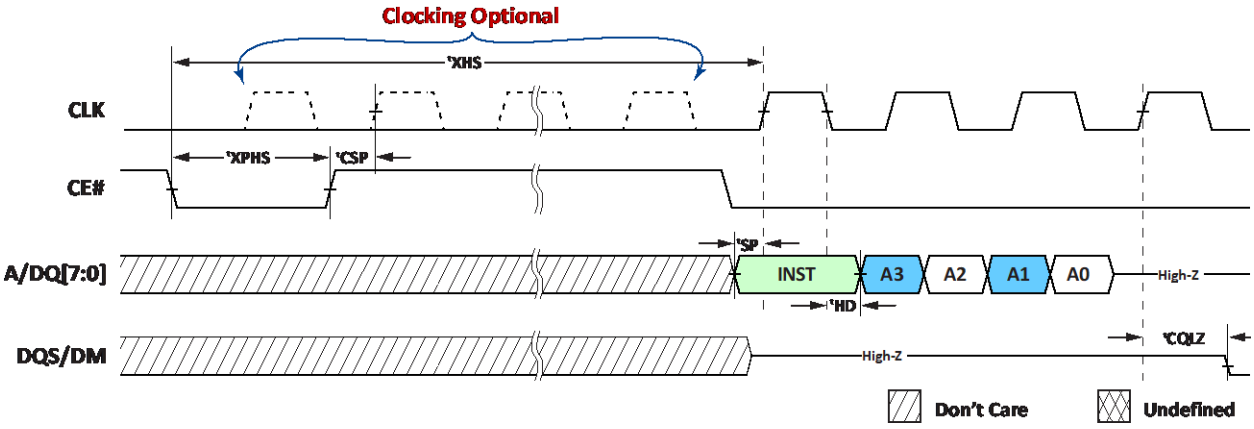


Figure 15: Halfsleep™ Exit (Read Operation shown as example)

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved
深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

7.9 Deep Power Down Mode

Deep Power Down Mode (DPD) puts the device into power down state. DPD Mode Entry is entered by writing 8'hC0 into MR6. CE# going high initiates the DPD Mode and must be maintained for the minimum duration of Deep Power Down time, tDPD. The Deep Power Down Entry command sequence is shown below.

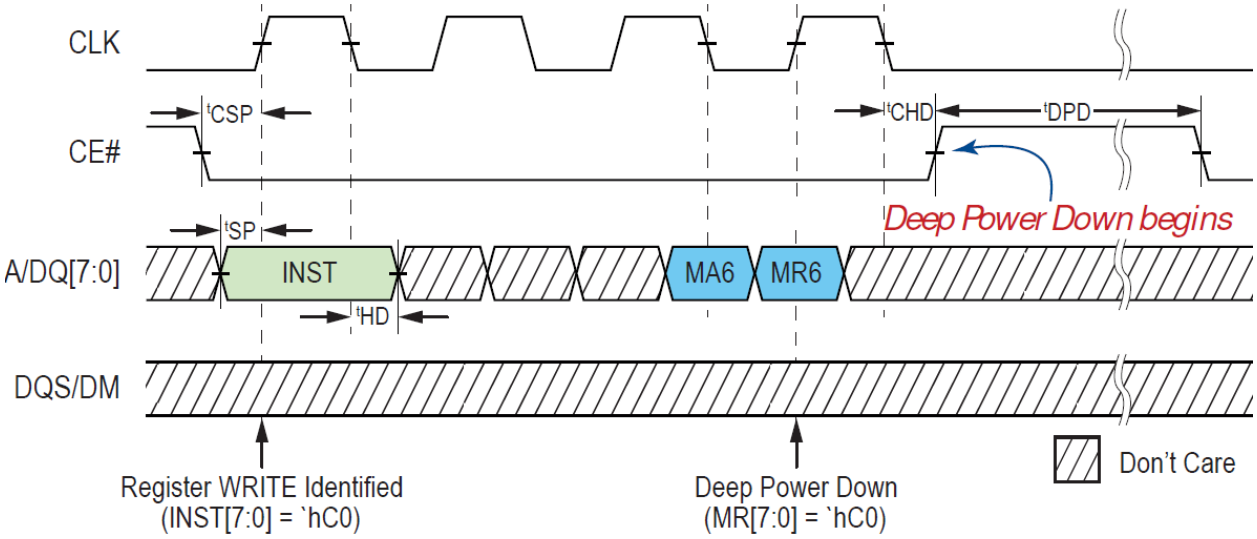


Figure 16: Deep Power Down Entry

Deep Power Down Exit is initiated by a low pulsed CE#. After a CE# DPD exit, CE# must be held high with or without clock toggling until the first operation begins (observing minimum Deep Power Down Exit time, tXDPD).

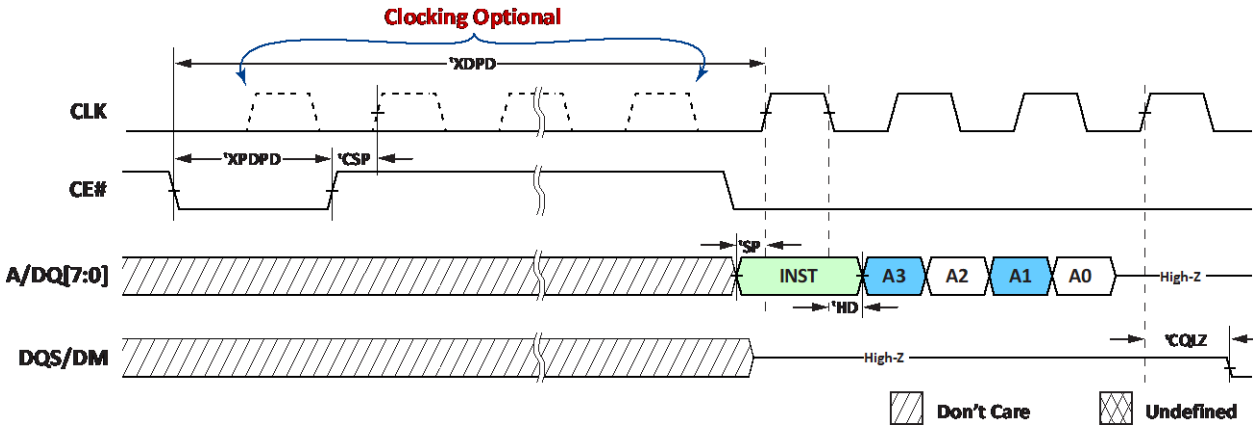


Figure 17: Deep Power Down Exit (Read Operation shown as example)

Register values and memory content are not retained in DPD Mode. After DPD mode register values will reset to defaults. tDPDp is minimum period between two DPD Modes (measured from DPD exit to the next DPD entry) as well as from the initial powerup to the first DPD entry.

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved
深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

8 Electrical Specifications:

8.1 Absolute Maximum Ratings

Table 21: Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit	Notes
Voltage to any ball except V_{DD}, V_{DDQ} relative to V_{SS}	VT	-0.4 to V_{DD}/V_{DDQ}+0.4	V	
Voltage on V_{DD} supply relative to V_{SS}	V_{DD}	-0.4 to +2.45	V	
Voltage on V_{DDQ} supply relative to V_{SS}	V_{DDQ}	-0.4 to +2.45	V	
Storage Temperature	T_{STG}	-55 to +150	°C	1

Notes 1: Storage temperature refers to the case surface temperature on the center/top side of the PSRAM.

Caution:
Exposing the device to stress above those listed in Absolute Maximum Ratings could cause permanent damage. The device is not meant to be operated under conditions outside the limits described in the operational section of this specification. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability.

8.2 Pin Capacitance

Table 22: Package Pin Capacitance

Parameter	Symbol	Min	Max	Unit	Notes
Input Pin Capacitance	CIN		5	pF	VIN=0V
Output Pin Capacitance	COUT		6	pF	VOUT=0V

Note: spec'd at 25°C.

Table 23: Load Capacitance


Parameter	Symbol	Min	Max	Unit	Notes
Load Capacitance	C_L		15	pF	

Note: System C_L for the use of package

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved
深圳市满度科技有限公司 Tel:150-1290-5940
Web:www.manduic.com Email:sales@manduic.com

8.3 Decoupling Capacitor Requirement

System designers need to take care of power integrity considering voltage regulator response and the memory peak currents/usage modes.

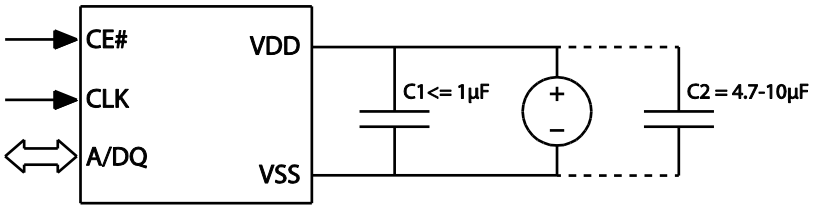

8.3.1 Low ESR cap C1:

It is recommended to place a low ESR decoupling capacitor of <=1µF close to the device to absorb transient peaks.

8.3.2 Large cap C2:

Though half-sleep average current is small (less than 100µA), its peak current from internal periodical burst refresh can reach up to the level of 25mA. The peak current duration can last for few tens of microseconds. During this period if the system regulator cannot supply such large peaks, it is important to place a 4.7µF-10µF cap to cover the burst refresh current demand and replenish the cap before the next burst of refresh.

If needed, contact AP Memory for further decoupling solution assistance.

8.4 Operating Conditions

Table 24: Operating Characteristics

Parameter	Min	Max	Unit	Notes
Operating Temperature (extended)	-40	105	°C	
Operating Temperature (standard)	-40	85	°C	

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved
深圳市满度科技有限公司 Tel:150-1290-5940
Web:www.manduic.com Email:sales@manduic.com

8.5 DC Characteristics

Table 25: DC Characteristics

Symbol	Parameter	Min	Max	Unit	Notes
V_{DD}	Supply Voltage	1.62	1.98	V	
V_{DDQ}	I/O Supply Voltage	1.62	1.98	V	
V_{IH}	Input high voltage	V_{DDQ}-0.4	V_{DDQ}+0.3	V	
V_{IL}	Input low voltage	-0.3	0.4	V	
V_{OH}	Output high voltage (I_{OH}=-0.2mA)	0.8 V_{DDQ}		V	
V_{OL}	Output low voltage (I_{OL}=+0.2mA)		0.2 V_{DDQ}	V	
I_{LI}	Input Pin leakage current		1	µA	
I_{LO}	Output Pin leakage current		1	µA	
ICC	Read/Write @13MHz		7.5	mA	1
	Read/Write @133MHz		28.5	mA	1
	Read/Write @166MHz		33	mA	1
	Read/Write @200MHz		39	mA	1
ISB_{EXT}	Standby current (105C)		1100	µA	2
ISB_{STD}	Standby current (85C)		680	µA	2
ISB_{STDDPD}	Standby current (Deep Power Down -40°C to 85°C)		20	µA	7

Note 1: Current is only characterized.

Note 2: Without CLK toggling. ISB will be higher if CLK is toggling.

Note 3: 0.5x Refresh.

Note 4: Typical mean $ISB_{STDROOM}$ 90uA.

Note 5: Current is only guaranteed after 150ms into Halfsleep™ mode.

Note 6: Typical mean ISB_{STDHS} 40uA

Note 7: Typical mean ISB_{STDDPD} 8uA at 25°C

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved

深圳市满度科技有限公司 Tel:150-1290-5940
Web:www.manduic.com Email:sales@manduic.com

8.6 ISB Partial Array Refresh Current

Table 26:Typical-mean PASR Current @ 25°C

Standby Current @ 25°C			
PASR	**ISB –typical mean**	**Unit**	**Notes**
Full	90	µA	1, 2
1/2	80	µA	1, 2
1/4	75	µA	1, 2
1/8	72	µA	1, 2
Halfsleep™ Current @ 25°C			
PASR	**I Halfsleep™-typical mean**	**Unit**	**Notes**
Full	40	µA	1,2,3
1/2	30	µA	1,2,3
1/4	25	µA	1,2,3
1/8	22	µA	1,2,3

Table 27: Typical-mean PASR Current @ 105°C /85°C

Standby Current @ 85°C			
PASR	**ISB –typical mean**	**Unit**	**Notes**
Full	530	µA	2
1/2	370	µA	2
1/4	290	µA	2
1/8	250	µA	2
Halfsleep™ Current @ 85°C			
PASR	**I Halfsleep™-typical mean**	**Unit**	**Notes**
Full	440	µA	2, 3
1/2	300	µA	2, 3
1/4	230	µA	2, 3
1/8	190	µA	2, 3

Note1: Current at 25°C is only attainable by enabling 0.5x Refresh Frequency (see Table 17)

Note2: PASR Current is only characterized without CLK toggling.

Note3: Spec'd Halfsleep™ current is only guaranteed after 150ms into Halfsleep™ mode.

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved

深圳市满度科技有限公司 Tel:150-1290-5940
Web:www.manduic.com Email:sales@manduic.com

8.7 AC Characteristics

Table 28: READ/WRITE Timing

		BGA 1.8V Only							
		-7(133MHz)		-6(166MHz)		-5(200MHz)			
Symbol	**Parameter**	**Min**	**Max**	**Min**	**Max**	**Min**	**Max**	**Unit**	**Notes**
tCLK	CLK period	7.5		6		5		ns	
tCH/tCL	Clock high/low width	0.45	0.55	0.45	0.55	0.45	0.55	tCLK	
tKHKL	CLK rise or fall time		1.2		1		0.8	ns	
tCPH	CE# HIGH between subsequent burst operations	15		18		24		ns	
tCEM	CE# low pulse width (excluding Halfsleep™ exit)		4		4		4	µs	Standard temp
			1		1		1	µs	Extended temp
tCEM	CE# low pulse width	3		3		3		tCLK	Minimum 3
tCSP	CE# setup time to CLK rising edge	2		2		2		ns	
tCSP2	CE# rising edge to next CLK falling edge	1.5		1.5		1.5		ns	
tCHD	CE# hold time from CLK falling edge	2		2		2		ns	
tSP	Setup time to active CLK edge	0.8		0.6		0.5		ns	
tHD	Hold time from active CLK edge	0.8		0.6		0.5		ns	Max 0.75*tCLK
tHZ	Chip disable to DQ/DQS output		6		6		6	ns	
tRBXwait	Row Boundary Crossing Wait Time	30	65	30	65	30	65	ns	
tRC	Write Cycle	60		60		60		ns	
tRC	Read Cycle	60		60		60		ns	
tHS	Minimum Halfsleep™ duration	150		150		150		µs	
tXHS	Halfsleep™ Exit CE# low to CLK setup time	150		150		150		µs	
tXPHS	Halfsleep™ Exit CE# low pulse width	60		60		60		ns	
			tCEM		tCEM		tCEM	µs	Standard temp
								µs	Extended temp
tDPD	Minimum DPD duration	500		500		500		µs	
tDPDp	Minimum period between DPD	500		500		500		µs	
tXDPD	DPD CE# low to CLK setup time	150		150		150		µs	
tXPDPD	DPD Exit CE# low pulse width	60		60		60		ns	
tPU	Device Initialization	150		150		150		µs	
tRP	RESET# low pulse width	1		1		1		µs	
tRST	Reset to CMD valid	2		2		2		µs	

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved
深圳市满度科技有限公司 Tel:150-1290-5940
Web:www.manduic.com Email:sales@manduic.com

Table 29: DDR timing parameters

		BGA 1.8V Only							
		-7(133MHz)		-6(166MHz)		-5(200MHz)			
Symbol	**Parameter**	**Min**	**Max**	**Min**	**Max**	**Min**	**Max**	**Unit**	**Notes**
tCQLZ	Clock rising edge to DQS low	1	6	1	6	1	6	ns	
tDQSCK	DQS output access time from CLK	2	6.5	2	6.5	2	6.5	ns	
tDQSQ	DQS – DQ skew		0.6		0.5		0.4	ns	
tDS	DQ and DM input setup time	0.8		0.6		0.5		ns	
tDH	DQ and DM input hold time	0.8		0.6		0.5		ns	

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

9 Change Log

Version	Who	Date	Description
0.29		Jul 08, 2019	Initial Version derived from E7 XX 0.29; Update table 28
0.3		Jul 16, 2019	Update ball assignment, tXPHS
0.31		Jul 17, 2019	Update VDDQ information
0.32		Aug 2, 2019	Updated note for RFU, NC, and DC Characteristics; Updated Deep Power Down Mode description and PASR table
0.33		Aug 23, 2019	Updated tHS, package code, note for ball assignment
0.34		Aug 29, 2019	Updated note for DC Characteristics
0.35		Dec 12, 2019	Updated Figure 15 and Figure 17
0.40		Jun 11, 2020	Drive strength: 25 Ohm (default). Remove all room temperature maximum spec.(Standby mode & Halfsleep™ mode).
1.00		Jul 27, 2020	ICC updated. Revised Typical-mean PASR Current.
1.1		Oct 18, 2021	tCEM revised data by BD suggest (E7_OPI_256Mb/512Mb) Standard temp: 2 us -> 4 us. Extended temp: 0.5 us -> 1 us.
1.1a		Dec 29, 2021	Revised some figure can't display grid (ex: Don't care/Undefined) when conversion to PDF.
1.2	Kim	Aug 31, 2022	Revised typos and add tCSP2 SPEC

AP Memory reserves the right to change products and/or specifications without notice
@2021 AP Memory. All rights reserved
深圳市满度科技有限公司 Tel:150-1290-5940
Web:www.manduic.com Email:sales@manduic.com