512K X 16 BIT HIGH SPEED CMOS SRAM

FEATURES

- Fast access time : 10ns
- **low power consumption:**
  Operating current:
  80mA (TYP. 10/ns)
  Standby current:
  3mA(TYP)
- Single 3.3V power supply
- All inputs and outputs TTL compatible
- Fully static operation
- Tri-state output
- Data byte control : LB# (DQ0 ~ DQ7)
  UB# (DQ8 ~ DQ15)
- Data retention voltage : 1.5V (MIN.)
- **Green package available**
- Package : 44-pin 400 mil TSOP-II
  48-ball 6mmx8mm TFBGA

GENERAL DESCRIPTION

The AS7C38098A is a 8M-bit high speed CMOS static random access memory organized as 512K words by 16 bits. It is fabricated using very high performance, high reliability CMOS technology. Its standby current is stable within the range of operating temperature.


The AS7C38098A operates from a single power supply of 3.3V and all inputs and outputs are fully TTL compatible

PRODUCT FAMILY

Product Family	Operating Temperature	Vcc Range	Speed	Power Dissipation	
				Standby(I_{SB1},TYP.)	Operating(I_{CC1},TYP.)
AS7C38098A	-40 ~ 85℃	2.7 ~ 3.6V	10ns	3mA	80/70mA

512K X 16 BIT HIGH SPEED CMOS SRAM

FUNCTIONAL BLOCK DIAGRAM

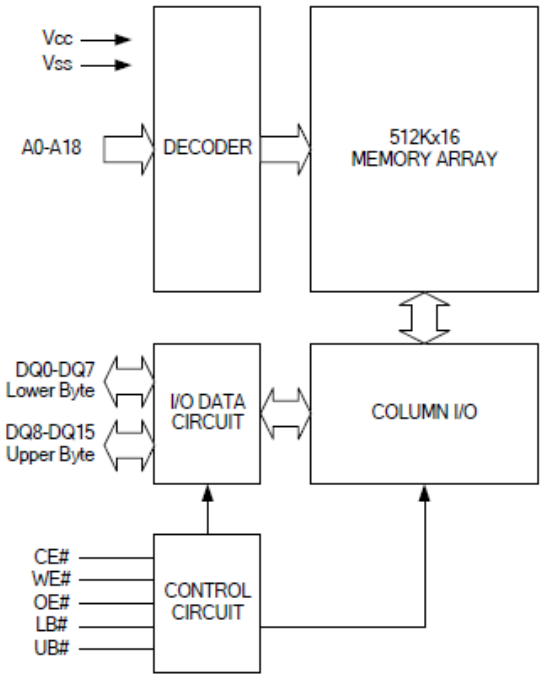


PIN DESCRIPTION


SYMBOL	DESCRIPTION
A0 - A18	Address Inputs
DQ0 – DQ15	Data Inputs/Outputs
CE#	Chip Enable Input
WE#	Write Enable Input
OE#	Output Enable Input
LB#	Lower Byte Control
UB#	Upper Byte Control
V_{CC}	Power Supply
V_{SS}	Ground

512K X 16 BIT HIGH SPEED CMOS SRAM

PIN CONFIGURATION

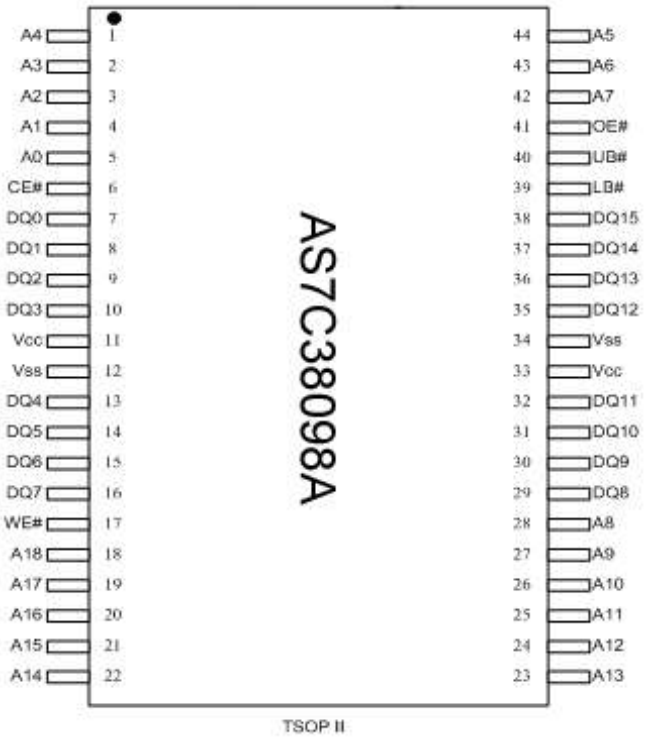

TSOP II

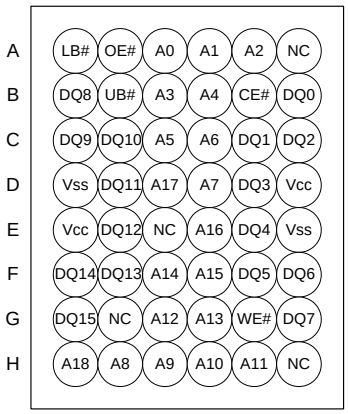

TFBGA

ABSOLUTE MAXIMUM RATINGS*

PARAMETER	SYMBOL	RATING	UNIT
Terminal Voltage with Respect to V_{SS}	V_{TERM}	-0.5 to 4.6	V
Operating Temperature	T_A	-40 to 85	℃
Storage Temperature	T_{STG}	-65 to 150	℃
Power Dissipation	P_D	1	W
DC Output Current	I_{OUT}	50	mA
Soldering Temperature (under 10 sec)	T_{SOLDER}	260	℃

*Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to the absolute maximum rating conditions for extended period may affect device reliability.

512K X 16 BIT HIGH SPEED CMOS SRAM

TRUTH TABLE

MODE	CE#	OE#	WE#	LB#	UB#	I/O OPERATION		SUPPLY CURRENT
						DQ0-DQ7	DQ8-DQ15	
Standby	H	X	X	X	X	High – Z	High – Z	I_{SB1}
Output Disable	L	H	H	X	X	High – Z	High – Z	I_{CC}
	L	X	X	H	H	High – Z	High – Z	
Read	L	L	H	L	H	D_{OUT}	High – Z	I_{CC}
	L	L	H	H	L	High – Z	D_{OUT}	
	L	L	H	L	L	D_{OUT}	D_{OUT}	
Write	L	X	L	L	H	D_{IN}	High – Z	I_{CC}
	L	X	L	H	L	High – Z	D_{IN}	
	L	X	L	L	L	D_{IN}	D_{IN}	

Note: H = V_{IH}, L = V_{IL}, X = Don't care.

DC ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITION		MIN.	TYP.*4	MAX.	UNIT
Supply Voltage	V_{CC}		-10	2.7	3.3	3.6	V
Input High Voltage	V_{IH}*1			2.2	-	V_{CC}+0.3	V
Input Low Voltage	V_{IL}*2			- 0.3	-	0.8	V
Input Leakage Current	I_{LI}	$V_{CC} \geqq V_{IN} \geqq V_{SS}$		- 1	-	1	μA
Output Leakage Current	I_{LO}	$V_{CC} \geqq V_{OUT} \geqq V_{SS}$, Output Disabled		- 1	-	1	μA
Output High Voltage	V_{OH}	I_{OH} = -8mA		2.4	-	-	V
Output Low Voltage	V_{OL}	I_{OL} =4mA		-	-	0.4	V
Average Operating Power supply Current	Icc	CE# = V_{IL} , $I_{I/O}$ = 0mA ;f=max	-10	-	100	130	mA
	Icc_1	CE# ≧V_{CC} - 0.2V, Other pin is at 0.2V or Vcc-0.2V, $I_{I/O}$ = 0mA;f=max	-10		80	110	mA
Standby Power Supply Current	Isb	CE# ≧Vih Other pin is at Vil or Vih				40	mA
Standby Power Supply Current	I_{SB1}	CE# ≧V_{CC} - 0.2V; Other pin is at 0.2V or Vcc-0.2V			3	25	mA

Notes:
1. V_{IH}(max) = V_{CC} + 3.0V for pulse width less than 10ns.
2. V_{IL}(min) = V_{SS} - 3.0V for pulse width less than 10ns.
3. Over/Undershoot specifications are characterized, not 100% tested.
4. Typical values are included for reference only and are not guaranteed or tested.

Typical valued are measured at V_{CC} = V_{CC}(TYP.) and T_A = 25℃

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

512K X 16 BIT HIGH SPEED CMOS SRAM

CAPACITANCE (T_A = 25℃, f = 1.0MHz)

PARAMETER	SYMBOL	MIN.	MAX	UNIT
Input Capacitance	C_{IN}	-	8	pF
Input/Output Capacitance	$C_{I/O}$	-	10	pF

Note : These parameters are guaranteed by device characterization, but not production tested.

AC TEST CONDITIONS

speed	10ns
Input Pulse Levels	0.2V to Vcc-0.2V
Input Rise and Fall Times	3ns
Input and Output Timing Reference Levels	1.5V
Output Load	C_L = 30pF + 1TTL, I_{OH}/I_{OL} = -4mA/8mA

AC ELECTRICAL CHARACTERISTICS

(1) READ CYCLE

PARAMETER	SYM.	AS7C38098A-10		UNIT
		MIN.	MAX.	
Read Cycle Time	t_{RC}	10	-	ns
Address Access Time	t_{AA}	-	10	ns
Chip Enable Access Time	t_{ACE}	-	10	ns
Output Enable Access Time	t_{OE}	-	4.5	ns
Chip Enable to Output in Low-Z	t_{CLZ}*	2	-	ns
Output Enable to Output in Low-Z	t_{OLZ}*	0	-	ns
Chip Disable to Output in High-Z	t_{CHZ}*	-	4	ns
Output Disable to Output in High-Z	t_{OHZ}*	-	4	ns
Output Hold from Address Change	t_{OH}	2	-	ns
LB#, UB# Access Time	t_{BA}	-	4.5	ns
LB#, UB# to High-Z Output	t_{BHZ}*	-	4	ns
LB#, UB# to Low-Z Output	t_{BLZ}*	0	-	ns

(2) WRITE CYCLE


PARAMETER	SYM.	AS7C38098A-10		UNIT
		MIN.	MAX.	
Write Cycle Time	t_{WC}	10	-	ns
Address Valid to End of Write	t_{AW}	8	-	ns
Chip Enable to End of Write	t_{CW}	8	-	ns
Address Set-up Time	t_{AS}	0	-	ns
Write Pulse Width	t_{WP}	8	-	ns
Write Recovery Time	t_{WR}	0	-	ns
Data to Write Time Overlap	t_{DW}	6	-	ns
Data Hold from End of Write Time	t_{DH}	0	-	ns
Output Active from End of Write	t_{OW}*	2	-	ns
Write to Output in High-Z	t_{WHZ}*	-	4	ns
LB#, UB# Valid to End of Write	t_{BW}	8	-	ns

*These parameters are guaranteed by device characterization, but not production tested.


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

TIMING WAVEFORMS

READ CYCLE 1 (Address Controlled) (1,2)

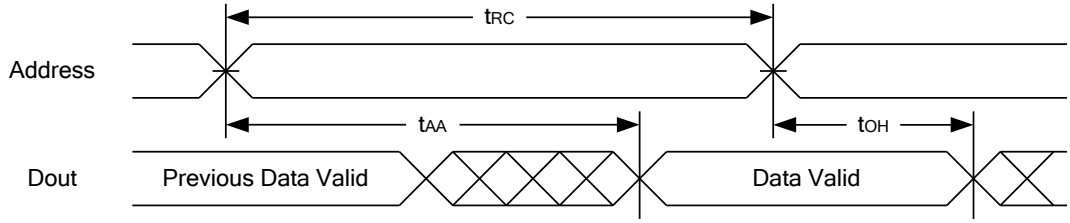


READ CYCLE 2 (CE# and OE# Controlled) (1,3,4,5)

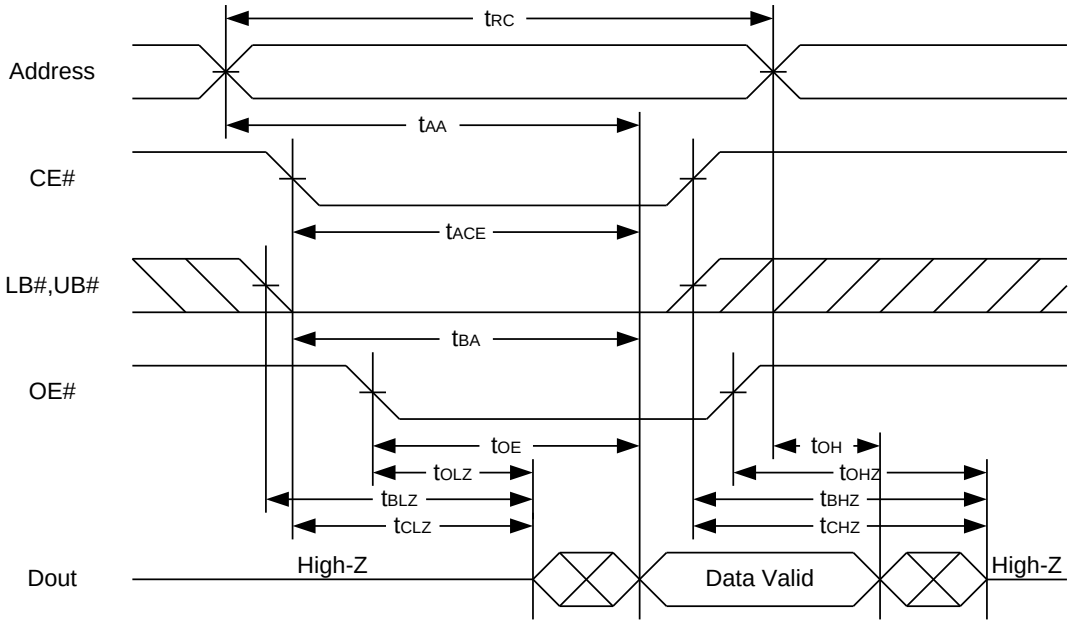


Notes :
1.WE#is high for read cycle.
2.Device is continuously selected OE# = low, CE# = low, LB# or UB# = low.
3.Address must be valid prior to or coincident with CE# = low, LB# or UB# = low transition; otherwise t_{AA} is the limiting parameter.
4.t_{CLZ}, t_{BLZ}, t_{OLZ}, t_{CHZ}, t_{BHZ} and t_{OHZ} are specified with C_L = 5pF. Transition is measured ±500mV from steady state.
5.At any given temperature and voltage condition, t_{CHZ} is less than t_{CLZ} , t_{BHZ} is less than t_{BLZ}, t_{OHZ} is less than t_{OLZ}.


WRITE CYCLE 1 (WE# Controlled) (1,2,3,5,6)

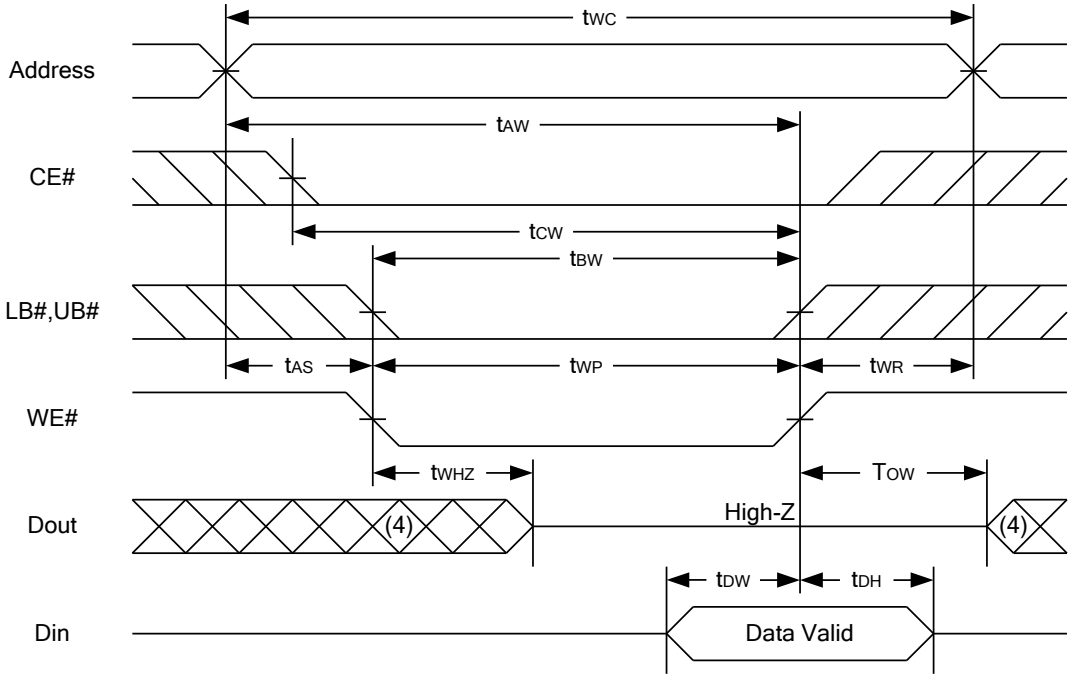

WRITE CYCLE 2 (CE# Controlled) (1,2,5,6)

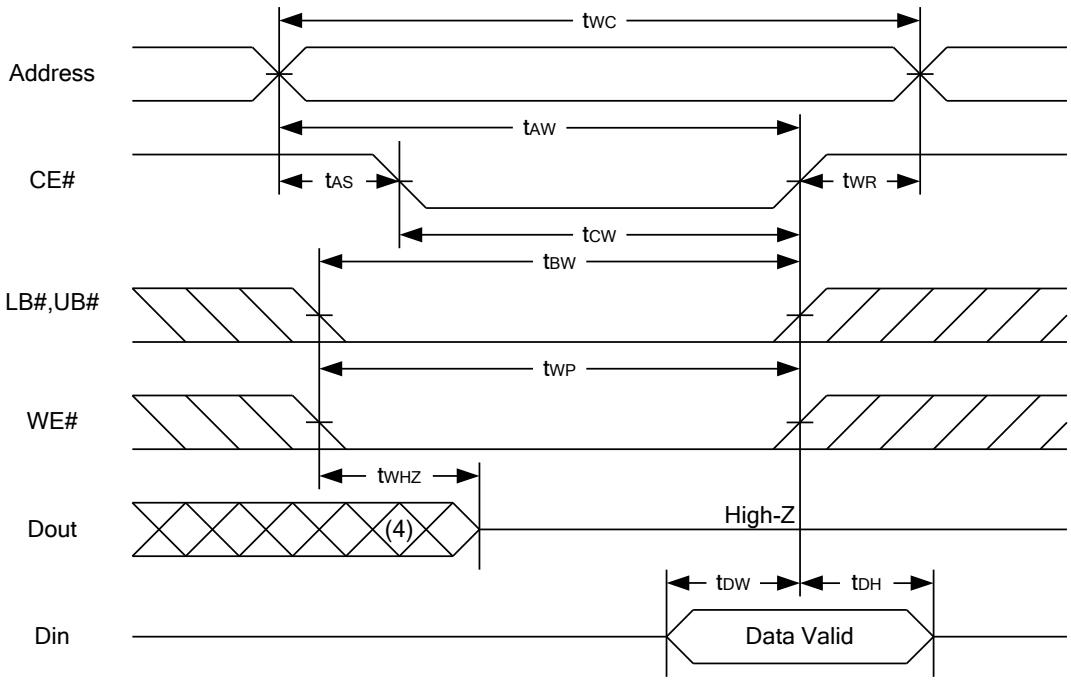

WRITE CYCLE 3 (LB#,UB# Controlled) (1,2,5,6)

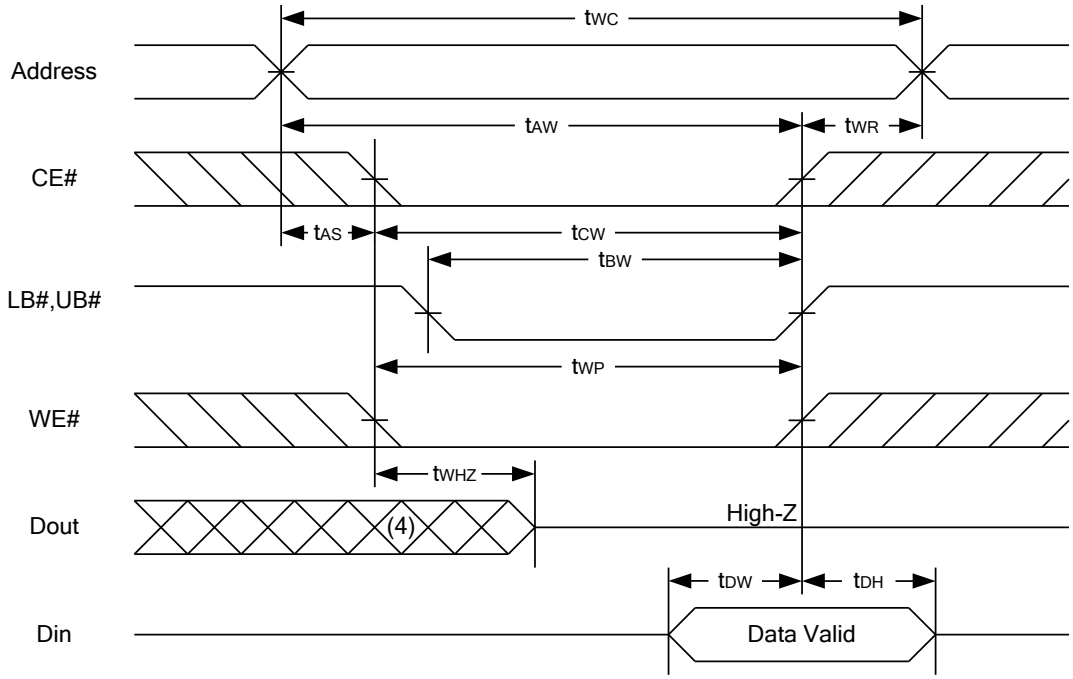

Notes :
1.WE#,CE#, LB#, UB# must be high during all address transitions.
2.A write occurs during the overlap of a low CE#, low WE#, LB# or UB# = low.
3.During a WE# controlled write cycle with OE# low, t_{WP} must be greater than $t_{WHZ} + t_{DW}$ to allow the drivers to turn off and data to be placed on the bus.
4.During this period, I/O pins are in the output state, and input signals must not be applied.
5.If the CE#, LB#, UB# low transition occurs simultaneously with or after WE# low transition, the outputs remain in a high impedance state.
6.t_{OW} and t_{WHZ} are specified with C_L = 5pF. Transition is measured ±500mV from steady state.


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

DATA RETENTION CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
V_{CC} for Data Retention	V_{DR}	CE# ≧ V_{CC} - 0.2V	1.5	-	3.6	V
Data Retention Current	I_{DR}	V_{CC} = 1.5V CE# ≧V_{CC} - 0.2V; Other pin is at 0.2V or Vcc-0.2V	- -	3	25	mA
Chip Disable to Data Retention Time	t_{CDR}	See Data Retention Waveforms (below)	0	-	-	ns
Recovery Time	t_R		t_{RC*}	-	-	ns

t_{RC*} = Read Cycle Time


DATA RETENTION WAVEFORM

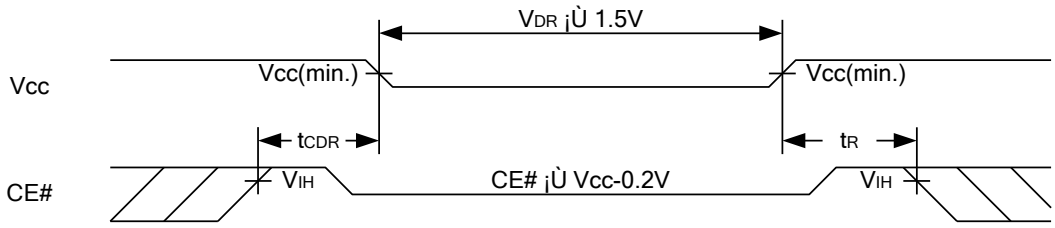



512K X 16 BIT HIGH SPEED CMOS SRAM


PACKAGE OUTLINE DIMENSION

44-pin 400mil TSOP-Ⅱ Package Outline Dimension

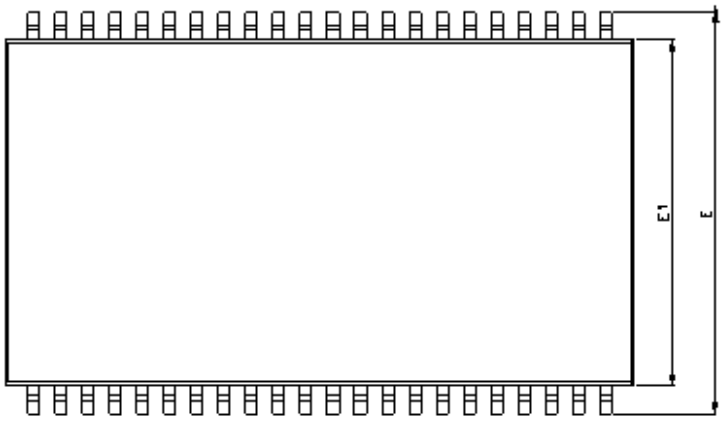



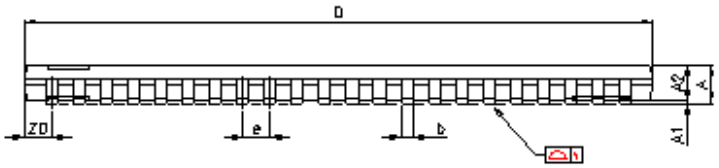


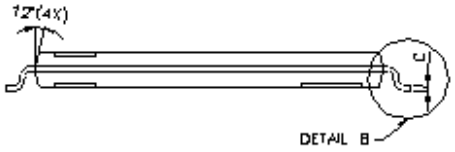

SYMBOLS	DIMENSIONS IN MILLMETERS			DIMENSIONS IN MILS		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	-	-	1.20	-	-	47.2
A1	0.05	0.10	0.15	2.0	3.9	5.9
A2	0.95	1.00	1.05	37.4	39.4	41.3
b	0.30	-	0.45	11.8	-	17.7
c	0.12	-	0.21	4.7	-	8.3
D	18.212	18.415	18.618	717	725	733
E	11.506	11.760	12.014	453	463	473
E1	9.957	10.160	10.363	392	400	408
e	-	0.800	-	-	31.5	-
L	0.40	0.50	0.60	15.7	19.7	23.6
ZD	-	0.805	-	-	31.7	-
y	-	-	0.076	-	-	3
Θ	0^o	3^o	6^o	0^o	3^o	6^o

512K X 16 BIT HIGH SPEED CMOS SRAM

48-ball 6mm × 8mm TFBGA Package Outline Dimension

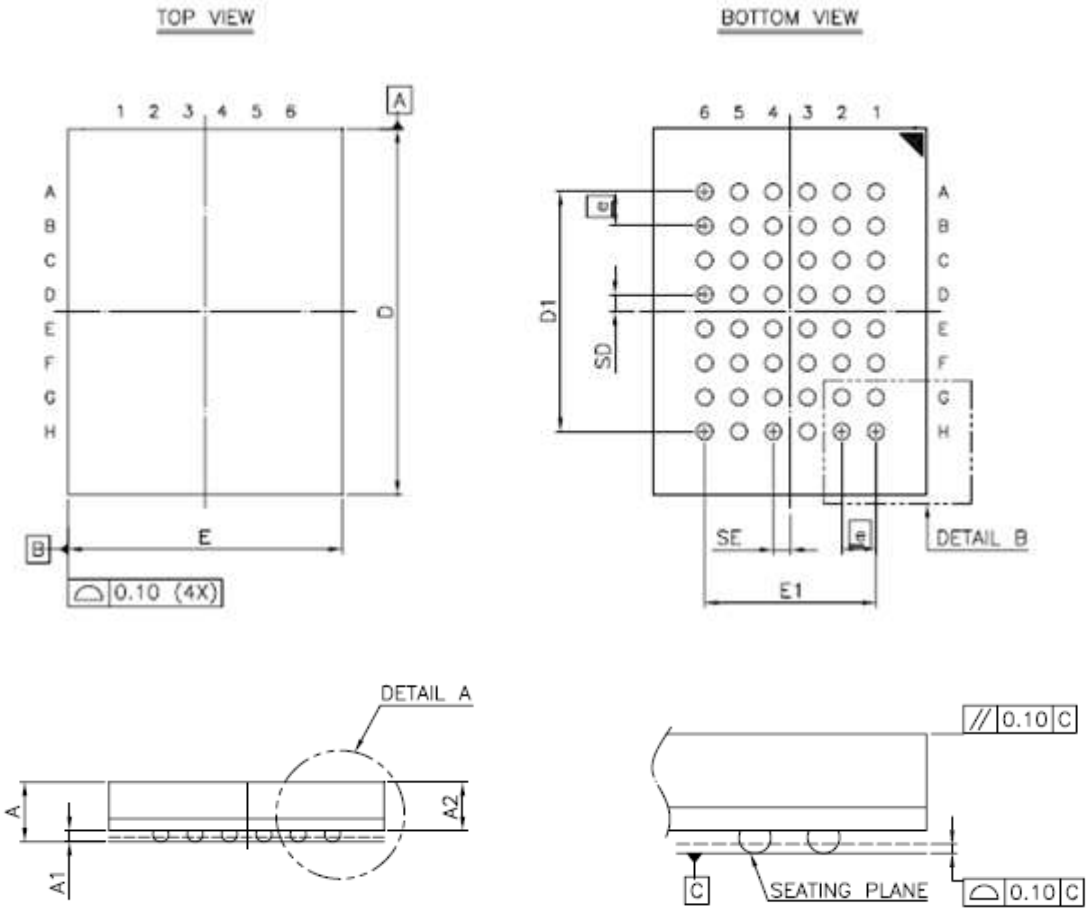


DETAIL A

SYM.	DIMENSION (mm)			DIMENSION (inch)		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	—	—	1.40	—	—	0.055
A1	0.20	0.25	0.30	0.008	0.010	0.012
A2	—	—	1.05	—	—	0.041
b	0.30	0.35	0.40	0.012	0.014	0.016
D	7.95	8.00	8.05	0.313	0.315	0.317
D1	5.25 BSC			0.207 BSC		
E	5.95	6.00	6.05	0.234	0.236	0.238
E1	3.75 BSC			0.148 BSC		
SE	0.375 TYP			0.015 TYP		
SD	0.375 TYP			0.015 TYP		
e	0.75 BSC			0.030 BSC		

NOTE:
1. CONTROLLING DIMENSION : MILLIMETER.
2. REFERENCE DOCUMENT : JEDEC MO-207.

512K X 16 BIT HIGH SPEED CMOS SRAM

ORDERING INFORMATION

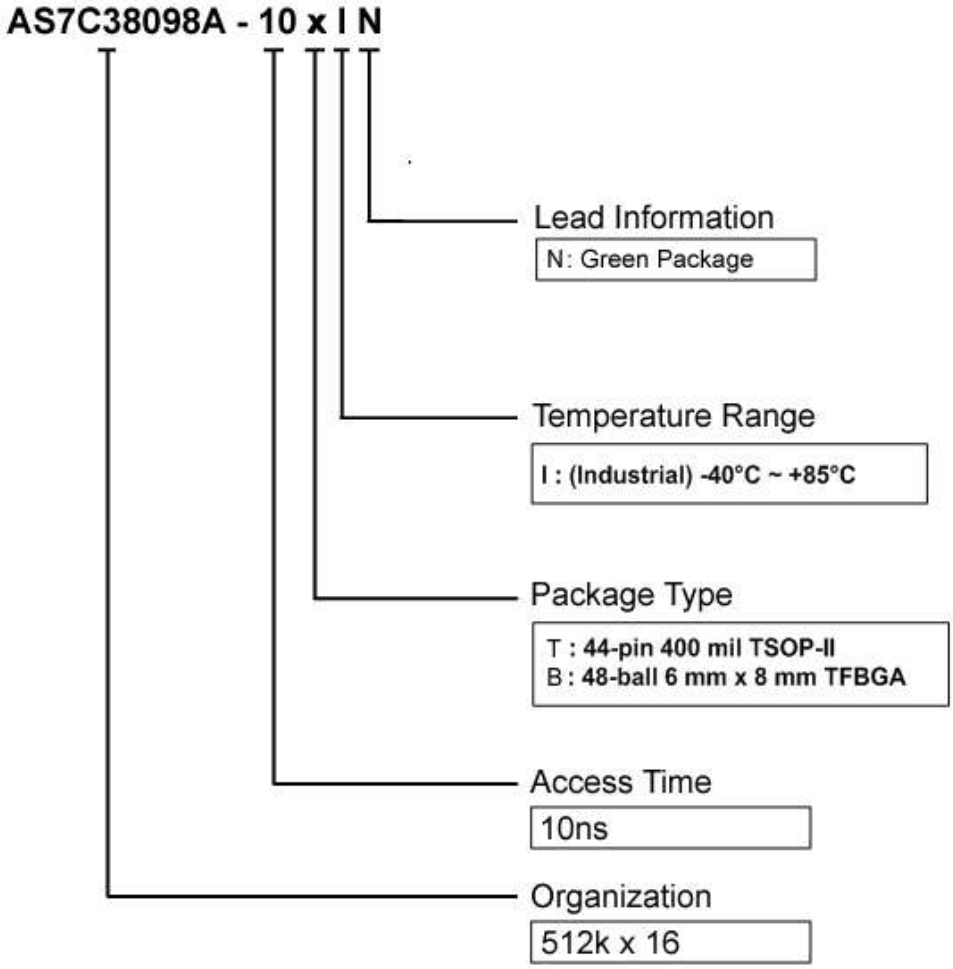

BGA : 48-ball 6 mm x 8 mm TFBGA	Industrial -40°C ~ +85°C	AS7C38098A-10BIN
TSOP II : 44-pin 400 mil TSOP II	Industrial -40°C ~ +85°C	AS7C38098A-10TIN

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com