# CT815x

## Integrated Omnipolar TMR Analog Sensor

### FEATURES AND BENEFITS

- Sensitivity and magnetic field range:
  - □ S = 5 mV/V/G, $B_{ANA}$ = ±80 G
- Analog output mode current consumption: ~1.3 µA
  - □ Current consumption in digital output only: ~150 nA @ $V_{DD}$ = 1.8 V and $f_S$ = 12.5 Hz
- Supply voltage range: 1.7 to 5.5 V
- Sensor polarity: omnipolar
- Sample and hold analog output @ $f_S$ = 100 Hz
- Dual analog and digital output operation capability
  - □ Digital output is push-pull
- Undervoltage lockout (UVLO)

### APPLICATIONS

- IoT devices
- Smartphones, tablets, and laptops
- Door or lid closure
- Tamper-proofing for utility smart meters
- Fluid level sensing/detection
- Proximity detection
- Motor controllers
- Gimbals for camera systems in drones/UAVs
- Industrial machinery/robots
- Medical devices

### PACKAGES:



3-lead SOT-23



5-lead SOT-23

*Not to scale.*
*4-lead LGA package not shown.*

### DESCRIPTION

The CT815x series of tunnel magnetoresistance (TMR) analog sensors (with option for digital latch output) are designed for consumer and industrial applications. The devices are based on Allegro patented XtremeSense™ TMR technology with integrated CMOS process to provide a monolithic solution for superior sensing performance. The CT815x digital latches offer magnetic operation over the operating temperature range.

The CT815x is an analog sensor product family that provides a linear sample-and-hold (S&H) analog output voltage with a sampling frequency of 100 Hz.

The CT8152 is a TMR sensor that combines both analog and digital outputs in a single chip. It uses the digital output to turn on the analog output so that it can remain in an ultra-low power state until the analog mode is enabled. When $B_{RP}$ is triggered in digital mode, the analog output function will start operating.

This product family has very low power consumption—as low as 1.3 µA in analog output mode and 150 nA in digital output mode—which makes it ideal for battery-operated products where minimal current consumption is required.

For applications that require a very small form factor and low profile, the CT815x sensors are assembled in a 4-lead LGA package. The CT8150 is also available in an industry-standard 3-lead SOT-23 package while CT8152 is offered in a 5-lead SOT23 package to support high-volume manufacturing.

### FUNCTIONAL BLOCK DIAGRAMS

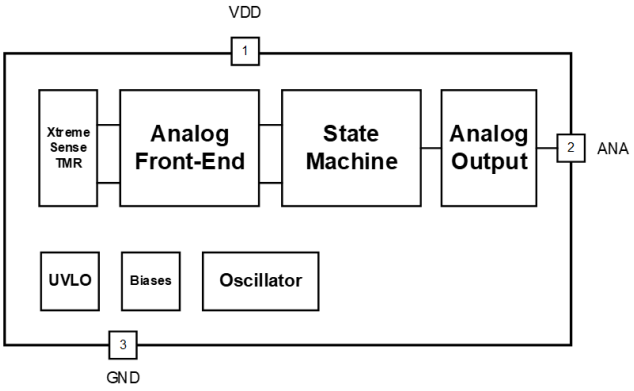



**Figure 1: CT8150 with Analog Output Block Diagram**

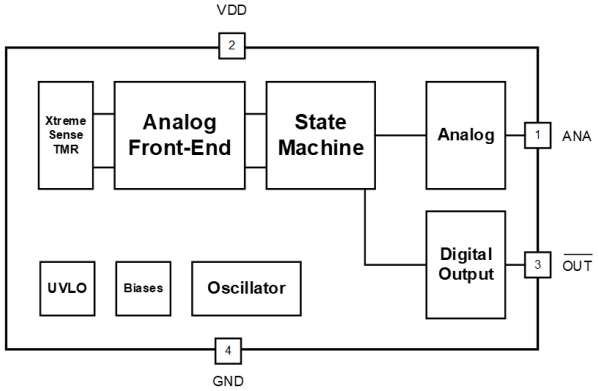



**Figure 2: CT8152 with Dual Analog and Digital Outputs Block Diagram**

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com
微信扫码咨询客服

## Table of Contents

Features and Benefits ..... 1
Description ..... 1
Applications ..... 1
Functional Block Diagrams ..... 1
Selection Guide ..... 2
Absolute Maximum Ratings ..... 3
Recommended Operating Conditions ..... 3
Thermal Characteristics ..... 3
Pinout Diagrams and Terminal Lists ..... 4
Electrical Characteristics ..... 5
Functional Description ..... 14
Applications Information ..... 16
XtremeSense TMR Current Sensor Location ..... 17
Package Outline Drawings ..... 18
Tape and Reel Pocket Drawings and Dimensions ..... 21
Package Information ..... 24
Revision History ..... 25

### SELECTION GUIDE

| Part Number | Operating Temp. Range (°C) | Sensor Type | Analog Output | Digital Output ($B_{OP}/B_{RP}$) | S (mV/V/G) | Range (G) | Package | Packing |
|---|---|---|---|---|---|---|---|---|
| CT8150PC-IS3 | –40 to 85 | Omnipolar | Yes | No | 5 | ±80 | 3-lead SOT23 | Tape and Reel |
| CT8150PC-HS3 | –40 to 125 | | | | | | | |
| CT8150PC-IL4 | –40 to 85 | Omnipolar | Yes | No | 5 | ±80 | 4-lead LGA | Tape and Reel |
| CT8150PC-HL4 | –40 to 125 | | | | | | | |
| CT8152PC-IS5 | –40 to 85 | Omnipolar | Yes | Yes (60 G/40 G) | 5 | ±80 | 5-lead SOT23 | Tape and Reel |
| CT8152PC-HS5 | –40 to 125 | | | | | | | |
| CT8152PC-IL4 | –40 to 85 | Omnipolar | Yes | Yes (60 G/40 G) | 5 | ±80 | 4-lead LGA | Tape and Reel |
| CT8152PC-HL4 | –40 to 125 | | | | | | | |



深圳市满度科技有限公司
Web:www.manduic.com
ALLEGRO microsystems
Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com
Tel:150-1290-5940
Email:sales@manduic.com

## ABSOLUTE MAXIMUM RATINGS [1]

| Characteristic | Symbol | Notes | Rating | Unit |
|---|---|---|---|---|
| Supply Voltage | $V_{DD}$ | | –0.3 to 6.0 | V |
| Push-Pull Output (Active Low) | $V_{OUT_PP}$ | | –0.3 to $V_{DD}$ + 0.3 [2] | V |
| Analog Input/Output Pins Maximum Voltage | $V_{I/O}$ | | –0.3 to $V_{DD}$ + 0.3 [2] | V |
| Input and Output Current | $I_{IN}$, $I_{OUT}$ | | ±20.0 | mA |
| Analog Output | $I_{ANA}$ | | ±140 | µA |
| Maximum External Magnetic Field | $B_{MAX}$ | $T_A$ = 25°C | ±2000 | G |
| Electrostatic Discharge Protection Level | ESD | Human Body Model (HBM) per JESD22-A114 | ±4.0 (min) | kV |
| | | Charged Device Model (CDM) per JESD22-C101 | ±0.5 (min) | kV |
| Junction Temperature | $T_J$ | | –40 to 150 | °C |
| Storage Temperature | $T_{STG}$ | | –65 to 155 | °C |
| Lead Soldering Temperature | $T_L$ | 10 seconds | 260 | °C |

[1] Stresses exceeding the absolute maximum ratings may damage the CT815x and may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only. Allegro does not recommend exceeding or designing to absolute maximum ratings

[2] The lower of $V_{DD}$ + 0.3 V or 6.0 V.

## RECOMMENDED OPERATING CONDITIONS [1]

| Characteristic | Symbol | Notes | Min. | Typ. | Max. | Unit |
|---|---|---|---|---|---|---|
| Supply Voltage Range | $V_{DD}$ | | 1.7 | 3.3 | 5.5 | V |
| Output Voltage Range | $V_{OUT}$ | | 0 | – | $V_{DD}$ | V |
| Operating Magnetic Flux | $B_{OP}$ | | – | – | 300 | G |
| Output Current | $I_{OUT}$ | | – | – | ±3.0 | mA |
| Bypass Capacitor | $C_{BYP}$ | | – | 1.0 | – | µF |
| Operating Ambient Temperature | $T_A$ | Industrial | –40 | 25 | 85 | °C |
| | | Extended Industrial | –40 | 25 | 125 | °C |
| Operating Junction Temperature | $T_J$ | | –40 | – | 125 | °C |

[1] The Recommended Operating Conditions table defines the conditions for actual operation of the CT815x. Recommended operating conditions are specified to ensure optimal performance to the specifications. Allegro does not recommend exceeding them or designing to absolute maximum ratings.

## THERMAL CHARACTERISTICS

| Characteristic | Symbol | Test Conditions | | Value | Unit |
|---|---|---|---|---|---|
| Junction-to-Ambient Thermal Resistance | $R_{\theta JA}$ | Junction-to-ambient thermal resistance is a function of application and board layout and is determined in accordance to JEDEC standard JESD51 for a four (4) layer 2s2p FR-4 printed circuit board (PCB) with 2 oz. of copper (Cu) and 4 oz. of copper (Cu) or more for 65 A. Special attention must be paid not to exceed junction temperature $T_{J(MAX)}$ at a given ambient temperature $T_A$. | SOT23-3 | 202 | °C/W |
| | | | LGA-4 | 165 | °C/W |



深圳市满度科技有限公司
Web:www.manduic.com
ALLEGRO microsystems
Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com
Tel:150-1290-5940
Email:sales@manduic.com

## PINOUT DIAGRAMS AND TERMINAL LISTS

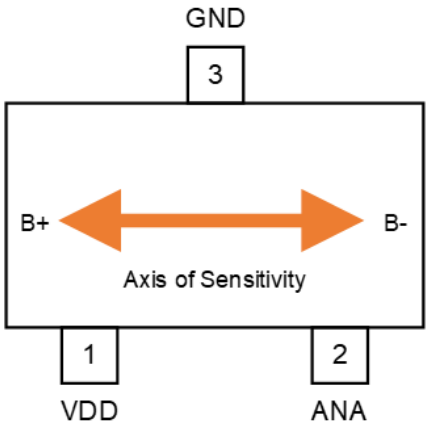



**Figure 3: CT8150 3-Lead SOT23 Package for Analog Output**

**Terminal List**

| Number | Name | Function |
|---|---|---|
| 1 | VDD | Supply Voltage |
| 2 | ANA | Analog Output |
| 3 | GND | Ground |

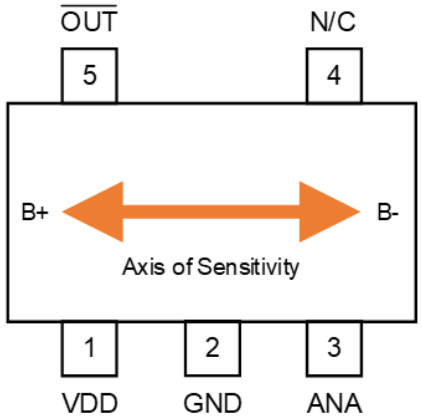



**Figure 4: CT8152 5-Lead SOT23 Package for Analog Output**

**Terminal List**

| Number | Name | Function |
|---|---|---|
| 1 | VDD | Supply Voltage |
| 2 | GND | Ground |
| 3 | ANA | Analog Output |
| 4 | NC | No Connect |
| 5 | $\overline{\text{OUT}}$ | Output Signal (Active Low) |

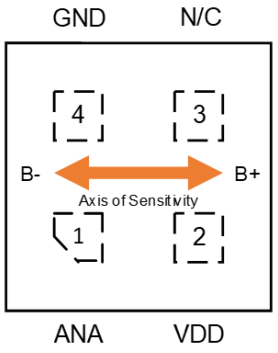



**Figure 5: CT8150 4-Lead LGA Package with Analog Output (Top View)**

**Terminal List**

| Number | Name | Function |
|---|---|---|
| 1 | ANA | Analog Output |
| 2 | VDD | Supply Voltage |
| 3 | NC | No Connect |
| 4 | GND | Ground |





**Figure 6: CT8152 4-Lead LGA Package with Analog and Digital Outputs (Top View)**

**Terminal List**

| Number | Name | Function |
|---|---|---|
| 1 | ANA | Analog Output |
| 2 | VDD | Supply Voltage |
| 3 | $\overline{\text{OUT}}$ | Output Signal (Active Low) |
| 4 | GND | Ground |



深圳市满度科技有限公司
Web:www.manduic.com
Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com
Tel:150-1290-5940
Email:sales@manduic.com

**ELECTRICAL CHARACTERISTICS:** Valid for $V_{DD}$ = 1.7 to 5.5 V, $C_{BYP}$ = 1.0 µF, and $T_A$ = –40°C to 125°C, typical values are $V_{DD}$ = 3.3 V and $T_A$ = 25°C, unless otherwise specified

| Characteristics | Symbol | Test Conditions | Min. | Typ. | Max. | Unit |
|---|---|---|---|---|---|---|
| **TIMINGS** | | | | | | |
| Power-On Time [1] | $t_{ON}$ | $V_{DD}$ ≥ 1.7 V | – | 50 | 75 | µs |
| Active Mode Time [1] | $t_{ACTIVE}$ | | – | 2.6 | – | µs |
| **PROTECTION** | | | | | | |
| Undervoltage Lockout | $V_{UVLO}$ | Rising $V_{DD}$ | – | 1.60 | 1.64 | V |
| | | Falling $V_{DD}$ | 1.44 | 1.53 | – | V |
| UVLO Hysteresis | $V_{UV_HYS}$ | | – | 70 | – | mV |

[1] Guaranteed by design and characterization; not tested in production.

## TYPICAL TIMING CHARACTERISTICS

$V_{DD}$ = 3.3 V, $T_A$ = 25°C, and $C_{BYP}$ = 1.0 µF (unless otherwise specified)

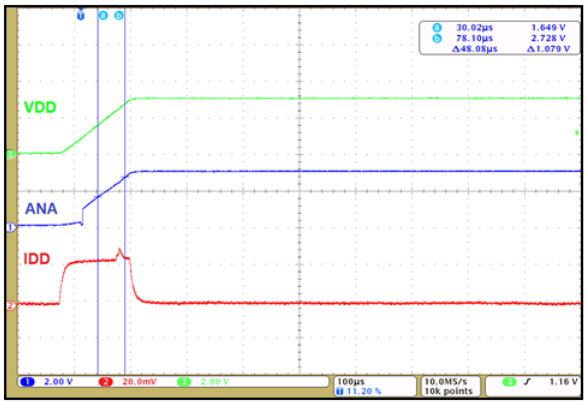



**Figure 7: Power-On Time for Analog Output**



深圳市满度科技有限公司
Web:www.manduic.com
Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com
Tel:150-1290-5940
Email:sales@manduic.com

**CT8150PC – ELECTRICAL CHARACTERISTICS and MAGNETIC SPECIFICATIONS:** Uness otherwise specified, valid for $V_{DD}$ = 1.7 to 5.5 V, $C_{BYP}$ = 1.0 µF, and $T_A$ = –40°C to 125°C, typical values are $V_{DD}$ = 3.3 V and $T_A$ = 25°C

| Characteristics | Symbol | Test Conditions | Min. | Typ. | Max. | Unit |
|---|---|---|---|---|---|---|
| Average Supply Current | $I_{DD(AVG)}$ | t ≥ 10 seconds | – | 1.5 | 5.0 | µA |
| | $I_{DD(AVG)_1.8V}$ | t ≥ 10 seconds, $V_{DD}$ = 1.8 V | – | 1.3 | 3.0 | µA |
| Sampling Frequency | $f_S$ | | 60 | 100 | 140 | Hz |
| Idle Mode Time | $t_{IDLE}$ | $f_S$ = 100 Hz | 7.1 | 10.0 | 16.7 | ms |
| Maximum Drive Capability [1] | $I_{DRV(MAX)}$ | $\Delta V_{OUT}$ ≤ 10 mV | –10 | – | +10 | µA |
| Output Capacitive Load [1] | $C_L$ | | – | – | 10 | pF |
| Analog Output Magnetic Field | $B_{ANA}$ | | ±54 | ±80 | ±100 | G |
| Analog Output Voltage Range | $V_{ANA}$ | | 0.1 × $V_{DD}$ | – | 0.9 × $V_{DD}$ | V |
| Voltage Output Quiescent | $V_{OQ}$ | | 45 | 50 | 55 | % $V_{DD}$ |
| Sensitivity | S | | 3.5 | 5.0 | 6.5 | mV/V/G |

[1] Guaranteed by design and characterization; not tested in production.



深圳市满度科技有限公司
Web:www.manduic.com
Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com
Tel:150-1290-5940
Email:sales@manduic.com

## TYPICAL MAGNETIC CHARACTERISTICS FOR CT8150PC

$V_{DD}$ = 3.3 V, $T_A$ = 25°C, and $C_{BYP}$ = 1.0 µF (unless otherwise specified)

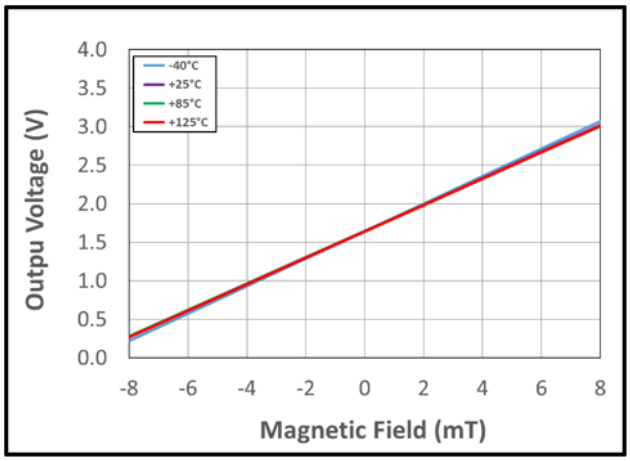



**Figure 8: Output Voltage vs. Magnetic Field over Temperature at $V_{DD}$ = 3.3 V**

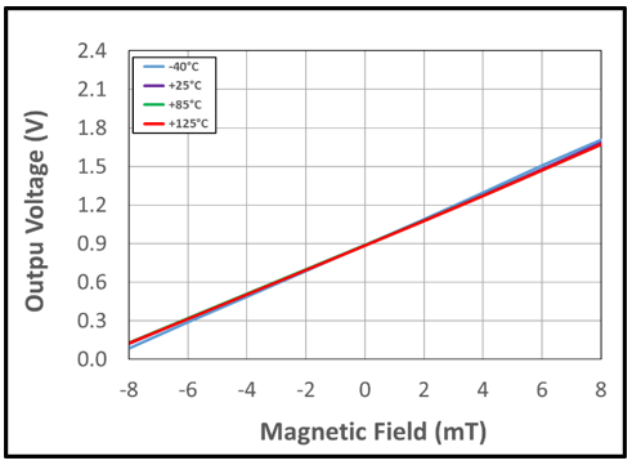



**Figure 9: Output Voltage vs. Magnetic Field over Temperature at $V_{DD}$ = 1.8 V**

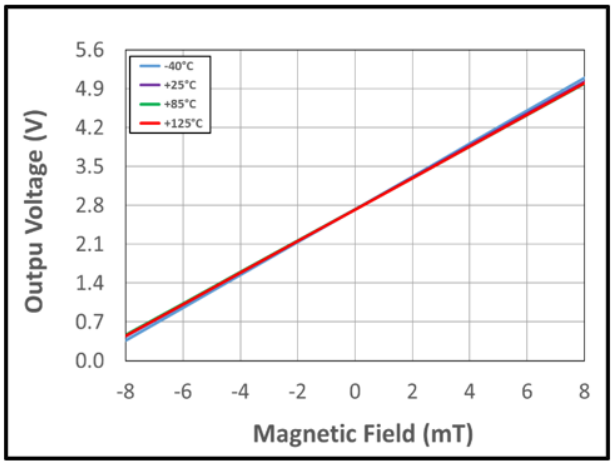



**Figure 10: Output Voltage vs. Magnetic Field over Temperature at $V_{DD}$ = 5.5 V**



深圳市满度科技有限公司
Web:www.manduic.com
ALLEGRO microsystems
Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com
Tel:150-1290-5940
Email:sales@manduic.com

## TYPICAL ELECTRICAL CHARACTERISTICS FOR CT8150PC

$V_{DD}$ = 3.3 V, $T_A$ = 25°C, and $C_{BYP}$ = 1.0 µF (unless otherwise specified)

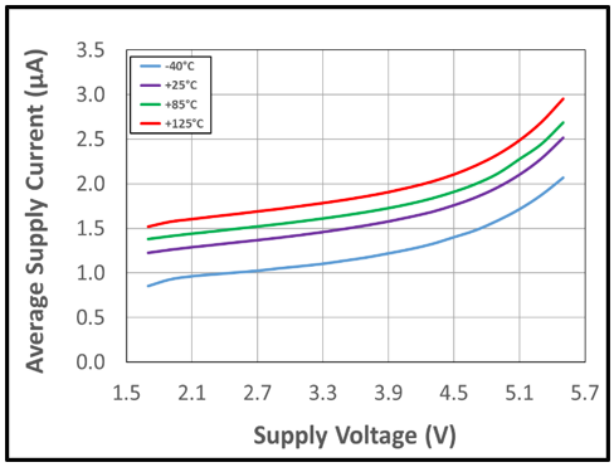



**Figure 11: Average Supply Current vs. Supply Voltage vs. Temperature**

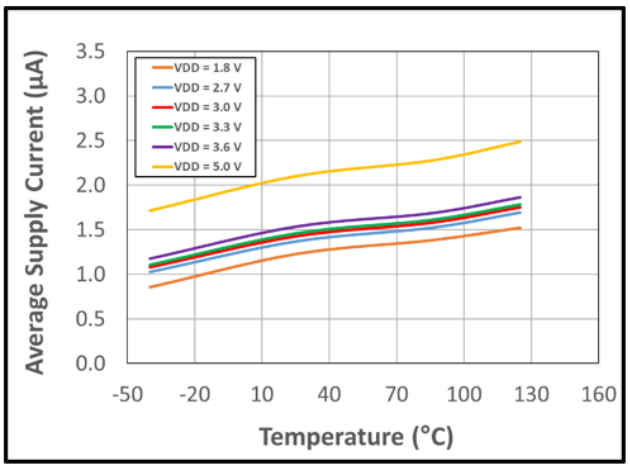



**Figure 12: Average Supply Current vs. Temperature vs. Supply Voltage**

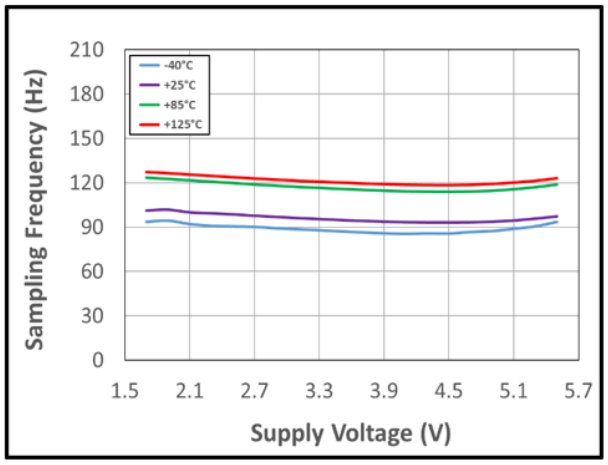



**Figure 13: Sampling Frequency vs. Supply Voltage vs. Temperature**



深圳市满度科技有限公司
Web:www.manduic.com
Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com
Tel:150-1290-5940
Email:sales@manduic.com

**CT8152PC – ELECTRICAL CHARACTERISTICS and MAGNETIC SPECIFICATIONS:** Uness otherwise specified, valid for $V_{DD}$ = 1.7 to 5.5 V, $C_{BYP}$ = 1.0 µF, and $T_A$ = –40°C to 125°C, typical values are $V_{DD}$ = 3.3 V and $T_A$ = 25°C

| Characteristics | Symbol | Test Conditions | Min. | Typ. | Max. | Unit |
|---|---|---|---|---|---|---|
| **ANALOG OUTPUT MODE (DIGITAL MODE IS ON)** | | | | | | |
| Average Supply Current | $I_{DD(AVG)}$ | t ≥ 10 seconds; analog and digital modes on | – | 1.5 | 5.0 | µA |
| | $I_{DD(AVG)_1.8V}$ | t ≥ 10 seconds, $V_{DD}$ = 1.8 V; analog and digital modes on | – | 1.3 | 3.0 | µA |
| Maximum Drive Capability [1] | $I_{DRV(MAX)}$ | $\Delta V_{OUT}$ ≤ 10 mV | –10 | – | +10 | µA |
| Analog Sampling Frequency | $f_{S_ANA}$ | | 60 | 100 | 140 | Hz |
| Idle Mode Time, Analog Output | $t_{IDLE_ANA}$ | $f_S$ = 100 Hz | 7.1 | 10.0 | 16.7 | ms |
| Output Capacitive Load [1] | $C_L$ | | – | – | 10 | pF |
| Analog Output Magnetic Field | $B_{ANA}$ | | ±54 | ±80 | ±100 | G |
| Analog Output Voltage Range | $V_{ANA}$ | | 0.1 × $V_{DD}$ | – | 0.9 × $V_{DD}$ | V |
| Voltage Output Quiescent | $V_{OQ}$ | | 45 | 50 | 55 | % $V_{DD}$ |
| Sensitivity | S | | 3.5 | 5.0 | 6.5 | mV/V/mGT |
| **DIGITAL OUTPUT MODE** | | | | | | |
| Average Supply Current | $I_{DD(AVG)}$ | t ≥ 10 seconds; analog mode off | – | 200 | 900 | nA |
| | $I_{DD(AVG)_1.8V}$ | t ≥ 10 seconds, $V_{DD}$ = 1.8 V; analog mode off | – | 150 | 700 | nA |
| Output Voltage High $\overline{OUT}$ [1] | $V_{OH}$ | | 0.9 × $V_{DD}$ | – | – | V |
| Output Voltage Low $\overline{OUT}$ [1] | $V_{OL}$ | | – | – | 0.1 × $V_{DD}$ | V |
| $\overline{OUT}$ Current [1] | $I_{OUT}$ | | – | ±2.0 | – | mA |
| Sampling Frequency | $f_{S_DIG}$ | | 7.5 | 12.5 | 17.5 | Hz |
| Idle Mode Time | $t_{IDLE_DIG}$ | $f_S$ = 2 Hz | 57 | 80 | 133 | ms |
| Operate Point, B+ | $B_{OPS}$ | | 46 | 60 | 76 | G |
| Operate Point, B– | $B_{OPN}$ | | –76 | –60 | –46 | G |
| Release Point, B+ | $B_{RPS}$ | | 28 | 40 | 56 | G |
| Release Point, B– | $B_{RPN}$ | | –56 | –40 | –28 | G |
| Hysteresis | $B_{HYST}$ | | 10 | 20 | – | G |

[1] Guaranteed by design and characterization; not tested in production.



深圳市满度科技有限公司
Web:www.manduic.com
ALLEGRO microsystems
Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com
Tel:150-1290-5940
Email:sales@manduic.com

## TYPICAL MAGNETIC CHARACTERISTICS FOR CT8152PC IN DIGITAL MODE

$V_{DD}$ = 3.3 V, $T_A$ = 25°C, and $C_{BYP}$ = 1.0 µF (unless otherwise specified)

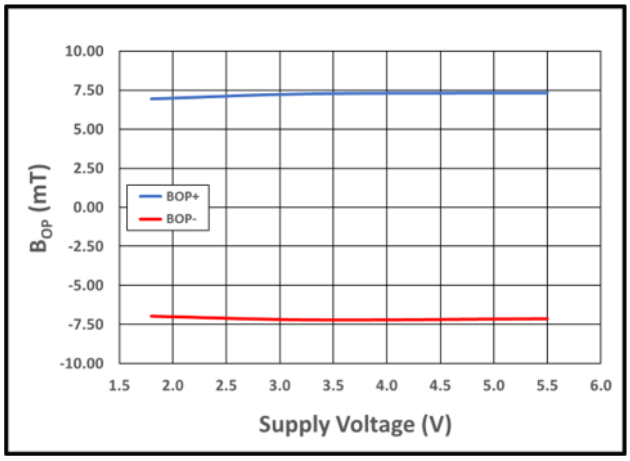



**Figure 14: $B_{OP_}$ (Red) and $B_{OP+}$ (Blue) vs. Supply Voltage at $T_A$ = 25°C**

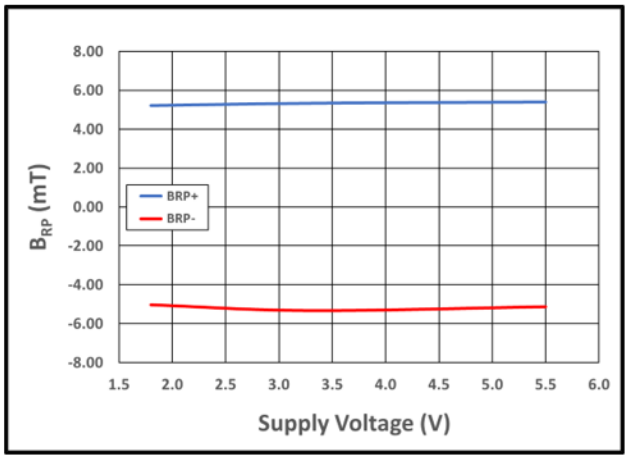



**Figure 15: $B_{RP_}$ (Red) and $B_{RP+}$ (Blue) vs. Supply Voltage at $T_A$ = 25°C**

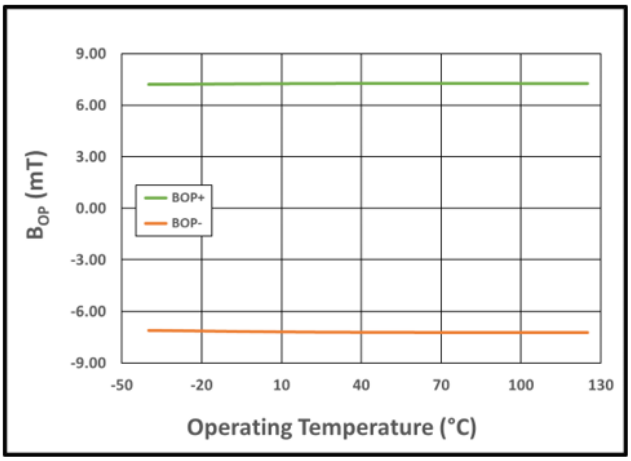



**Figure 16: $B_{OP_}$ (Orange) and $B_{OP+}$ (Green) vs. Temperature at $V_{DD}$ = 3.3 V**

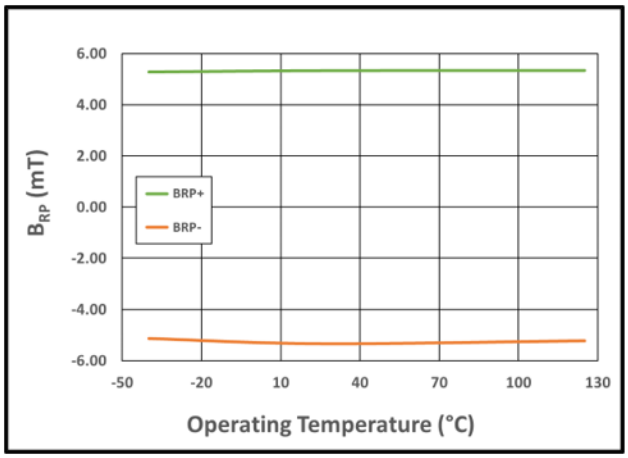



**Figure 17: $B_{RP_}$ (Orange) and $B_{RP+}$ (Green) vs. Temperature at $V_{DD}$ = 3.3 V**



深圳市满度科技有限公司
Web:www.manduic.com
Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com
Tel:150-1290-5940
Email:sales@manduic.com

## TYPICAL MAGNETIC CHARACTERISTICS FOR CT8152PC IN ANALOG MODE

$V_{DD}$ = 3.3 V, $T_A$ = 25°C, and $C_{BYP}$ = 1.0 µF (unless otherwise specified)

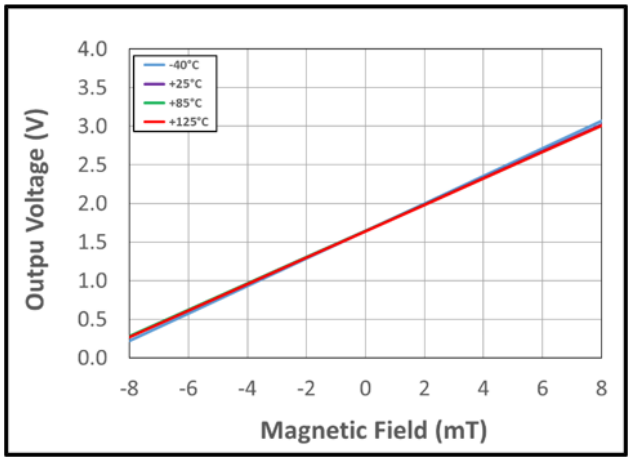



**Figure 18: Output Voltage vs. Magnetic Field over Temperature at $V_{DD}$ = 3.3 V**

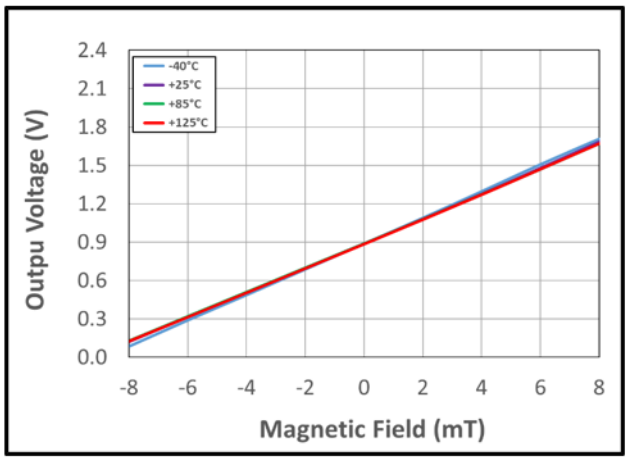



**Figure 19: Output Voltage vs. Magnetic Field over Temperature at $V_{DD}$ = 1.8 V**

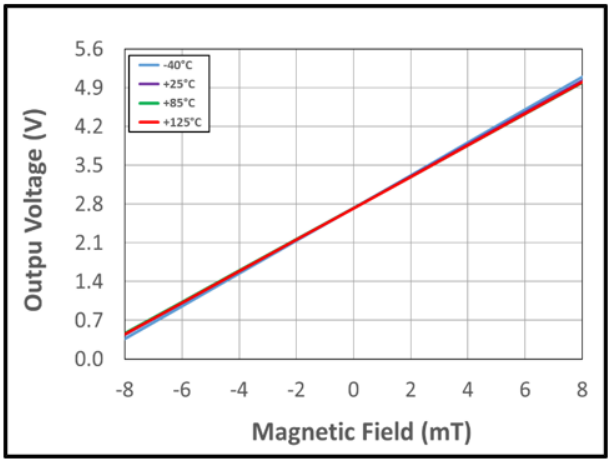



**Figure 20: Output Voltage vs. Magnetic Field over Temperature at $V_{DD}$ = 5.5 V**



深圳市满度科技有限公司
Web:www.manduic.com
Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com
Tel:150-1290-5940
Email:sales@manduic.com

## TYPICAL ELECTRICAL CHARACTERISTICS FOR CT8152PC IN DIGITAL MODE ONLY

$V_{DD}$ = 3.3 V, $T_A$ = 25°C, and $C_{BYP}$ = 1.0 µF (unless otherwise specified)

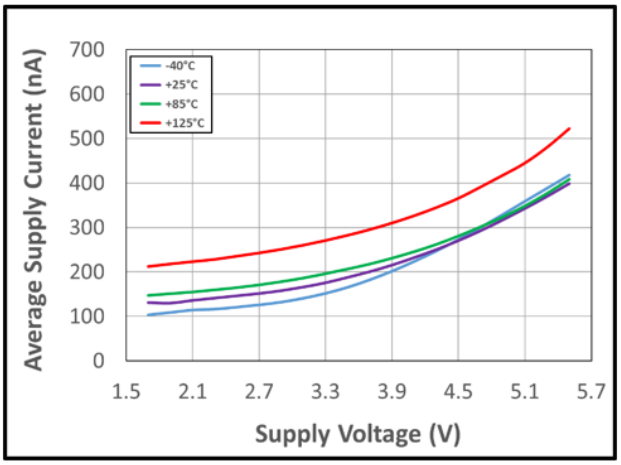



**Figure 21: Average Supply Current vs. Supply Voltage vs. Temperature**

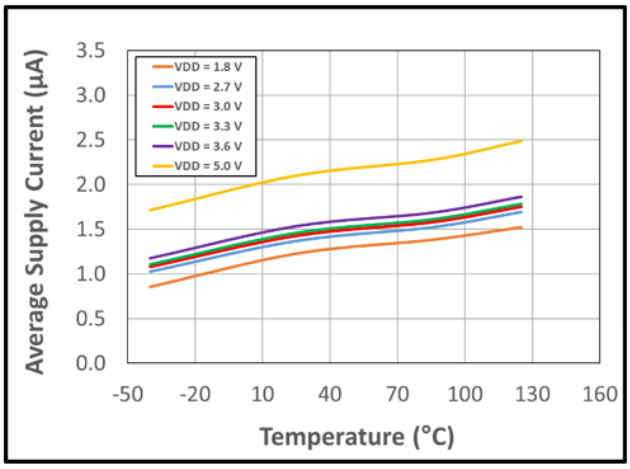



**Figure 22: Average Supply Current vs. Temperature vs. Supply Voltage**

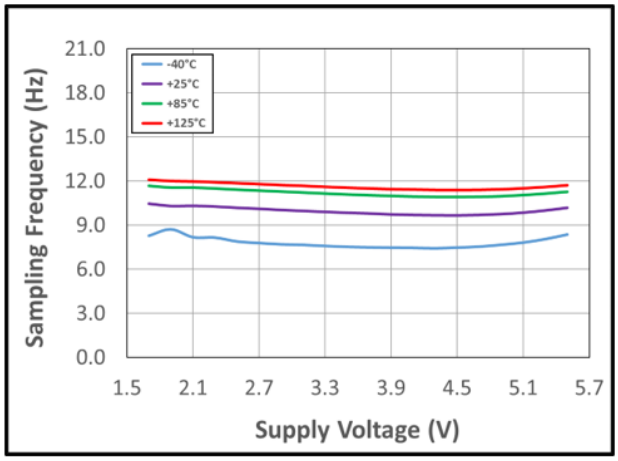



**Figure 23: Sampling Frequency vs. Supply Voltage vs. Temperature**



深圳市满度科技有限公司
Web:www.manduic.com
Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com
Tel:150-1290-5940
Email:sales@manduic.com

## TYPICAL ELECTRICAL CHARACTERISTICS FOR CT8152PC IN ANALOG AND DIGITAL MODE

$V_{DD}$ = 3.3 V, $T_A$ = 25°C, and $C_{BYP}$ = 1.0 µF (unless otherwise specified)

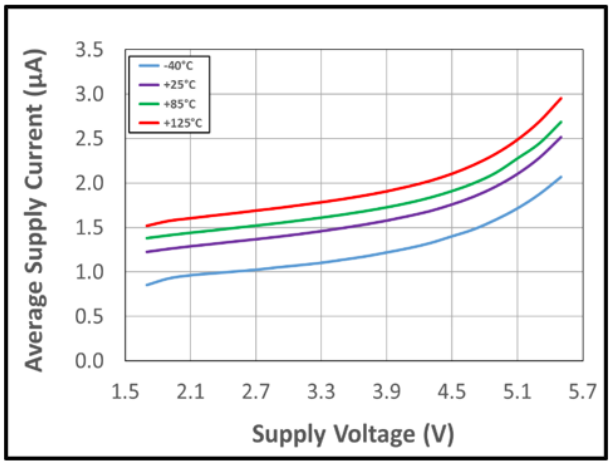



**Figure 24: Average Supply Current vs. Supply Voltage vs. Temperature**

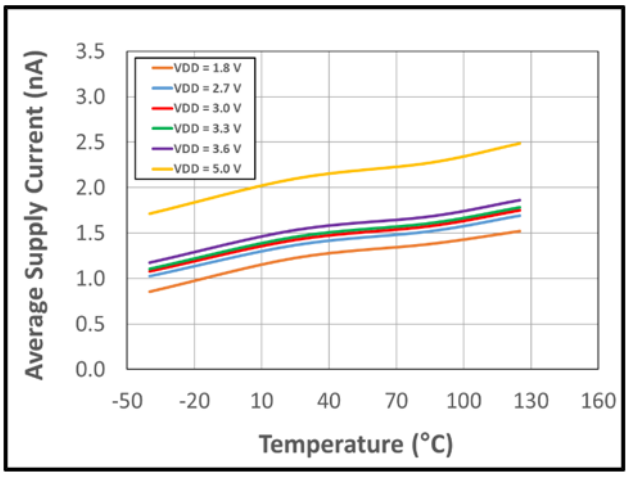



**Figure 25: Average Supply Current vs. Temperature vs. Supply Voltage**

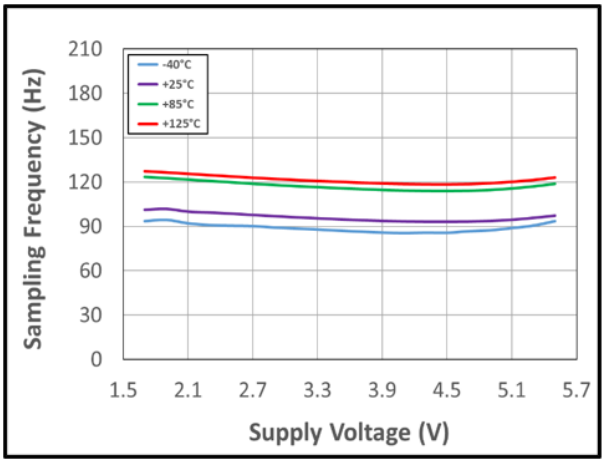



**Figure 26: Sampling Frequency vs. Supply Voltage vs. Temperature**



深圳市满度科技有限公司
Web:www.manduic.com
Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com
Tel:150-1290-5940
Email:sales@manduic.com

## FUNCTIONAL DESCRIPTION

### Overview

The CT815x is a product family of TMR analog sensors that provides a linear analog output voltage for a range of magnetic fields. It supports a wide operating voltage range of 1.7 to 5.5 V, enabling these devices to be used in many applications. Designed to consume a minimal amount of current which is ideal for battery-powered products.

### Analog Output Measurement

The CT815x provides a continuous (sample & hold) linear analog output voltage which represents the measured magnetic field. The output voltage range of ANA is 10% of $V_{DD}$ to 90% of $V_{DD}$ which represents the magnetic field from the typical low-end value of –80 G to the maximum magnetic field value of +80 G for a sensitivity of 5 mV/V/G. A resistor-capacitor (R-C) filter may be implemented on the ANA pin to further lower the noise. Figure 27 illustrates the output voltage range of the ANA pin as a function of the measured current.

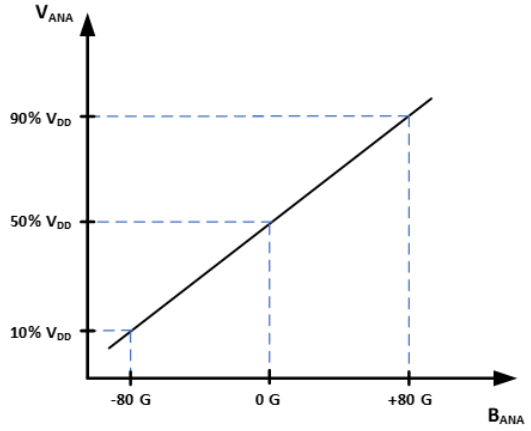



**Figure 27: Linear Output Voltage Range vs. Measured Magnetic Field for S = 5 mV/V/G.**

### Undervoltage Lockout (UVLO)

The Undervoltage Lockout protection circuitry of the CT815x is activated when the supply voltage ($V_{DD}$) falls below 1.53 V. The CT815x remains in a low quiescent state and the ANA and $\overline{OUT}$ outputs are not valid until $V_{DD}$ rises above the UVLO threshold (1.60 V).

### Power-On Time ($t_{ON}$)

The Power-On Time ($t_{ON}$) of 50 µs is the amount of time required by the CT815x to start up, power-on, and acquire the first sample. The chip is fully powered up and operational from the moment the supply voltage passes the rising UVLO point (1.60 V). This time includes the ramp-up time and the settling time (within 10% of steady-state voltage under an applied magnetic field) after the power supply have reach the minimum $V_{DD}$.

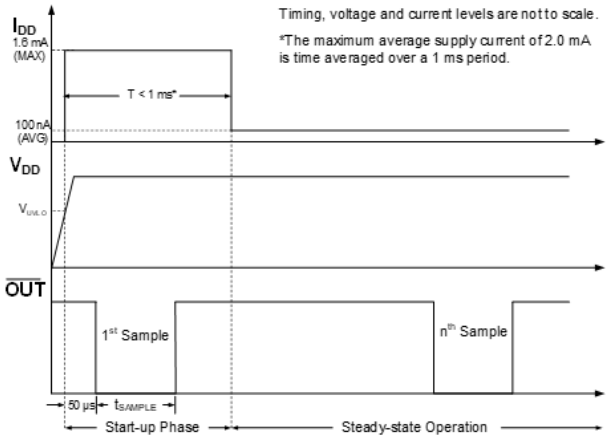



**Figure 28: CT815x Power-On Timing Diagram**

### Omnipolar Magnetic Flux

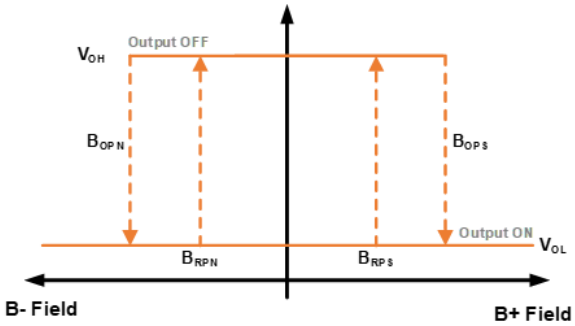



**Figure 29: CT8152 Output Behavior vs. Magnetic Field**

**Table 1: CT8152 Push-Pull Output Behavior**

| Magnetic Field | Condition | Output |
|---|---|---|
| Positive Field | $B > B_{OPS}$ | Low (ON) |
| | $0 < B < B_{RPS}$ | High (OFF) |
| Negative Field | $B < B_{OPN}$ | Low (ON) |
| | $0 > B > B_{RPN}$ | High (OFF) |



深圳市满度科技有限公司
Web:www.manduic.com
ALLEGRO microsystems
Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com
Tel:150-1290-5940
Email:sales@manduic.com

## Dual Analog and Digital Output Mode

The CT8152 supports both a digital and an analog signal output operating at the same time. The analog output will turn on when $B_{RP}$ on the digital output side is triggered at ±8.0 mT and both outputs remain on until the CT8152 is powered off. The digital output is configured as a CMOS push-pull, and it will start sampling one full cycle/period once dual output mode has been initiated. The analog and digital outputs have a sampling frequency of 100 Hz and 12.5 Hz, respectively, and they work independently of one another.

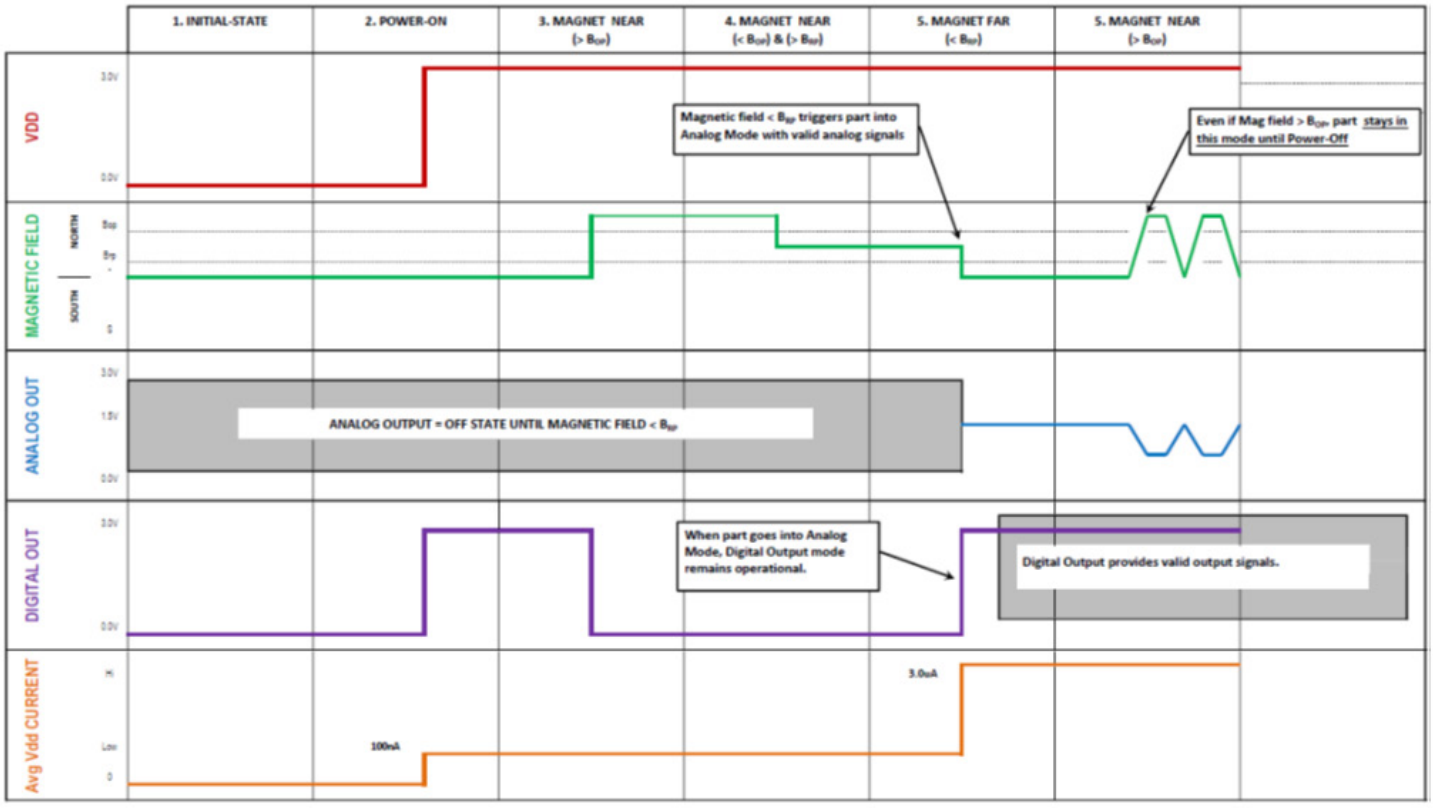



**Figure 30: Dual Analog and Digital Mode Operating Conditions of the CT8152.**



深圳市满度科技有限公司
Web:www.manduic.com
Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com
Tel:150-1290-5940
Email:sales@manduic.com

## APPLICATIONS INFORMATION

A decoupling capacitor, $C_{BYP}$, between the supply voltage (VDD) and ground (GND) is required to lower the noise going into the CT815x as well as providing isolation from the other circuits. The decoupling capacitor should be placed close to the TMR analog sensor. A typical capacitor value of 1.0 µF (ceramic) will be sufficient. For the analog output, a simple RC filter (R = 47 kΩ and C = 100 pF) is recommended on the ANA pin as shown in Figure 31.

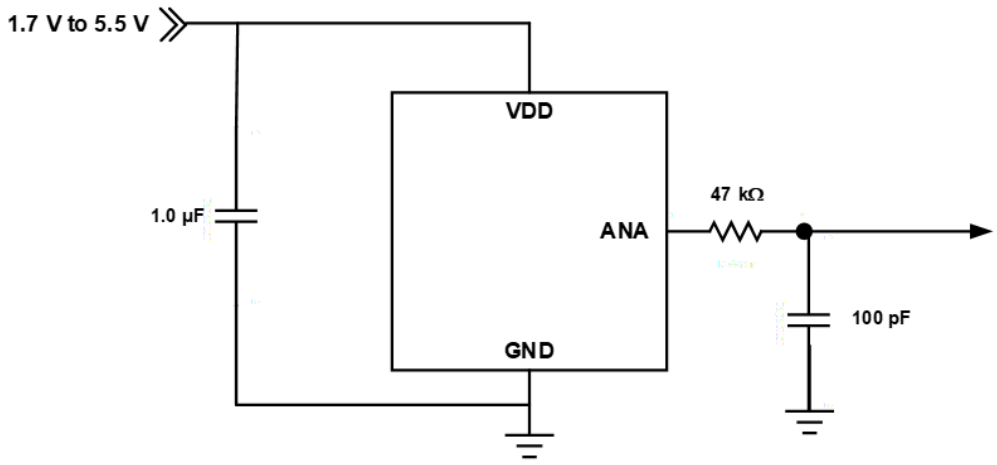



**Figure 31: CT8150 Application Block Diagram**

For the CT8152, the same bypass capacitor and RF filter of the CT8150 should be implemented.

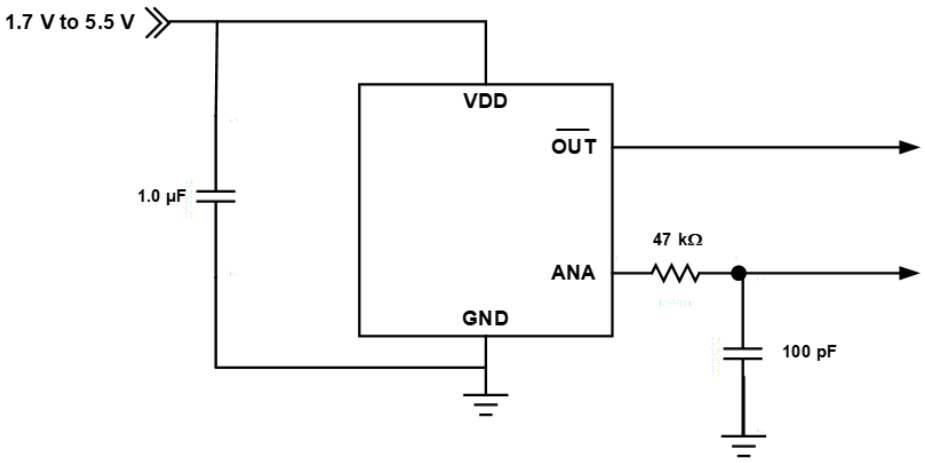



**Figure 32: CT8152 Application Block Diagram**



深圳市满度科技有限公司
Web:www.manduic.com
Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com
Tel:150-1290-5940
Email:sales@manduic.com

## XtremeSense TMR Current Sensor Location

The XtremeSense TMR sensor location for the CT815x products are shown in Figure 33, Figure 34, and Figure 35. The dimensions shown in the three figures are typical values.

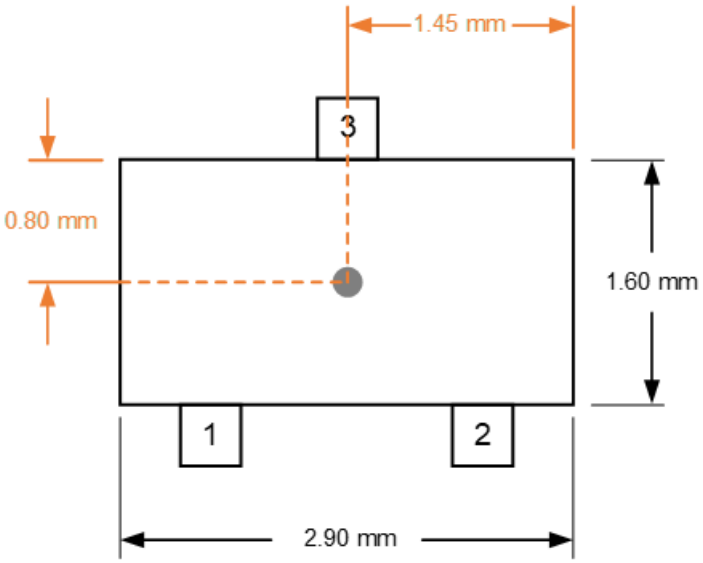



**Figure 33: XtremeSense TMR Sensor Location for CT8150 products in 3-lead SOT23 Package**

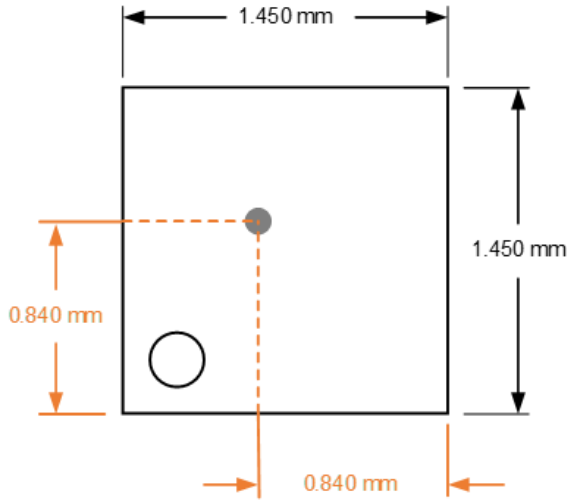



**Figure 34: XtremeSense TMR Sensor Location for CT815x products in 4-lead LGA Package**

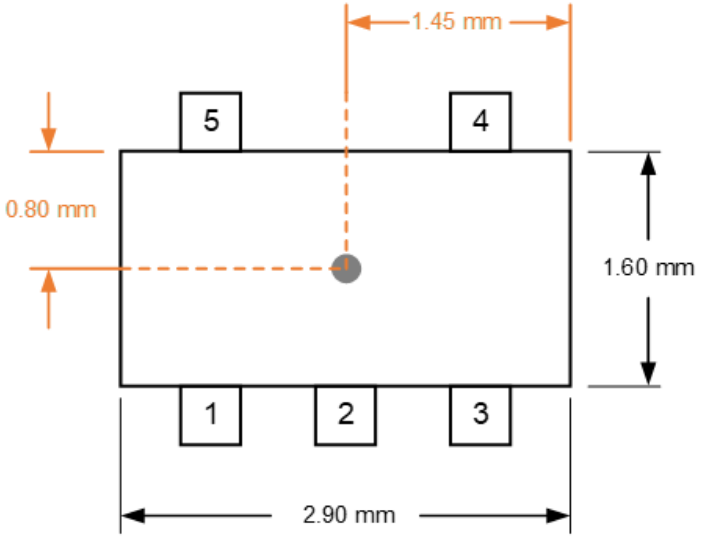



**Figure 35: XtremeSense TMR Sensor Location for CT8152 products in 5-lead SOT23 Package**




**Figure 36: XtremeSense TMR Sensor Location in z Dimension for CT815x in 4-lead LGA Package**

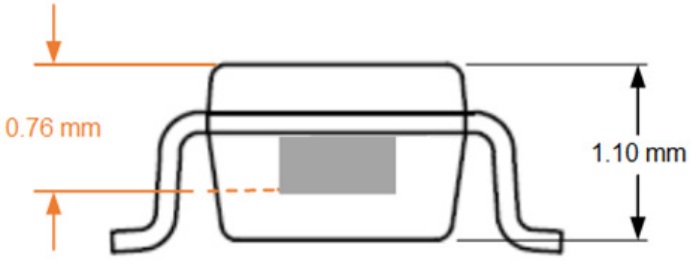



**Figure 37: XtremeSense TMR Sensor Location in z Dimension for CT815x in SOT23 Package**



深圳市满度科技有限公司
Web:www.manduic.com
ALLEGRO microsystems
Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com
Tel:150-1290-5940
Email:sales@manduic.com

## PACKAGE OUTLINE DRAWINGS

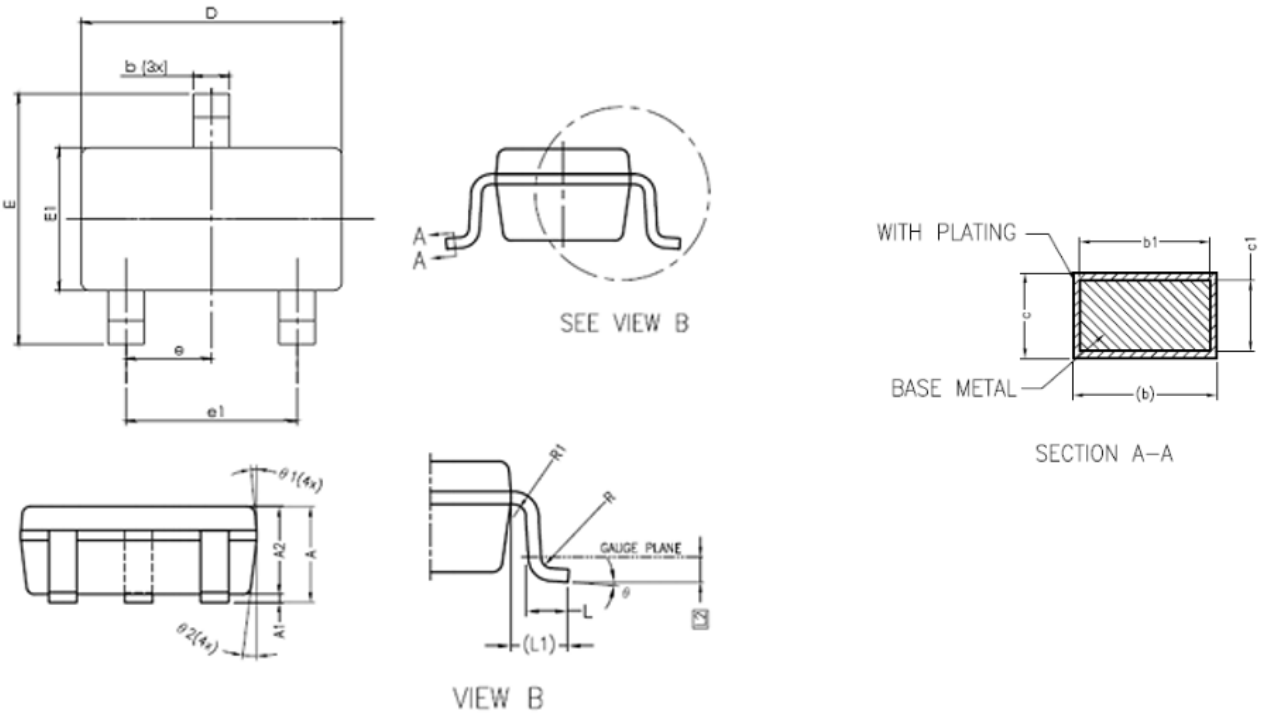



**Figure 38: 3-Lead SOT23 Package Drawing**


**Table 2: CT815x 3-Lead SOT23 Package Dimensions**

| Symbol | Dimensions in Millimeters (mm) | | |
|---|---|---|---|
| | Min. | Typ. | Max. |
| A | 1.05 | 1.20 | 1.35 |
| A1 | 0.00 | 0.10 | 0.15 |
| A2 | 1.00 | 1.10 | 1.20 |
| b | 0.30 | – | 0.50 |
| b1 | 0.30 | 0.35 | 0.45 |
| c | 0.08 | – | 0.22 |
| c1 | 0.08 | 0.13 | 0.20 |
| D | 2.80 | 2.90 | 3.00 |
| E | 2.60 | 2.80 | 3.00 |
| E1 | 1.50 | 1.60 | 1.70 |

| Symbol | Dimensions in Millimeters (mm) | | |
|---|---|---|---|
| | Min. | Typ. | Max. |
| e | | 0.95 BSC | |
| e1 | | 1.90 BSC | |
| L | 0.35 | 0.43 | 0.60 |
| L1 | | 0.50 REF | |
| L2 | | 0.25 BSC | |
| R | 0.10 | – | – |
| R1 | 0.10 | – | 0.25 |
| θ | 0° | 4° | 8° |
| θ1 | 5° | 6° | 15° |
| θ2 | 5° | 8° | 15° |



深圳市满度科技有限公司
Web:www.manduic.com
Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com
Tel:150-1290-5940
Email:sales@manduic.com

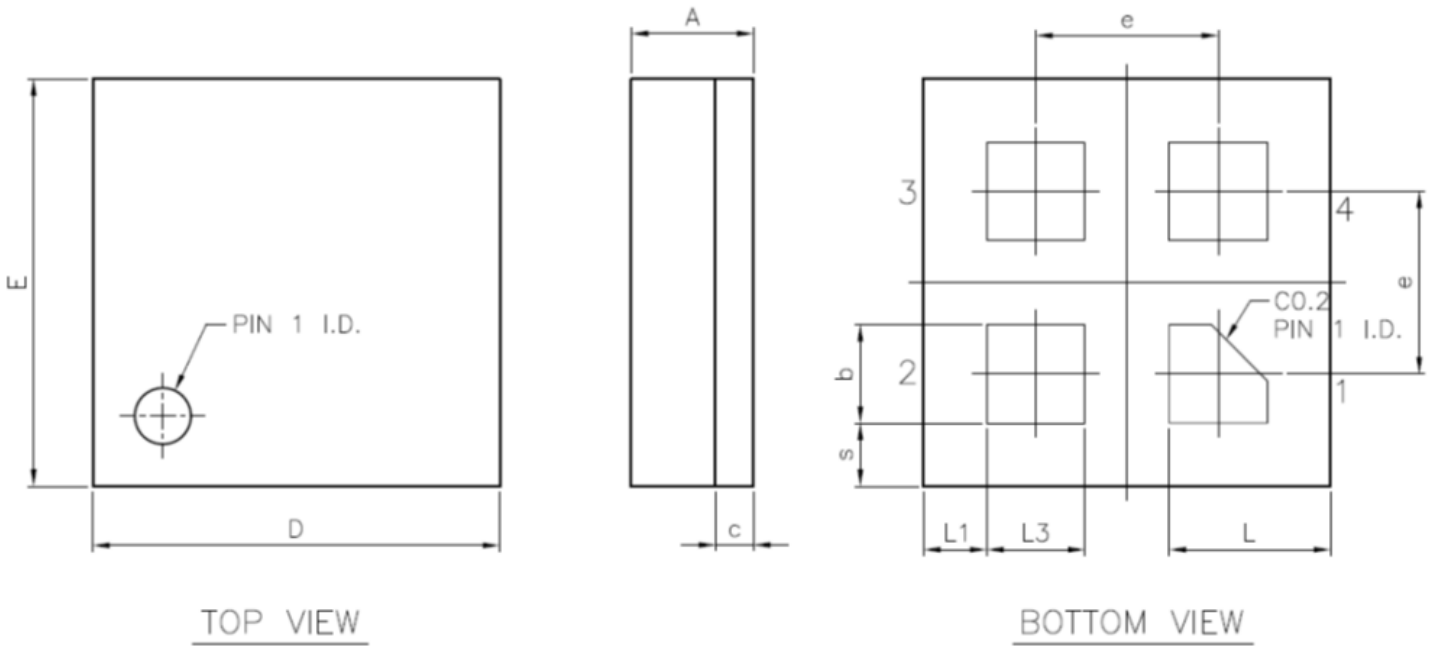


NOTES:

1. All dimensions are in millimeters.
2. Pin A1 ID is marked by ink or laser.

**Figure 39: 4-Lead LGA Package Drawing**

**Table 3: CT815x 4-Lead LGA Package Dimensions**

| Symbol | Dimensions in Millimeters (mm) | | |
|---|---|---|---|
| | Min. | Typ. | Max. |
| A | 0.386 | 0.436 | 0.486 |
| b | 0.300 | 0.350 | 0.400 |
| c | – | 0.136 REF | – |
| D | 1.400 | 1.450 | 1.500 |
| E | 1.400 | 1.450 | 1.500 |
| e | – | 0.650 | – |
| L | 0.525 | 0.575 | 0.625 |
| L1 | 0.175 | 0.225 | 0.275 |
| L3 | 0.300 | 0.350 | 0.400 |
| s | 0.175 | 0.225 | 0.275 |



深圳市满度科技有限公司
Web:www.manduic.com
Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com
Tel:150-1290-5940
Email:sales@manduic.com

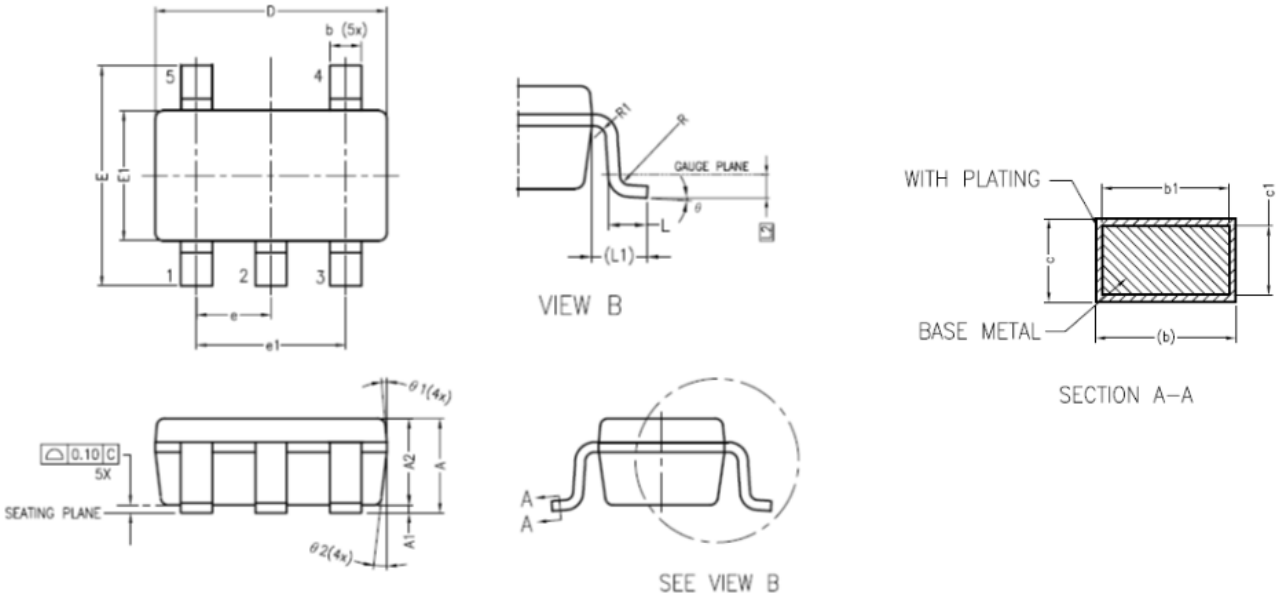



**Figure 40: 5-Lead SOT23 Package Drawing**

**Table 4: CT815x 3-Lead SOT23 Package Dimensions**


| Symbol | Dimensions in Millimeters (mm) | | |
|---|---|---|---|
| | Min. | Typ. | Max. |
| A | 1.05 | 1.20 | 1.35 |
| A1 | 0.00 | 0.10 | 0.15 |
| A2 | 1.00 | 1.10 | 1.20 |
| b | 0.30 | – | 0.50 |
| b1 | 0.30 | 0.35 | 0.45 |
| c | 0.08 | – | 0.22 |
| c1 | 0.08 | 0.13 | 0.20 |
| D | 2.80 | 2.90 | 3.00 |
| E | 2.60 | 2.80 | 3.00 |
| E1 | 1.50 | 1.60 | 1.70 |

| Symbol | Dimensions in Millimeters (mm) | | |
|---|---|---|---|
| | Min. | Typ. | Max. |
| e | | 0.95 BSC | |
| e1 | | 1.90 BSC | |
| L | 0.35 | 0.43 | 0.60 |
| L1 | | 0.60 REF | |
| L2 | | 0.25 BSC | |
| R | 0.10 | – | – |
| R1 | 0.10 | – | 0.25 |
| θ | 0° | 4° | 8° |
| θ1 | 5° | 6° | 15° |
| θ2 | 5° | 8° | 15° |



深圳市满度科技有限公司
Web:www.manduic.com
Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com
Tel:150-1290-5940
Email:sales@manduic.com

## TAPE AND REEL POCKET DRAWINGS AND DIMENSIONS

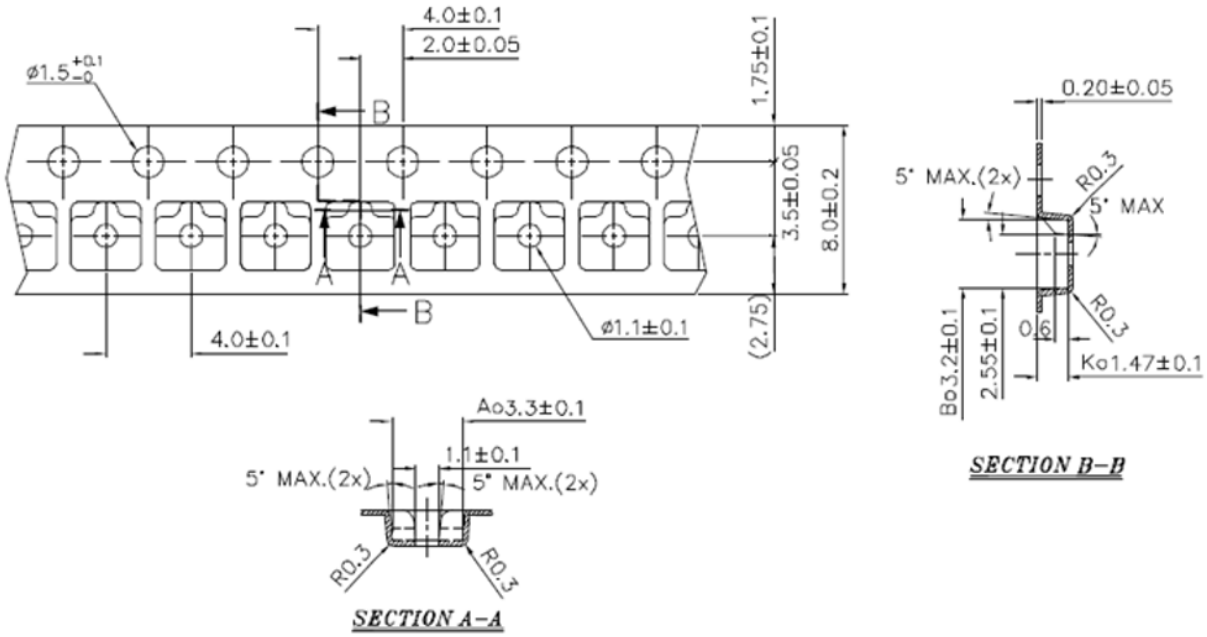


NOTES:

1. Material: Conductive Polystyrene.
2. Dimensions in mm.
3. 10 sprocket hole pitch cumulative tolerance ±0.20 mm.
4. Camber not to exceed 1 mm in 100 mm.
5. Pocket position relative to sprocket hole measured as true position of pocket and not pocket hole.
6. (S.R. Ω/sq) means surface electric resistivity of the carrier tape.

**Figure 41: Tape and Pocket Drawing for 3-lead SOT23 Package**

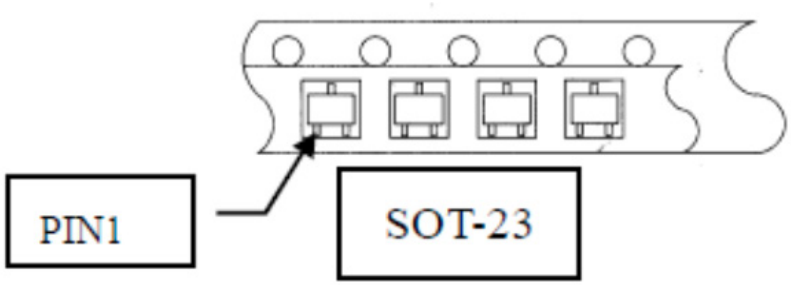



**Figure 42: SOT23 Orientation in Tape Pocket**



深圳市满度科技有限公司
Web:www.manduic.com
Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com
Tel:150-1290-5940
Email:sales@manduic.com

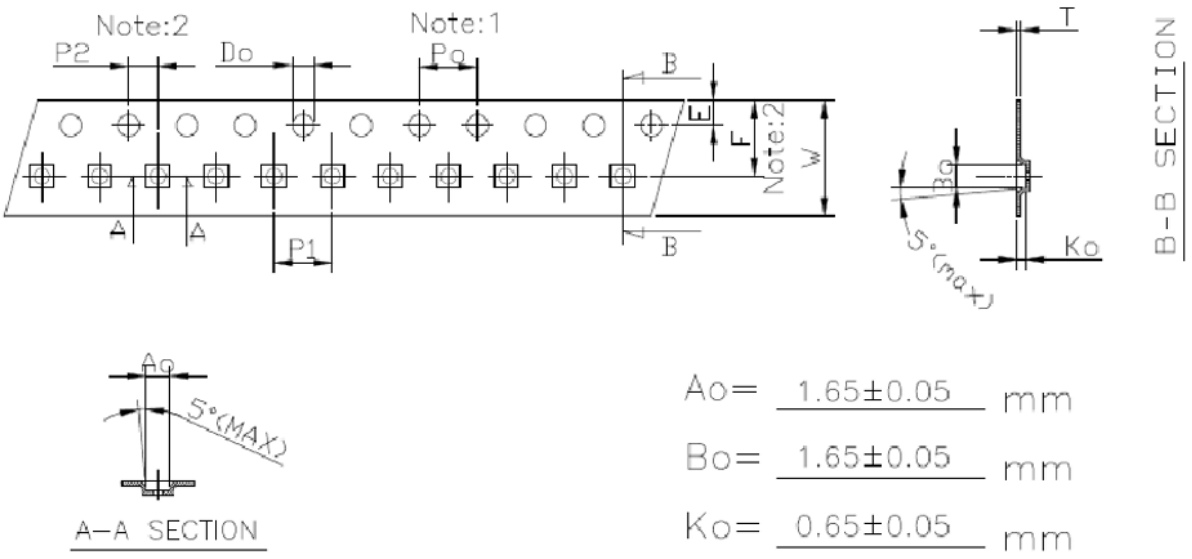



**Figure 43: Tape and Pocket Drawing for LGA-4 Package**

**Table 5: LGA-4 Tape and Pocket Dimensions**


| Symbol | Specification |
|---|---|
| Po | 4.00 mm ± 0.10 mm |
| P1 | 4.00 mm ± 0.10 mm |
| P2 | 2.00 mm ± 0.05 mm |
| Do | 1.50 mm ± 0.10 mm |
| D1 | 1.10 mm ± 0.05 mm |
| E | 1.75 mm ± 0.10 mm |
| F | 3.50 mm ± 0.05 mm |
| 10Po | 40.00 mm ± 0.10 mm |
| W | 8.00 mm ± 0.20 mm |
| T | 0.25 mm ± 0.02 mm |

NOTES:

1. 10 sprocket hole pitch cumulative tolerance is ±0.10 mm.
2. Pocket position is relative to sprocket hole measured as true position of pocket and not pocket hole.
3. Ao and Bo measured on a place of 0.3 mm above the bottom of the pocket to top surface of the carrier.
4. Ko measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
5. Carrier camber shall not more than 1 mm per 100 mm through a length of 250 mm.



深圳市满度科技有限公司
Web:www.manduic.com
Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com
Tel:150-1290-5940
Email:sales@manduic.com

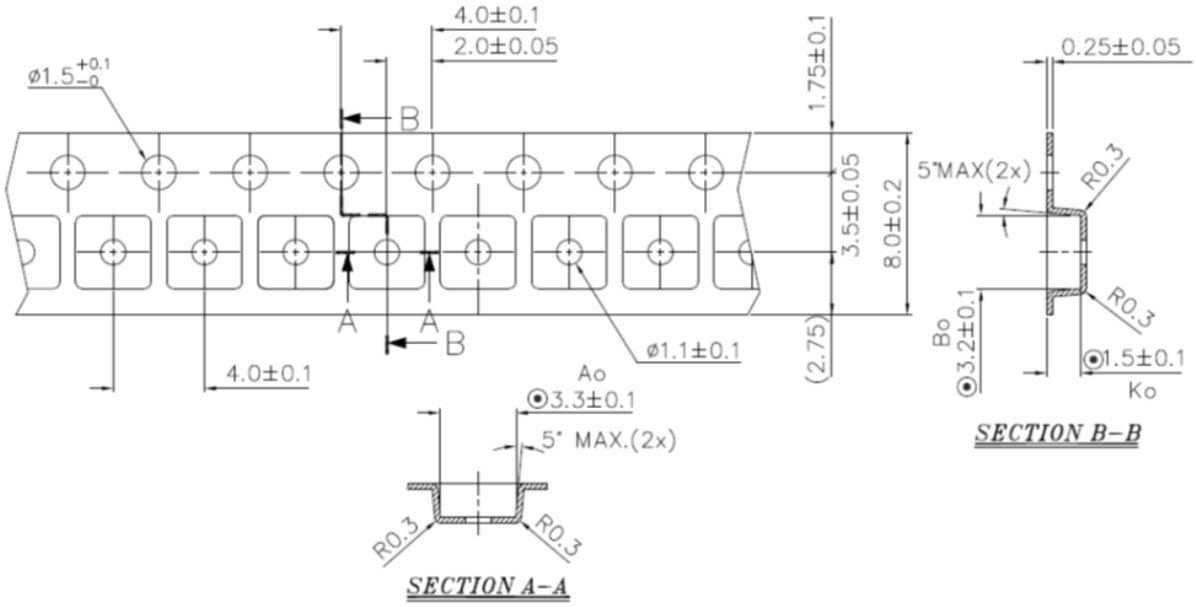


NOTES:

1. Material: Conductive Polystyrene
2. Dimensions in mm.
3. 10 sprocket hole pitch cumulative tolerance ±0.20 mm.
4. Camber not to exceed 1 mm in 100 mm.
5. Pocket position relative to sprocket hole measured as true position of pocket and not pocket hole.
6. (S.R. Ω/sq) means surface electric resistivity of the carrier tape. S.R. is less than or equal to 1.0 × 10E7 Ω/sq.
7. $A_O$ and $B_O$ measured on a plane 0.30 mm above the bottom of the pocket.
8. $K_O$ measured from a plane on the inside bottom of the pocket to the top surface of the carrier.

**Figure 44: Tape and Pocket Drawing for 5-lead SOT23 Package**



深圳市满度科技有限公司
Web:www.manduic.com
Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com
Tel:150-1290-5940
Email:sales@manduic.com

## PACKAGE INFORMATION

**Table 6: CT815x Package Information**

| Part Number | Package Type | # of Leads | Package Quantity | Lead Finish | Eco Plan [1] | MSL Rating [2] | Operating Temperature (°C) [3] | Device Marking [4] |
|---|---|---|---|---|---|---|---|---|
| CT8150PC-IS3 | SOT23 | 3 | 3000 | Sn | Green & RoHS | 1 | –40 to 85 | MH YWWS |
| CT8150PC-HS3 | SOT23 | 3 | 3000 | Sn | Green & RoHS | 1 | –40 to 125 | MH YWWS |
| CT8150PC-IL4 | LGA | 4 | 3000 | Au | Green & RoHS | 3 | –40 to 85 | H YZ |
| CT8150PC-HL4 | LGA | 4 | 3000 | Au | Green & RoHS | 3 | –40 to 125 | H YZ |
| CT8152PC-IS5 | SOT23 | 5 | 3000 | Au | Green & RoHS | 1 | –40 to 85 | MK YWWS |
| CT8152PC-HS5 | SOT23 | 5 | 3000 | Au | Green & RoHS | 1 | –40 to 125 | MK YWWS |
| CT8152PC-IL4 | LGA | 4 | 3000 | Au | Green & RoHS | 3 | –40 to 85 | R YZ |
| CT8152PC-HL4 | LGA | 4 | 3000 | Au | Green & RoHS | 3 | –40 to 125 | R YZ |

[1] RoHS is defined as semiconductor products that are compliant to the current EU RoHS requirements. It also will meet the requirement that RoHS substances do not exceed 0.1% by weight in homogeneous materials. Green is defined as the content of chlorine (Cl), bromine (Br), and antimony trioxide based flame retardants satisfy JS709B low halogen requirements of ≤ 1,000 ppm.
[2] MSL Rating = Moisture Sensitivity Level Rating as defined by JEDEC standard classifications.
[3] Package will withstand ambient temperature range of –40°C to 150°C and storage temperature range of –65°C to 150°C.
[4] Device Marking for SOT23 is defined as XZ YWWS where XZ = part number, Y = year, WW = work week, and S = sequential number. LGA is defined as X where X = part number and YZ = date code information.



深圳市满度科技有限公司
Web:www.manduic.com
Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com
Tel:150-1290-5940
Email:sales@manduic.com

## Revision History

| Number | Date | Description |
|---|---|---|
| 2 | December 11, 2023 | Document rebranded and minor editorial updates |

Copyright 2023, Allegro MicroSystems.
Allegro MicroSystems reserves the right to make, from time to time, such departures from the detail specifications as may be required to permit improvements in the performance, reliability, or manufacturability of its products. Before placing an order, the user is cautioned to verify that the information being relied upon is current.
Allegro's products are not to be used in any devices or systems, including but not limited to life support devices or systems, in which a failure of Allegro's product can reasonably be expected to cause bodily harm.
The information included herein is believed to be accurate and reliable. However, Allegro MicroSystems assumes no responsibility for its use; nor for any infringement of patents or other rights of third parties which may result from its use.
Copies of this document are considered uncontrolled documents.

For the latest version of this document, visit our website:
**www.allegromicro.com**



深圳市满度科技有限公司
Web:www.manduic.com
Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com
Tel:150-1290-5940
Email:sales@manduic.com