# MR25H256 / MR25H256A

256Kb Serial SPI MRAM

## FEATURES

- No write delays
- Unlimited write endurance
- Data retention greater than 20 years
- Automatic data protection on power loss
- Block write protection
- Fast, simple SPI interface with up to 40 MHz clock rate
- 2.7 to 3.6 Volt power supply range
- Low current sleep mode
- Industrial and Automotive Grade 1 and Grade 3 temperatures
- Available in 8-DFN or 8-DFN Small Flag RoHS-compliant package.
- Direct replacement for serial EEPROM, Flash, FeRAM
- Industrial Grade and AEC-Q100 Grade 1 and Grade 3 options
- Moisture Sensitivity MSL-3



8-DFN



Small Flag 8-DFN

RoHS

## Product Versions and Options

**MR25H256A** has been released for mass production and is recommended for all new designs. **MR25H256** remains in mass production but will be subject to eventual phase out and end of life and is not recommended for new designs.Both versions have the same specifications.

| **MR25H256A Product Options** | | |
|---|---|---|
| **Grade** | **Temperature** | **Package** |
| Industrial | -40 to +85 C | 8-DFN Small Flag |
| Automotive AEC-Q100 Grade 3 | -40 to +85 C | 8-DFN Small Flag |
| Automotive AEC-Q100 Grade 1 | -40 to +125 C | 8-DFN Small Flag |

| **MR25H256 Product Options** (Not recommended for new designs) | | |
|---|---|---|
| **Grade** | **Temperature** | **Package** |
| Industrial | -40 to +85 C | 8-DFN Small Flag |
| | | 8-DFN |
| Automotive AEC-Q100 Grade 1 | -40 to +125 C | 8-DFN Small Flag |
| | | 8-DFN |

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com
微信扫码咨询客服

# TABLE OF CONTENTS

**OVERVIEW** ..... **4**

Figure 1 – Block Diagram ..... 4

**System Configuration** ..... **4**

Figure 2 – System Configuration ..... 4

**DEVICE PIN ASSIGNMENT** ..... **5**

Figure 3 – Pin Diagram All 8-DFN Packages ..... 5

Table 1 – Pin Functions All 8-DFN Packages ..... 5

**SPI COMMUNICATIONS PROTOCOL** ..... **6**

Table 2 – Command Codes ..... 6

**Status Register and Block Write Protection** ..... **6**

Table 3 – Status Register Bit Assignments ..... 6

Table 4 – Block Memory Write Protection ..... 7

Table 5 – Memory Protection Modes ..... 7

**Read Status Register (RDSR)** ..... **7**

Figure 4 – RDSR ..... 7

**Write Enable (WREN)** ..... **8**

Figure 5 – WREN ..... 8

**Write Disable (WRDI)** ..... **8**

Figure 6 – WRDI ..... 8

**Write Status Register (WRSR)** ..... **9**

Figure 7 – WRSR ..... 9

**Read Data Bytes (READ)** ..... **10**

Figure 8 – READ ..... 10

**Write Data Bytes (WRITE)** ..... **11**

Figure 9 – WRITE ..... 11

**Enter Sleep Mode (SLEEP)** ..... **12**

Figure 10 – SLEEP ..... 12



深圳市精芯科技有限公司 Tel:+86-755-2990-5940
Web:www.manduic.com Email:sales@manduic.com

# Table of Contents - Continued


**Exit Sleep Mode (WAKE)** ..... **12**
Figure 11 – WAKE ..... 12
**ELECTRICAL SPECIFICATIONS** ..... **13**
**Absolute Maximum Ratings** ..... **13**
Table 6 – Absolute Maximum Ratings ..... 13
Table 7 – Operating Conditions ..... 14
Table 8 – DC Characteristics ..... 14
Table 9 – Power Supply Characteristics ..... 14
**TIMING SPECIFICATIONS** ..... **15**
Table 10 – Capacitance ..... 15
Table 11 – AC Measurement Conditions ..... 15
Figure 12 – Output Load for Impedance Parameter Measurements ..... 15
Figure 13 – Output Load for All Other Parameter Measurements ..... 15
**Power-Up Timing** ..... **16**
Table 12 – Power-Up ..... 16
Figure 14 – Power-Up Timing ..... 16
**Synchronous Data Timing** ..... **17**
Table 13 – AC Timing Parameters ..... 17
Figure 15 – Synchronous Data Timing ..... 19
Figure 16 – $\overline{\text{HOLD}}$ Timing ..... 19
**ORDERING INFORMATION** ..... **20**
Table 14 – Ordering Part Number Decoder Table ..... 20
Table 15 – Ordering Part Numbers ..... 20
**PACKAGE OUTLINE DRAWINGS** ..... **21**
Figure 17 – 8-DFN Small Flag Package ..... 21
Figure 18 – 8-DFN Package ..... 22
**REVISION HISTORY** ..... **23**
**HOW TO REACH US** ..... **24**


深圳市精芯科技有限公司 Tel:+86-755-2990-5940
Web:www.manduic.com Email:sales@manduic.com

## OVERVIEW

The MR25H256/MR25H256A is a serial MRAM with memory array logically organized as 32Kx8 using the four pin interface of chip select (CS), serial input (SI), serial output (SO) and serial clock (SCK) of the serial peripheral interface (SPI) bus. Serial MRAM implements a subset of commands common to today's SPI EEPROM and Flash components allowing MRAM to replace these components in the same socket and interoperate on a shared SPI bus. Serial MRAM offers superior write speed, unlimited endurance, low standby & operating power, and more reliable data retention compared to available serial memory alternatives.


**Figure 1 – Block Diagram**

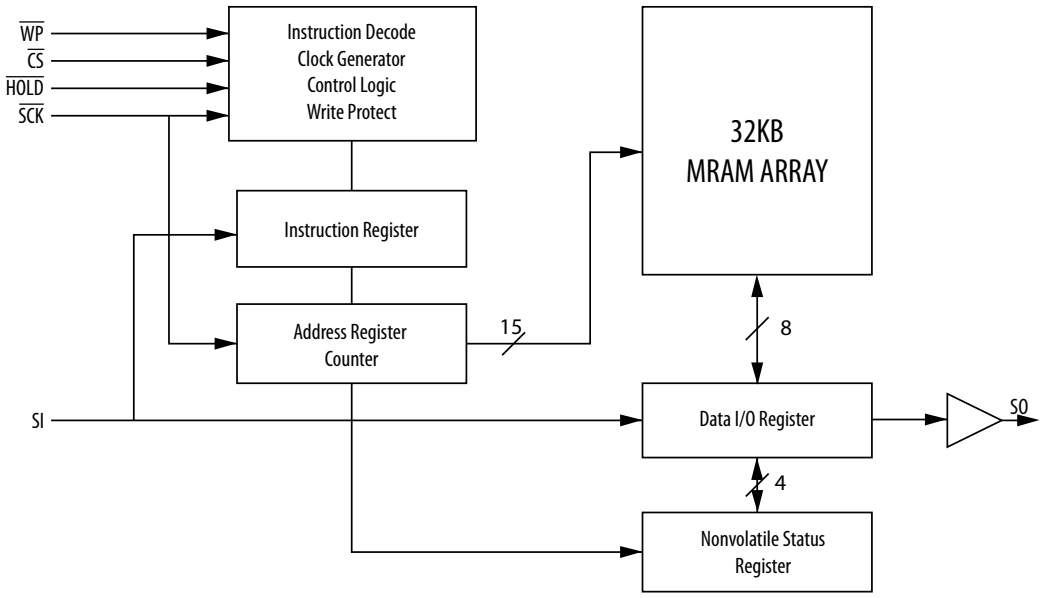


### System Configuration

Single or multiple devices can be connected to the bus as shown in Figure 2. Pins SCK, SO and SI are common among devices. Each device requires $\overline{CS}$ and $\overline{HOLD}$ pins to be driven separately.

**Figure 2 – System Configuration**

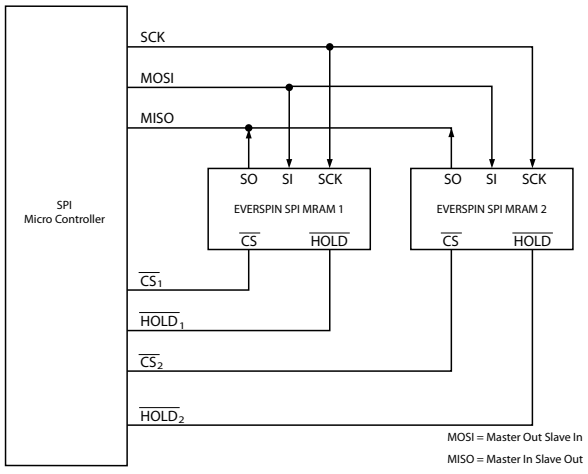




深圳市精芯科技有限公司 Tel:+86-755-2990-5940
Web:www.manduic.com Email:sales@manduic.com

## DEVICE PIN ASSIGNMENT

### Figure 3 – Pin Diagram All 8-DFN Packages

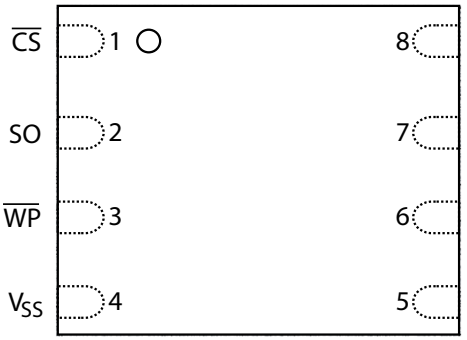


Top View

### Table 1 – Pin Functions All 8-DFN Packages

| Signal Name | Pin | I/O | Function | Description |
|---|---|---|---|---|
| $\overline{CS}$ | 1 | Input | Chip Select | An active low chip select for the serial MRAM. When chip select is high, the memory is powered down to minimize standby power, inputs are ignored and the serial output pin is Hi-Z. Multiple serial memories can share a common set of data pins by using a unique chip select for each memory. |
| SO | 2 | Output | Serial Output | The data output pin is driven during a read operation and remains Hi-Z at all other times. SO is Hi-Z when $\overline{HOLD}$ is low. Data transitions on the data output occur on the falling edge of SCK. |
| $\overline{WP}$ | 3 | Input | Write Protect | A low on the write protect input prevents write operations to the Status Register. |
| $V_{SS}$ | 4 | Supply | Ground | Power supply ground pin. |
| SI | 5 | Input | Serial Input | All data is input to the device through this pin. This pin is sampled on the rising edge of SCK and ignored at other times. SI can be tied to SO to create a single bidirectional data bus if desired. |
| SCK | 6 | Input | Serial Clock | Synchronizes the operation of the MRAM. The clock can operate up to 40 MHz to shift commands, address, and data into the memory. Inputs are captured on the rising edge of clock. Data outputs from the MRAM occur on the falling edge of clock. The serial MRAM supports both SPI Mode 0 (CPOL=0, CPHA=0) and Mode 3 (CPOL=1, CPHA=1). In Mode 0, the clock is normally low. In Mode 3, the clock is normally high. Memory operation is static so the clock can be stopped at any time. |
| $\overline{HOLD}$ | 7 | Input | Hold | A low on the Hold pin interrupts a memory operation for another task. When $\overline{HOLD}$ is low, the current operation is suspended. The device will ignore transitions on the $\overline{CS}$ and SCK when $\overline{HOLD}$ is low. All transitions of $\overline{HOLD}$ must occur while $\overline{CS}$ is low. |
| $V_{DD}$ | 8 | Supply | Power Supply | Power supply voltage from +2.7 to +3.6 volts. |


深圳市精芯科技有限公司 Tel:130-1290-5940
Web:www.manduic.com Email:sales@manduic.com

## SPI COMMUNICATIONS PROTOCOL

MR25H256/MR25H256A can be operated in either SPI Mode 0 (CPOL=0, CPHA =0) or SPI Mode 3 (CPOL=1, CPHA=1). For both modes, inputs are captured on the rising edge of the clock and data outputs occur on the falling edge of the clock. When not conveying data, SCK remains low for Mode 0; while in Mode 3, SCK is high. The memory determines the mode of operation (Mode 0 or Mode 3) based upon the state of the SCK when $\overline{CS}$ falls.

All memory transactions start when $\overline{CS}$ is brought low to the memory. The first byte is a command code. Depending upon the command, subsequent bytes of address are input. Data is either input or output. There is only one command performed per $\overline{CS}$ active period. $\overline{CS}$ must go inactive before another command can be accepted. To ensure proper part operation according to specifications, it is necessary to terminate each access by raising $\overline{CS}$ at the end of a byte (a multiple of 8 clock cycles from $\overline{CS}$ dropping) to avoid partial or aborted accesses.

**Table 2 – Command Codes**

| Instruction | Description | Binary Code | Hex Code | Address Bytes | Data Bytes |
|---|---|---|---|---|---|
| WREN | Write Enable | 0000 0110 | 06h | 0 | 0 |
| WRDI | Write Disable | 0000 0100 | 04h | 0 | 0 |
| RDSR | Read Status Register | 0000 0101 | 05h | 0 | 1 |
| WRSR | Write Status Register | 0000 0001 | 01h | 0 | 1 |
| READ | Read Data Bytes | 0000 0011 | 03h | 2 | 1 to ∞ |
| WRITE | Write Data Bytes | 0000 0010 | 02h | 2 | 1 to ∞ |
| SLEEP | Enter Sleep Mode | 1011 1001 | B9h | 0 | 0 |
| WAKE | Exit Sleep Mode | 1010 1011 | ABh | 0 | 0 |

### Status Register and Block Write Protection

The status register consists of the 8 bits listed in table 2.2. Status register bits BP0 and BP1 define the memory block arrays that are protected as described in table 2.3. The Status Register Write Disable bit (SRWD) is used in conjunction with bit 1 (WEL) and the Write Protection pin ($\overline{WP}$) as shown in table 2.4 to enable writes to status register bits. The fast writing speed of MR25H256/MR25H256A does not require write status bits. The state of bits 6,5,4, and 0 can be user modified and do not affect memory operation. All bits in the status register are pre-set from the factory to the "0" state.

**Table 3 – Status Register Bit Assignments**

| Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|---|---|---|---|---|---|---|---|
| SRWD | Don't Care | Don't Care | Don't Care | BP1 | BP0 | WEL | Don't Care |

Copyright © 2018 Everspin Technologies

深圳市精芯科技有限公司 Tel:400-1290-5940
Web:www.manduic.com Email:sales@manduic.com

**Table 4 – Block Memory Write Protection**

| Status Register | | Memory Contents | |
|---|---|---|---|
| BP1 | BP0 | Protected Area | Unprotected Area |
| 0 | 0 | None | All Memory |
| 0 | 1 | Upper Quarter | Lower Three-Quarters |
| 1 | 0 | Upper Half | Lower Half |
| 1 | 1 | All | None |

**Table 5 – Memory Protection Modes**


| WEL | SRWD | $\overline{WP}$ | Protected Blocks | Unprotected Blocks | Status Register |
|---|---|---|---|---|---|
| 0 | X | X | Protected | Protected | Protected |
| 1 | 0 | X | Protected | Writable | Writable |
| 1 | 1 | Low | Protected | Writable | Protected |
| 1 | 1 | High | Protected | Writable | Writable |

When WEL is reset to 0, writes to all blocks and the status register are protected. When WEL is set to 1, BP0 and BP1 determine which memory blocks are protected. While SRWD is reset to 0 and WEL is set to 1, status register bits BP0 and BP1 can be modified. Once SRWD is set to 1, $\overline{WP}$ must be high to modify SRWD, BP0 and BP1.

## Read Status Register (RDSR)

The Read Status Register (RDSR) command allows the Status Register to be read. The Status Register can be read at any time to check the status of write enable latch bit, status register write protect bit, and block write protect bits. For MR25H256/MR25H256A, the write in progress bit (bit 0) is not written by the memory because there is no write delay. The RDSR command is entered by driving $\overline{CS}$ low, sending the command code, and then driving $\overline{CS}$ high.

**Figure 4 – RDSR**

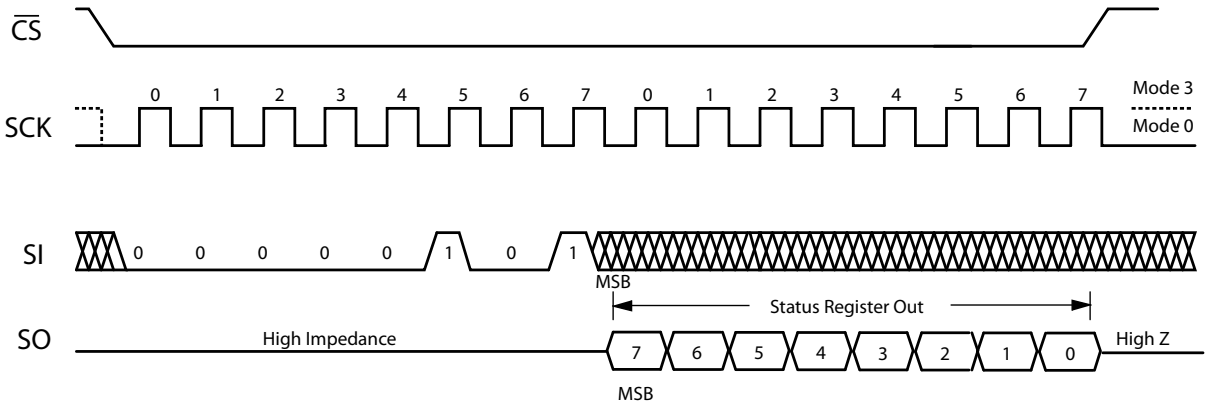





深圳市满度科技有限公司 Tel:+86-755-2390-5940
Web:www.manduic.com Email:sales@manduic.com

## Write Enable (WREN)

The Write Enable (WREN) command sets the Write Enable Latch (WEL) bit in the status register to 1. The WEL bit must be set prior to writing in the status register or the memory. The WREN command is entered by driving $\overline{CS}$ low, sending the command code, and then driving $\overline{CS}$ high.

**Figure 5 – WREN**

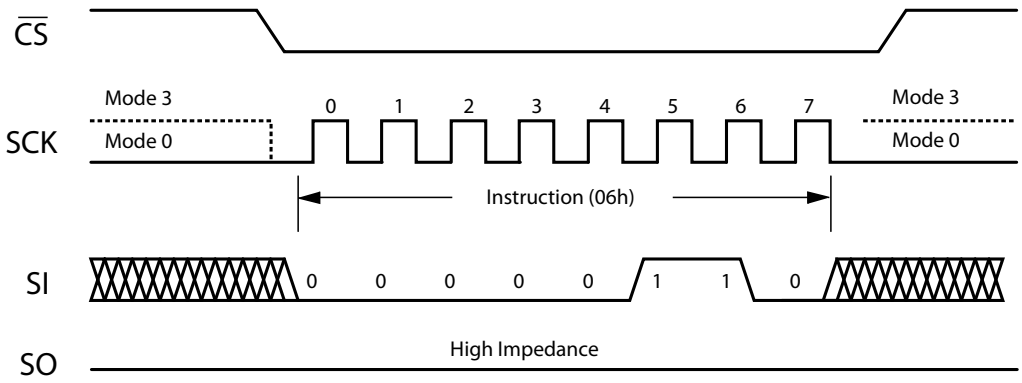



## Write Disable (WRDI)

The Write Disable (WRDI) command resets the WEL bit in the status register to 0. This prevents writes to status register or memory. The WRDI command is entered by driving $\overline{CS}$ low, sending the command code, and then driving $\overline{CS}$ high.

The WEL bit is reset to 0 on power-up or completion of WRDI.

**Figure 6 – WRDI**

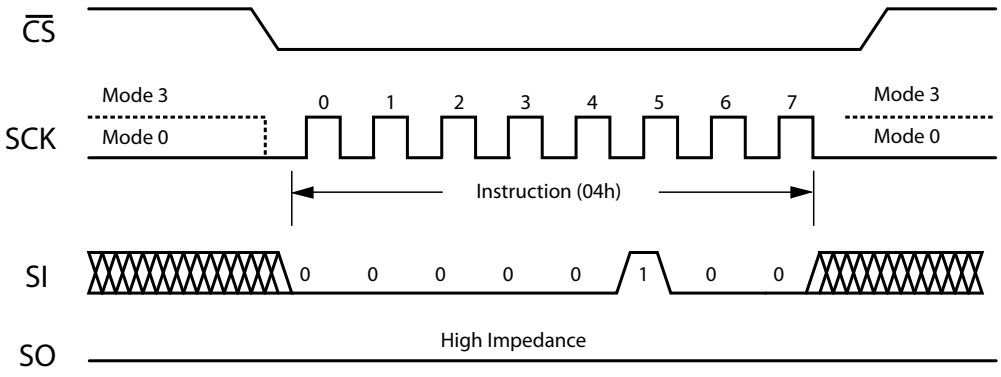




深圳市硕电科技有限公司 Tel:+86-755-2690-5940
Web:www.manduic.com Email:sales@manduic.com

## Write Status Register (WRSR)

The Write Status Register (WRSR) command allows new values to be written to the Status Register. The WRSR command is not executed unless the Write Enable Latch (WEL) has been set to 1 by executing a WREN command while pin $\overline{WP}$ and bit SRWD correspond to values that make the status register writable as seen in table 2.4. Status Register bits are non-volatile with the exception of the WEL which is reset to 0 upon power cycling.

The WRSR command is entered by driving $\overline{CS}$ low, sending the command code and status register write data byte, and then driving $\overline{CS}$ high.

**Figure 7 – WRSR**

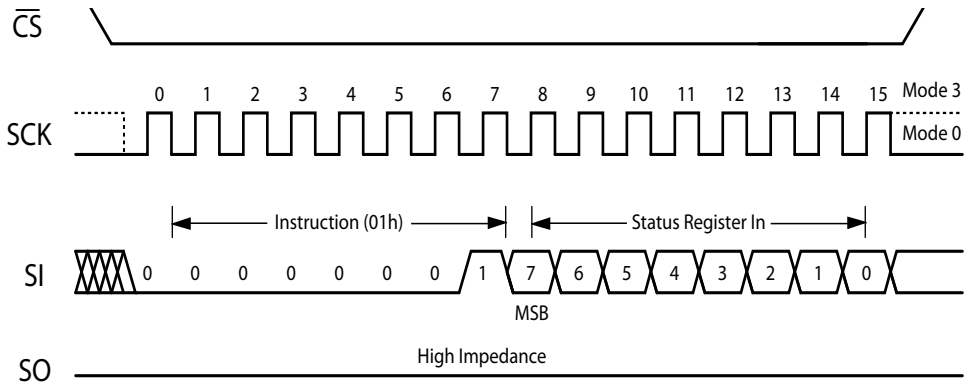




深圳市硕电科技有限公司 Tel:+86-755-2690-5940
Web:www.manduic.com Email:sales@manduic.com

## Read Data Bytes (READ)

The Read Data Bytes (READ) command allows data bytes to be read starting at an address specified by the 16-bit address. Only address bits 0-14 are decoded by the memory. The data bytes are read out sequentially from memory until the read operation is terminated by bringing $\overline{CS}$ high The entire memory can be read in a single command. The address counter will roll over to 0000h when the address reaches the top of memory.

The READ command is entered by driving $\overline{CS}$ low and sending the command code. The memory drives the read data bytes on the SO pin. Reads continue as long as the memory is clocked. The command is terminated by bring $\overline{CS}$ high.

**Figure 8 – READ**

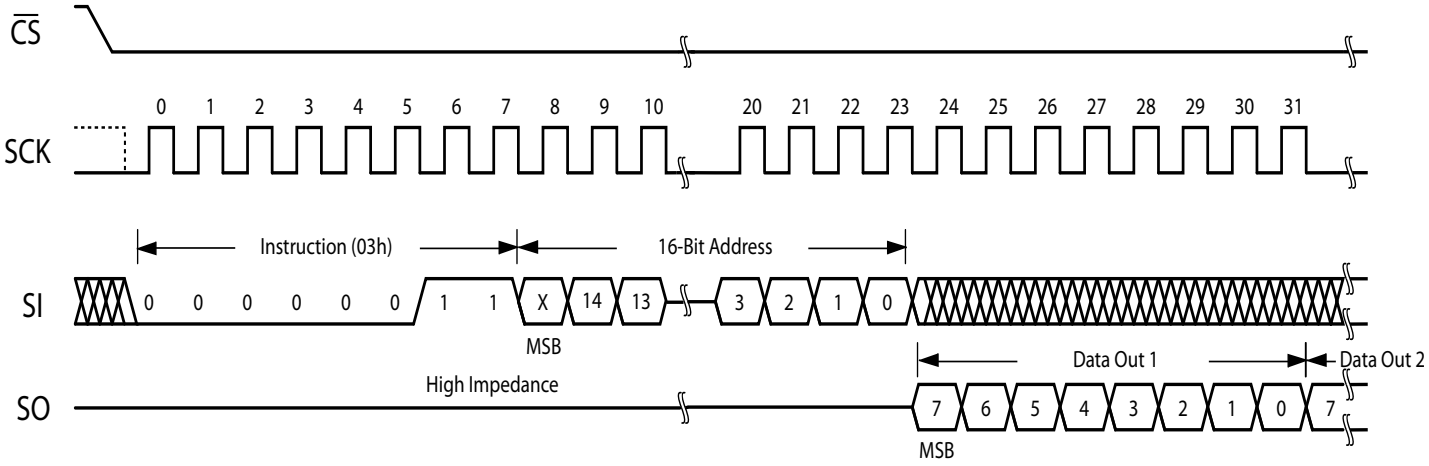



深圳市硕电科技有限公司 Tel:+86-1290-5940
Web:www.manduic.com Email:sales@manduic.com


## Write Data Bytes (WRITE)

The Write Data Bytes (WRITE) command allows data bytes to be written starting at an address specified by the 16-bit address. Only address bits 0-14 are decoded by the memory. The data bytes are written sequentially in memory until the write operation is terminated by bringing $\overline{CS}$ high. The entire memory can be written in a single command. The address counter will roll over to 0000h when the address reaches the top of memory.

Unlike EEPROM or Flash Memory, MRAM can write data bytes continuously at its maximum rated clock speed without write delays or data polling. Back to back WRITE commands to any random location in memory can be executed without write delay. MRAM is a random access memory rather than a page, sector, or block organized memory making it ideal for both program and data storage.

The WRITE command is entered by driving $\overline{CS}$ low, sending the command code, and then sequential write data bytes. Writes continue as long as the memory is clocked. The command is terminated by bringing $\overline{CS}$ high.

**Figure 9 – WRITE**

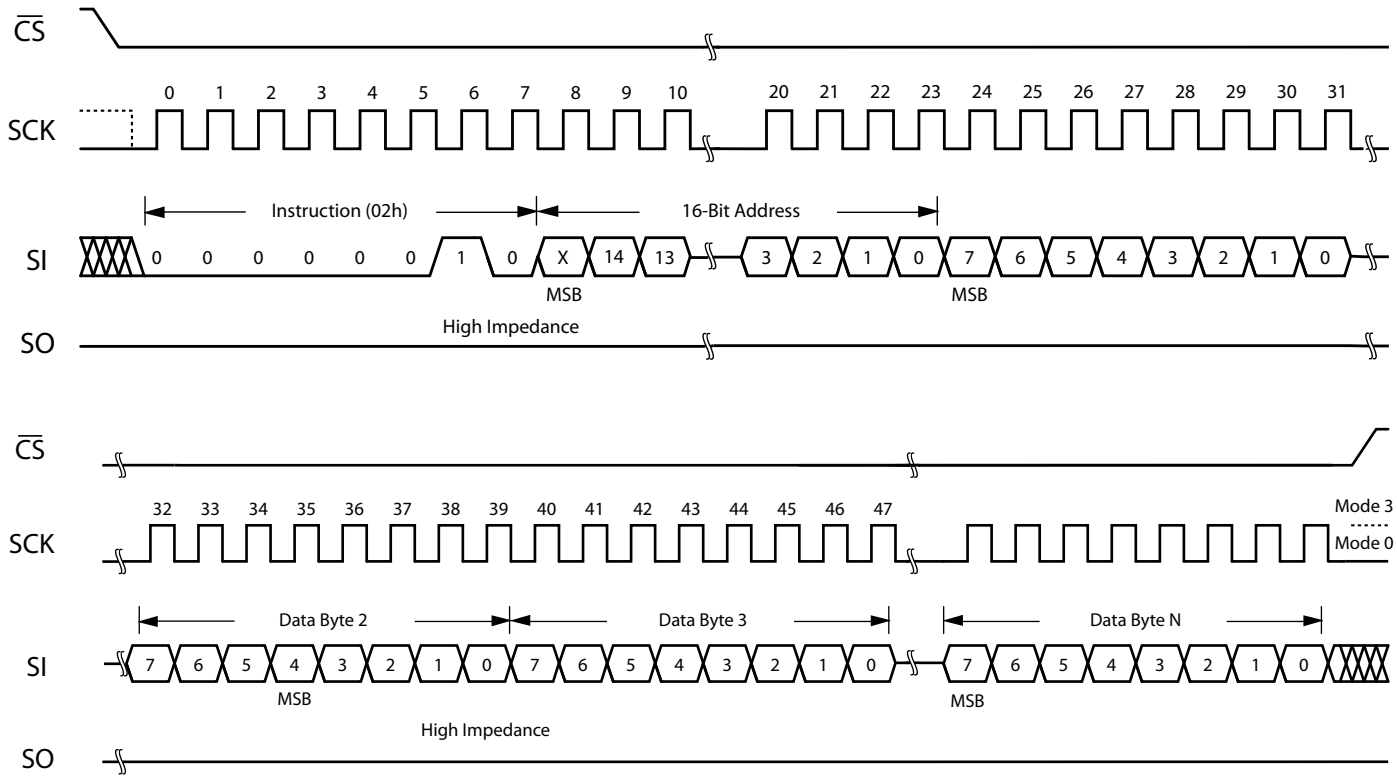




深圳市精芯科技有限公司 Tel:+86-1290-5940
Web:www.manduic.com Email:sales@manduic.com

## Enter Sleep Mode (SLEEP)

The Enter Sleep Mode (SLEEP) command turns off all MRAM power regulators in order to reduce the overall chip standby power to 3 µA typical. The SLEEP command is entered by driving $\overline{CS}$ low, sending the command code, and then driving $\overline{CS}$ high. The standby current is achieved after time, $^{t}DP$. If power is removed when the part is in sleep mode, upon power restoration, the part enters normal standby. The only valid command following SLEEP mode entry is a WAKE command.


**Figure 10 – SLEEP**

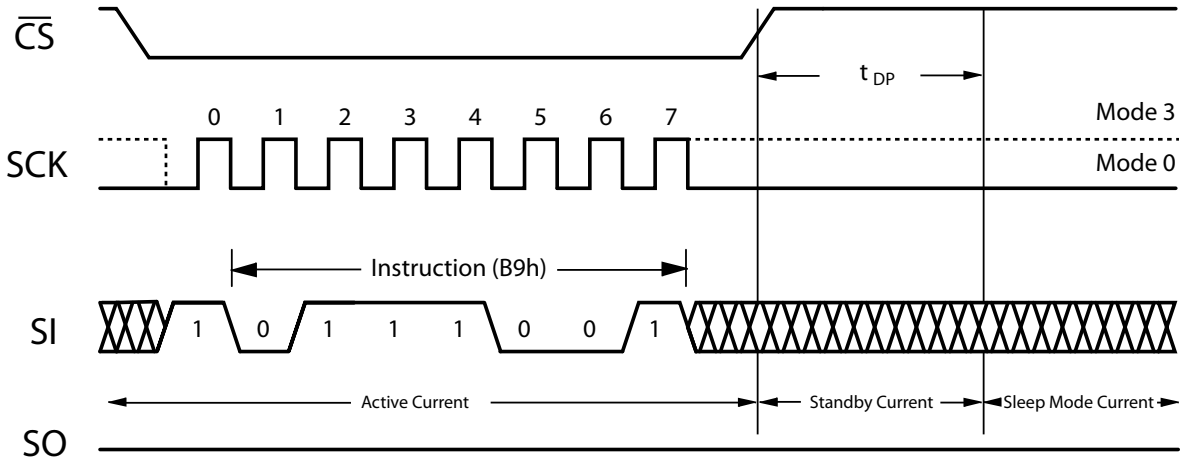


## Exit Sleep Mode (WAKE)

The Exit Sleep Mode (WAKE) command turns on internal MRAM power regulators to allow normal operation. The WAKE command is entered by driving $\overline{CS}$ low, sending the command code, and then driving $\overline{CS}$ high. The memory returns to standby mode after $^{t}RDP$. The $\overline{CS}$ pin must remain high until the $^{t}RDP$ period is over.

**Figure 11 – WAKE**

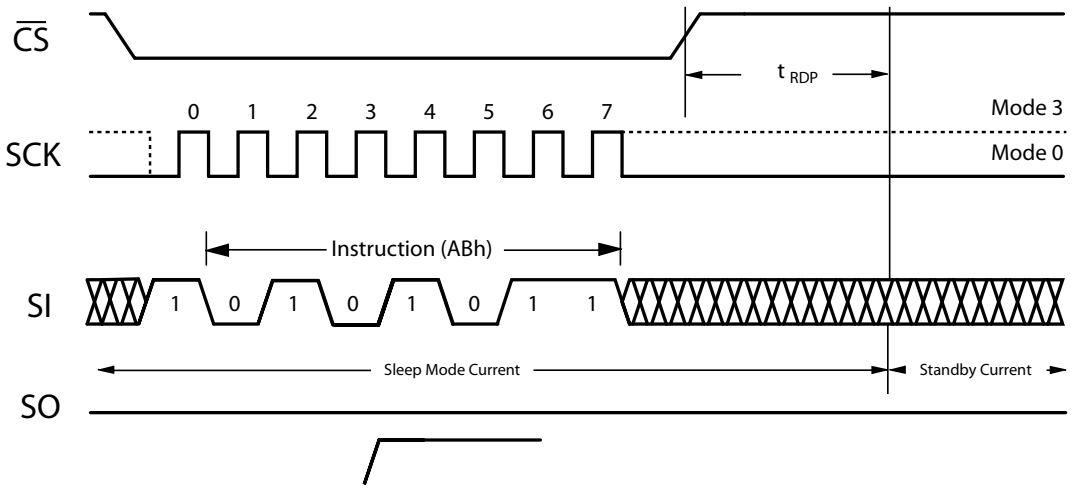



深圳市精芯科技有限公司 Tel:+86-1290-5940
Web:www.manduic.com Email:sales@manduic.com

# ELECTRICAL SPECIFICATIONS

## Absolute Maximum Ratings

This device contains circuitry to protect the inputs against damage caused by high static voltages or electric fields; however, it is advised that normal precautions be taken to avoid application of any voltage greater than maximum rated voltages to these high-impedance (Hi-Z) circuits.

The device also contains protection against external magnetic fields. Precautions should be taken to avoid application of any magnetic field more intense than the field intensity specified in the maximum ratings.

**Table 6 – Absolute Maximum Ratings**

| Symbol | Parameter | Conditions | Value [1] | Unit |
|---|---|---|---|---|
| $V_{DD}$ | Supply voltage [2] | All | -0.5 to 4.0 | V |
| $V_{IN}$ | Voltage on any pin [2] | All | -0.5 to $V_{DD}$ + 0.5 | V |
| $I_{OUT}$ | Output current per pin | All | ±20 | mA |
| $P_D$ | Package power dissipation [3] | All | 0.600 | W |
| $T_{BIAS}$ | Temperature under bias | Industrial | -45 to 95 | °C |
| | | AEC-Q100 Grade 3 | -45 to 95 | °C |
| | | AEC-Q100 Grade 1 | -45 to 135 | °C |
| $T_{stg}$ | Storage Temperature | All | -55 to 150 | °C |
| $T_{Lead}$ | Lead temperature during solder (3 minute max) | All | 260 | °C |
| $H_{max_write}$ | Maximum magnetic field (Write) | During Write | 12,000 | A/m |
| $H_{max_read}$ | Maximum magnetic field (Read or Standby) | During Read or Standby | 12,000 | A/m |

Notes:

1. Permanent device damage may occur if absolute maximum ratings are exceeded. Functional operation should be restricted to recommended operating conditions. Exposure to excessive voltages or magnetic fields could affect device reliability.
2. All voltages are referenced to $V_{SS}$. The DC value of $V_{IN}$ must not exceed actual applied $V_{DD}$ by more than 0.5V. The AC value of $V_{IN}$ must not exceed applied $V_{DD}$ by more than 2V for 10ns with $I_{IN}$ limited to less than 20mA.
3. Power dissipation capability depends on package characteristics and use environment.


深圳市满度科技有限公司 Tel:+86-1290-5940
Web:www.manduic.com Email:sales@manduic.com

## Table 7 – Operating Conditions

| Symbol | Parameter | Grade | Min | Typical | Max | Unit |
|---|---|---|---|---|---|---|
| $V_{DD}$ | Power supply voltage | Industrial | 2.7 | - | 3.6 | V |
| | | AEC-Q100 Grade 3 | 2.7 | - | 3.6 | V |
| | | AEC-Q100 Grade1 | 3.0 | - | 3.6 | V |
| $V_{IH}$ | Input high voltage | All | 2.2 | - | $V_{DD}$ + 0.3 | V |
| $V_{IL}$ | Input low voltage | All | -0.5 | - | 0.8 | V |
| $T_A$ | Temperature under bias | Industrial | -40 | - | 85 | °C |
| | | AEC-Q100 Grade 3 | -40 | - | 85 | °C |
| | | AEC-Q100 Grade 1 [1] | -40 | - | 125 | °C |

1. AEC-Q100 Grade 1 temperature profile assumes 10 percent duty cycle at maximum temperature (2 years out of 20-year life.)

## Table 8 – DC Characteristics

| Symbol | Parameter | Conditions | Min | Typical | Max | Unit |
|---|---|---|---|---|---|---|
| $I_{LI}$ | Input leakage current | All | - | - | ±1 | µA |
| $I_{LO}$ | Output leakage current | All | - | - | ±1 | µA |
| $V_{OL}$ | Output low voltage | $I_{OL}$ = +4 mA | - | - | 0.4 | V |
| | | $I_{OL}$ = +100 µA | - | - | $V_{SS}$ + 0.2v | V |
| $V_{OH}$ | Output high voltage | $I_{OH}$ = -4 mA | 2.4 | - | - | V |
| | | $I_{OH}$ = -100 µA | $V_{DD}$ - 0.2 | - | - | V |

## Table 9 – Power Supply Characteristics

| Symbol | Parameter | Conditions | Typical | Max | Unit |
|---|---|---|---|---|---|
| $I_{DDR}$ | Active Read Current | @ 1 MHz | 2.5 | 3 | mA |
| | | @ 40 MHz | 6 | 10 | mA |
| $I_{DDW}$ | Active Write Current | @ 1 MHz | 8 | 13 | mA |
| | | @ 40 MHz | 23 | 27 | mA |
| $I_{SB}$ | Standby Current | $\overline{CS}$ High [1] | 90 | 115 | µA |
| $I_{ZZ}$ | Standby Sleep Mode Current | $\overline{CS}$ High | 7 | 30 | µA |

1. $I_{SB}$ current is specified with $\overline{CS}$ high and the SPI bus inactive.


深圳市脉度科技有限公司 Tel:+86-755-2690-5940
Web:www.manduic.com Email:sales@manduic.com

## TIMING SPECIFICATIONS

### Table 10 – Capacitance


| Symbol | Parameter | Typical | Max [1] | Unit |
|---|---|---|---|---|
| $C_{In}$ | Control input capacitance | - | 6 | pF |
| $C_{I/O}$ | Input/Output capacitance | - | 8 | pF |

1. $f$ = 1.0 MHz, dV = 3.0 V, $T_A$ = 25 °C, periodically sampled rather than 100% tested.


### Table 11 – AC Measurement Conditions

| Parameter | Value | Unit |
|---|---|---|
| Logic input timing measurement reference level | 1.5 | V |
| Logic output timing measurement reference level | 1.5 | V |
| Logic input pulse levels | 0 or 3.0 | V |
| Input rise/fall time | 2 | ns |
| Output load for low and high impedance parameters | See Figure 4.1 | |
| Output load for all other timing parameters | See Figure 4.2 | |

### Figure 12 – Output Load for Impedance Parameter Measurements

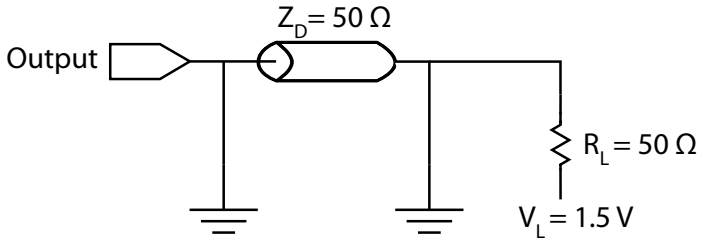


### Figure 13 – Output Load for All Other Parameter Measurements

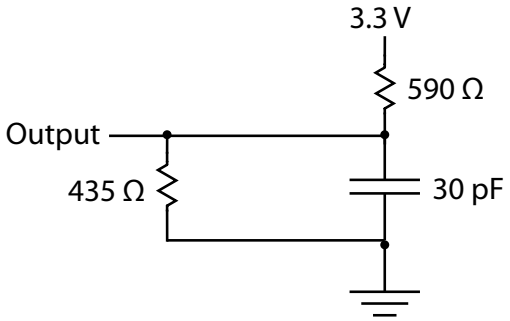



深圳市脉度科技有限公司 Tel:+86-755-2690-5940
Web:www.manduic.com Email:sales@manduic.com


## Power-Up Timing

The MR25H256/MR25H256A is not accessible for a start-up time $^{t}PU$ = 400 µs after power up. Users must wait this time from the time when $V_{DD}$ (min) is reached until the first $\overline{CS}$ low to allow internal voltage references to become stable. The $\overline{CS}$ signal should be pulled up to $V_{DD}$ so that the signal tracks the power supply during power-up sequence.

**Table 12 – Power-Up**

| Symbol | Parameter | Min | Typical | Max | Unit |
|---|---|---|---|---|---|
| $V_{WI}$ | Write Inhibit Voltage | 2.2 | - | 2.7 | V |
| $^{t}PU$ | Startup Time | 400 | - | - | µs |

**Figure 14 – Power-Up Timing**

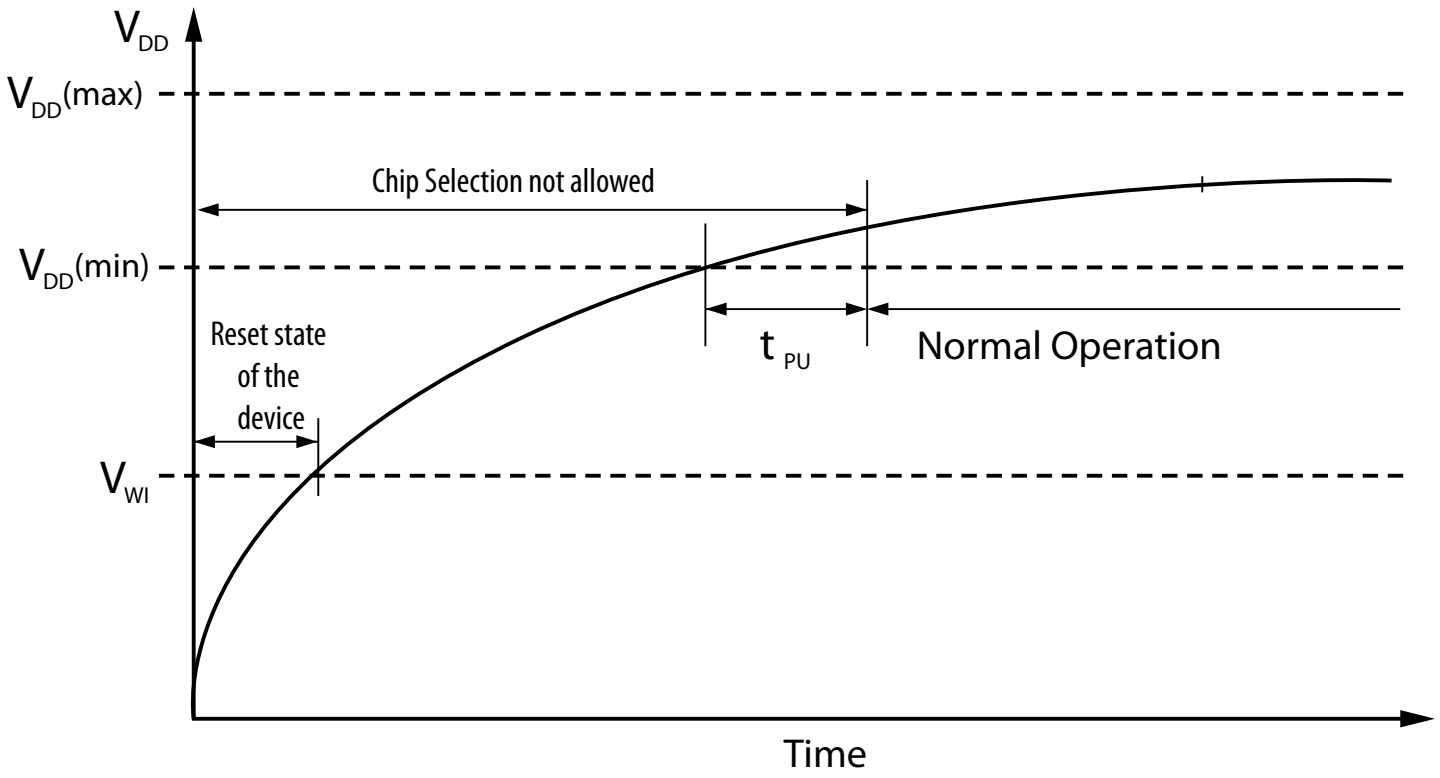



深圳市硕美科技有限公司 Tel:+86-755-1290-5940
Web:www.manduic.com Email:sales@manduic.com

## Synchronous Data Timing

### Table 13 – AC Timing Parameters

| Over the Operating Temperature Range and $C_L$ = 30 pF | | | | | | |
|---|---|---|---|---|---|---|
| **Symbol** | **Parameter** | | | **Min** | **Max** | **Unit** |
| $^{f}SCK$ | SCK Clock Frequency | | | 0 | 40 | MHz |
| $^{t}RI$ | Input Rise Time | | | - | 50 | ns |
| $^{t}RF$ | Input Fall Time | | | - | 50 | ns |
| $^{t}WH$ | SCK High Time | | | 11 | - | ns |
| $^{t}WL$ | SCK Low Time | | | 11 | - | ns |
| Synchronous Data Timing (See "Figure 15 – Synchronous Data Timing" on page 19 | | | | | | |
| $^{t}CS$ | $\overline{CS}$ High Time | | | 40 | - | ns |
| $^{t}CSS$ | $\overline{CS}$ Setup Time | | | 10 | - | ns |
| $^{t}CSH$ | $\overline{CS}$ Hold Time | | | 10 | - | ns |
| $^{t}SU$ | Data In Setup Time | | | 5 | - | ns |
| $^{t}H$ | Data In Hold Time | | | 5 | - | ns |
| $^{t}V$ | Output Valid | Industrial Grade | $V_{DD}$ = 2.7 to 3.6v. | 0 | 10 | ns |
| | | | $V_{DD}$ = 3.0 to 3.6v. | 0 | 9 | ns |
| | | AEC Q-100 Grade 3 | $V_{DD}$ = 2.7 to 3.6v. | 0 | 10 | ns |
| | | | $V_{DD}$ = 3.0 to 3.6v. | 0 | 9 | ns |
| | | AEC Q-100 Grade 1 | $V_{DD}$ = 3.0 to 3.6v. | 0 | 10 | ns |

Table continues next page.



深圳市精芯科技有限公司 Tel:+86-755-2990-5940
Web:www.manduic.com Email:sales@manduic.com

## AC Timing Parameters (Continued)

| Symbol | Parameter | Min | Max | Unit |
|---|---|---|---|---|
| $^{t}HO$ | Output Hold Time | 0 | - | ns |
| $\overline{HOLD}$ Timing | | | | |
| $^{t}HD$ | $\overline{HOLD}$ Setup Time | 10 | - | ns |
| $^{t}CD$ | $\overline{HOLD}$ Hold Time | 10 | - | ns |
| $^{t}LZ$ | $\overline{HOLD}$ to Output Low Impedance | - | 20 | ns |
| $^{t}HZ$ | $\overline{HOLD}$ to Output High Impedance | - | 20 | ns |
| Other Timing Specifications (See "Figure 16 – HOLD Timing" on page 19) | | | | |
| $^{t}WPS$ | $\overline{WP}$ Setup To $\overline{CS}$ Low | 5 | - | ns |
| $^{t}WPH$ | $\overline{WP}$ Hold From $\overline{CS}$ High | 5 | - | ns |
| $^{t}DP$ | Sleep Mode Entry Time | 3 | - | µs |
| $^{t}RDP$ | Sleep Mode Exit Time | 400 | - | µs |
| $^{t}DIS$ | Output Disable Time | 12 | - | ns |


深圳市精芯科技有限公司 Tel:+86-755-2990-5940
Web:www.manduic.com Email:sales@manduic.com

**Figure 15 – Synchronous Data Timing**


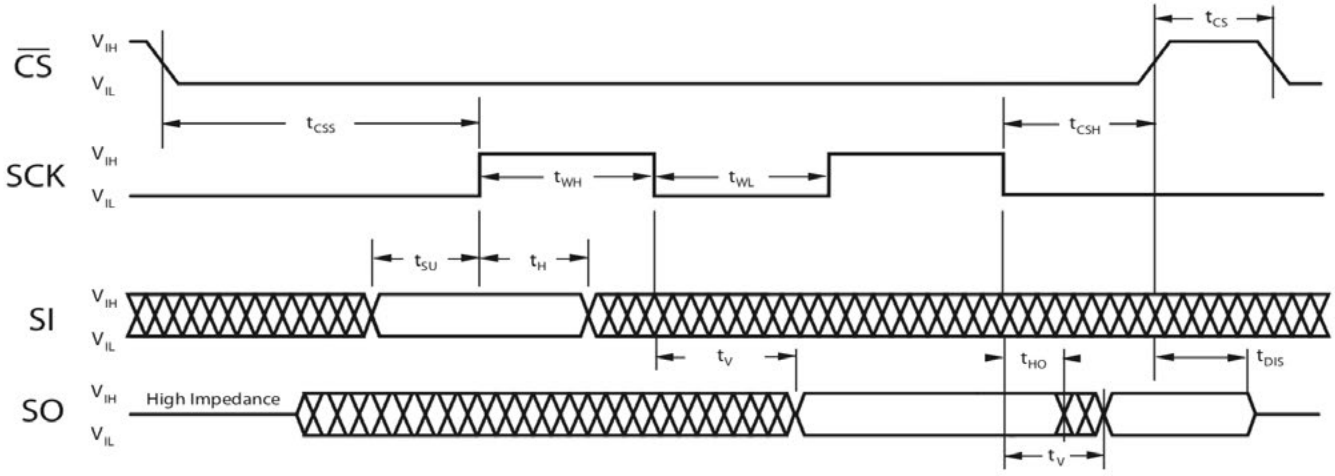



**Figure 16 – $\overline{\text{HOLD}}$ Timing**



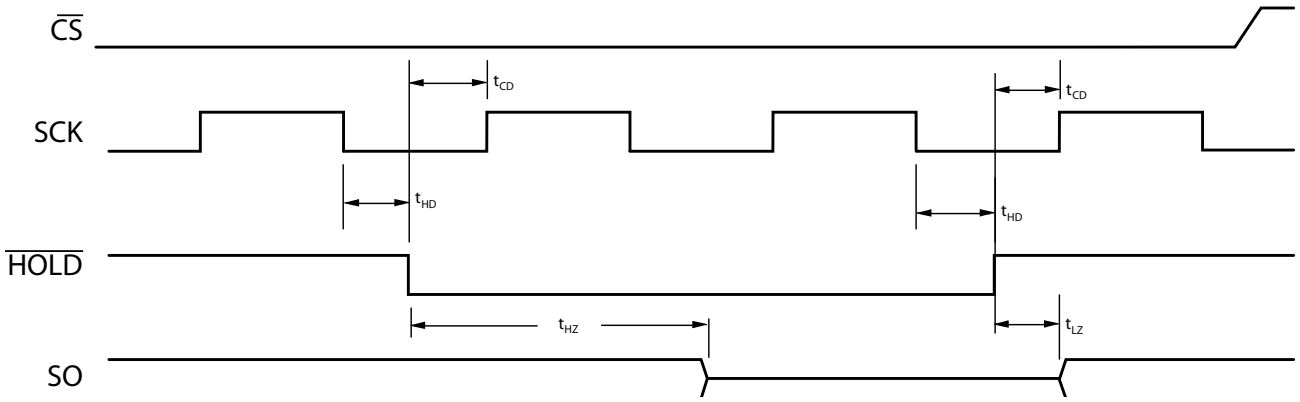

深圳市脉度科技有限公司 TEL:+86-755-2690-5940
Web:www.manduic.com Email:sales@manduic.com

# ORDERING INFORMATION

## Table 14 – Ordering Part Number Decoder Table

| | | | Memory | Speed | Voltage | Density | Revision | Temp | Package | Grade |
|---|---|---|---|---|---|---|---|---|---|---|
| Example Ordering Part Number | | | MR | 25 | H | 256 | A | C | DF | |
| Everspin MRAM | | MR | | | | | | | | |
| 40 MHz | | 25 | | | | | | | | |
| 3.0v. Vdd | | H | | | | | | | | |
| 256 Kb | | 256 | | | | | | | | |
| No Revision | | Blank | | | | | | | | |
| Revision A | | A | | | | | | | | |
| Revision B | | B | | | | | | | | |
| Industrial | -40 to 85°C | C | | | | | | | | |
| AEC Q-100 Grade 3 | -40 to 85°C | P | | | | | | | | |
| AEC-Q100 Grade 1 | -40 to 125°C | M | | | | | | | | |
| 8-pin DFN | | DC | | | | | | | | |
| 8-pin DFN Tape and Reel | | DCR | | | | | | | | |
| 8-pin DFN (small flag) in Tray | | DF | | | | | | | | |
| 8-pin DFN (small flag) Tape and Reel | | DFR | | | | | | | | |
| Engineering Samples | | ES | | | | | | | | |
| Customer Samples | | CS | | | | | | | | |
| Mass Production | | Blank | | | | | | | | |

## Table 15 – Ordering Part Numbers

| Grade | Temperature | Package | Shipping Container | Order Part Number |
|---|---|---|---|---|
| Industrial | -40 to +85 C | 8-DFN Small Flag | Trays | MR25H256ACDF |
| | | | Tape and Reel | MR25H256ACDFR |
| AEC-Q100 Grade 3 | -40 to +85 C | 8-DFN Small Flag | Trays | MR25H256APDF |
| | | | Tape and Reel | MR25H256APDFR |
| AEC-Q100 Grade 1 | -40 to +125 C | 8-DFN Small Flag | Trays | MR25H256AMDF |
| | | | Tape and Reel | MR25H256AMDFR |
| Industrial | -40 to +85 C | 8-DFN Small Flag | Trays | MR25H256CDF [1] |
| | | | Tape and Reel | MR25H256CDFR [1] |
| Industrial | -40 to +85 C | 8-DFN | Trays | MR25H256CDC [1] |
| | | | Tape and Reel | MR25H256CDCR [1] |
| AEC-Q100 Grade 1 | -40 to +125 C | 8-DFN Small Flag | Trays | MR25H256MDF [1] |
| | | | Tape and Reel | MR25H256MDFR [1] |
| AEC-Q100 Grade 1 | -40 to +125 C | 8-DFN | Trays | MR25H256MDC [1] |
| | | | Tape and Reel | MR25H256MDCR [1] |

Note:

1. Not recommended for new designs.




深圳市硕美科技有限公司 Tel:400-1299-5940
Web:www.manduic.com Email:sales@manduic.com

## PACKAGE OUTLINE DRAWINGS



**Figure 17 – 8-DFN Small Flag Package**

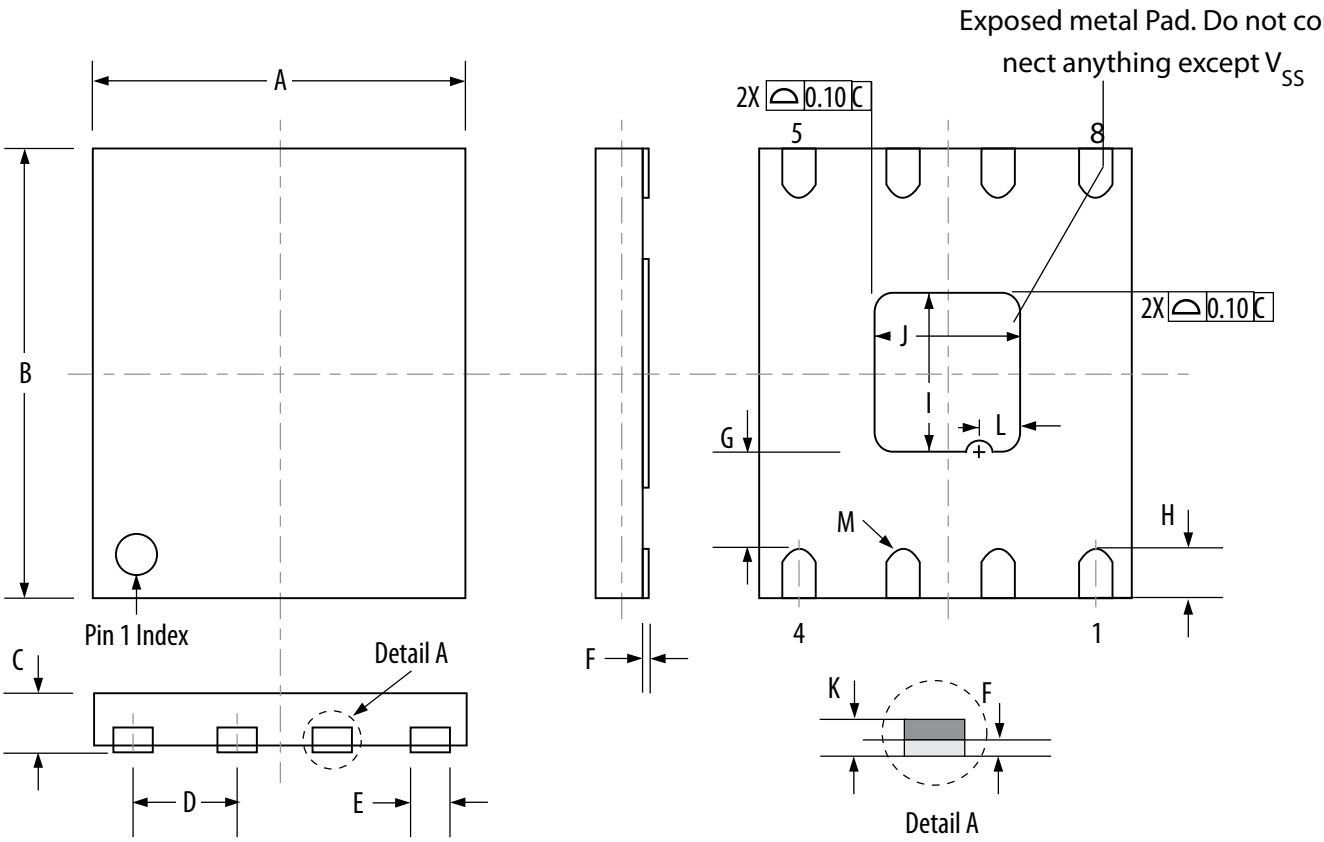


| Dimension | A | B | C | D | E | F | G | H | I | J | K | L | M |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Max | 5.10 | 6.10 | 0.90 | - | 0.45 | 0.05 | 1.54 | 0.70 | 2.10 | 2.10 | 0.210 | - | - |
| Nominal | 5.00 | 6.00 | 0.85 | 1.27 BSC | 0.40 | - | 1.40 | 0.60 | 2.00 | 2.00 | 0.200 | C0.45 | R0.20 |
| Min | 4.90 | 5.90 | 0.80 | - | 0.35 | 0.00 | 1.26 | 0.50 | 1.90 | 1.90 | 0.190 | - | - |

NOTE:

1. All dimensions are in mm. Angles in degrees.
2. Coplanarity applies to the exposed pad as well as the terminals. Coplanarity shall be within 0.08 mm.
3. Refer to JEDEC MO-229-E


Copyright © 2018 Everspin Technologies

深圳市精芯科技有限公司 Tel:130-1290-5940
Web:www.manduic.com Email:sales@manduic.com



**Figure 18 – 8-DFN Package**

Not Recommended for New Designs

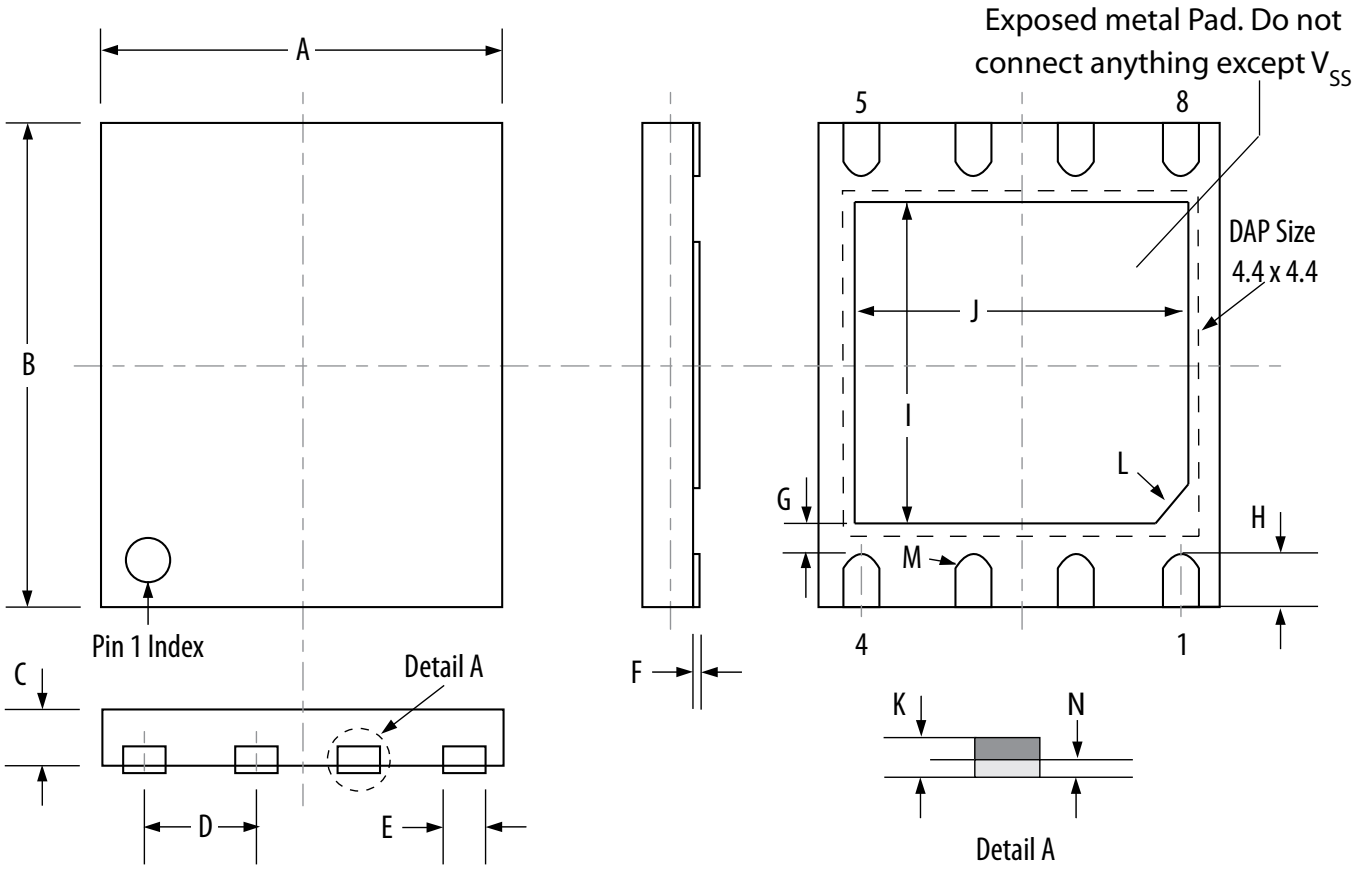


| Dimension | A | B | C | D | E | F | G | H | I | J | K | L | M | N |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Max. | 5.10 | 6.10 | 1.00 | 1.27 | 0.45 | 0.05 | 0.35 | 0.70 | 4.20 | 4.20 | 0.261 | C0.35 | R0.20 | 0.05 |
| Min. | 4.90 | 5.90 | 0.90 | BSC | 0.35 | 0.00 | Ref. | 0.50 | 4.00 | 4.00 | 0.195 | | | 0.00 |

NOTE:

1. All dimensions are in mm. Angles in degrees.
2. Coplanarity applies to the exposed pad as well as the terminals. Coplanarity shall be within 0.08 mm.
3. Warpage shall not exceed 0.10 mm.
4. Refer to JEDEC MO-229-E



深圳市精芯科技有限公司 Tel:+86-755-2990-5940
Web:www.manduic.com Email:sales@manduic.com

## REVISION HISTORY

| Revision | Date | Description of Change |
|---|---|---|
| 0.1 | June 1, 2015 | First Draft |
| 0.2 | September 29, 2015 | Added Grade 3 parameters to Table 4.4 and reformatted the table. |
| 0.3 | November 2, 2015 | Revised Part Number Decoder Table. |
| 1.0 | October 1, 2016 | Production release. Removed all Preliminary status statements and indications. Added nominal values to DFN package outline dimensions table. |
| 1.1 | October 12, 2016 | Combined with MR25H256 to make single data sheet for both product families. |
| 1.2 | December 13, 2016 | Revised product name in header. |
| 1.3 | December 20, 2016 | Minor Revisions. 8-DFN package option will remain. |
| 1.4 | February 1, 2017 | Added $^{t}$HO and $^{t}$V relationship to Synchronous Data Timing |
| 1.5 | March 23, 2018 | Updated the Contact Us table |

Copyright © 2018 Everspin Technologies

深圳市满度科技有限公司 Tel:400-1290-5940
Web:www.manduic.com Email:sales@manduic.com

# HOW TO REACH US

## Everspin Technologies, Inc.

**How to Reach Us:**

Home Page:

www.everspin.com

**World Wide Information Request**

**WW Headquarters - Chandler, AZ**

5670 W. Chandler Blvd., Suite 100

Chandler, Arizona 85226

Tel: +1-877-480-MRAM (6726)

Local Tel: +1-480-347-1111

Fax: +1-480-347-1175

support@everspin.com

orders@everspin.com

sales@everspin.com

**Europe, Middle East and Africa**

Everspin Europe Support

support.europe@everspin.com

**Japan**

Everspin Japan Support

support.japan@everspin.com

**Asia Pacific**

Everspin Asia Support

support.asia@everspin.com

**Filename:**

EST02896MR25H256-MR25H256ADatasheet_Rev1.5032318

Information in this document is provided solely to enable system and software implementers to use Everspin Technologies products. There are no express or implied licenses granted hereunder to design or fabricate any integrated circuit or circuits based on the information in this document. Everspin Technologies reserves the right to make changes without further notice to any products herein. Everspin makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Everspin Technologies assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters, which may be provided in Everspin Technologies data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters including "Typicals" must be validated for each customer application by customer's technical experts. Everspin Technologies does not convey any license under its patent rights nor the rights of others. Everspin Technologies products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Everspin Technologies product could create a situation where personal injury or death may occur. Should Buyer purchase or use Everspin Technologies products for any such unintended or unauthorized application, Buyer shall indemnify and hold Everspin Technologies and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Everspin Technologies was negligent regarding the design or manufacture of the part. Everspin™ and the Everspin logo are trademarks of Everspin Technologies, Inc. All other product or service names are the property of their respective owners.

**Copyright © 2018 Everspin Technologies, Inc.**






深圳市慧芯科技有限公司 Tel:+86-755-2990-5940
Web:www.manduic.com Email:sales@manduic.com