NOVOSENSE
纳芯微电子

NSPGS2 Series
Integrated Gauge Pressure Sensor
Datasheet (EN) 4.0

Product Overview

NSPGS2 series are calibrated gauge pressure sensor which combines state-of-art MEMS sensor technology and CMOS mix-signal processing technology to produce an amplified, fully conditioned, multi-order pressure and temperature compensated sensor in a Small Outline Package (SOP) with tube port. NSPGS2 series pressure sensor is target for consumer and medical application. Combining the pressure sensor with a signal conditioning ASIC in a single package simplifies the use of advanced silicon micromachined pressure sensors. The pressure sensor can be mounted directly to a standard printed circuit board and an amplified, high-level, calibrated pressure signal can be acquired from the digital interface or analog output. This eliminates the need for additional circuitry, such as a compensation network or micro-controller containing a custom correction algorithm. NSPGS2 series are designed for operating pressure ranges of -100kPa Gauge to 250kPa Gauge, very suitable for consumer electronics such as vacuum cleaner and medical applications.

Key Features

- High accuracy

  Total error band initially better than ±1.5%

  Full life accuracy better than ±2.5%
- Large temperature range -40°C ~70°C
- Ratio-metric/Absolute analog output
- 24bit I^2C/SPI
- SOP package with air nozzle, easy to assembly
- RoHS & REACH Compliance


Applications

- Vacuum cleaner, Vacuum juicer
- Air bed, Massage chair
- Smart blood pressure monitoring, Oxygen concentrators
- Industrial pressure sensor
- IoT pressure sensor

Device Information

Part Number	*Package*	*Body Size*
NSPGS2	SOP6	7mm*7mm

Outline

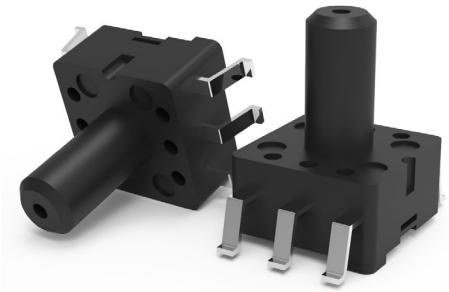

INDEX

1. PIN CONFIGURATION AND FUNCTIONS 3
2. ABSOLUTE MAXIMUM RATINGS 5
3. ESD RATINGS 5
4. RECOMMENDED OPERATING CONDITIONS 5
5. SPECIFICATIONS 6
5.1. ELECTRICAL CHARACTERISTIC 6
5.2. I²C TIMING DIAGRAM 7
5.3. I²C ELECTRICAL CHARACTERISTICS 7
5.4. SPI TIMING DIAGRAM 8
5.5. SPI ELECTRICAL CHARACTERISTICS 8
6. FUNCTION DESCRIPTION 9
6.1. OVERVIEW 9
6.2. ANALOG OUTPUT TRANSFER FUNCTION 9
6.3. DIGITAL OUTPUT TRANSFER FUNCTION 10
6.4. I²C INTERFACE 11
6.5. SPI INTERFACE 13
7. TYPICAL APPLICATION 15
7.1. APPLICATION CIRCUIT 15
8. PACKAGE INFORMATION 17
8.1. PACKAGE SIZE 17
8.2. RECOMMENDED FOOTPRINT 17
9. ORDER INFORMATION 18
10. SOLDERING PARAMETERS 19
10.1. REFLOW SOLDERING (SMD TERMINAL) 19
10.2. MANUAL SOLDERING 20
11. PACKING INFORMATION 20
12. IDENTIFICATION CODE 21
13. REVISION HISTORY 22
NOTES： 23

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

1. Pin Configuration and Functions

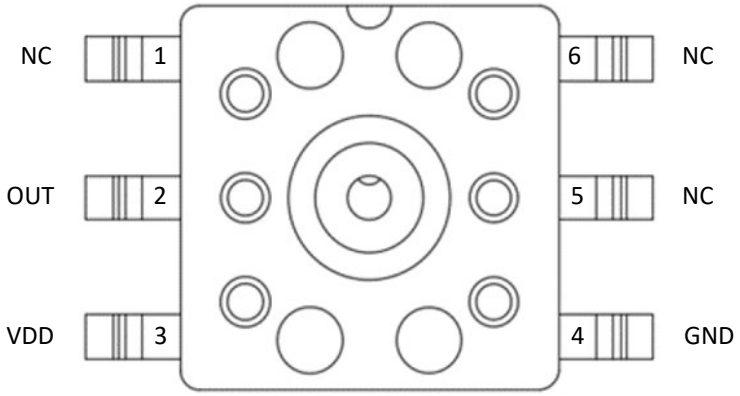


Figure 1.1 NSPGS2 Series Analog Output Pin Definition (Top view)

Table 1.1 Analog Output Pin Description

Pin NO.	*Pin Name*	*Description*
1	NC	No connect
2	OUT	Analog output
3	VDD	Power supply
4	GND	Ground
5	NC	No connect
6	NC	No connect

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

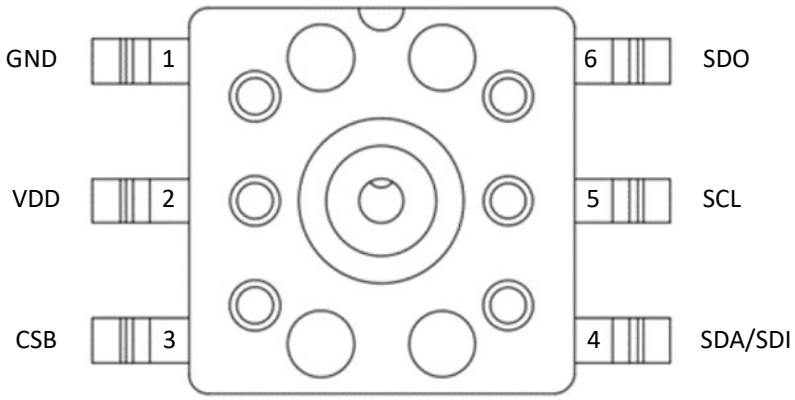


Figure 1.2 NSPGS2 Series Digital Output Pin Definition (Top view)

Table 1.2 Digital Output Pin Description

Pin NO.	*Pin name*	*Description*
1	GND	Ground
2	VDD	Power supply
3	CSB	Chip select
4	SDA/SDI	Serial data input/output in I^2C mode (SDA)
		Serial data input in SPI mode (SDI)
5	SCL	Serial clock
6	SDO	Serial data output in SPI mode (SDO)

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

2. Absolute Maximum Ratings

Parameters	Symbol	Min	Typ	Max	Unit	Comments
Supply voltage	VDD	-0.3		6.5	V	
Analog output current limit				25	mA	
Digital pin voltage		-0.3		VDD+0.3	V	@25℃
Proof pressure	P_{proof}	30			kPa	Operating pressure range <10kPa@25℃
		300				Operating pressure range ≥10kPa@25℃
Burst pressure	P_{burst}	50			kPa	Operating pressure range <10kPa@25℃
		500		1000		Operating pressure range ≥10kPa@25℃
Storage temperature	T_{stg}	-40		105	℃	

3. ESD Ratings

	Ratings	Value	Unit
Electrostatic discharge	Human body model (HBM), per AEC-Q100-002-RevE	±2	kV
	Charged device model (CDM), per AEC-Q100-011-RevD	±500	V
	Latch up (LU), per JESD78D	±100	mA

4. Recommended Operating Conditions

Parameters	Symbol	Min	Typ	Max	Unit	Comments
Supply voltage	VDD	3	3.3	3.6	V	
		4.5	5	5.5	V	
Operating pressure	P_{amb}	-100		250	kPa	
Operating pressure range	P_{range}	2		350	kPa	P_{max} - P_{min}
Operating temperature	T_{opr}	-40		70	℃	

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

5. Specifications

5.1. Electrical Characteristic

Parameters	*Symbol*	*Min*	*Typ*	*Max*	*Unit*	*Comments*
Operating current	I_{avdd}	1.8	2.5	3	mA	Analog output
			0.3	30	uA	Standby mode in digital output
ADC resolution	RES_{RAW}		24		Bits	
PSRR	PSRR	90	120		dB	
DAC resolution			12		Bits	
Output load resistance	R_{load}	1			kOhm	Analog output
Output load capacitance	C_{load}			15	nF	Analog output
Accuracy [1,2,3,4]	ACC	-1.5%		1.5%	%FS	Initially accuracy
		-2.5%		2.5%	%FS	Full life accuracy
Power up time	T_{UP}		100		ms	
EEPROM data retention	T_{live}	10			years	@125°C

1. Accuracy includes non-linearity, temperature, pressure hysteresis, temperature hysteresis.
2. Full life accuracy based on the part number NSPGS2F002RTA2、NSPGS2F035RT01 500 hour HTOL, LTOL, HTSL, THB and PCT testing.
3. For pressure accuracy of different part number, please refer to complete part number list at chapter 9.
4. The ratiometric analog output also include ±0.6% ratiometric error. The ratiometric error is defined as the difference between the ratio that VDD changed and the ratio that VOUT changed. Ratiometric signal error is not included in the overall accuracy. Absolute analog output and I^2C/SPI output are not applicable.

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

5.2. I²C Timing Diagram

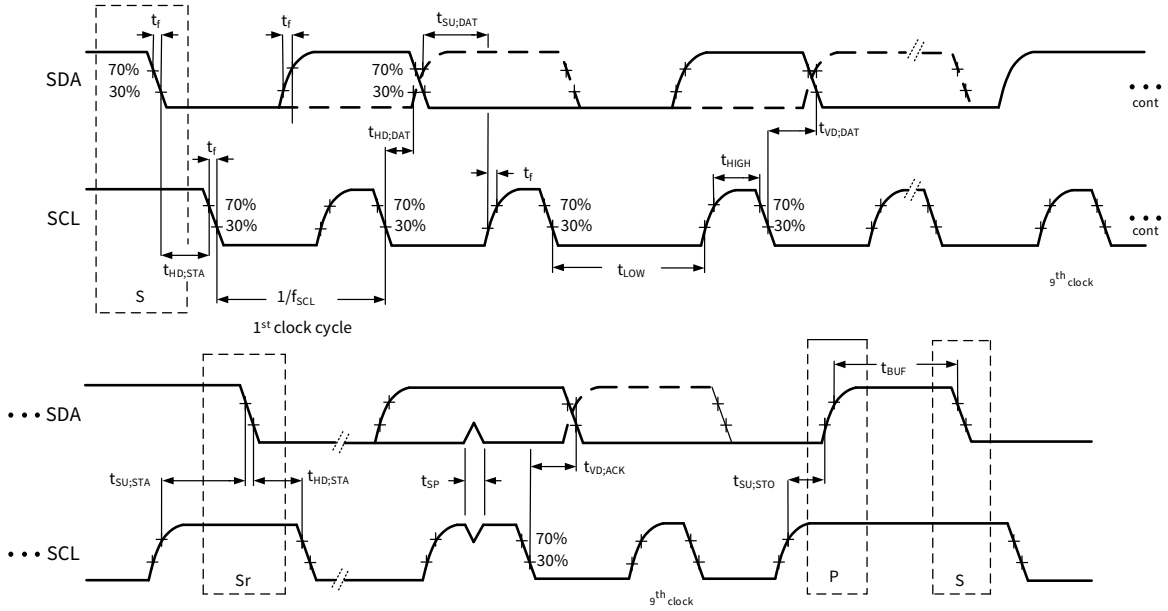


Figure 5.1 I²C Timing Diagram

5.3. I²C Electrical Characteristics

Parameters	*Symbol*	*Min*	*Typ*	*Max*	*Unit*	*Comments*
Clock frequency	f_{scl}			400	kHz	
SCL low pulse	t_{LOW}	1.3			us	
SCL high pulse	t_{HIGH}	0.6			us	
SDA setup time	t_{SUDAT}	0.1			us	
SDA hold time	t_{HDDAT}	0.0			us	
Setup time for a repeated start condition	t_{SUSTA}	0.6			us	
Hold time for a start condition	t_{HDSTA}	0.6			us	
Setup time for a stop condition	t_{SUSTO}	0.6			us	
Time before a new transmission can start	t_{BUF}	1.3			us	

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

5.4. SPI Timing Diagram

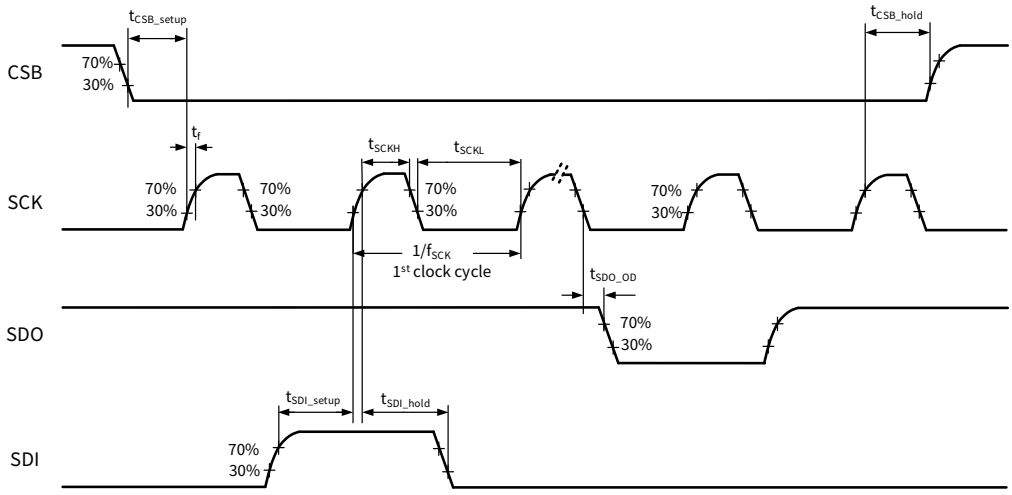


Figure 5.2 SPI Timing Diagram

5.5. SPI Electrical Characteristics

Parameters	*Symbol*	*Min*	*Typ*	*Max*	*Unit*	*Comments*
Clock frequency	f_{SCK}			10	MHz	Max load on SDI or SDO = 25pF
SLCK low pulse	t_{SCKL}	20			ns	
SLCK high pulse	t_{SCKH}	20			ns	
SDI setup time	t_{SDI_setup}	20			ns	
SDI hold time	t_{SDI_hold}	20			ns	
SDO/SDI output delay	t_{SDO_OD}			30	ns	Load = 25pF
				40	ns	Load = 250pF
CSB setup time	t_{CSB_setup}	20			ns	
CSB hold time	t_{CSB_hold}	40			ns	

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

6. Function Description

6.1. Overview

NSPGS2 uses a MEMS piezoresistive differential pressure sensor element as a pressure sensitive component that provide an original signal output that is proportional to ambient pressure. The built-in conditioning IC drives the sensitive component and amplifies, temperature compensates, and linearizes the original signal to output a voltage signal that is linear with the applied pressure.

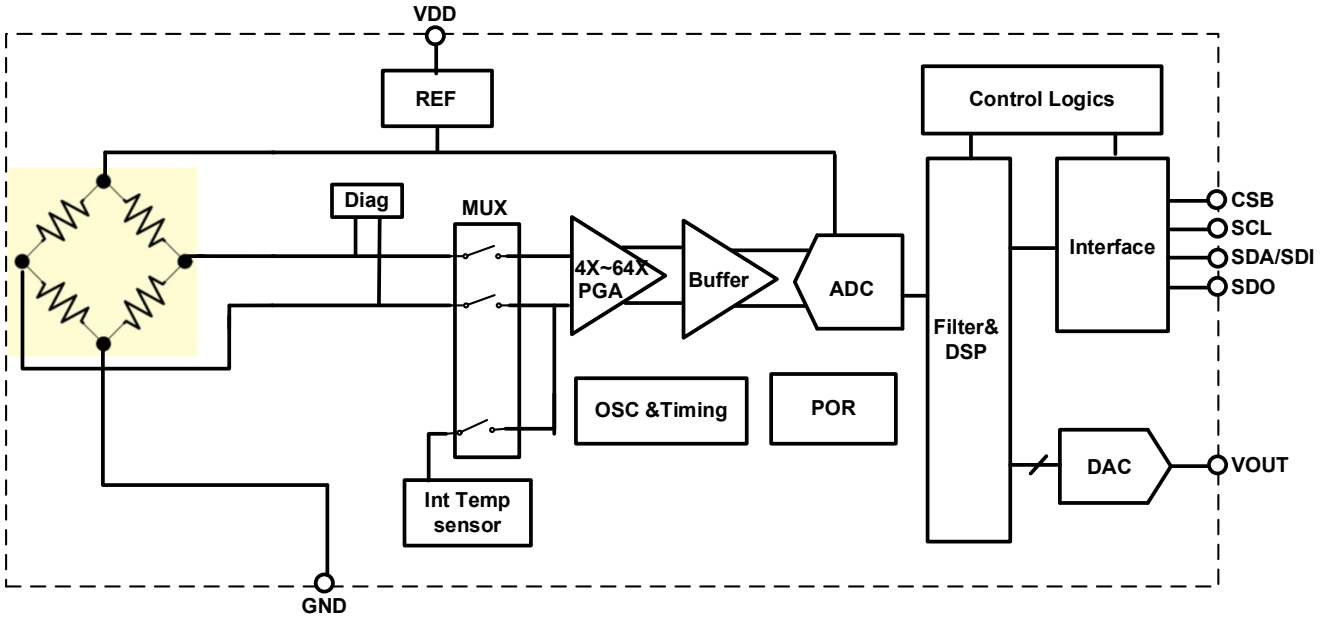


Figure 6.1 Product Function Block Diagram

6.2. Analog Output Transfer Function

$OUT = (A \times P + B) \times 5$ @absolute analog output, VDD=5V

$OUT = (A \times P + B) \times 3.3$ @absolute analog output, VDD=3.3V

$OUT = (A \times P + B) \times VDD$ @ratiometric analog output

Note:

OUT is the analog output, unit is V.

P is the pressure value, gauge pressure, unit is kPa.

Table 6.1 Analog Output Transfer Function Coefficient

Product Type	*Pressure Range*		*Output Range*		*Gain and Offset*	
	P_L	P_H	O_L	O_H	A	B
NSPGS2F035RT01	0kPa	-35kPa	0.1*VDD	0.9*VDD	-0.02286	0.1

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

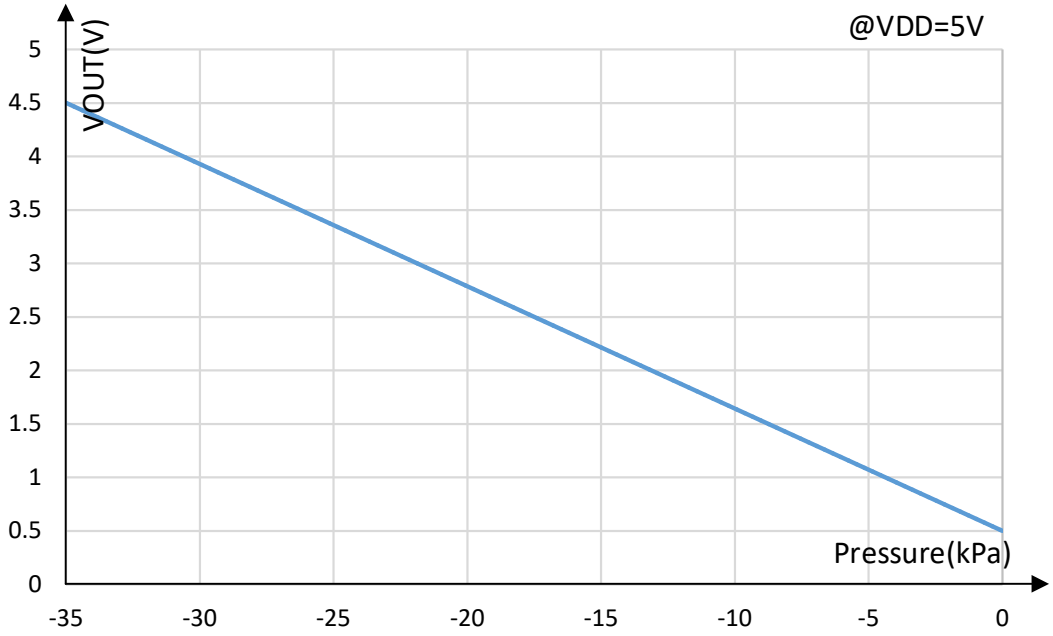


Figure 6.2 Analog Output Transfer Function

6.3. Digital Output Transfer Function

$$Code = (A \times P + B) \times 8388607$$

Code is the register 0x06~0x08 value.

P is the pressure value, gauge pressure, unit is kPa.

Table 6.2 Digital Output Transfer Function Coefficient

Product Type	*Pressure Range*		*Output Range*		*Gain and Offset*	
	P_L	P_H	O_L	O_H	A	B
NSPGS2F035DT09	0kPa	-35kPa	838861	7549746	-0.02286	0.1

Register Map：

Addr	*Bit Addr*	*Description*	*Default*	*Description*
0x30	7 – 4	Reserve	4’b0000	Write with 0x0A to start a conversion, automatically come back to 0x02 after conversion ends.
	3	Sco	1’b0	
	2 – 0	Measurement_ctrl<2:0>	3’b000	
0x06	7 – 0	PDATA<23:16>	0x00	Output Pressure Data. Code = Data0x06*2^16+ Data0x07*2^8+ Data0x08；
0x07	7 – 0	PDATA<15:8>	0x00	
0x08	7 – 0	PDATA<7:0>	0x00	

For example:

If the value of the registers 0x06、0x07、0x08 are 0x3F, 0xFF, 0xFF, according to NSPGS2F035DT09 transfer function, Code = 4194303, P(kPa) = (4194303/8388607-B)/A, and finally get the value of pressure about -17.5kPa.

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

6.4. I²C Interface

I²C bus uses SCL and SDA as signal lines. Both lines are connected to VDD externally via pull-up resistors so that they are pulled high when the bus is free. The I²C device address of NSPGS2 is shown below.

Table 6.3 I²C Address

A7	A6	A5	A4	A3	A2	A1	W/R
1	1	1	1	1	1	1	0/1

The I²C interface protocol has special bus signal conditions. Start (S), stop (P) and binary data conditions are shown below. At start condition, SCL is high and SDA has a falling edge. Then the slave address is sent. After the 7 address bits, the direction control bit R/W selects the read or write operation. When a slave device recognizes that it is being addressed, it should acknowledge by pulling SDA low in the ninth SCL (ACK) cycle.

At stop condition, SCL is also high, but SDA has a rising edge. Data must be held stable at SDA when SCL is high. Data can change value at SDA only when SCL is low.

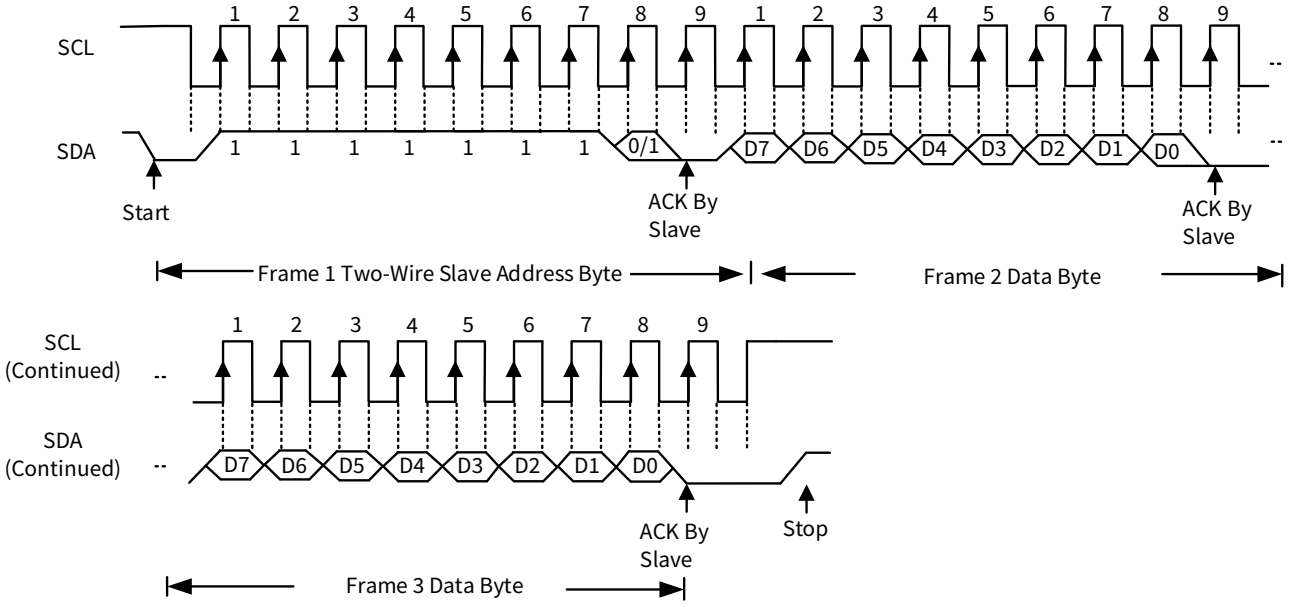


Figure 6.3 I²C Protocol

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

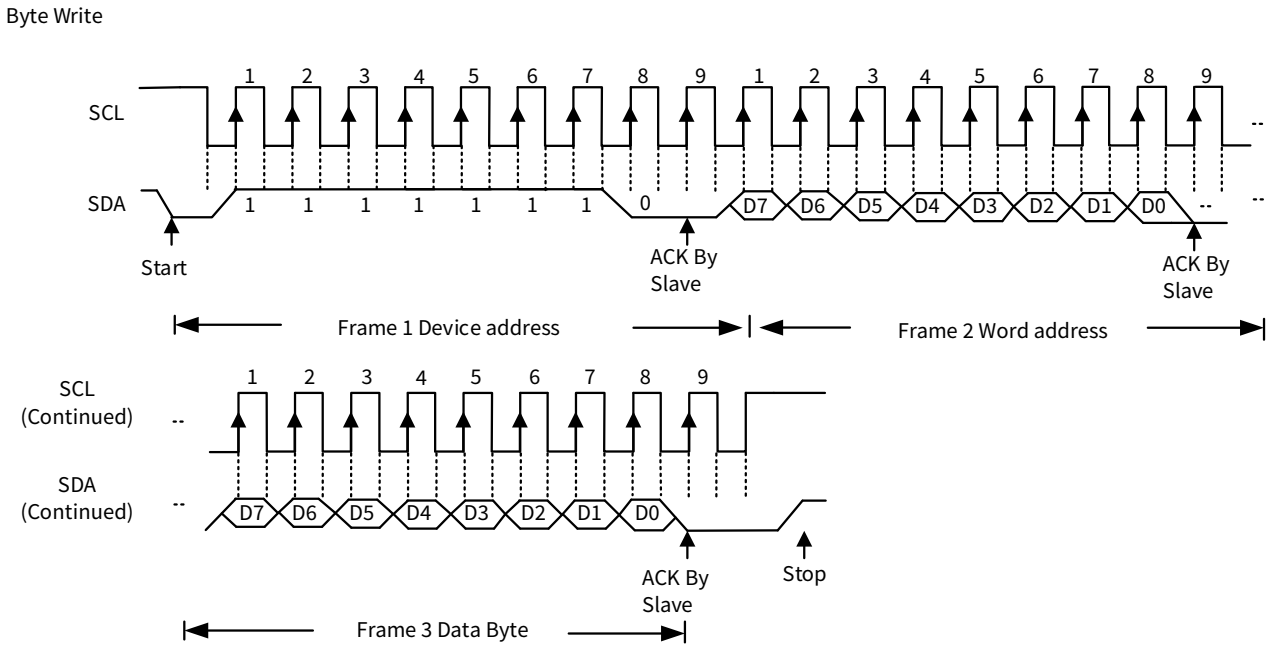


Figure 6.4 I²C Write Byte

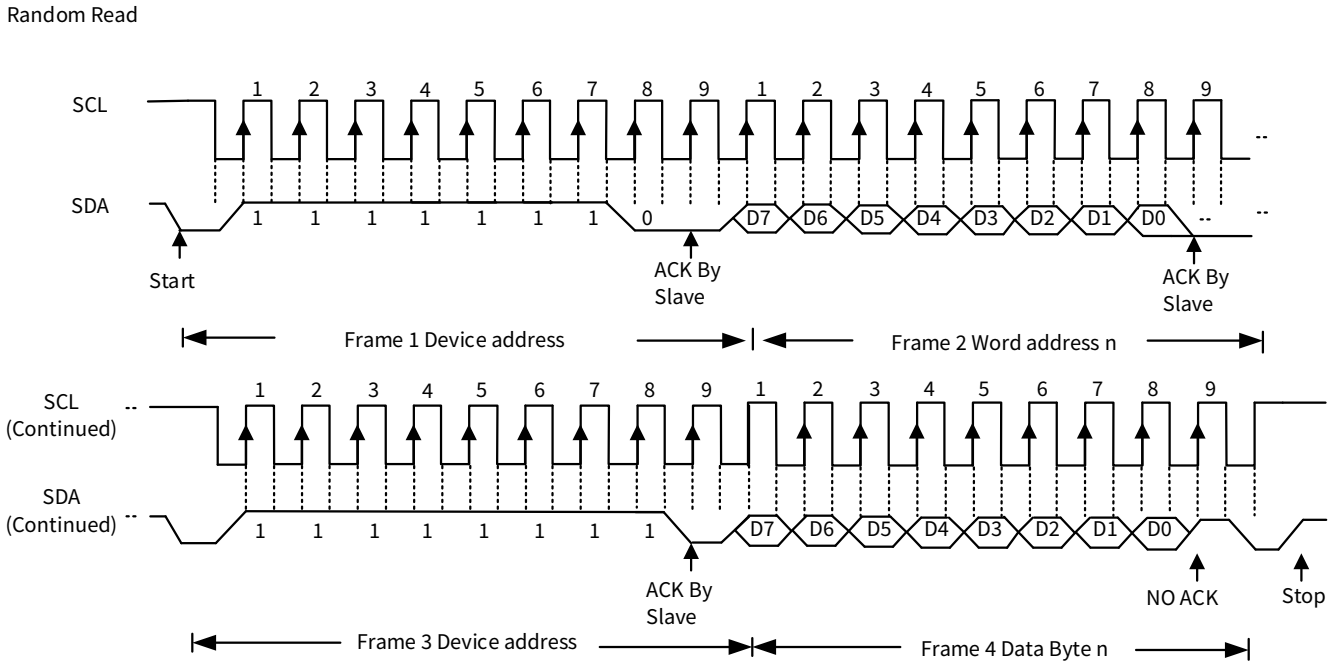


Figure 6.5 I²C Read Byte

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

6.5. SPI Interface

The falling edge of CSB, in conjunction with the rising edge of SCK, determines the start of framing. Once the beginning of the frame has been determined, timing is straightforward. The first phase of the transfer is the instruction phase, which consists of 16 bits followed by data that can be of variable lengths in multiples of 8 bits. If the device is configured with CSB tied low, framing begins with the first rising edge of SCK.

The instruction phase is the first 16 bits transmitted. As shown in Figure 6.6, the instruction phase is divided into a number of bit fields.

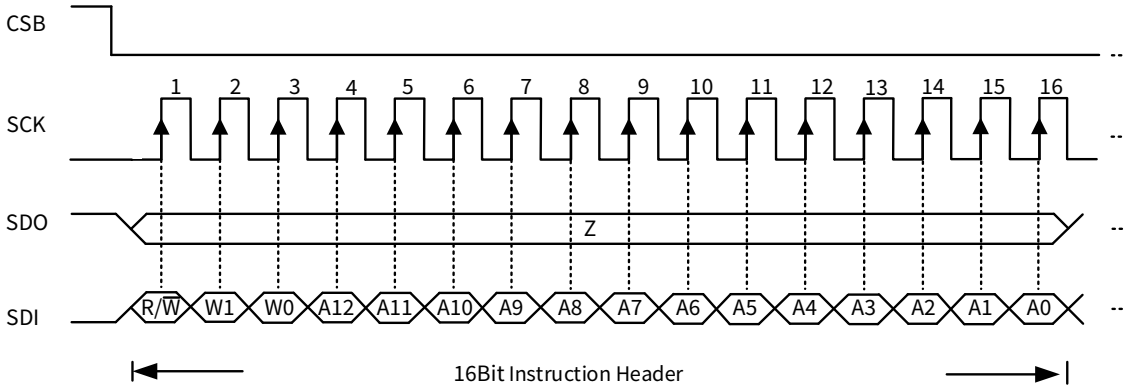


Figure 6.6 Instruction Phase Bit Field

The first bit in the stream is the read/write indicator bit (R/$\overline{W}$). When this bit is high, a read is being requested, otherwise indicates it is a write operation.

W1 and W0 represent the number of data bytes to transfer for either read or write (Table 6.4). If the number of bytes to transfer is three or less (00, 01, or 10), CSB can stall high on byte boundaries. Stalling on a nonbyte boundary terminates the communications cycle. If these bits are 11, data can be transferred until CSB transitions high. CSB is not allowed to stall during the streaming process.

The remaining 13 bits represent the starting address of the data sent. If more than one word is being sent, sequential addressing is used, starting with the one specified, and it either increments (LSB first) or decrements (MSB first) based on the mode setting.

Table 6.4 W1 and W0 settings

W1:W0	***Action***	***CSB Stalling***
00	1 byte of data can be transferred.	Optional
01	2 bytes of data can be transferred.	Optional
10	3 bytes of data can be transferred.	Optional
11	4 or more bytes of data can be transferred. CSB must be held low for entire sequence; otherwise, the cycle is terminated.	No

Data follows the instruction phase. The amount of data sent is determined by the word length (Bit W0 and Bit W1). This can be one or more bytes of data. All data is composed of 8-bit words.

Data can be sent in either MSB-first mode or LSB-first mode (by setting 'LSB_first' bit). On power up, MSB-first mode is the default. This can be changed by programming the configuration register. In MSB-first mode, the serial exchange starts with the highest-order bit and ends with the LSB. In LSB-first mode, the order is reversed. (Figure 6.7)

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

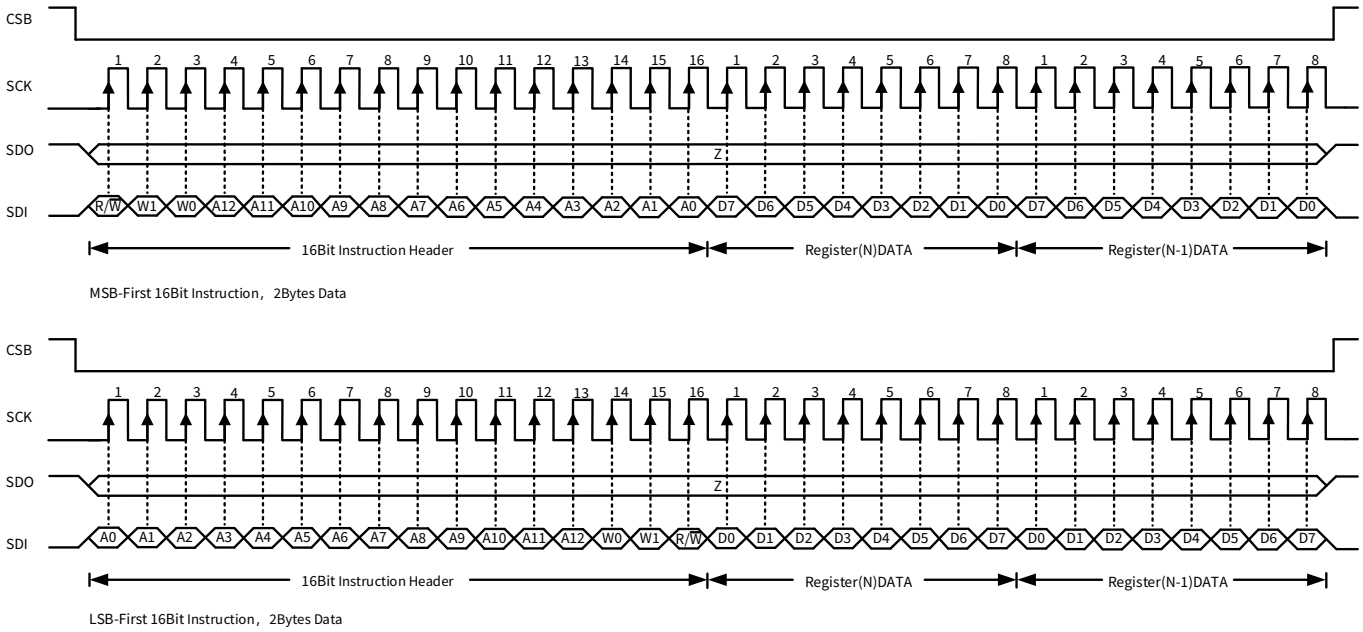


Figure 6.7 MSB First and LSB First Instruction and Data Phases

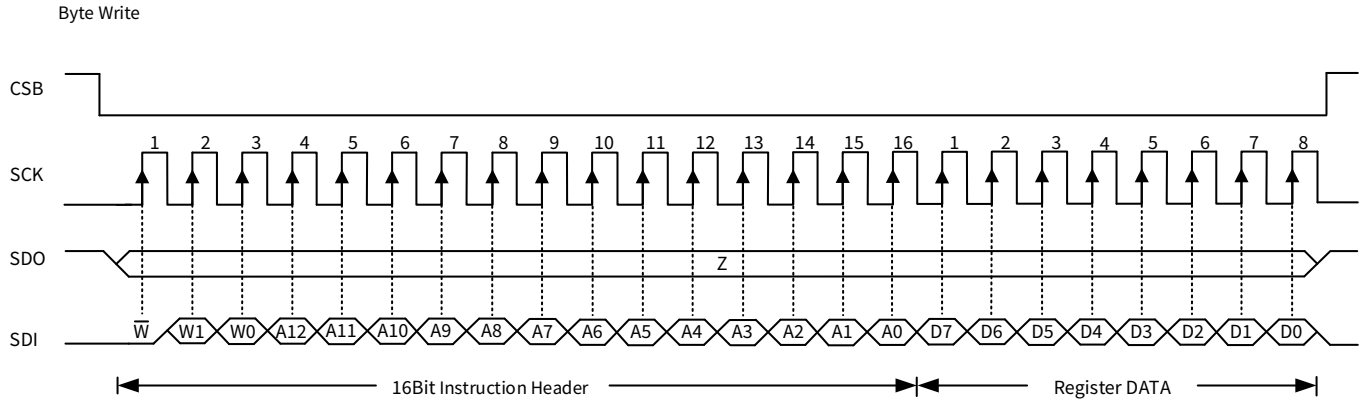


Figure 6.8 SPI Write Byte

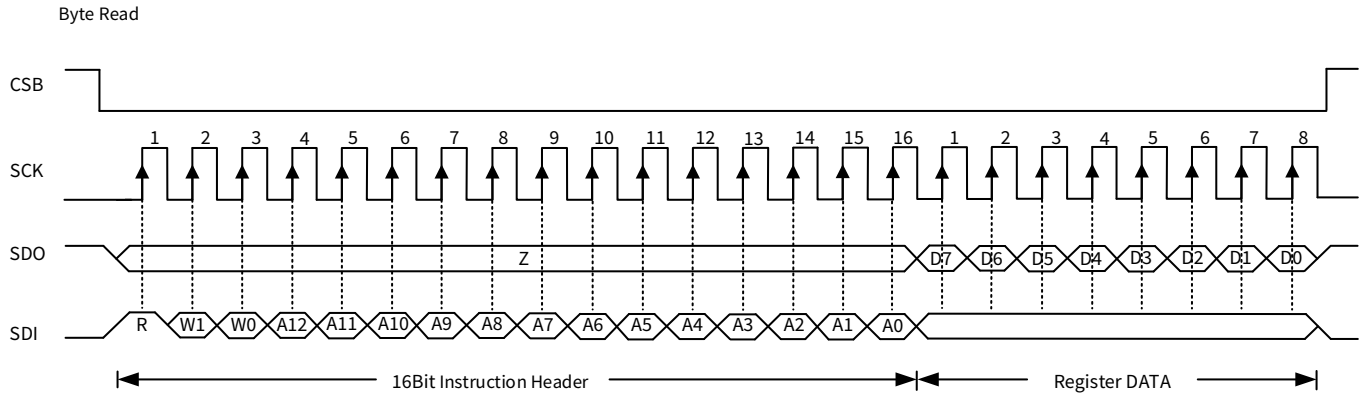


Figure 6.9 SPI Read Byte

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

7. Typical Application

7.1. Application Circuit

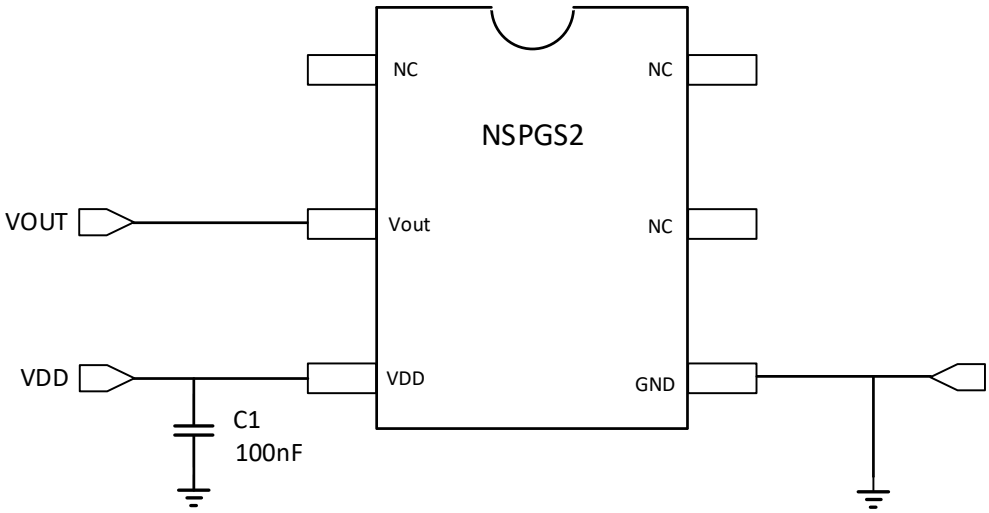


Figure 7.1 Analog Output Application Circuit

Note: For applications with higher ESD requirements, it is recommended that customers use the Figure 7.2 protection circuits.

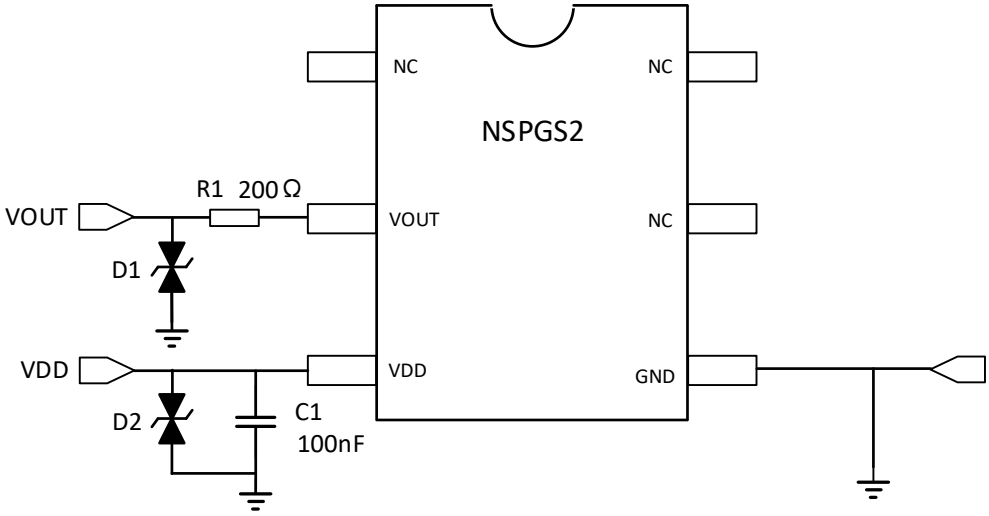


Figure 7.2 Analog Output Protection Circuit

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

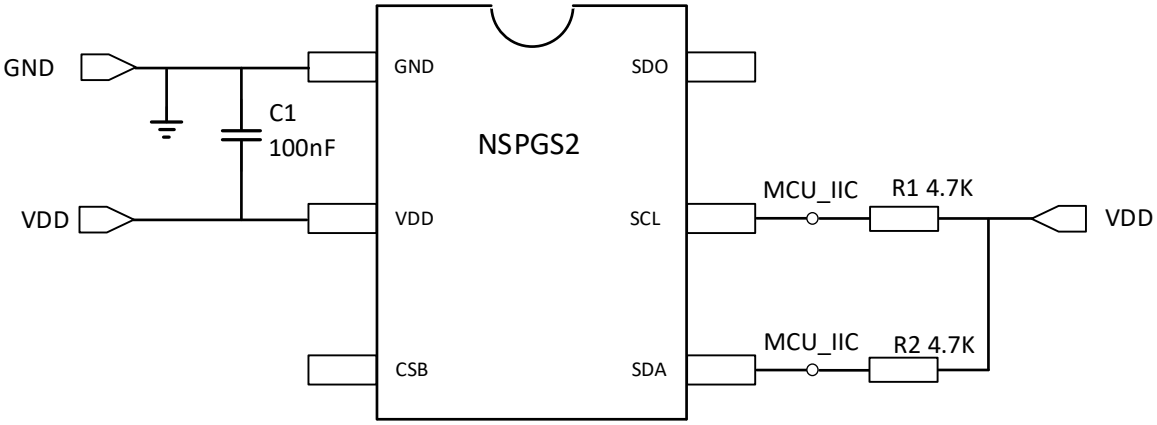


Figure 7.3 I²C Output Application Circuit

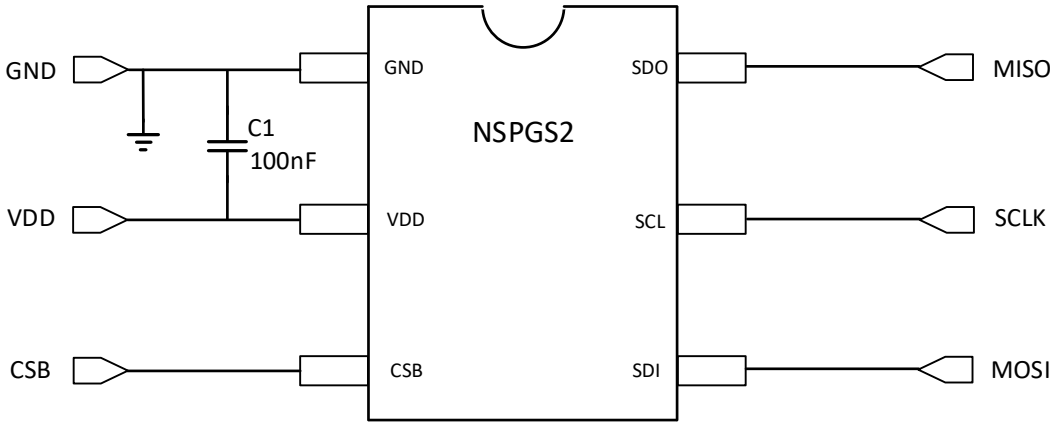


Figure 7.4 SPI Output Application Circuit

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

8. Package Information

8.1. Package Size

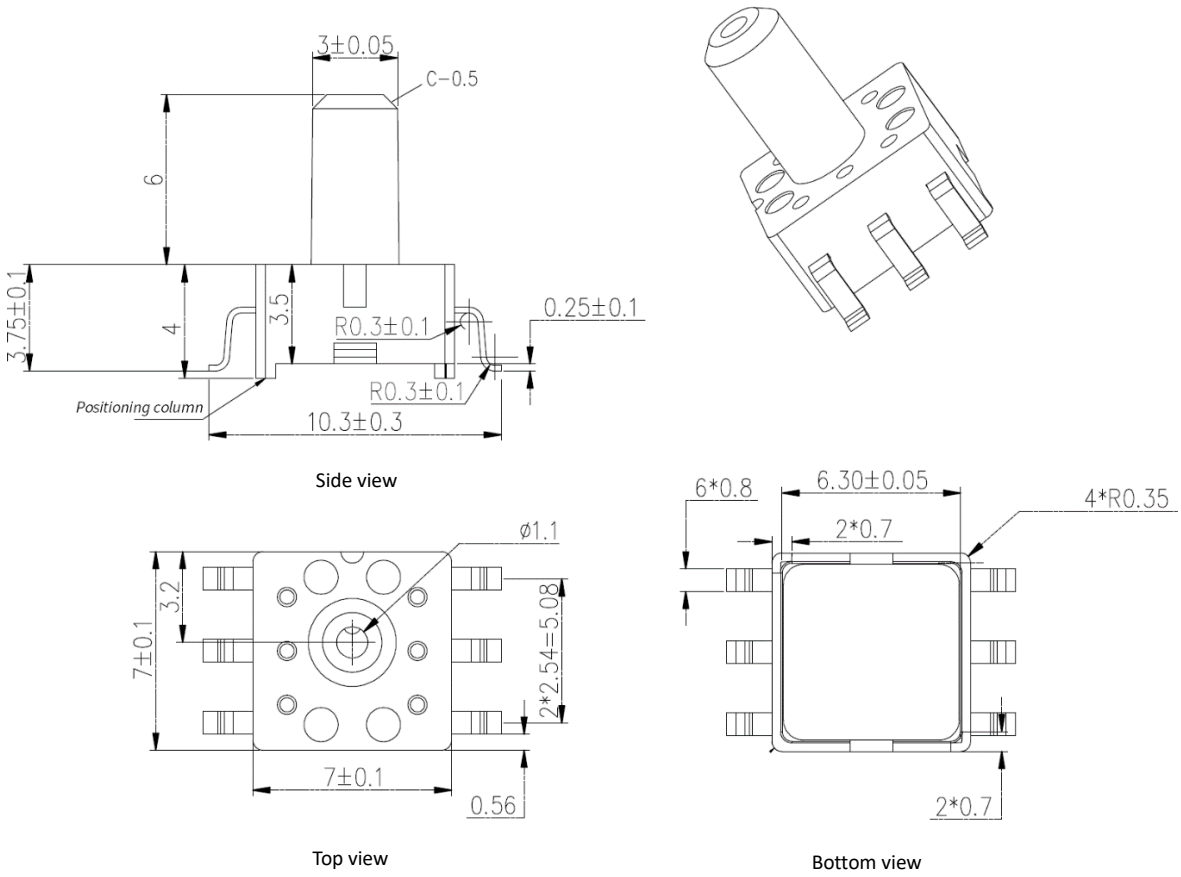


Figure 8.1 Package Outline mm

8.2. Recommended Footprint

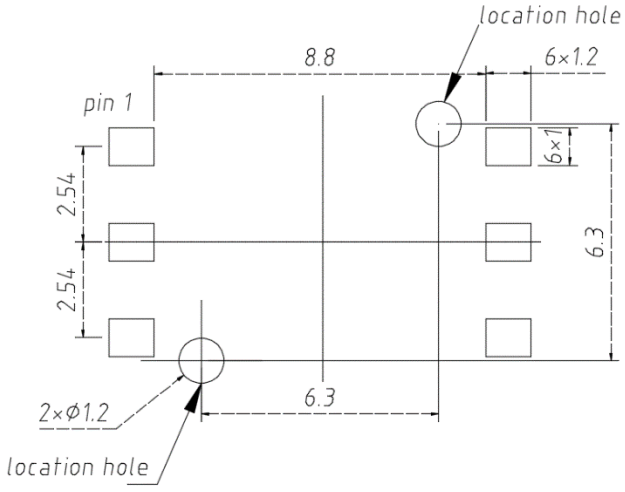


Figure 8.2 Footprint mm

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

9. Order Information

Product Type	Output Type	Pressure Range		Output Range		Clamp Level		Gain and Offset		Supply Voltage	Accuracy	
		P_L	P_H	O_L	O_H	V_{CL}	V_{CH}	A	B		Initially	Full Life
NSPGS2F035RT01	Ratiometric	0.00kPa	-35.00kPa	0.50V	4.50V	4.76%	94%	-0.022860	0.100000	5.0V	±1.5%	±2.5%
NSPGS2F100RT02	Ratiometric	0.00kPa	-100.00kPa	0.50V	4.50V	4.76%	94%	-0.008000	0.100000	5.0V	±1.5%	±2.5%
NSPGS2F100RT03	Ratiometric	0.00kPa	100.00kPa	0.50V	4.50V	4.76%	94%	0.008000	0.100000	5.0V	±1.5%	±2.5%
NSPGS2F200AT04	Absolute	-100.00kPa	100.00kPa	0.20V	4.70V	0%	100%	0.004500	0.490000	5.0V	±1.5%	±2.5%
NSPGS2F020RT05	Ratiometric	0.00kPa	-20.00kPa	0.50V	4.50V	0%	100%	-0.040000	0.100000	5.0V	±1.5%	±2.5%
NSPGS2F100AT08	Absolute	0.00kPa	-100.00kPa	0.50V	4.50V	4.76%	94%	-0.008000	0.100000	5.0V	±1.5%	±2.5%
NSPGS2F035DT09	I^2C/SPI	0.00kPa	-35.00kPa	838861	7549746	NA	NA	-0.022860	0.100000	5.0V	±1%	±2%
NSPGS2F200AT11	Absolute	0.00kPa	190.00kPa	0.72V	3.226V	0%	100%	0.003996	0.218182	3.3V	±1.5%	±2.5%
NSPGS2F200RT13	Ratiometric	0.00kPa	200.00kPa	0.33V	2.97V	0%	100%	0.004000	0.100000	3.3V	±1.5%	±2.5%
NSPGS2F200DT16	I^2C/SPI	-100kPa	100.00kPa	838861	7549746	NA	NA	0.004000	0.500000	3.3V	±1%	±2%
NSPGS2F050DT18	I^2C/SPI	0.00kPa	50.00kPa	838861	7549746	NA	NA	0.016000	0.100000	3.3V	±1%	±2%
NSPGS2F105DT25	I^2C/SPI	0.00kPa	105.00kPa	838861	7549746	NA	NA	0.007620	0.100000	3.3V	±1%	±2%
NSPGS2F200DT28	I^2C/SPI	0.00kPa	200.00kPa	838861	7549746	NA	NA	0.004000	0.100000	3.3V	±1%	±2%

Product Type	Output Type	Pressure Range		Output Range		Clamp Level		Gain and Offset		Supply Voltage	Accuracy	
		P_L	P_H	O_L	O_H	V_{CL}	V_{CH}	A	B		Initially	Full Life
NSPGS2F004RTA1	Ratiometric	0.00kPa	4.00kPa	0.50V	4.50V	0%	100%	0.200000	0.100000	5.0V	±1.5%	±2.5%
NSPGS2F002RTA2	Ratiometric	0.00kPa	2.00kPa	0.50V	4.50V	4.76%	94%	0.400000	0.100000	5.0V	±1.5%	±2.5%
NSPGS2F004RTA3	Ratiometric	0.00kPa	3.92kPa	0.50V	4.50V	0%	100%	0.204082	0.100000	5.0V	±1.5%	±2.5%
NSPGS2F003RTA4	Ratiometric	0.00kPa	3.00kPa	0.50V	4.50V	0%	100%	0.266667	0.100000	5.0V	±1.5%	±2.5%
NSPGS2F005DTA5	I^2C/SPI	0.00kPa	5.00kPa	838861	7549746	0%	100%	0.160000	0.100000	3.3V	±1.5%	±2.5%
NSPGS2F006ATA6	Absolute	0.00kPa	6.00kPa	0.50V	4.50V	0%	100%	0.133333	0.100000	5.0V	±1.5%	±2.5%
NSPGS2F004ATA8	Absolute	0.00kPa	4.00kPa	0.50V	4.50V	0%	100%	0.200000	0.100000	5.0V	±1.5%	±2.5%
NSPGS2F010ATA9	Absolute	0.00kPa	10.00kPa	0.33V	2.97V	0%	100%	0.080000	0.100000	3.3V	±1.5%	±2.5%
NSPGS2F005DTB1	I^2C/SPI	0.00kPa	5.00kPa	838861	7549746	0%	100%	0.160000	0.100000	5.0V	±1.5%	±2.5%
NSPGS2F004DTB2	I^2C/SPI	0mmH_2O	325mmH_2O	838861	7549746	0%	100%	0.002462	0.100000	5.0V	±1.5%	±2.5%
NSPGS2F008ATB3	Absolute	0.00kPa	8.00kPa	0.50V	4.50V	0%	100%	0.100000	0.100000	5.0V	±1.5%	±2.5%

Please scan the following QR code for complete part number list.


https://www.novosns.com/Public/Uploads/uploadfile4/nspgs2-series.pdf

NSPGS2 Series

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Naming Convention:

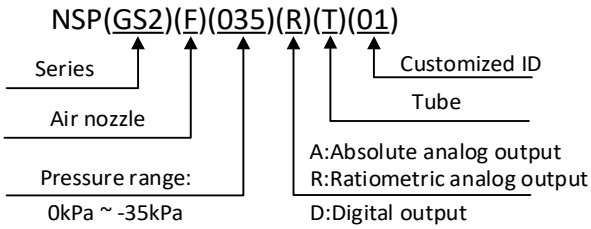

10. Soldering Parameters

10.1. Reflow Soldering (SMD Terminal)

Table 10.1 Soldering Parameters

Reflow Condition		*Lead-free Assembly*
Pre Heat	Temperature Min (T_s(min))	150°C
	Temperature Max (T_s(max)	180°C
	Time (min to max) (t_s)	60 – 150 secs
Average ramp up rate (Liquidus Temp (T_L) to peak		2°C/second max
TS (max)to TL – Ramp-up Rate		2°C/second max
Reflow	Temperature (T_L) (Liquidus)	210°C
	Time (min to max) (t_L)	60 – 120 seconds
Peak Temperature (T_P)		240°C
Time within 5°C of actual peak Temperature (t_p)		12 – 30 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_P)		230 seconds Max.
Do not exceed		240°C

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

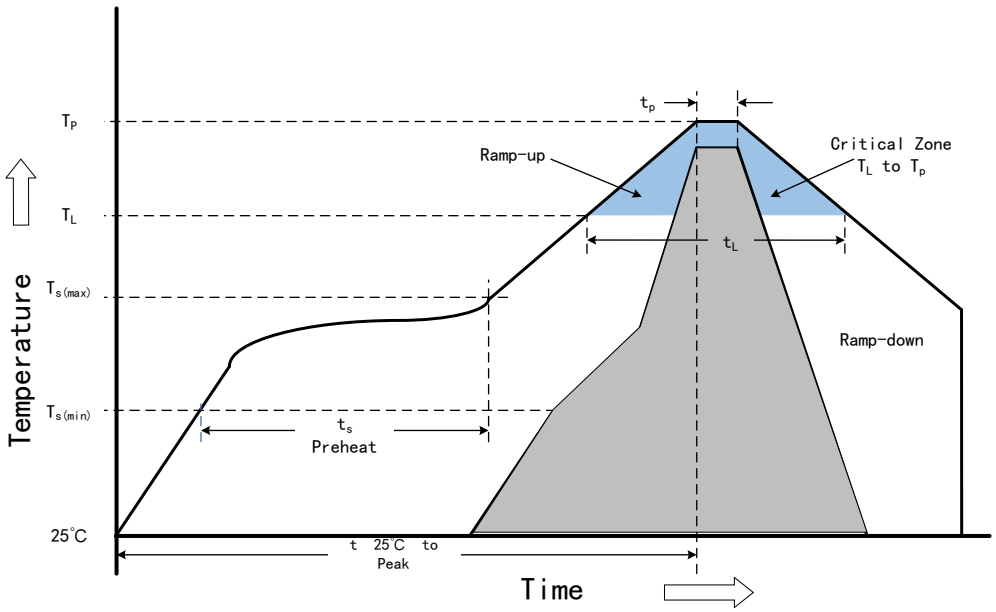



Figure 10.1 Reflow Soldering Curve

10.2. Manual Soldering


- Raise the temperature of the soldering tip between 260 °C and 300 °C and solder within 5 seconds.
- Use a flattened soldering tip when performing rework on the solder bridge.
- Complete rework in one time.

11. Packing Information

This series product using tube package, each tube contains 70ea devices. Each tube has a deep color plug at the bottom and a white plug at the top, as follows:

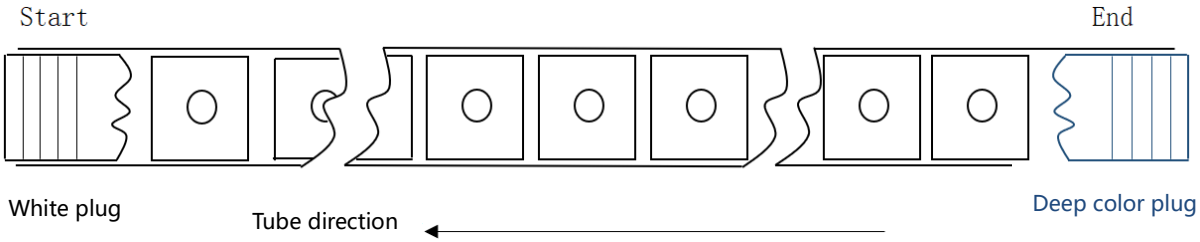

Pin1 point faces to the white plug at the top:

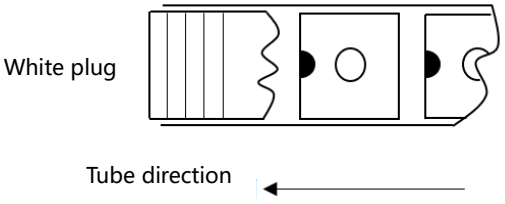


Minimum ordering quantity (MOQ): 1400EA.
Standard pack quantity (SPQ): 700EA.

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

12. Identification Code

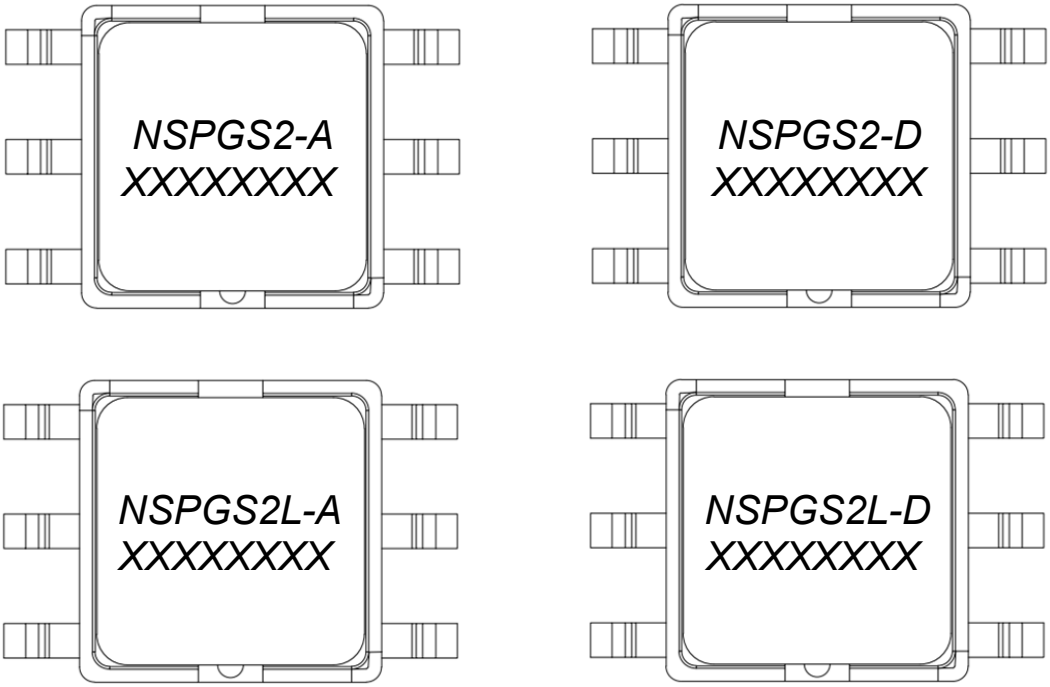

NSPGS2/NSPGS2L: series name, L (Low pressure product).

A: analog output.

D: I^2C/SPI digital output.

xxxxxxxx: package date code.

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

13. Revision History

Revision	Description	Date
0.1	Initial version.	2018/4/23
1.0	Formal release.	2018/12/8
2.0	Update DS format and Part number.	2020/5/17
3.0	Add SPI output description and pin definition, Update order Information, Identification Code, I^2C、SPI protocol description.	2023/4/4
4.0	Add Low pressure range product description.	2024/4/1

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Notes：

1. I²C code

```
#define ACK     1
#define NACK    0
uchar REG06=0,REG07=0,REG08=0;
uchar number=1;
uchar Reg30[1];
int PCode=0, Pdata=0;
float Pressure=0.0;
void IIC_Start(void)                //Start the IIC, SDA High-to-low when SCL is high
{
    IIC_SCL(1);                     //SCL output high level
    SDA_OUT(1);                     //SDA output high level
    Delay_us(2);                    //Delay 2us
    SDA_OUT(0);                     //SDA output low level
    Delay_us(2);
}

void IIC_Stop(void)                 //Stop the IIC, SDA Low-to-high when SCL is high
{
    IIC_SCL(0);
    Delay_us(2);
    IIC_SCL(1);
    SDA_OUT(0);
    Delay_us(2);
    SDA_OUT(1);
    Delay_us(2);
}

void IIC_ACK(void)                  //Send ACK (LOW)
{
    SDA_OUT(0);
    IIC_SCL(1);
    Delay_us(2);
    IIC_SCL(0);
}

void IIC_NACK(void)                 //Send No ACK (High)
{
    SDA_OUT(1);
    IIC_SCL(1);
    Delay_us(2);
    IIC_SCL(0);
}

uchar IIC_Wait_ACK(void)            //Check ACK, if return 0, then right, if return 1, then error
{
```

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

```
    int ErrTime=0;
    SDA_IN();                       //SDA set as input
    IIC_SCL(1);
    Delay_us(2);
    while(Read_SDA)
    {
        ErrTime++;
        if(ErrTime>200)
        {
            IIC_Stop();
            return 1;
        }
    }
    IIC_SCL(0);
    SDA_OUT(0);
    Delay_us(2);
    return 0;
}

void IIC_Send(uchar IIC_Data)       //Send a byte to IIC
{
    uchar i;
    IIC_SCL(0);
    Delay_us(2);
    for(i=0;i<8;i++)
    {
        if((IIC_Data&0x80)>>7)
            SDA_OUT(1);
        else
            SDA_OUT(0);
        IIC_Data<<=1;
        IIC_SCL(1);
        Delay_us(2);
        IIC_SCL(0);
        Delay_us(2);
    }
}

uchar IIC_Receive(uchar ACK)        //Receive a byte from I2C
{
    uchar i,Receive_Data=0;
    SDA_IN();
    for(i=0;i<8;i++)
    {
        IIC_SCL(0);
        Delay_us(2);
        IIC_SCL(1);
        Receive_Data<<=1;
        if(Read_SDA==1)
```

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

```
                Receive_Data++;
            Delay_us(2);
        }
        IIC_SCL(0);
        Delay_us(2);
        if(ACK==0x01)
            IIC_ACK();
        else
            IIC_NACK();
        return Receive_Data;
}

void NSPGS2F035DT09_Write_Byte(uchar WriteAddr,uchar WriteData)
{
        IIC_Start();
        IIC_Send(0xFE|0x00);
        IIC_Wait_ACK();
        IIC_Send(WriteAddr);
        IIC_Wait_ACK();
        IIC_Send(WriteData);
        IIC_Wait_ACK();
        IIC_Stop();
}

void NSPGS2F035DT09_Read_Byte(uchar ReadAddr, uchar *pBuffer)
{
        IIC_Start();
        IIC_Send(0xFE|0x00);
        IIC_Wait_ACK();
        IIC_Send(ReadAddr);
        IIC_Wait_ACK();
        IIC_Start();
        IIC_Send(0xFE|0x01);
        IIC_Wait_ACK();
        pBuffer[0]=IIC_Receive(0);
        IIC_Stop();
}

void NSPGS2F035DT09_Read_3Byte(uchar ReadAddr,uchar *pBuffer)
{
        IIC_Start();
        IIC_Send(0xFE|0x00);
        IIC_Wait_ACK();
        IIC_Send(ReadAddr);
        IIC_Wait_ACK();
        IIC_Start();
        IIC_Send(0xFE|0x01);
        IIC_Wait_ACK();
        pBuffer[0]=IIC_Receive(ACK);
```

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

```
    pBuffer[1]=IIC_Receive(ACK);
    pBuffer[2]=IIC_Receive(NACK);
    IIC_Stop();
}

void main()
{
     uchar PData[3]={0,0,0};
     while(1)
     {
          NSPGS2F035DT09_Write_Byte(0x30,0x0A);
          while(1)                                          //Check whether the conversion ends
          {
               if(number<=50)
               {
                    number++;
                    delay_ms(1);
                    NSPGS2F035DT09_Read_Byte(0x30,Reg30);
                    if(0x02==Reg30[0])
                    {
                         number=1;
                         break;
                    }
               }
               if(number>50)
               {
                    number=1;
                    //User can add his own error handler function
                    break;
               }
          }
          NSPGS2F035DT09_Read_3Byte(0x06,PData);
          REG06 = PData [0];                                //Register 0x06
          REG07 = PData [1];                                //Register 0x07
          REG08 = PData [2];                                //Register 0x08
          PCode=(REG06*65536+REG07*256+REG08);              //PCode = Data0x06*2^16+ Data0x07*2^8+ Data0x08
          if (PCode >8388607)
               Pdata= PCode-16777216;                       //Symbol processing
          else
               Pdata= PCode;
          Pressure =((float)Pdata/8388607-0.1)/(-0.02286);  //PCode=(AxP+B)*8388607     P=(PCode/8388607-B)/A
                                                            //A=-0.02286, B=0.1
                                                            //PNormalized=PCode/8388607
     }
}
```

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

2. SPI code

```
u8 REG06=0,REG07=0,REG08=0;
u8 number=1;
u8 PData[3]={0};
u32 PCode=0,Pdata=0;
float Pressure=0.0;
void NSPGS2F105DT25_SPI_Init(void)
{
	SPI_PORT_GPIO_Config();
	CSB(1);
	SCLK(0);
	SDI(1);
}

void NSPGS2F105DT25_SPI_Write_OneByte(u8 addr,u8 val)
{
	u8 i=0; u16 dat;

	dat=0x0000+addr;
	CSB(0);
	delay_us(2);

	for(i=0;i<16;i++)
	{
		SCLK(0);
		if(dat&0x8000)
			SDI(1);
		else
			SDI(0);
		delay_us(2);
		dat<<=1;
		SCLK(1);
		delay_us(2);
	}

	for(i=0;i<8;i++)
	{
		SCLK(0);
		if(val&0x80)
			SDI(1);
		else
			SDI(0);
		delay_us(2);
		val<<=1;
		SCLK(1);
		delay_us(2);
	}

	SCLK(0);
	CSB(1);
	delay_us(2);

}
```

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

```
u8 NSPGS2F105DT25_SPI_Read_OneByte(u8 addr)
{
	u8 i=0;	u16 dat; u8 val=0;

	dat=0x8000+addr;
	CSB(0);
	delay_us(2);

	for(i=0;i<16;i++)
	{
		SCLK(0);
		if(dat&0x8000)
		{
			SDI(1);
		}
		else
		{
			SDI(0);
		}
		delay_us(2);
		dat <<= 1;
		SCLK(1);
		delay_us(2);
	}

	for(i=0;i<8;i++)
	{
		SCLK(0);
		val<<=1;
		if(SPI_MISO)
			val++;
		delay_us(2);
		SCLK(1);
		delay_us(2);
	}

	SCLK(0);
	CSB(1);
	delay_us(2);

	return val;
}

void NSPGS2F105DT25_SPI_Read_3Byte(u8 addr,u8* pBuffer)
{
	u8 i=0;	u16 dat; u8 val_1=0,val_2=0,val_3=0;

	dat=0xC000+addr;
	CSB(0);
	delay_us(2);

	for(i=0;i<16;i++)
	{
		SCLK(0);
		if(dat&0x8000)
		{
```

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

```
                SDI(1);
            }
            else
            {
                SDI(0);
            }
            delay_us(2);
            dat <<= 1;
            SCLK(1);
            delay_us(2);
        }

        for(i=0;i<8;i++)
        {
            SCLK(0);
            val_1<<=1;
            if(SPI_MISO) val_1++;
            delay_us(2);
            SCLK(1);
            delay_us(2);
        }

        for(i=0;i<8;i++)
        {
            SCLK(0);
            val_2<<=1;
            if(SPI_MISO) val_2++;
            delay_us(2);
            SCLK(1);
            delay_us(2);
        }

        for(i=0;i<8;i++)
        {
            SCLK(0);
            val_3<<=1;
            if(SPI_MISO) val_3++;
            delay_us(2);
            SCLK(1);
            delay_us(2);
        }
        pBuffer[0]=val_1;
        pBuffer[1]=val_2;
        pBuffer[2]=val_3;

        SCLK(0);
        CSB(1);
        delay_us(2);
}

void NSPGS2F105DT25_SPI_Read_MultiByte(u8 addr,u8 len,u8 *pBuffer)
{
        u8 i=0,k=0,val=0; u16 dat;

        dat=0xE000+addr;
        CSB(0);
```

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

```
        delay_us(2);

        for(i=0;i<16;i++)
        {
                SCLK(0);
                if(dat&0x8000)
                {
                        SDI(1);
                }
                else
                {
                        SDI(0);
                }
                delay_us(2);
                dat <<= 1;
                SCLK(1);
                delay_us(2);
        }

                for(k=0;k<len;k++)
        {
                for(i=0;i<8;i++)
                {
                        SCLK(0);
                        val<<=1;
                        if(SPI_MISO)val++;
                        delay_us(2);
                        SCLK(1);
                        delay_us(2);

                }
                pBuffer[k]=val;

        }

        SCLK(0);
        CSB(1);
        delay_us(2);
}

int main(void)
{
        NSPGS2F105DT25_SPI_Init();
        delay_ms(100);
        NSPGS2F105DT25_SPI_Write_OneByte(0x00,0x81);

        while(1)
        {
                NSPGS2F105DT25_SPI_Write_OneByte(0x30,0x0A);
                while(1)                                        //Check whether the conversion ends
                {
                        if(number<=50)
                        {
                                number++;
                                delay_ms(1);
                                if(0x02== NSPGS2F105DT25_SPI_Read_OneByte(0x30))
```

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

```
                    {
                        number=1;
                        break;
                    }
                }
                if(number>50)
                {
                    number=1;
                    break;
                }
        }

        NSPGS2F105DT25_SPI_Read_3Byte(0x08,PData);
        REG08=PData[0];                          //Register 0x08
        REG07=PData[1];                          //Register 0x07
        REG06=PData[2];                          //Register 0x06
        PCode=(REG06*65536+REG07*256+REG08);     //PCode = Data0x06*2^16+ Data0x07*2^8+ Data0x08
        if (PCode>8388607)
            Pdata=PCode-16777215;                //Symbol processing
        else Pdata=PCode;
        Pressure=((float)Pdata/8388607-0.1)/0.00762;   //PCode=(AxP+B)∗8388607   P=(PCode/8388607-B)/A
                                                       //A=0.00762, B=0.1
                                                       //PNormalized=PCode/8388607
        }
}
```

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

IMPORTANT NOTICE

The information given in this document (the “Document”) shall in no event be regarded as any warranty or authorization of, express or implied, including but not limited to accuracy, completeness, merchantability, fitness for a particular purpose or infringement of any third party’s intellectual property rights.

Users of this Document shall be solely responsible for the use of NOVOSENSE’s products and applications, and for the safety thereof. Users shall comply with all laws, regulations and requirements related to NOVOSENSE’s products and applications, although information or support related to any application may still be provided by NOVOSENSE.

This Document is provided on an “AS IS” basis, and is intended only for skilled developers designing with NOVOSENSE’s products. NOVOSENSE reserves the rights to make corrections, modifications, enhancements, improvements or other changes to the products and services provided without notice. NOVOSENSE authorizes users to use this Document exclusively for the development of relevant applications or systems designed to integrate NOVOSENSE’s products. No license to any intellectual property rights of NOVOSENSE is granted by implication or otherwise. Using this Document for any other purpose, or any unauthorized reproduction or display of this Document is strictly prohibited. In no event shall NOVOSENSE be liable for any claims, damages, costs, losses or liabilities arising out of or in connection with this Document or the use of this Document.

For further information on applications, products and technologies, please contact NOVOSENSE (www.novosns.com).

Suzhou NOVOSENSE Microelectronics Co., Ltd

Copyright © 2024, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com