# PY25F128LA

## Ultra-Low Power, 128M-bit

## Serial Multi I/O Flash Memory Datasheet

### Performance Highlight

- *Supply Range from 1.65 to 2.0V for Read, Erase and Program*
- *Ultra-Low Power consumption for Read, Erase and Program*
- *X1, X2 and X4 Multi I/O, QPI, DTR Support*
- *High reliability with 100K cycling and 20 Year-retention*
- *Permanently fixed QE bit, QE=1; and 4 I/O mode is enabled*

PUYA CONFIDENTIAL

# 1 Overview

## General

- **Single 1.65 to 2.0V supply**
- **Industrial Temperature Range -40C to 85C**
- **Serial Peripheral Interface (SPI) Compatible: Mode 0 and Mode 3**
- **Single, Dual, Quad SPI, QPI, DTR**
  - Standard SPI: SCLK, CS#, SI, SO
  - Dual SPI: SCLK, CS#, IO0, IO1
  - Quad SPI: SCLK, CS#, IO0, IO1, IO2, IO3
  - QPI: SCLK, CS#, IO0, IO1, IO2, IO3
  - DTR: Double Transfer Rate Read
- **Flexible Architecture for Code and Data Storage**
  - Uniform 256-byte Page Program
  - Uniform 4K-byte Sector Erase
  - Uniform 32K/64K-byte Block Erase
  - Full Chip Erase
- **One Time Programmable (OTP) Security Register**
  - 3*1024-Byte Security Registers with OTP Lock
- **128-bit Unique ID for each device**
- **Fast Program and Erase Speed Typical**
  - 0.5ms Page program time
  - 50ms 4K-byte sector erase time
  - 0.16s 32K-byte block erase time
  - 0.3s 64K-byte block erase time
- **JEDEC Standard Manufacturer and Device ID Read Methodology**
- **Ultra-Low Power Consumption Typical**
  - 0.3uA Deep Power Down current
  - 20uA Standby current
  - 4mA Active Read current at 85MHz for STR 4IO
  - 7mA Active Program or Erase current
- **High Reliability**
  - 100,000 Program / Erase Cycles
  - 20-year Data Retention
- **Industry Standard Green Package Options**
  - 8-Lead SOP (208mil)
  - 8-Pad WSON(6x5x0.75mm, 8x6x0.75mm)
  - KGD for SiP

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

# 2 Description

The PY25F128LA is a serial interface Flash memory device designed for use in a wide variety of high-volume consumer-based applications in which program code is shadowed from Flash memory into embedded or external RAM for execution. The flexible erase architecture of the device, with its page erase granularity it is ideal for data storage as well, eliminating the need for additional data storage devices.

The erase block sizes of the device have been optimized to meet the needs of today's code and data storage applications. By optimizing the size of the erase blocks, the memory space can be used much more efficiently. Because certain code modules and data storage segments must reside by themselves in their own erase regions, the wasted and unused memory space that occurs with large sectored and large block erase Flash memory devices can be greatly reduced. This increased memory space efficiency allows additional code routines and data storage segments to be added while still maintaining the same overall device density.

The device also contains an additional 3*1024-byte security registers with OTP lock (One-Time Programmable), can be used for purposes such as unique device serialization, system-level Electronic Serial Number (ESN) storage, locked key storage, etc.


Specifically designed for use in many different systems, the device supports read, program, and erase operations with a wide supply voltage range of 1.65V to 2.0V. No separate voltage is required for programming and erasing.

PUYA CONFIDENTIAL



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

# 3 Pin Definition

## 3.1 Pin Configurations

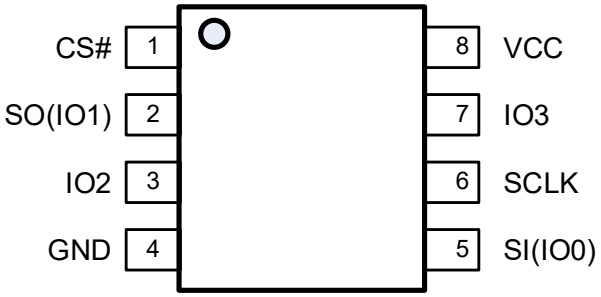


8-Lead SOP (208mil)

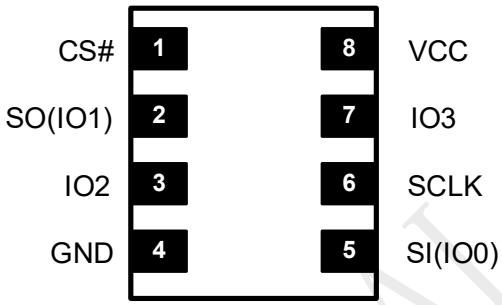


8-Pad WSON (6x5mm/8x6mm)

## 3.2 Pin Descriptions

| No. | Symbol | Extension | Remarks |
|---|---|---|---|
| 1 | CS# | I | Chip select |
| 2 | SO(IO1) | I/O | Serial data output for 1 x I/O<br>Serial data input and output for 2 x I/O read mode<br>Serial data input and output for 4 x I/O read mode |
| 3 | IO2 | I/O | Serial data input and output for 4 x I/O read mode |
| 4 | GND | - | Ground of the device |
| 5 | SI(IO0) | I/O | Serial data input for 1x I/O<br>Serial data input and output for 2 x I/O read mode<br>Serial data input and output for 4 x I/O read mode |
| 6 | SCLK | I | Serial interface clock input |
| 7 | IO3 | I/O | Serial data input and output for 4 x I/O read mode |
| 8 | VCC | - | Power supply of the device |


Notes:

1. SIO0 and SIO1 are used for Standard and Dual SPI instructions
2. SIO0 – SIO3 are used for Quad SPI instructions.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

# 4 Block Diagram

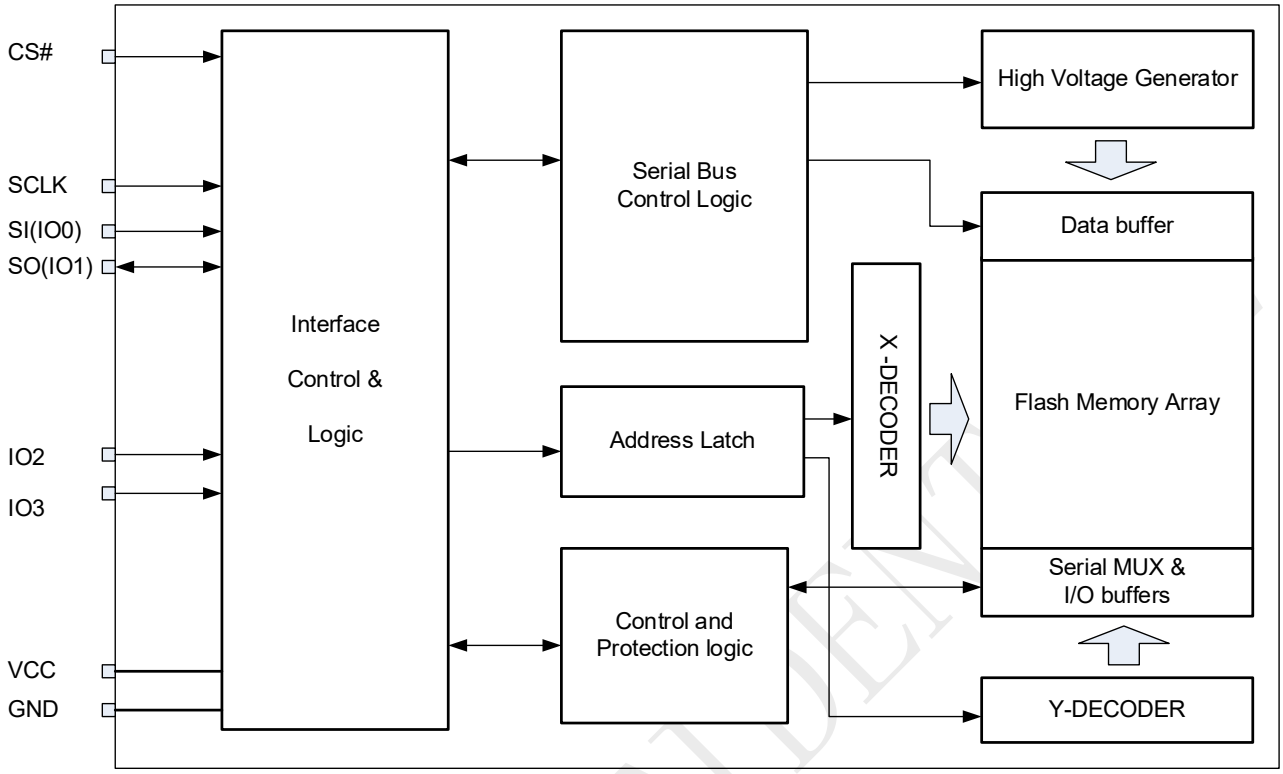


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

# 5 Electrical Specifications

## 5.1 Absolute Maximum Ratings

- Storage Temperature .....-65°C to +150°C
- Operation Temperature .....-40°C to +85°C
- Maximum Operation Voltage..... 2.5V
- Voltage on Any Pin with respect to Ground.....-0.6V to VCC+0.5V
- DC Output Current .....5.0 mA

**NOTICE:** Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational listings of this specification is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

**Table 5-1 Pin Capacitance [1]**

| Symbol | Parameter | Max | Units | Test Condition |
|---|---|---|---|---|
| $C_{OUT}$ | Output Capacitance | 8 | pF | $V_{OUT}$=GND |
| $C_{IN}$ | Input Capacitance | 6 | pF | $V_{IN}$=GND |

Note:

1. Test Conditions: $T_A$= 25°C, F = 1MHz, Vcc = 1.8V.

**Figure 5-1 Input Test Waveforms and Measurement Level**


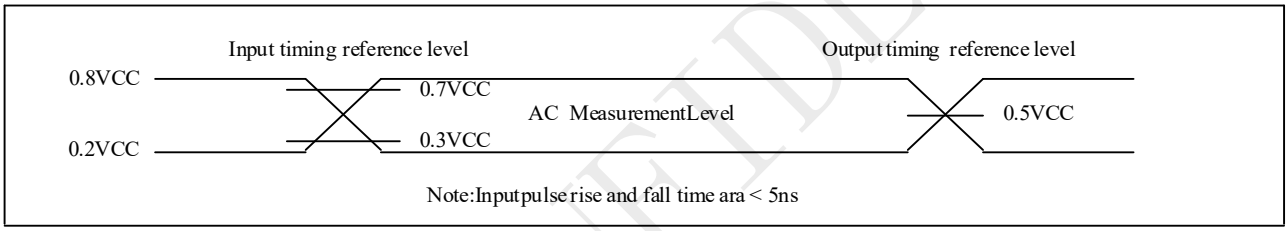



**Figure 5-2 Output Loading**

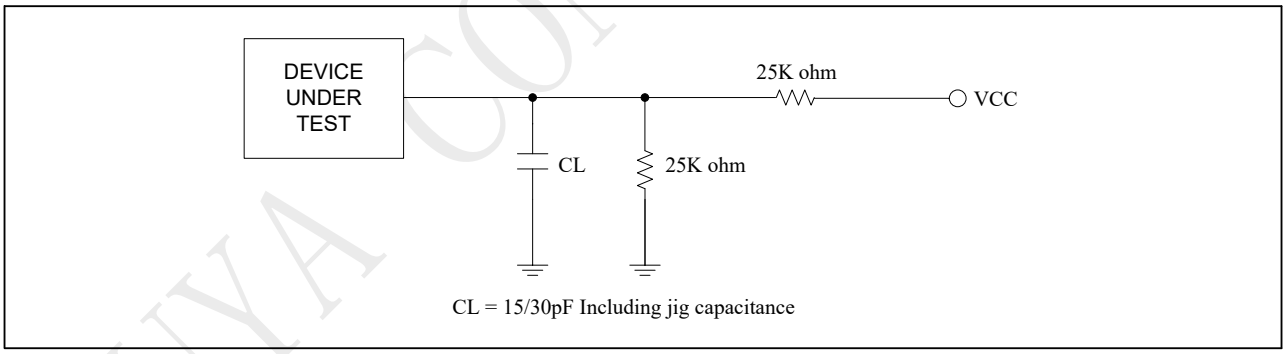


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 5.2 DC Characteristics

**Table 5-2 DC Parameters (Ta=-40°C ~ +85°C)**

| Symbol | Parameter | Conditions | 1.65V~2.0V | | | Units |
|---|---|---|---|---|---|---|
| | | | Min | Typ(1) | Max | |
| $I_{DPD}$ | Deep power down current | CS#=Vcc, all other inputs at 0V or Vcc | | 0.3 | 3 | uA |
| $I_{SB}$ | Standby current | CS#=VIH all inputs at CMOS levels | | 20 | 50 | uA |
| $I_{CC1}$ | Read current (STR) (1 IO) | f=50MHz; IOUT=0mA | | 1.5 | 2.0 | mA |
| | | f=85MHz; IOUT=0mA | | 2.0 | 2.8 | mA |
| | | f=133MHz; IOUT=0mA | | 2.5 | 4.0 | mA |
| | Read current (STR) (2 IO) | f=50MHz; IOUT=0mA | | 2.4 | 2.8 | mA |
| | | f=85MHz; IOUT=0mA | | 3.0 | 4.0 | mA |
| | | f=133MHz; IOUT=0mA | | 4.0 | 6.0 | mA |
| | Read current (STR) (4 IO) | f=50MHz; IOUT=0mA | | 3.0 | 4.0 | mA |
| | | f=85MHz; IOUT=0mA | | 4.0 | 6.0 | mA |
| | | f=133MHz; IOUT=0mA | | 6.0 | 8.0 | mA |
| $I_{CC2}$ | Read current (DTR) (1 IO) | f=33MHz; IOUT=0mA | | 2.0 | 2.5 | mA |
| | | f=50MHz; IOUT=0mA | | 2.5 | 3.5 | mA |
| | | f=66MHz; IOUT=0mA | | 2.8 | 4.0 | mA |
| | Read current (DTR) (2 IO) | f=33MHz; IOUT=0mA | | 2.5 | 3.5 | mA |
| | | f=50MHz; IOUT=0mA | | 3.0 | 4.5 | mA |
| | | f=66MHz; IOUT=0mA | | 3.5 | 5.5 | mA |
| | Read current (DTR) (4 IO) | f=33MHz; IOUT=0mA | | 3.0 | 5.0 | mA |
| | | f=50MHz; IOUT=0mA | | 4.0 | 6.0 | mA |
| | | f=66MHz; IOUT=0mA | | 6.0 | 8.0 | mA |
| $I_{CC3}$ | Program current | CS#=Vcc | | 7 | 12 | mA |
| $I_{CC4}$ | Erase current | CS#=Vcc | | 7 | 12 | mA |
| $I_{LI}$ | Input load current | All inputs at CMOS level | | | 2.0 | uA |
| $I_{LO}$ | Output leakage | All inputs at CMOS level | | | 2.0 | uA |
| $V_{IL}$ | Input low voltage | | | | 0.3Vcc | V |
| $V_{IH}$ | Input high voltage | | 0.7Vcc | | | V |
| $V_{OL}$ | Output low voltage | IOL=100uA | | | 0.2 | V |
| $V_{OH}$ | Output high voltage | IOH=-100uA | Vcc-0.2 | | | V |

Notes:

1. Typical values measured at 1.8V @ 25°C for the 1.6V to 2.0V range.
2. The value guaranteed by characterization, not 100% tested in production.

**Figure 5-3 Maximum Overshoot Waveform**




During DC conditions, input or I/O signals should remain equal to or between VSS and VCC. During voltage transitions, inputs or I/Os may negative overshoot to -1.0V or positive overshoot to VCC + 1.0 V, for periods up to 20 ns.


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 5.3 AC Characteristics

**Table 5-3-1 AC Parameters (Ta=-40°C ~ +85°C)**

| Symbol | Alt. | Parameter | 1.65V~2.0V | | | Units |
|---|---|---|---|---|---|---|
| | | | Min | Typ | Max | |
| fSCLK | fC | Clock Frequency for all instructions except for special marking | D.C | | 133 | MHz |
| fRSCLK | fR | Clock Frequency for READ instructions | D.C | | 80 | MHz |
| fWSCLK | fW | Clock Frequency for 4IO WORD READ instructions | D.C | | 104 | MHz |
| fDSCLK | fD | Clock Frequency for DTR instructions | | | 85 | MHz |
| tCH(1) | tCLH | Clock High Time | 3.3 | | | ns |
| tCL(1) | tCLL | Clock Low Time, 45% x (1/fSCLK) | 3.3 | | | ns |
| tCLCH(3) | | Clock Rise Time (peak to peak) | 0.1 | | | v/ns |
| tCHCL(3) | | Clock Fall Time (peak to peak) | 0.1 | | | v/ns |
| tSLCH | tCSS | CS# Active Setup Time (relative to SCLK) | 5 | | | ns |
| tCHSL | | CS# Not Active Hold Time (relative to SCLK) | 5 | | | ns |
| tDVCH | tDSU | Data in Setup Time | 2 | | | ns |
| tCHDX | tDH | Data in Hold Time | 3 | | | ns |
| tCHSH | | CS# Active Hold Time (relative to SCLK) | 5 | | | ns |
| tSHCH | | CS# Not Active Setup Time (relative to SCLK) | 5 | | | ns |
| tSHSL | tCSH | CS# Deselect Time from Read to next Read | 20 | | | ns |
| | | CS# Deselect Time from Write, Erase, Program to Read Status Register | 30 | | | ns |
| tSHQZ(3) | tDIS | Output Disable Time | | | 6 | ns |
| tCLQV | tV | Clock Low to Output Valid Loading 30pF | | | 7 | ns |
| | | Clock Low to Output Valid Loading 15pF | | | 6 | ns |
| tCLQX | tHO | Output Hold Time | 1 | | | ns |
| tDP | | CS# High to Deep Power-down Mode | | | 3 | us |
| tRES1 | | CS# High to Standby Mode Without Electronic Signature Read | | | 25 | us |
| tRES2 | | CS# High to Standby Mode with Electronic Signature Read | | | 25 | us |
| tW | | Write Status Register Cycle Time | | 2 | 8 | ms |

Notes:
1. tCH + tCL must be greater than or equal to 1/ Frequency.
2. Only applicable as a constraint for a WRSR instruction.
3. The value guaranteed by characterization, not 100% tested in production.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

**Table 5-3-2 SPI Read Command Performance Comparison (MHz)**

| Read command | Dummy Cycles (VCC=1.65V~2.0V) | | | |
|---|---|---|---|---|
| | 4 | 6 | 8 | 10 |
| FREAD | - | - | 133 | - |
| DREAD | - | - | 133 | - |
| 2READ | 104(default) | - | 133 | - |
| QREAD | - | - | 133 | - |
| 4READ | - | 104(default) | - | 133 |
| DTR_FREAD | - | 85 | - | - |
| DTR_2READ | - | 85 | - | - |
| DTR_4READ | - | - | - | 85 |

**Table 5-3-3 QPI Read Command Performance Comparison (MHz)**

| Read command | Dummy Cycles (VCC=1.65V~2.0V) | | | |
|---|---|---|---|---|
| | 4 | 6 | 8 | 10 |
| FREAD | 70 | 104 | 120 | 133(default) |
| 4READ | 70 | 104 | 120 | 133(default) |
| BURST READ | 70 | 104 | 120 | 133(default) |
| DTR_FREAD | - | - | - | 85 |
| DTR_4READ | - | - | - | 85 |
| DTR_BURST READ | - | - | - | 85 |

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 5.4 AC Characteristics for Program and Erase

**Table 5-4 AC Parameters for Program and Erase (Ta=-40°C ~ +85°C)**

| Symbol | Parameter | 1.65V~2.0V | | | Units |
|---|---|---|---|---|---|
| | | Min | Typ | Max | |
| $T_{ESL}$(4) | Erase Suspend Latency | | | 30 | us |
| $T_{PSL}$(4) | Program Suspend Latency | | | 30 | us |
| $T_{PRS}$(2) | Latency between Program Resume and next Suspend | 0.5 | | | us |
| $T_{ERS}$(3) | Latency between Erase Resume and next Suspend | 0.5 | | | us |
| $t_{PSR}$ | Program Security Registers time (up to 256 bytes) | | 0.5 | 2.4 | ms |
| $t_{ESR}$ | Erase Security Registers time | | 50 | 240 | ms |
| $t_{PP}$ | Page program time (up to 256 bytes) | | 0.5 | 2.4 | ms |
| $t_{SE}$ | Sector erase time | | 50 | 240 | ms |
| $t_{BE1}$ | Block erase time for 32K bytes | | 0.16 | 0.8 | s |
| $t_{BE2}$ | Block erase time for 64K bytes | | 0.3 | 1.2 | s |
| $t_{CE}$ | Chip erase time | | 50 | 120 | s |

Notes:

1. Typical values given for TA=25°C. Not 100% tested.
2. Program operation may be interrupted as often as system request. The minimum timing of tPRS must be observed before issuing the next program suspend command. However, in order for a Program operation to make progress, tPRS ≥ 100us must be included in resume-to-suspend loop(s). Not 100% tested.
3. Erase operation may be interrupted as often as system request. The minimum timing of tERS must be observed before issuing the next erase suspend command. However, in order for an Erase operation to make progress, tERS ≥ 100us must be included in resume-to-suspend loop(s). Not 100% tested.
4. Latency time is required to complete Erase/Program Suspend operation.
5. The value guaranteed by characterization, not 100% tested in production.

**Figure 5-4 Serial Input Timing**


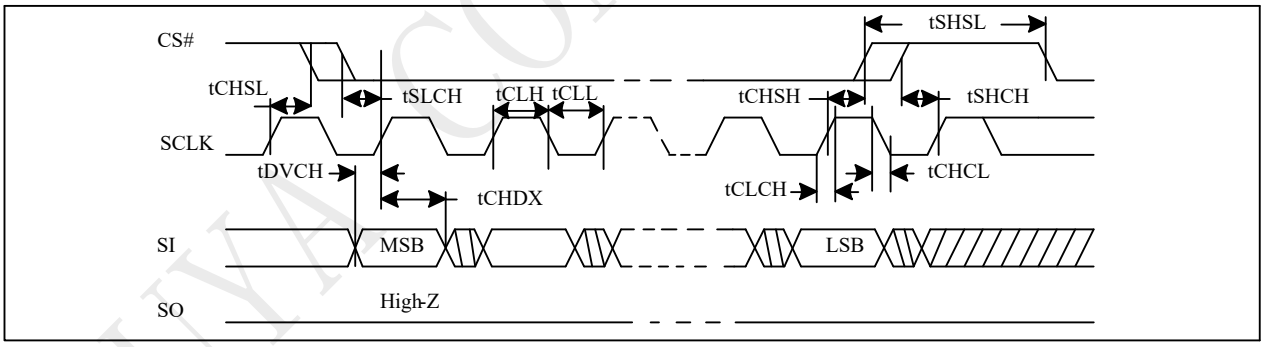



**Figure 5-5 Output Timing**

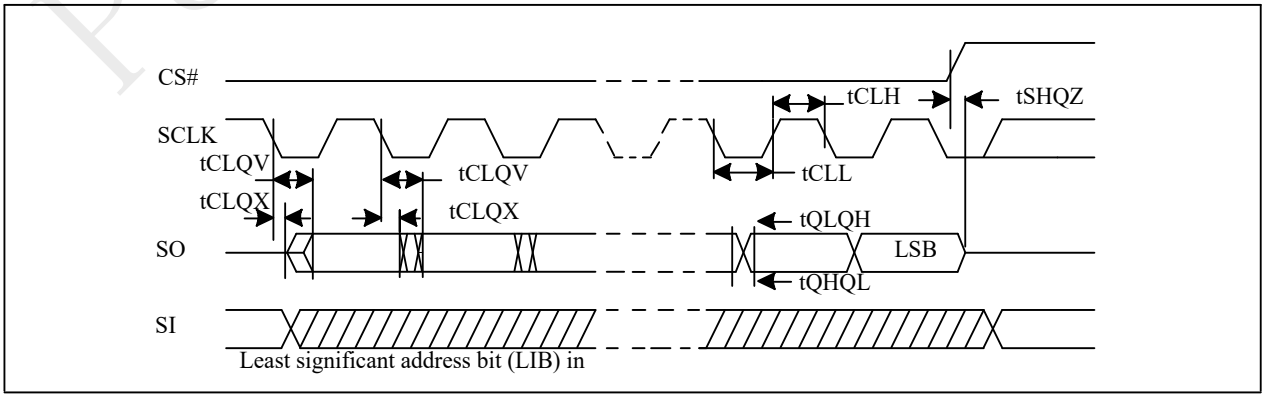


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 5.5 Operation Conditions

**At Device Power-Up and Power-Down**

AC timing illustrated in "Figure AC Timing at Device Power-Up" and "Figure Power-Down Sequence" are for the supply voltages and the control signals at device power-up and power-down. If the timing in the figures is ignored, the device will not operate correctly.

During power-up and power-down, CS# needs to follow the voltage applied on VCC to keep the device not to be selected. The CS# can be driven low when VCC reach Vcc(min.) and wait a period of tVSL.

**Figure 5-8 AC Timing at Device Power-Up**


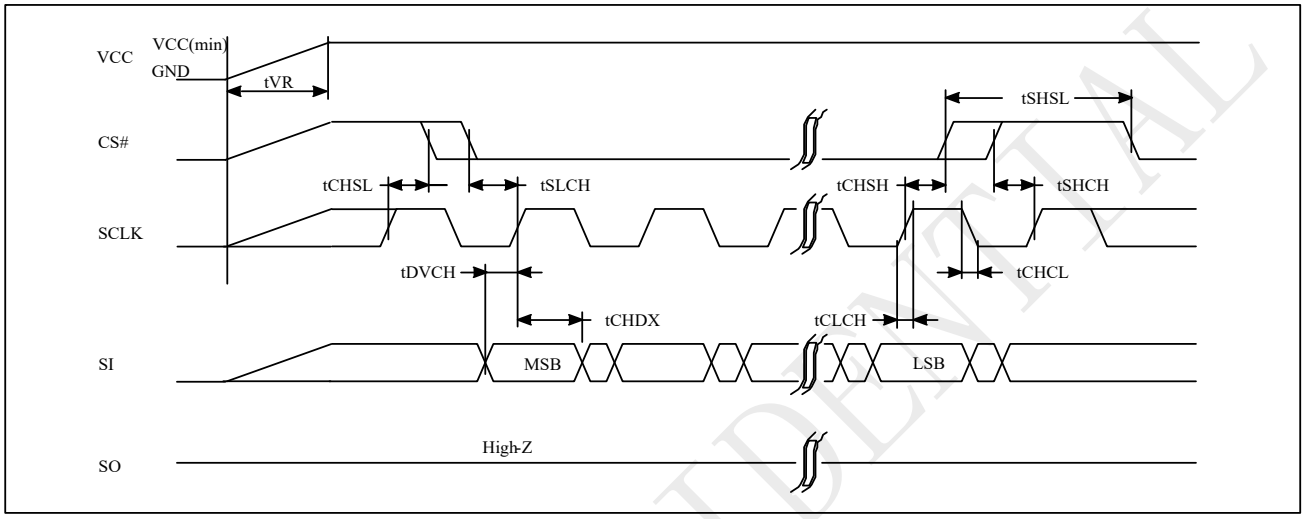



**Figure 5-9 Power-Up Timing**

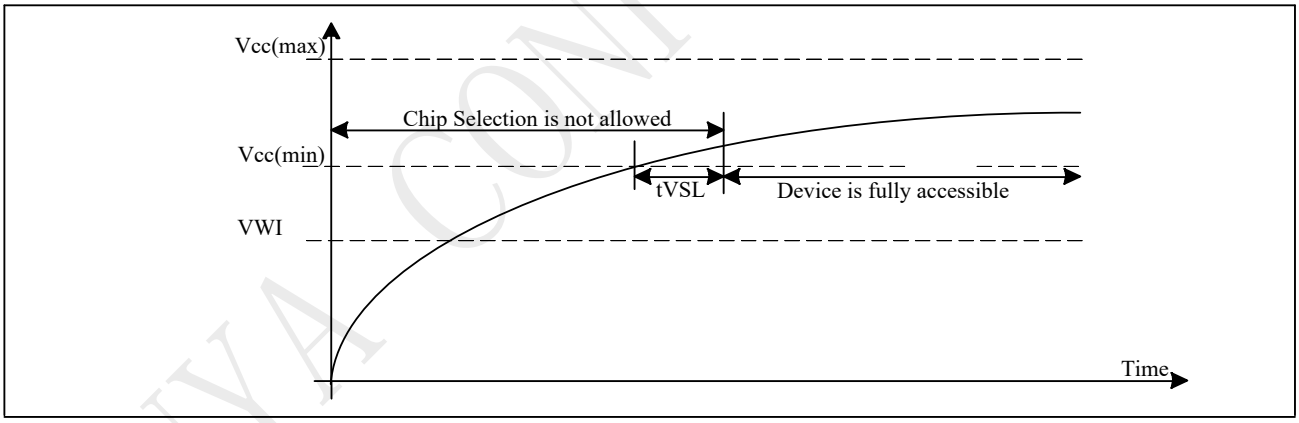



**Power Up/Down and Voltage Drop**

For Power-down to Power-up operation, the VCC of flash device must below VPWD for at least tPWD timing. Please check the table below for more detail.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

**Figure 5-10 Power down-up Timing**

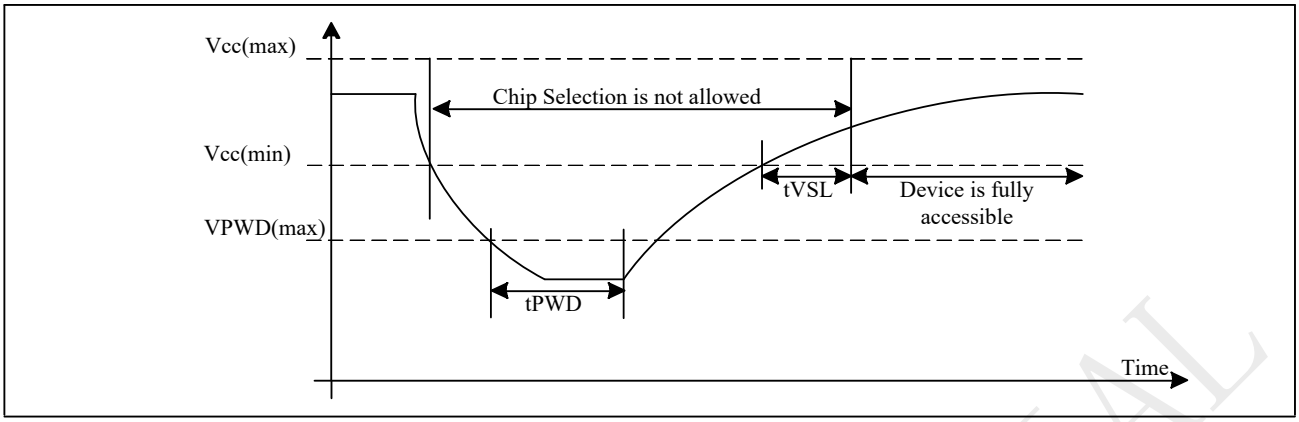


| Symbol | Parameter | Min | Max | Units |
|---|---|---|---|---|
| VPWD | VCC voltage needed to below VPWD for ensuring initialization will occur | | 1 | V |
| tPWD | The minimum duration for ensuring initialization will occur | 300 | | us |
| tVSL(1) | Vcc(min.) to device operation | 2.5 | | ms |
| tVR | Vcc Rise Time | 1 | 500000 | us/V |
| VWI | Write Inhibit Voltage | 1.1 | 1.4 | V |

Note: 1. tVSL average time is 500us except for power down at erase mode.

**Initial Delivery State**

The device is delivered with the memory array erased: all bits are set to 1 (each byte contains FFH). The Status Register contains 00H (all Status Register bits are 0).

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

# 6 Data Protection

During power transition, there may be some false system level signals which result in inadvertent erasure or programming. The device is designed to protect itself from these accidental write cycles.
The state machine will be reset as standby mode automatically during power up. In addition, the control register architecture of the device constrains that the memory contents can only be changed after specific command sequences have completed successfully.
In the following, there are several features to protect the system from the accidental write cycles during VCC power-up and power-down or from system noise.
• Power-on reset: to avoid sudden power switch by system power supply transition, the power-on reset may protect the Flash.
• Valid command length checking: The command length will be checked whether it is at byte base and completed on byte boundary.
• Write Enable (WREN) command: WREN command is required to set the Write Enable Latch bit (WEL) before issuing other commands to change data.
• Software Protection Mode: The Block Protect (BP4, BP3, BP2, BP1, and BP0) bits define the section of the memory array that can be read but not change.
• Deep Power-Down Mode: By entering deep power down mode, the flash device is under protected from writing all commands except the Release from Deep Power-Down Mode command.

**Protected Area Sizes**

**Table 6-1. PY25F128LA Protected Area Sizes (WPS=0, CMP bit = 0)**

| Status Register | | | | | Memory content | | | |
|---|---|---|---|---|---|---|---|---|
| BP4 | BP3 | BP2 | BP1 | BP0 | Blocks | Addresses | Density | Portion |
| X | X | 0 | 0 | 0 | NONE | NONE | NONE | NONE |
| 0 | 0 | 0 | 0 | 1 | 252 to 255 | FC0000h – FFFFFFh | 256KB | Upper 1/64 |
| 0 | 0 | 0 | 1 | 0 | 248 to 255 | F80000h – FFFFFFh | 512KB | Upper 1/32 |
| 0 | 0 | 0 | 1 | 1 | 240 to 255 | F00000h – FFFFFFh | 1MB | Upper 1/16 |
| 0 | 0 | 1 | 0 | 0 | 224 to 255 | E00000h – FFFFFFh | 2MB | Upper 1/8 |
| 0 | 0 | 1 | 0 | 1 | 192 to 255 | C00000h – FFFFFFh | 4MB | Upper 1/4 |
| 0 | 0 | 1 | 1 | 0 | 128 to 255 | 800000h – FFFFFFh | 8MB | Upper 1/2 |
| 0 | 1 | 0 | 0 | 1 | 0 to 3 | 000000h – 03FFFFh | 256KB | Lower 1/64 |
| 0 | 1 | 0 | 1 | 0 | 0 to 7 | 000000h – 07FFFFh | 512KB | Lower 1/32 |
| 0 | 1 | 0 | 1 | 1 | 0 to 15 | 000000h – 0FFFFFh | 1MB | Lower 1/16 |
| 0 | 1 | 1 | 0 | 0 | 0 to 31 | 000000h – 1FFFFFh | 2MB | Lower 1/8 |
| 0 | 1 | 1 | 0 | 1 | 0 to 63 | 000000h – 3FFFFFh | 4MB | Lower 1/4 |
| 0 | 1 | 1 | 1 | 0 | 0 to 127 | 000000h – 7FFFFFh | 8MB | Lower 1/2 |
| X | X | 1 | 1 | 1 | 0 to 255 | 000000h – FFFFFFh | 16MB | ALL |
| 1 | 0 | 0 | 0 | 1 | 255 | FFF000h – FFFFFFh | 4KB | U - 1/4096 |
| 1 | 0 | 0 | 1 | 0 | 255 | FFE000h – FFFFFFh | 8KB | U - 1/2048 |
| 1 | 0 | 0 | 1 | 1 | 255 | FFC000h – FFFFFFh | 16KB | U - 1/1024 |
| 1 | 0 | 1 | 0 | X | 255 | FF8000h – FFFFFFh | 32KB | U - 1/512 |
| 1 | 0 | 1 | 1 | 0 | 255 | FF8000h – FFFFFFh | 32KB | U - 1/512 |
| 1 | 1 | 0 | 0 | 1 | 0 | 000000h – 000FFFh | 4KB | L - 1/4096 |
| 1 | 1 | 0 | 1 | 0 | 0 | 000000h – 001FFFh | 8KB | L - 1/2048 |
| 1 | 1 | 0 | 1 | 1 | 0 | 000000h – 003FFFh | 16KB | L - 1/1024 |
| 1 | 1 | 1 | 0 | X | 0 | 000000h – 007FFFh | 32KB | L - 1/512 |
| 1 | 1 | 1 | 1 | 0 | 0 | 000000h – 007FFFh | 32KB | L - 1/512 |

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

**Table 6-2. PY25F128LA Protected Area Sizes (WPS=0, CMP bit = 1)**

| Status Register | | | | | Memory content | | | |
|---|---|---|---|---|---|---|---|---|
| BP4 | BP3 | BP2 | BP1 | BP0 | Blocks | Addresses | Density | Portion |
| X | X | 0 | 0 | 0 | 0 to 255 | 000000h - FFFFFFh | 16MB | ALL |
| 0 | 0 | 0 | 0 | 1 | 0 to 251 | 000000h - FBFFFFh | 16,128KB | Lower 63/64 |
| 0 | 0 | 0 | 1 | 0 | 0 to 247 | 000000h – F7FFFFh | 15,872KB | Lower 31/32 |
| 0 | 0 | 0 | 1 | 1 | 0 to 239 | 000000h - EFFFFFh | 15MB | Lower 15/16 |
| 0 | 0 | 1 | 0 | 0 | 0 to 223 | 000000h - DFFFFFh | 14MB | Lower 7/8 |
| 0 | 0 | 1 | 0 | 1 | 0 to 191 | 000000h - BFFFFFh | 12MB | Lower 3/4 |
| 0 | 0 | 1 | 1 | 0 | 0 to 127 | 000000h - 7FFFFFh | 8MB | Lower 1/2 |
| 0 | 1 | 0 | 0 | 1 | 4 to 255 | 040000h - FFFFFFh | 16,128KB | Upper 63/64 |
| 0 | 1 | 0 | 1 | 0 | 8 to 255 | 080000h - FFFFFFh | 15,872KB | Upper 31/32 |
| 0 | 1 | 0 | 1 | 1 | 16 to 255 | 100000h - FFFFFFh | 15MB | Upper 15/16 |
| 0 | 1 | 1 | 0 | 0 | 32 to 255 | 200000h - FFFFFFh | 14MB | Upper 7/8 |
| 0 | 1 | 1 | 0 | 1 | 64 to 255 | 400000h - FFFFFFh | 12MB | Upper 3/4 |
| 0 | 1 | 1 | 1 | 0 | 128 to 255 | 800000h - FFFFFFh | 8MB | Upper 1/2 |
| X | X | 1 | 1 | 1 | NONE | NONE | NONE | NONE |
| 1 | 0 | 0 | 0 | 1 | 0 to 255 | 000000h – FFEFFFh | 16,380KB | L - 4095/4096 |
| 1 | 0 | 0 | 1 | 0 | 0 to 255 | 000000h – FFDFFFh | 16,376KB | L - 2047/2048 |
| 1 | 0 | 0 | 1 | 1 | 0 to 255 | 000000h – FFBFFFh | 16,368KB | L - 1023/1024 |
| 1 | 0 | 1 | 0 | X | 0 to 255 | 000000h – FF7FFFh | 16,352KB | L - 511/512 |
| 1 | 0 | 1 | 1 | 0 | 0 to 255 | 000000h – FF7FFFh | 16,352KB | L - 511/512 |
| 1 | 1 | 0 | 0 | 1 | 0 to 255 | 001000h – FFFFFFh | 16,380KB | U - 4095/4096 |
| 1 | 1 | 0 | 1 | 0 | 0 to 255 | 002000h – FFFFFFh | 16,376KB | U - 2047/2048 |
| 1 | 1 | 0 | 1 | 1 | 0 to 255 | 004000h – FFFFFFh | 16,368KB | U -1023/1024 |
| 1 | 1 | 1 | 0 | X | 0 to 255 | 008000h – FFFFFFh | 16,352KB | U - 511/512 |
| 1 | 1 | 1 | 1 | 0 | 0 to 255 | 008000h – FFFFFFh | 16,352KB | U - 511/512 |

Notes:


1. X=don't care

2. If any erase or program command specifies a memory that contains protected data portion, this command will be ignored.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

**Table 6-3. PY25F128LA Individual Block Protection (WPS=1)**

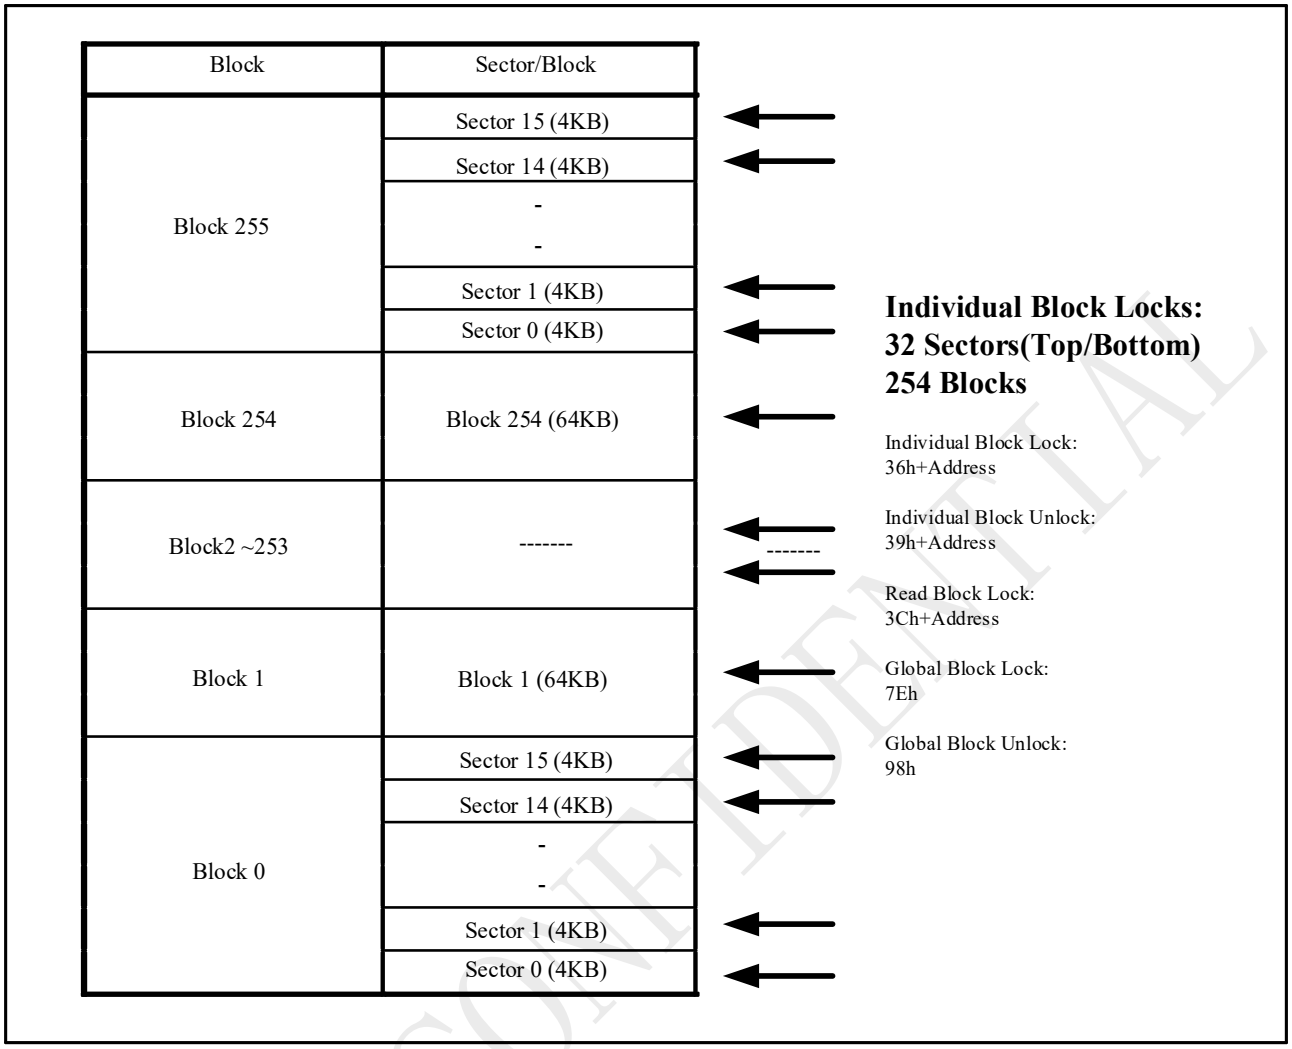


Notes:

1. Individual Block/Sector protection is only valid when WPS=1.
2. All individual block/sector lock bits are set to 1 by default after power up, all memory array is protected.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

# 7 Memory Address Mapping

The memory array can be erased in three levels of granularity including a full chip erase. The size of the erase blocks is optimized for both code and data storage applications, allowing both code and data segments to reside in their own erase regions.

| Each device has | Each block has | Each sector has | Each page has | |
|---|---|---|---|---|
| 16M | 64/32K | 4K | 256 | bytes |
| 64K | 256/128 | 16 | - | pages |
| 4096 | 16/8 | - | - | sectors |
| 256/512 | - | - | - | blocks |

PY25F128LA Memory Organization

| Block | Sector | Address range | |
|---|---|---|---|
| 255 | 4095 | FFF000H | FFFFFFH |
| | …… | …… | …… |
| | 4080 | FF0000H | FF0FFFH |
| 254 | 4079 | FEF000H | FEFFFFH |
| | …… | …… | …… |
| | 4064 | FE0000H | FE0FFFH |
| …… | …… | …… | …… |
| | …… | …… | …… |
| | …… | …… | …… |
| …… | …… | …… | …… |
| | …… | …… | …… |
| | …… | …… | …… |
| 2 | 47 | 02F000H | 02FFFFH |
| | …… | …… | …… |
| | 32 | 020000H | 020FFFH |
| 1 | 31 | 01F000H | 01FFFFH |
| | …… | …… | …… |
| | 16 | 010000H | 010FFFH |
| 0 | 15 | 00F000H | 00FFFFH |
| | …… | …… | …… |
| | 0 | 000000H | 000FFFH |

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

# 8 Device Operation

Before a command is issued, status register should be checked to ensure device is ready for the intended operation.


When incorrect command is inputted to this LSI, this LSI becomes standby mode and keeps the standby mode until next CS# falling edge. In standby mode, SO pin of this LSI should be High-Z. When correct command is inputted to this LSI, this LSI becomes active mode and keeps the active mode until next CS# rising edge.

Input data is latched on the rising edge of Serial Clock (SCLK) and data shifts out on the falling edge of SCLK. The difference of serial peripheral interface mode 0 and mode 3 is shown as Figure 8-1.

For the following instructions: RDID, RDSR, RDSR1, RDSCUR, READ, FREAD, DREAD, 2READ, 4READ, QREAD, RDSFDP, RES, REMS, DREMS, QREMS, the shifted-in instruction sequence is followed by a data-out sequence. After any bit of data being shifted out, the CS# can be high. For the following instructions: WREN, WRDI, WRSR, SE, BE32K, BE, CE, PP, QPP, DP, ERSCUR, PRSCUR, SUSPEND, RESUME, RSTEN, RST, the CS# must go high exactly at the byte boundary; otherwise, the instruction will be rejected and not executed.

During the progress of Write Status Register, Program, Erase operation, to access the memory array is neglected and not affect the current operation of Write Status Register, Program, Erase.


**Figure 8-1 Serial Peripheral Interface Modes Supported**

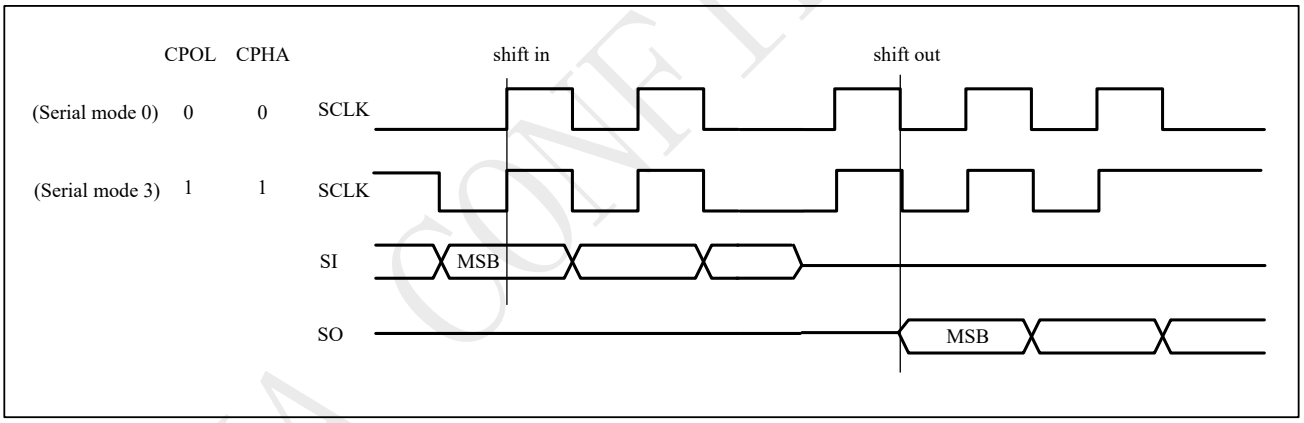


Note: CPOL indicates clock polarity of serial master, CPOL=1 for SCLK high while idle, CPOL=0 for SCLK low while not transmitting. CPHA indicates clock phase. The combination of CPOL bit and CPHA bit decides which serial mode is supported.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

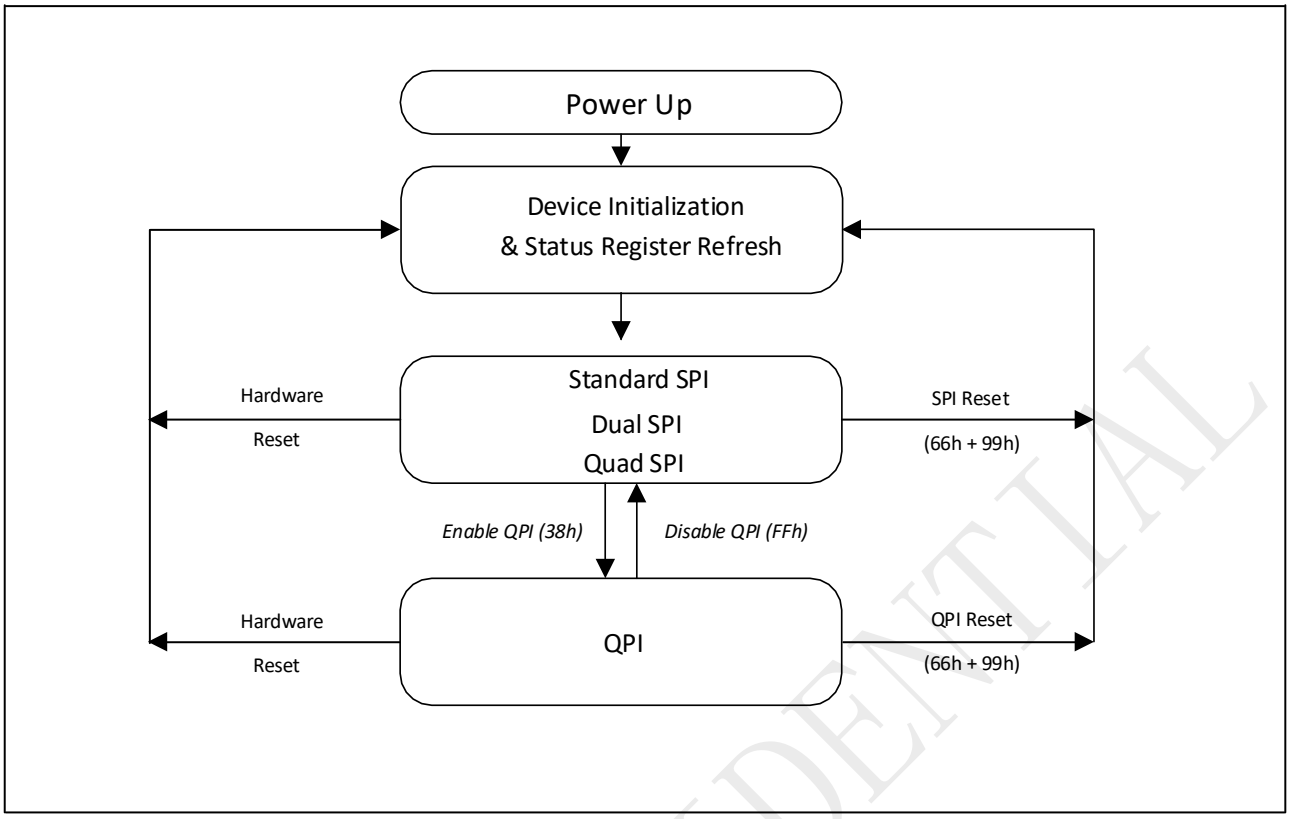


**Standard SPI**

The PY25F128LA features a serial peripheral interface on 4 signals bus: Serial Clock (SCLK), Chip Select (CS#), Serial Data Input (SI) and Serial Data Output (SO). Both SPI bus mode 0 and 3 are supported. Input data is latched on the rising edge of SCLK and data shifts out on the falling edge of SCLK.

**Dual SPI**

The PY25F128LA supports Dual SPI operation when using the “Dual Output Fast Read” and “Dual I/O Fast Read” (3BH and BBH) commands. These commands allow data to be transferred to or from the device at two times the rate of the standard SPI. When using the Dual SPI command, the SI and SO pins become bidirectional I/O pins: IO0 and IO1.

**Quad SPI**

The PY25F128LA supports Quad SPI operation when using the “Quad Output Fast Read”, “Quad I/O Fast Read” (6BH, EBH) commands. These commands allow data to be transferred to or from the device at four times the rate of the standard SPI. When using the Quad SPI command, the SI and SO pins become bidirectional I/O pins: IO0 and IO1. For PY25F128LA, the QE bit is set to 1 as default and cannot be changed.

**QPI**

The PY25F128LA supports Quad Peripheral Interface (QPI) operations only when the device is switched from Standard/Dual/Quad SPI mode to QPI mode using the “Enable the QPI (38H)” command. The QPI mode utilizes all four IO pins to input the command code. Standard/Dual/Quad SPI mode and QPI mode are exclusive. Only one mode can be active at any given times. “Enable the QPI (38H)”and “Disable the QPI(FFH)” commands are used to switch between these two modes. Upon power-up and after software reset using “” Reset (99H)” command, the default state of the device is Standard/Dual/Quad SPI mode. For PY25F128LA, the QE bit is set to 1 as default and cannot be changed.

**SPI / QPI DTR Read Instructions**

To effectively improve the read operation throughput without increasing the serial clock frequency, PY25F128LA introduces multiple DTR (Double Transfer Rate) Read instructions that support

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

Standard/Dual/Quad SPI and QPI modes. The byte-long instruction code is still latched into the device on the rising edge of the serial clock similar to all other SPI/QPI instructions. Once a DTR instruction code is accepted by the device, the address input and data output will be latched on both rising and falling edges of the serial clock.

**Software Reset & Hardware RESET# pin**

The PY25F128LA can be reset to the initial power-on state by a software Reset sequence, either in SPI mode or QPI mode. This sequence must include two consecutive commands: Enable Reset (66h) & Reset (99h). If the command sequence is successfully accepted, the device will take approximately 30uS (tReady) to reset. No command will be accepted during the reset period.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

# 9 Commands

## 9.1 Commands listing

**Figure 9-1 Command set (Standard/Dual/Quad SPI)**

| Commands | Abbr. | Code | ADR Bytes | DMY Cycles | Data Bytes | Function description |
|---|---|---|---|---|---|---|
| **Read** | | | | | | |
| Fast Read Array | FREAD | 0BH | 3 | 8 | 1+ | n bytes read out until CS# goes high |
| Normal Read Array | READ | 03H | 3 | 0 | 1+ | n bytes read out until CS# goes high |
| Read Dual Output | DREAD | 3BH | 3 | 8 | 1+ | n bytes read out by Dual output |
| Read 2IO | 2READ | BBH | 3 | 4(8) | 1+ | n bytes read out by 2IO |
| Read Quad Output | QREAD | 6BH | 3 | 8 | 1+ | n bytes read out by Quad output |
| Read 4IO | 4READ | EBH | 3 | 6(10) | 1+ | n bytes read out by 4IO |
| Read Word 4IO | WREAD | E7H | 3 | 4 | 1+ | n bytes word read out by 4IO |
| **Program and Erase** | | | | | | |
| Sector Erase (4K bytes) | SE | 20H | 3 | 0 | 0 | erase selected sector |
| Block Erase (32K bytes) | BE32 | 52H | 3 | 0 | 0 | erase selected 32K block |
| Block Erase (64K bytes) | BE | D8H | 3 | 0 | 0 | erase selected 64K block |
| Chip Erase | CE | 60H/C7H | 0 | 0 | 0 | erase whole chip |
| Page Program | PP | 02H | 3 | 0 | 1+ | program selected page |
| Quad page program | QPP | 32H | 3 | 0 | 1+ | quad input to program selected page |
| Program/Erase Suspend | PES | 75H | 0 | 0 | 0 | suspend program/erase operation |
| Program/Erase Resume | PER | 7AH | 0 | 0 | 0 | continue program/erase operation |
| **Protection** | | | | | | |
| Write Enable | WREN | 06H | 0 | 0 | 0 | sets the write enable latch bit |
| Write Disable | WRDI | 04H | 0 | 0 | 0 | resets the write enable latch bit |
| Volatile SR/CR Write Enable | VWREN | 50H | 0 | 0 | 0 | Write enable for volatile SR/CR |
| Individual Block Lock | SBLK | 36H | 3 | 0 | 0 | Individual block lock |
| Individual Block Unlock | SBULK | 39H | 3 | 0 | 0 | Individual block unlock |
| Read Block Lock Status | RDBLOCK | 3DH | 3 | 0 | 0 | Read individual block lock register |
| Global Block Lock | GBLK | 7EH | 0 | 0 | 0 | Whole chip block protect |
| Global Block Unlock | GBULK | 98H | 0 | 0 | 0 | Whole chip block unprotect |
| **Security** | | | | | | |
| Erase Security Registers | ERSCUR | 44H | 3 | 0 | 0 | Erase security registers |
| Program Security Registers | PRSCUR | 42H | 3 | 0 | 1+ | Program security registers |
| Read Security Registers | RDSCUR | 48H | 3 | 8 | 1+ | Read value of security register |

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

**Command set (Standard/Dual/Quad SPI)**

| Commands | Abbr. | Code | ADR Bytes | DMY Cycles | Data Bytes | Function |
|---|---|---|---|---|---|---|
| **Status Register** | | | | | | |
| Read Status Register | RDSR | 05H | 0 | 0 | 1 | read out status register |
| Read Status Register-1 | RDSR1 | 35H | 0 | 0 | 1 | Read out status register-1 |
| Read Configure Register | RDCR | 15H | 0 | 0 | 1 | Read out configure register |
| Write Status Register | WRSR | 01H | 0 | 0 | 1-2 | Write data to status registers and status registers-1 |
| Write Status Register-1 | WRSR1 | 31H | 0 | 0 | 1 | Write data to status registers-1 |
| Write Configure Register | WRCR | 11H | 0 | 0 | 1 | Write data to configuration register |
| **Other Commands** | | | | | | |
| Reset Enable | RSTEN | 66H | 0 | 0 | 0 | Enable reset |
| Reset | RST | 99H | 0 | 0 | 0 | Reset |
| Enable QPI | QPIEN | 38H | 0 | 0 | 0 | Enable QPI mode |
| Read Manufacturer/device ID | RDID | 9FH | 0 | 0 | 1 to 3 | output JEDEC ID: 1-byte manufacturer ID & 2-byte device ID |
| Read Manufacture ID | REMS | 90H | 3 | | 1+ | Read manufacturer ID/device ID data |
| Dual Read Manufacture ID | DREMS | 92H | 3 | 4 | 1+ | Dual output read manufacture/device ID |
| Quad Read Manufacture ID | QREMS | 94H | 3 | 6 | 1+ | Quad output read manufacture/device ID |
| Deep Power-down | DP | B9H | 0 | 0 | 0 | enters deep power-down mode |
| Release Deep Power-down/Read Electronic ID | RDP/RES | ABH | 3 | 0 | 1 | Read electronic ID data |
| Set burst length | SBL | 77H | 0 | 0 | 0 | Set burst length |
| Read SFDP | RDSFDP | 5AH | 3 | 8 | 1+ | Read SFDP parameter |
| Release read enhanced | | FFH | | | | Release from read enhanced |
| Read unique ID | RUID | 4BH | 3 | 8 | 1+ | Read unique ID |

**Command set (QPI Instructions)**

| Commands | Abbr. | Code | ADR Bytes | DMY Cycles | Data Bytes | Function description |
|---|---|---|---|---|---|---|
| **Read** | | | | | | |
| Fast read | | 0BH | 3 | 10/4/6/8 | 1+ | n bytes read out until CS# goes high |
| Burst Read with Wrap | | 0CH | 3 | 10/4/6/8 | 1+ | n bytes burst read with wrap by 4IO |
| Read Word 4x I/O | | EBH | 3 | 10/4/6/8 | 1+ | n bytes read out by 4IO |
| **Program and Erase** | | | | | | |
| Page Program | PP | 02H | 3 | 0 | 1+ | program selected page |
| Sector Erase (4K bytes) | SE | 20H | 3 | 0 | 0 | erase selected sector |
| Block Erase (32K bytes) | BE32 | 52H | 3 | 0 | 0 | erase selected 32K block |
| Block Erase (64K bytes) | BE | D8H | 3 | 0 | 0 | erase selected 64K block |
| Chip Erase | CE | 60H/C7H | 0 | 0 | 0 | erase whole chip |
| Program/Erase Suspend | PES | 75H | 0 | 0 | 0 | suspend program/erase operation |
| Program/Erase Resume | PER | 7AH | 0 | 0 | 0 | continue program/erase operation |
| **Protection** | | | | | | |
| Write Enable | WREN | 06H | 0 | 0 | 0 | sets the write enable latch bit |

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

| Commands | Abbr. | Code | ADR Bytes | DMY Cycles | Data Bytes | Function description |
|---|---|---|---|---|---|---|
| Volatile SR/CR Write Enable | VWREN | 50H | 0 | 0 | 0 | Write enable for volatile SR/CR |
| Write Disable | WRDI | 04H | 0 | 0 | 0 | resets the write enable latch bit |
| Individual Block Lock | SBLK | 36H | 3 | 0 | 0 | Individual block lock |
| Individual Block Unlock | SBULK | 39H | 3 | 0 | 0 | Individual block unlock |
| Read Block Lock Status | RDBLOCK | 3DH | 3 | 0 | 0 | Read individual block lock register |
| Global Block Lock | GBLK | 7EH | 0 | 0 | 0 | Whole chip block protect |
| Global Block Unlock | GBULK | 98H | 0 | 0 | 0 | Whole chip block unprotect |
| **Status Register** | | | | | | |
| Read Status Register | RDSR | 05H | 0 | 0 | 1 | read out status register |
| Read Status Register-1 | RDSR1 | 35H | 0 | 0 | 1 | Read out status register-1 |
| Read Configure Register | RDCR | 15H | 0 | 0 | 1 | Read out configure register |
| Write Status Register | WRSR | 01H | 0 | 0 | 1-2 | Write data to status registers-0 and status registers-1 |
| Write Status Register-1 | WRSR1 | 31H | 0 | 0 | 1 | Write data to status registers-1 |
| Write Configure Register | WRCR | 11H | 0 | 0 | 1 | Write data to configuration register |
| **Other Commands** | | | | | | |
| Deep Power-down | DP | B9H | 0 | 0 | 0 | enters deep power-down mode |
| Release Deep Power-down/Read Electronic ID | RDP/RES | ABH | 3 | 0 | 1 | Read electronic ID data |
| Set Read Parameters | SRP | C0H | 0 | 0 | 1 | Set read dummy and wrap |
| Read Manufacture ID | REMS | 90H | 3 | | 1+ | Read manufacturer ID/device ID data |
| Read Manufacturer/device ID | RDID | 9FH | 0 | 0 | 1 to 3 | output JEDEC ID: 1-byte manufacturer ID & 2-byte device ID |
| Read SFDP | RDSFDP | 5AH | 3 | 10/4/6/8 | 1+ | Read SFDP parameter |
| Disable QPI | | FFH | | | | Release from read enhanced |
| Reset Enable | RSTEN | 66H | 0 | 0 | 0 | Enable reset |
| Reset | RST | 99H | 0 | 0 | 0 | Reset |

**Command set (DTR Instructions)**

| Commands | Abbr. | Code | ADR Bytes | DMY Cycles | Data Bytes | Function description |
|---|---|---|---|---|---|---|
| DTR Fast Read | DTRFRD | 0DH | 3 | 6 | 1+ | DTR n byte fast read out |
| DTR 2IO Read | 2DTRD | BDH | 3 | 6 | 1+ | DTR n byte read out by 2IO |
| DTR 4IO Read | 4DTRD | EDH | 3 | 10 | 1+ | DTR n byte read out by 4IO |

**Command set (DTR QPI Instructions)**

| Commands | Abbr. | Code | ADR Bytes | DMY Cycles | Data Bytes | Function description |
|---|---|---|---|---|---|---|
| DTR Burst Read with Wrap | | 0EH | 3 | 10 | 1+ | DTR n bytes burst read with wrap by 4IO |
| DTR Fast Read | DTRFRD | 0DH | 3 | 10 | 1+ | DTR n byte fast read out |
| DTR 4IO Read | 4DTRD | EDH | 3 | 10 | 1+ | DTR n byte fast read out |

NOTES:

1. Dual Output data

IO0 = (D6, D4, D2, D0)

IO1 = (D7, D5, D3, D1)


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

2. Dual Input Address
IO0 = A22, A20, A18, A16, A14, A12, A10, A8 A6, A4, A2, A0, M6, M4, M2, M0
IO1 = A23, A21, A19, A17, A15, A13, A11, A9 A7, A5, A3, A1, M7, M5, M3, M1

3. Quad Output Data
IO0 = (D4, D0, …)
IO1 = (D5, D1, …)
IO2 = (D6, D2, …)
IO3 = (D7, D3, …)

4. Quad Input Address
IO0 = A20, A16, A12, A8, A4, A0, M4, M0
IO1 = A21, A17, A13, A9, A5, A1, M5, M1
IO2 = A22, A18, A14, A10, A6, A2, M6, M2
IO3 = A23, A19, A15, A11, A7, A3, M7, M3

5. Fast Read Quad I/O Data
IO0 = (x, x, x, x, D4, D0, …)
IO1 = (x, x, x, x, D5, D1, …)
IO2 = (x, x, x, x, D6, D2, …)
IO3 = (x, x, x, x, D7, D3, …)

6. Fast Word Read Quad I/O Data
IO0 = (x, x, D4, D0, …)
IO1 = (x, x, D5, D1, …)
IO2 = (x, x, D6, D2, …)
IO3 = (x, x, D7, D3, …)

7. Fast Word Read Quad I/O Data: the lowest address bit must be 0.

8. QPI Command, Address, Data input/output format:
IO0= C4, C0, A20, A16, A12, A8, A4, A0, D4, D0, D4, D0,
IO1= C5, C1, A21, A17, A13, A9, A5, A1, D5, D1, D5, D1
IO2= C6, C2, A22, A18, A14, A10, A6, A2, D6, D2, D6, D2
IO3= C7, C3, A23, A19, A15, A11, A7, A3, D7, D3, D7, D3

9. Security Registers Address:
Security Register1: A23-A16=00H, A15-A10=000100, A9-A0= Byte Address;
Security Register2: A23-A16=00H, A15-A10=001000, A9-A0= Byte Address;
Security Register3: A23-A16=00H, A15-A10=001100, A9-A0= Byte Address;

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 9.2 Write Enable (WREN) (06H)

The Write Enable (WREN) instruction is for setting Write Enable Latch (WEL) bit. For those instructions like PP, QPP, SE, BE32K, BE, CE and WRSR, WRSR1, WRCR, ERSCUR, PRSCUR which are intended to change the device content, should be set every time after the WREN instruction setting the WEL bit.
The sequence of issuing WREN instruction is: CS# goes low→ sending WREN instruction code→ CS# goes high.

**Figure 9-2 Write Enable (WREN) Sequence (Command 06h)**


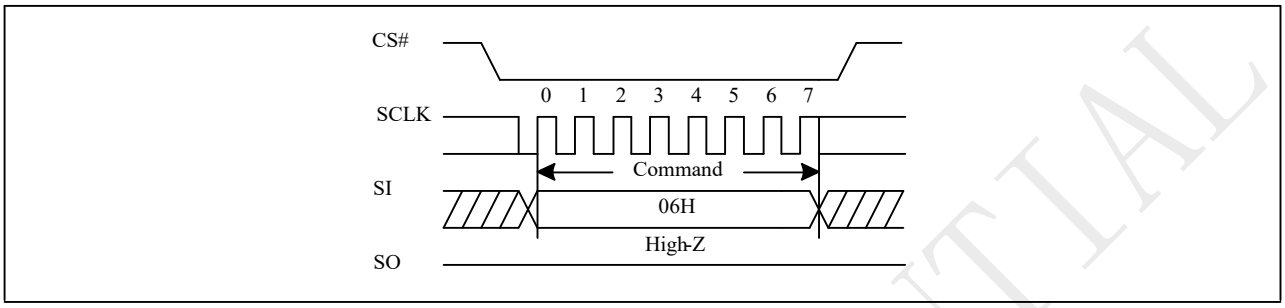



**Figure 9-2a Write Enable (WREN) Sequence (QPI)**

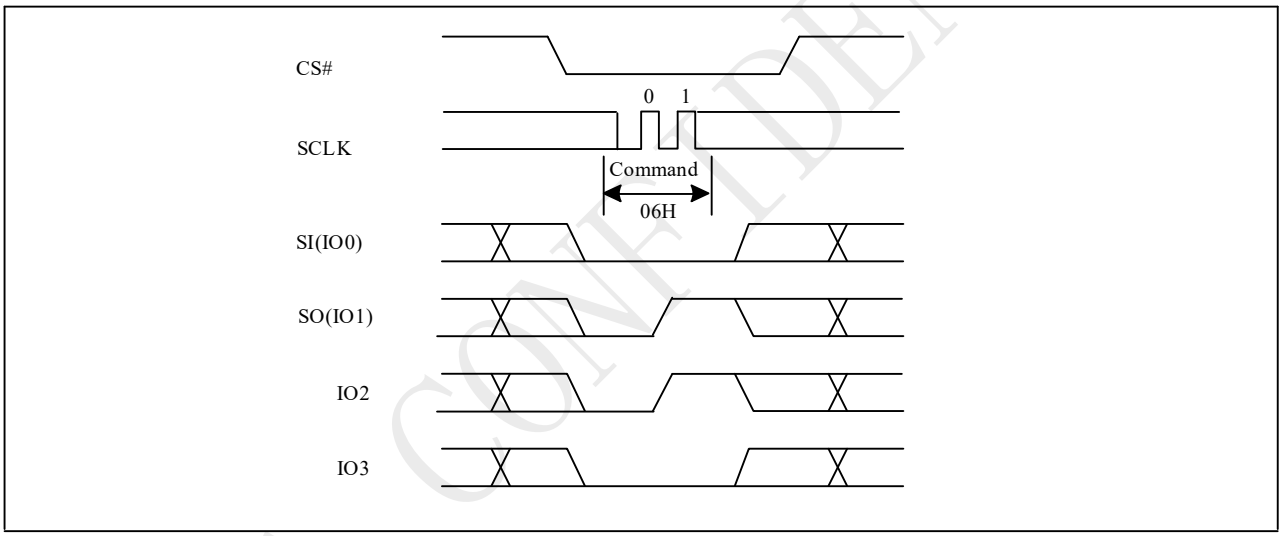


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 9.3 Write Disable (WRDI) (04H)

The Write Disable (WRDI) instruction is for resetting Write Enable Latch (WEL) bit.

The sequence of issuing WRDI instruction is: CS# goes low→ sending WRDI instruction code→ CS# goes high.

The WEL bit is reset by following situations:

- Power-up
- Write Disable (WRDI) instruction completion
- Write Status Register (WRSR/WRSR1/WRCR) instruction completion
- Page Program (PP) instruction completion
- Quod Page Program (QPP) instruction completion
- Sector Erase (SE) instruction completion
- Block Erase (BE32K, BE) instruction completion
- Chip Erase (CE) instruction completion
- Erase Security Register (ERSCUR) instruction completion
- Program Security Register (PRSCUR) instruction completion
- Reset (Soft Reset, Hard Reset) instruction completion
- Write Enable for Volatile Register

**Figure 9-3 Write Disable (WRDI) Sequence (Command 04h)**


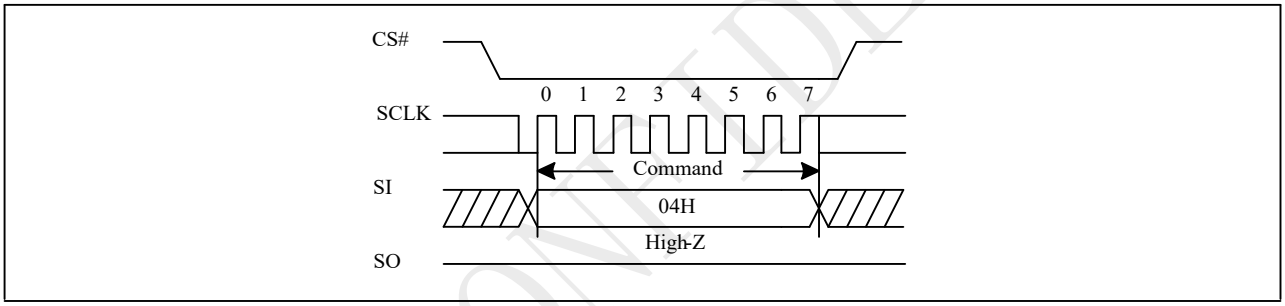



**Figure 9-3a Write Disable (WRDI) Sequence (QPI)**

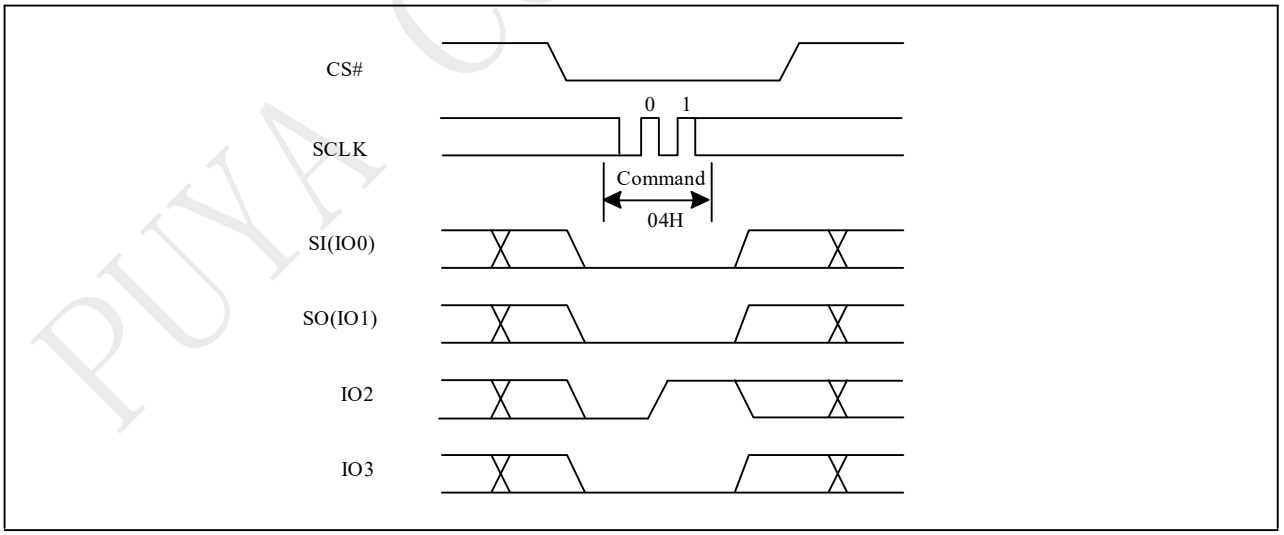


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 9.4 Write Enable for Volatile Register (50H)

The non-volatile Status Register and Configure Register bits can also be written to as volatile bits. This gives more flexibility to change the system configuration and memory protection schemes quickly without waiting for the typical non-volatile bit write cycles or affecting the endurance of the Status Register and Configure Register non-volatile bits. The Write Enable for Volatile Register command must be issued prior to a Write Status Register or Write Configure Register command, and any other commands cannot be inserted between them. The Write Enable for Volatile Register command will not set the Write Enable Latch, LB3, LB2 and LB1 bits, it is only valid for the Write Status Register or Write Configure Register command to change the volatile Register bit values.

The sequence of issuing Write Enable for Volatile Register instruction is: CS# goes low→ sending Write Enable for Volatile Register instruction code→ CS# goes high.

**Figure 9-4 Write Enable for Volatile Register Sequence (Command 50h)**


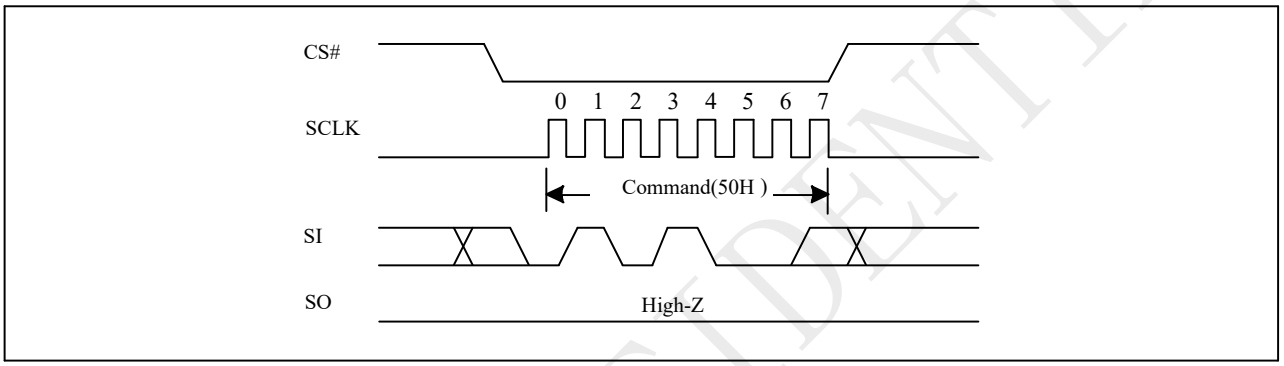



**Figure 9-4a Write Enable for Volatile Register Sequence (QPI)**

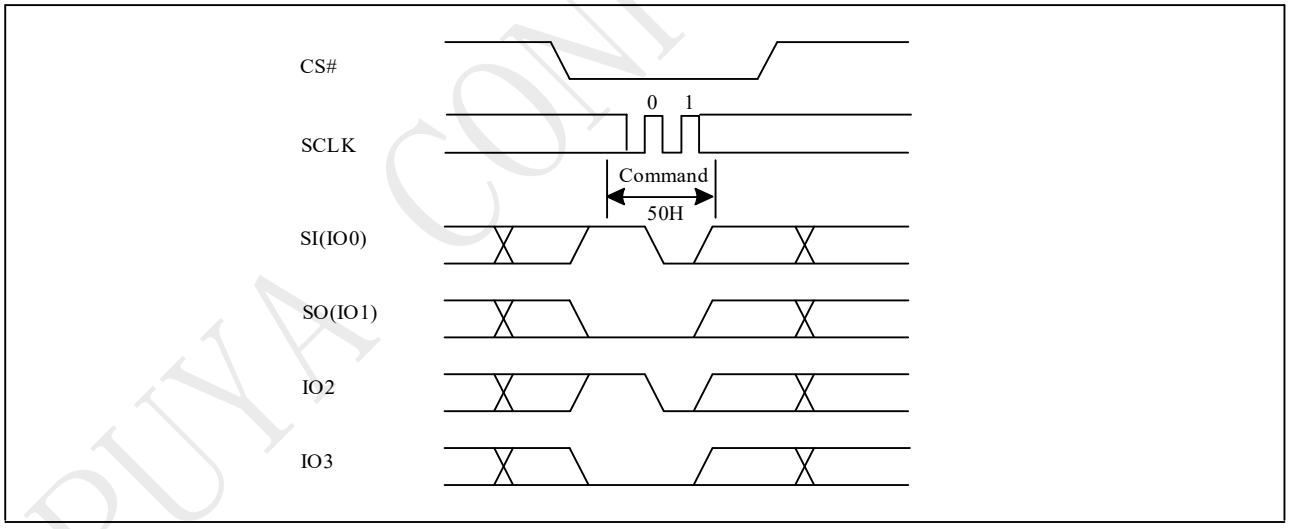


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 9.5 Read Status Register (RDSR) (05H/35H)

The RDSR instruction is for reading Status Register Bits. The Read Status Register can be read at any time (even in program/erase/write status register condition). It is recommended to check the Write in Progress (WIP) bit before sending a new instruction when a program, erase, or write status register operation is in progress. For command code “05H”, the SO will output Status Register bits S7~S0. The command code “35H”, the SO will output Status Register bits S15~S8.

The sequence of issuing RDSR instruction is: CS# goes low→ sending RDSR instruction code→ Status Register data out on SO. The SIO [3:1] are "don't care".

**Figure 9-5 Read Status Register (RDSR) Sequence (Command 05h or 35h)**


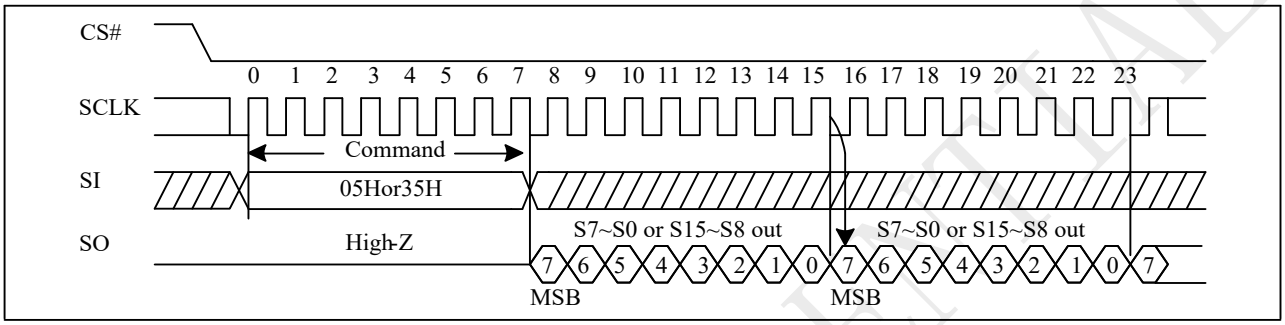



**Figure 9-5a Read Status Register (RDSR) Sequence (QPI)**

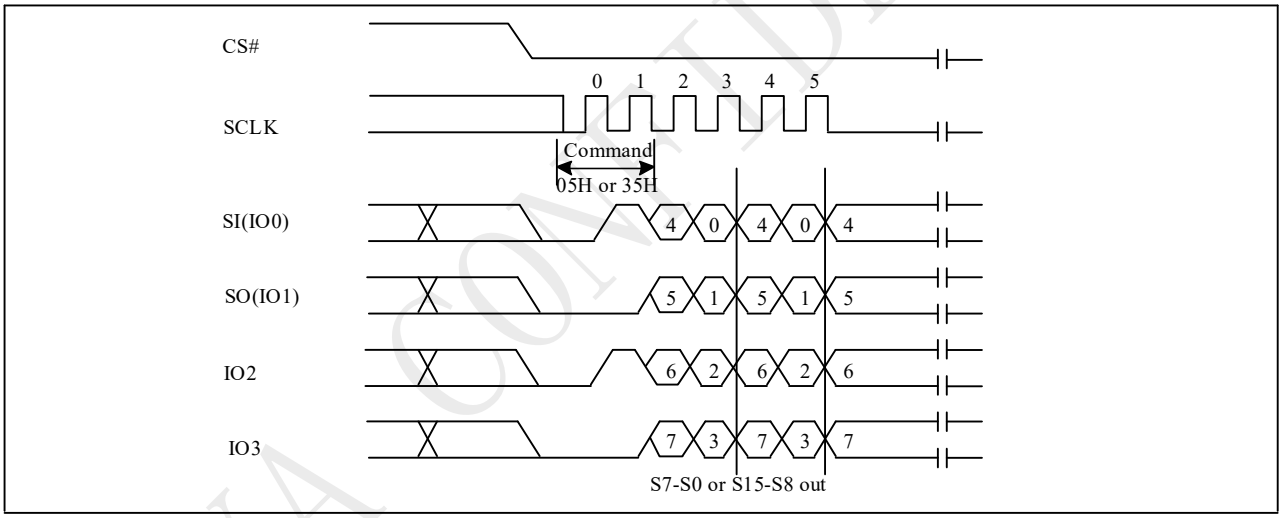


**Status Register**

| BIT | S15 | S14 | S13 | S12 | S11 | S10 | S9 | S8 |
|---|---|---|---|---|---|---|---|---|
| Definition | SUS | CMP | LB3 | LB2 | LB1 | EP_FAIL | QE | SRP1 |
| Volatile | RO | N | OTP | OTP | OTP | RO | N | N |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |

| BIT | S7 | S6 | S5 | S4 | S3 | S2 | S1 | S0 |
|---|---|---|---|---|---|---|---|---|
| Definition | SRP0 | BP4 | BP3 | BP2 | BP1 | BP0 | WEL | WIP |
| Volatile | N | N | N | N | N | N | V | RO |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Note:

1. RO=read only, N=non-volatile, V= volatile.

The definition of the status register bits is as below:

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

**WIP bit.**

The Write in Progress (WIP) bit indicates whether the memory is busy in program/erase/write status register progress. When WIP bit sets to 1, means the device is busy in program/erase/write status register progress, when WIP bit sets 0, means the device is not in program/erase/write status register progress.

**WEL bit.**

The Write Enable Latch (WEL) bit indicates the status of the internal Write Enable Latch. When set to 1 the internal Write Enable Latch is set, when set to 0 the internal Write Enable Latch is reset and no Write Status Register, Program or Erase command is accepted.

**BP4, BP3, BP2, BP1, BP0 bits.**

The Block Protect (BP4, BP3, BP2, BP1, and BP0) bits are non-volatile. They define the size of the area to be software protected against Program and Erase commands. These bits are written with the Write Status Register (WRSR) command. When the Block Protect (BP4, BP3, BP2, BP1, BP0) bits are set to 1, the relevant memory area (as defined in Table “Protected Area Sizes”). becomes protected against Page Program (PP), Sector Erase (SE) and Block Erase (BE) commands. The Block Protect (BP4, BP3, BP2, BP1, and BP0) bits can be written provided that the Hardware Protected mode has not been set. The Chip Erase (CE) command is executed, only if the Block Protect (BP4, BP3, BP2, BP1and BP0) are set to “None protected”.

**SRP1, SRP0 bits.**

The Status Register Protect (SRP1 and SRP0) bits are non-volatile Read/Write bits in the status register. The SRP bits control the method of write protection: software protection, hardware protection, power supply lock-down or one-time programmable protection

| SRP1 | SRP0 | Status Register | Description |
|---|---|---|---|
| 0 | 0 | Software Protected | The Status Register and Configure Register can be written to after a Write Enable command. |
| 1 | 0 | Power Supply Lock-Down | Status Register and Configure Register are protected and cannot be written to again until the next Power-Down, Power-Up cycle. |
| 1 | 1 | One Time Program | Status Register and Configure Register are permanently protected and cannot be written to. |

NOTE:

1. When SRP1, SRP0= (1, 0), Only a Power-Down, Power-Up cycle will change SRP1, SRP0 to (0, 0) state, not include soft reset and hard reset.
2. This feature is available on special order. Please contact PUYA for details.

**QE bit.**

The Quad Enable (QE) bit is an OTP bit in the Status Register which is permanently set to "1". The flash always performs Quad I/O mode.

**EP_FAIL bit.**

The Erase/Program Fail bit is a read only bit which shows the status of the last Program/Erase (PP, QPP, SE, BE32K, BE, CE and ERSCUR, PRSCUR) operation. The bit will be set to "1"if the program/erase operation failed or interrupted by reset or the program/erase region was protected. It will be automatically cleared to "0" if the next program/erase operation succeeds. Please note that it will not interrupt or stop any operation in the flash memory.

**LB3, LB2, LB1, bits.**

The LB3, LB2, LB1, bits are non-volatile One Time Program (OTP) bits in Status Register (S13-S11) that provide the write protect control and status to the Security Registers. The default state of LB3-LB1are0, the security registers are unlocked. The LB3-LB1bitscan be set to 1 individually using the Write Register

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

instruction. The LB3-LB1bits are One Time Programmable, once it's set to 1, the Security Registers will become read-only permanently.

**CMP bit**

The CMP bit is a non-volatile Read/Write bit in the Status Register(S14). It is used in conjunction the BP4-BP0 bits to provide more flexibility for the array protection. Please see the table "Protected Area Size" for details. The default setting is CMP=0.

**SUS bit**

The SUS bit is read only bit in the status register (S15) that is set to 1 after executing a Program/Erase Suspend (75H) command. The SUS bit is cleared to 0 by Program/Erase Resume (7AH) command and a power-down, power-up cycle, soft reset, hard reset.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 9.6 Read Configure Register (RDCR) (15H)

The RDCR instruction is for reading Configure Register Bits. The Read Configure Register can be read at any time (even in program/erase/write status register condition).

The sequence of issuing RDCR instruction is: CS# goes low→ sending RDCR instruction code→ Configure Register data out on SO. The SIO [3:1] are "don't care".

**Figure 9-6 Read Status Register (RDCR) Sequence (Command 15h)**


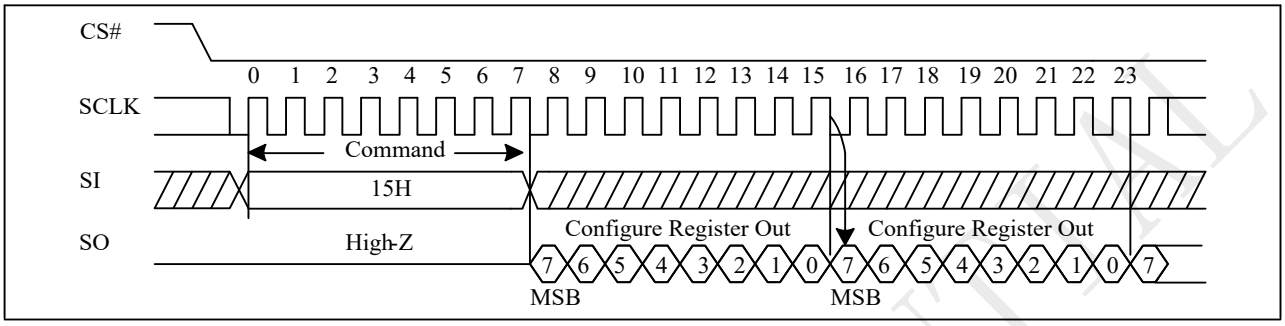



**Figure 9-6a Read Status Register (RDCR) Sequence (QPI)**

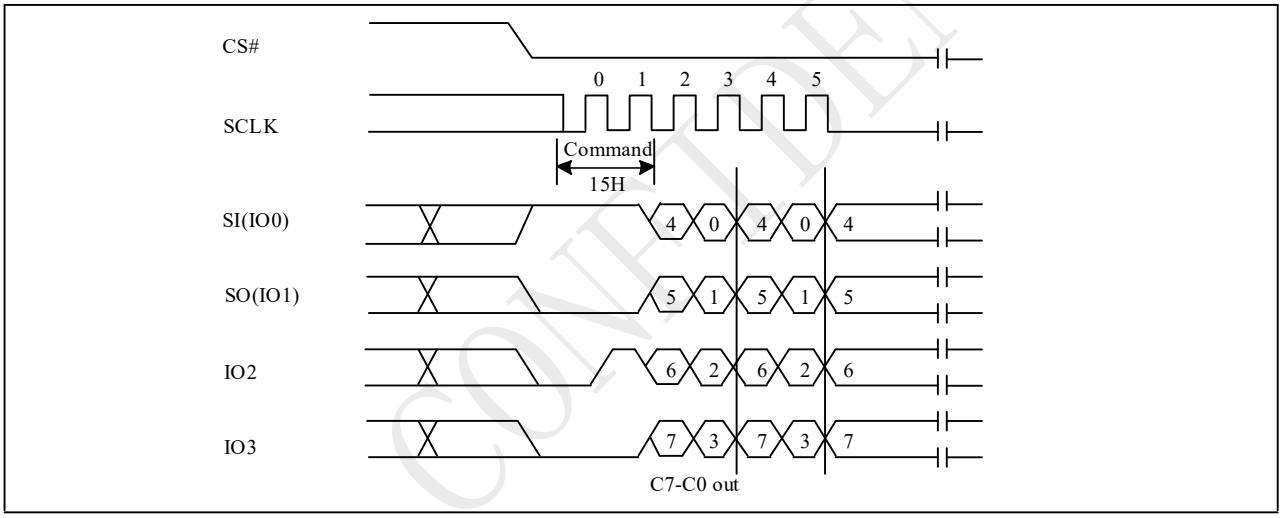


**Configure Register**

| BIT | Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|---|---|---|---|---|---|---|---|---|
| Definition | Reserved | DRV1 | DRV0 | Reserved | Reserved | WPS | DC | DLP |
| Volatile | N | N | N | Reserved | Reserved | N | V | V |
| Default | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Note:

1. N=non-volatile, V= volatile.

**DRV1 & DRV0 bit.**

The DRV1 & DRV0 bits are non-volatile Read/Write bits which are used to determine the output driver strength for the Read operations.

| DRV1, DRV0 | Drive Strength |
|---|---|
| 0,0 (default) | 100% |
| 0,1 | 50% |
| 1,0 | 100% |
| 1,1 | 100% |

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

**WPS bit.**

The WPS bit is a non-volatile Read/Write bit in the Configure Register which is used to select which Write Protect scheme should be used. When WPS=0(default), the device will use the combination of CMP, BP [4:0] bits to protect a specific area of the memory array. When WPS=1, the device will utilize the Individual Block Locks to protect any individual sector or blocks. The default value for all Individual Block Lock bits is 1 upon device power on or after reset.

**DC bit**

The Dummy Cycle (DC) bit is a volatile bit. The Dummy Cycle (DC) bit can be used to configure the number of dummy clocks for “SPI 2 X IO Read (BBH)” command, “SPI 4X I/O Read (EBH)” command.

**Dummy Cycle Table**

| Mode | Command | DC1 | Number of dummy cycles |
|---|---|---|---|
| SPI command | BB SPI | 0(default) | 4 |
| | | 1 | 8 |
| | EB SPI | 0(default) | 6 |
| | | 1 | 10 |

**DLP bit.**

The DLP bit is Data Learning Pattern Enable bit, which is volatile writable by 11H command. For DTR Read commands, a pre-defined “Data Learning Pattern” can be used by the flash memory controller to determine the flash data output timing on I/O pins. When DLP=1, in dummy cycles, the flash will output “00110100” Data Learning Pattern sequence on each of the I/O pins. During this period, controller can fine tune the data latching timing for each I/O pins to achieve optimum system performance. DLP=0(default) will disable the Data Learning Pattern output.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 9.7 Write Status Register (WRSR) (01H/31H)

The Write Status Register (WRSR) command allows new values to be written to the Status Register. Before it can be accepted, a Write Enable (WREN) command must previously have been executed. After the Write Enable (WREN) command has been decoded and executed, the device sets the Write Enable Latch (WEL).

The Write Status Register (WRSR) command has no effect on S15, S10, S1 and S0 of the Status Register. CS# must be driven high after the eighth or sixteen bits of the data byte has been latched in. If not, the Write Status Register (WRSR) command is not executed. If CS# is driven high after eighth bit of the data byte, the S15~S8 bits will keep the previous value. As soon as CS# is driven high, the self-timed Write Status Register cycle (whose duration is tW) is initiated. While the Write Status Register cycle is in progress, the Status Register may still be read to check the value of the Write in Progress (WIP) bit. The Write in Progress (WIP) bit is 1 during the self-timed Write Status Register cycle, and is 0 when it is completed. When the cycle is completed, the Write Enable Latch (WEL) is reset.


The Write Status Register (WRSR) command allows the user to change the values of the Block Protect (BP4, BP3, BP2, BP1, and BP0) bits, to define the size of the area that is to be treated as read-only, as defined in Table1.

The sequence of issuing WRSR instruction is: CS# goes low→ sending WRSR instruction code→ Status Register data on SI→CS# goes high.

The CS# must go high exactly at the 8 bits or 16 bits data boundary; otherwise, the instruction will be rejected and not executed. The self-timed Write Status Register cycle time (tW) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked during the Write Status Register cycle is in progress. The WIP sets 1 during the tW timing, and sets 0 when Write Status Register Cycle is completed, and the Write Enable Latch (WEL) bit is reset.

For compatibility with the old product, both 01H command followed by 2 bytes data and 31H command can allows new values to be written to the Status Register -1.

**Figure 9-7 Write Status Register (WRSR) Sequence (Command 01h or 31h)**

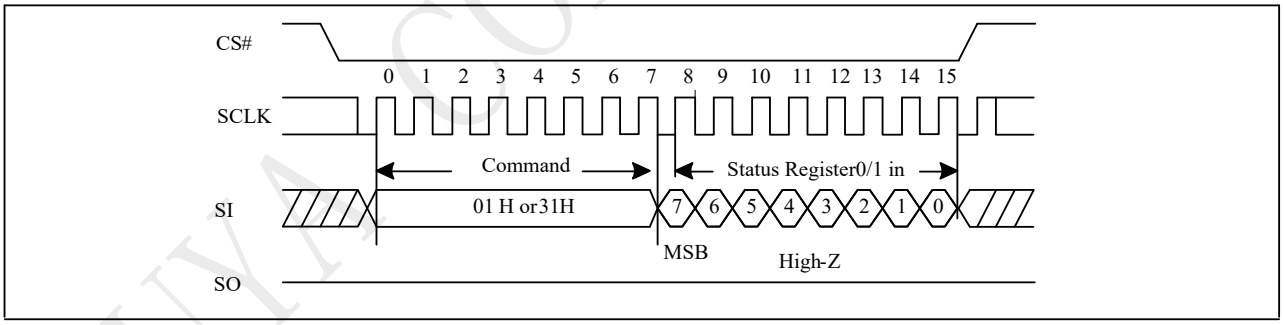


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

**Figure 9-7a Write Status Register (WRSR) Sequence (QPI)**

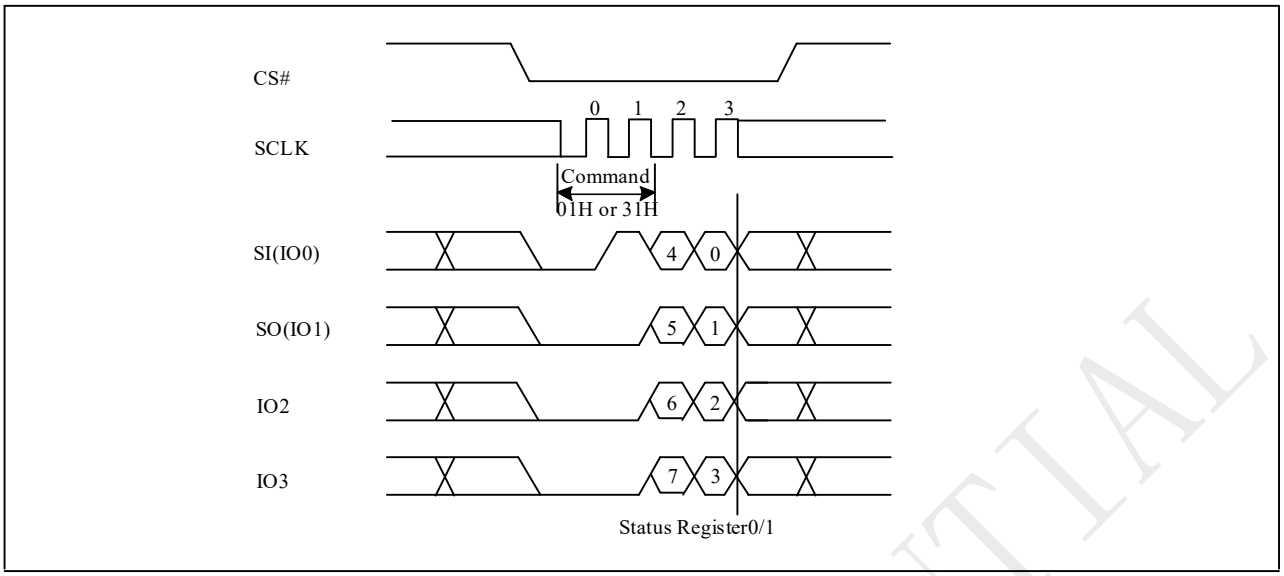



**Figure 9-7b Write Status Register (WRSR) Sequence (Command 01, 2 bytes data)**


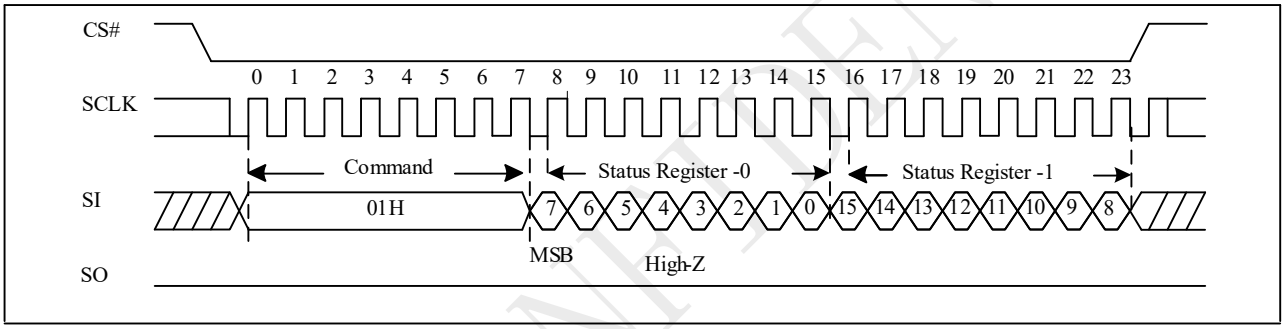



**Figure 9-7c Write Status Register (WRSR) Sequence (QPI)**

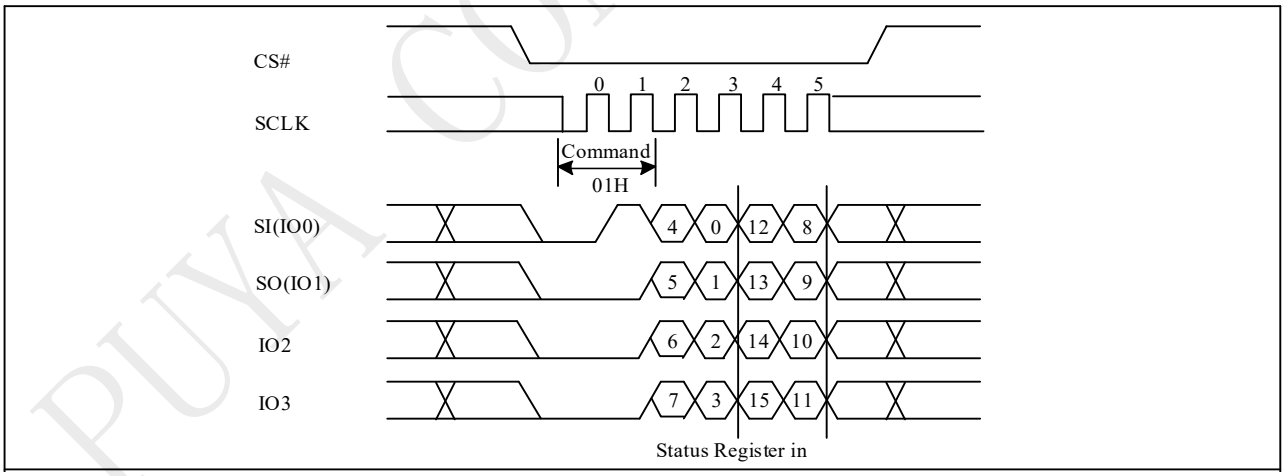


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 9.8 Write Configure Register (WRCR) (11H)

The Write Configure Register (WRCR) command allows new values to be written to the Configure Register. Before it can be accepted, a Write Enable (WREN) command must previously have been executed. After the Write Enable (WREN) command has been decoded and executed, the device sets the Write Enable Latch (WEL).

The sequence of issuing WRCR instruction is: CS# goes low→ sending WRCR instruction code→ Configure Register data on SI→CS# goes high.

The CS# must go high exactly at the 8 bits data boundary; otherwise, the instruction will be rejected and not executed. The self-timed Write Status Register cycle time (tW) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked during the Write Status Register cycle is in progress. The WIP sets 1 during the tW timing, and sets 0 when Write Configure Register Cycle is completed, and the Write Enable Latch (WEL) bit is reset.

**Figure 9-8 Write Configure Register (WRCR) Sequence (Command 11h)**


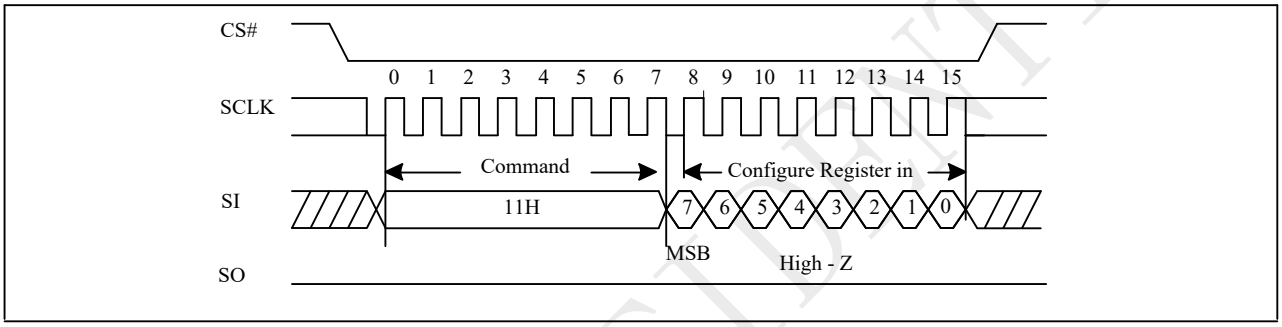



**Figure 9-8a Write Configure Register (WRCR) Sequence (QPI)**

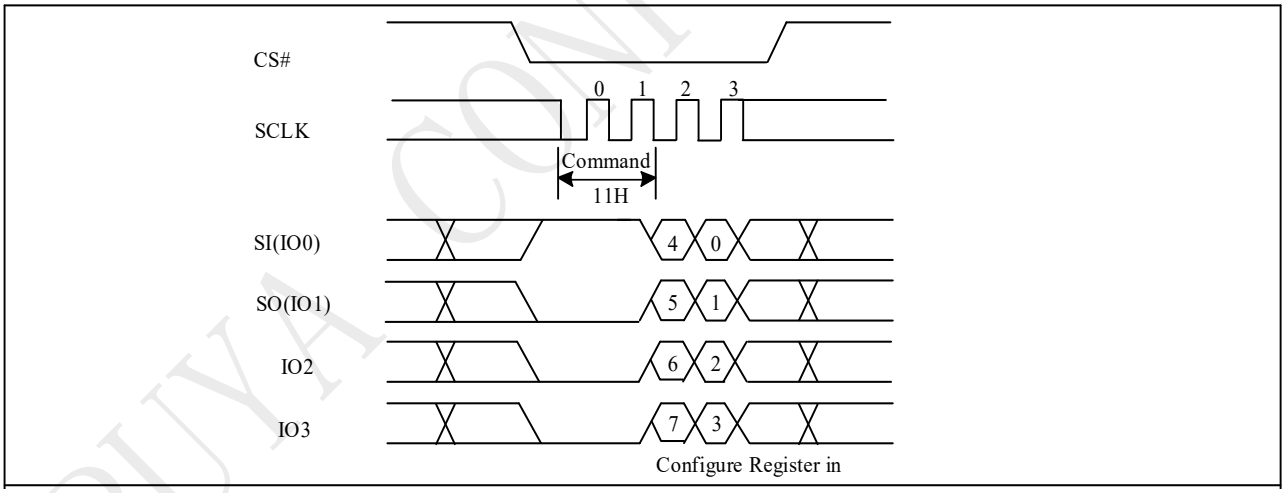


PUYA CONFIDENTIAL



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 9.9 Read Data Bytes (READ) (03H)

The read instruction is for reading data out. The address is latched on rising edge of SCLK, and data shifts out on the falling edge of SCLK at a maximum frequency fR. The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single READ instruction. The address counter rolls over to 0 when the highest address has been reached.

The sequence of issuing READ instruction is: CS# goes low→ sending READ instruction code→ 3-byte address on SI→ data out on SO→ to end READ operation can use CS# to high at any time during data out.

**Figure 9-9 Read Data Bytes (READ) Sequence (Command 03h)**

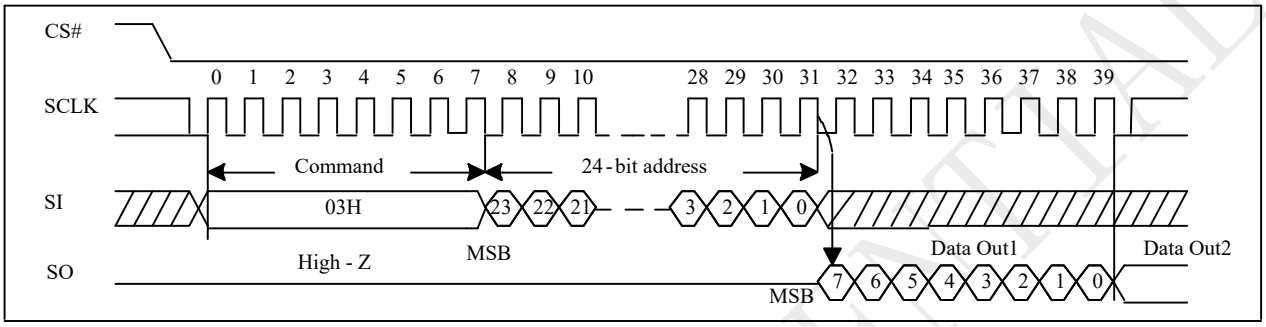


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 9.10 Fast Read (FREAD) (0BH)

The FAST READ instruction is for quickly reading data out. The address is latched on rising edge of SCLK, and data of each bit shifts out on the falling edge of SCLK at a maximum frequency fC. The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single FREAD instruction. The address counter rolls over to 0 when the highest address has been reached.

The sequence of issuing FREAD instruction is: CS# goes low→ sending FREAD instruction code→3-byte address on SI→ 1-dummy byte address on SI→ data out on SO→ to end FREAD operation can use CS# to high at any time during data out.

While Program/Erase/Write Status Register cycle is in progress, FREAD instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

### Fast Read in QPI mode

The Fast Read command is also supported in QPI mode. In QPI mode, the number of dummy clocks is configured by the “Set Read Parameters (C0H)” command to accommodate a wide range application with different needs for either maximum Fast Read frequency or minimum data access latency. Depending on the Read Parameter Bits P [5:4] setting, the number of dummy clocks can be configured.

**Figure 9-10 Fast Read (FREAD) Sequence (Command 0Bh)**


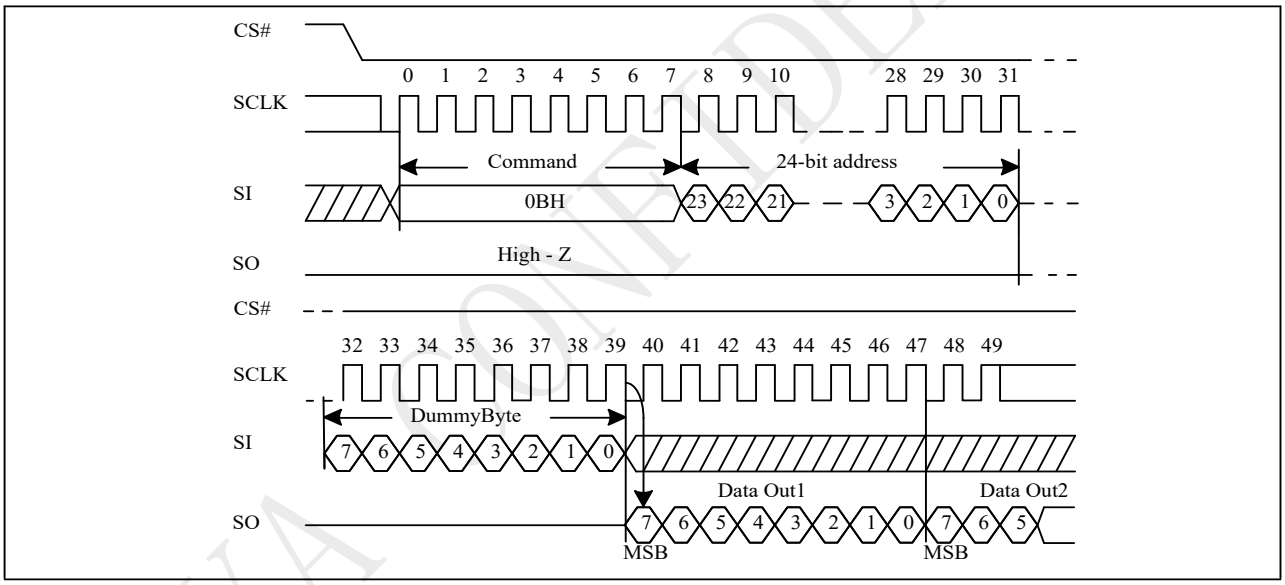



**Figure 9-10a Fast Read Sequence (QPI)**

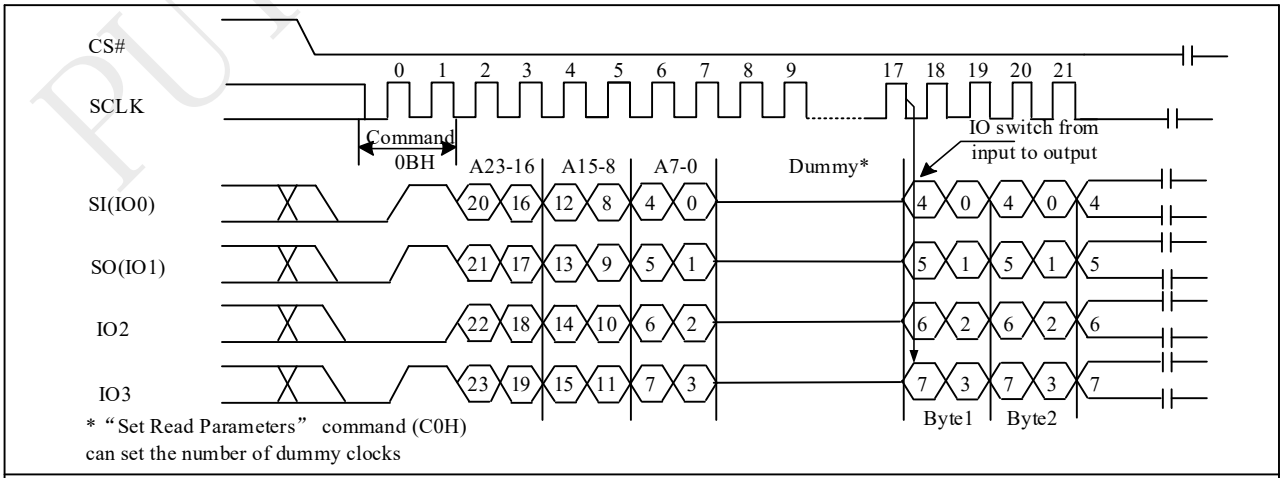



PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 9.11 DTR Fast Read (DTR_FREAD) (0DH)

The DTR Fast Read instruction is similar to the Fast Read instruction except that the 24-bit address input and the data output require DTR (Double Transfer Rate) operation. This is accomplished by adding six “dummy” clocks after the 24-bit address. The dummy clocks allow the devices internal circuits additional time for setting up the initial address. During the dummy clocks the data value on the DO pin is a “don’t care”.


**Figure 9-11 DTR Fast Read Sequence (Command 0Dh)**

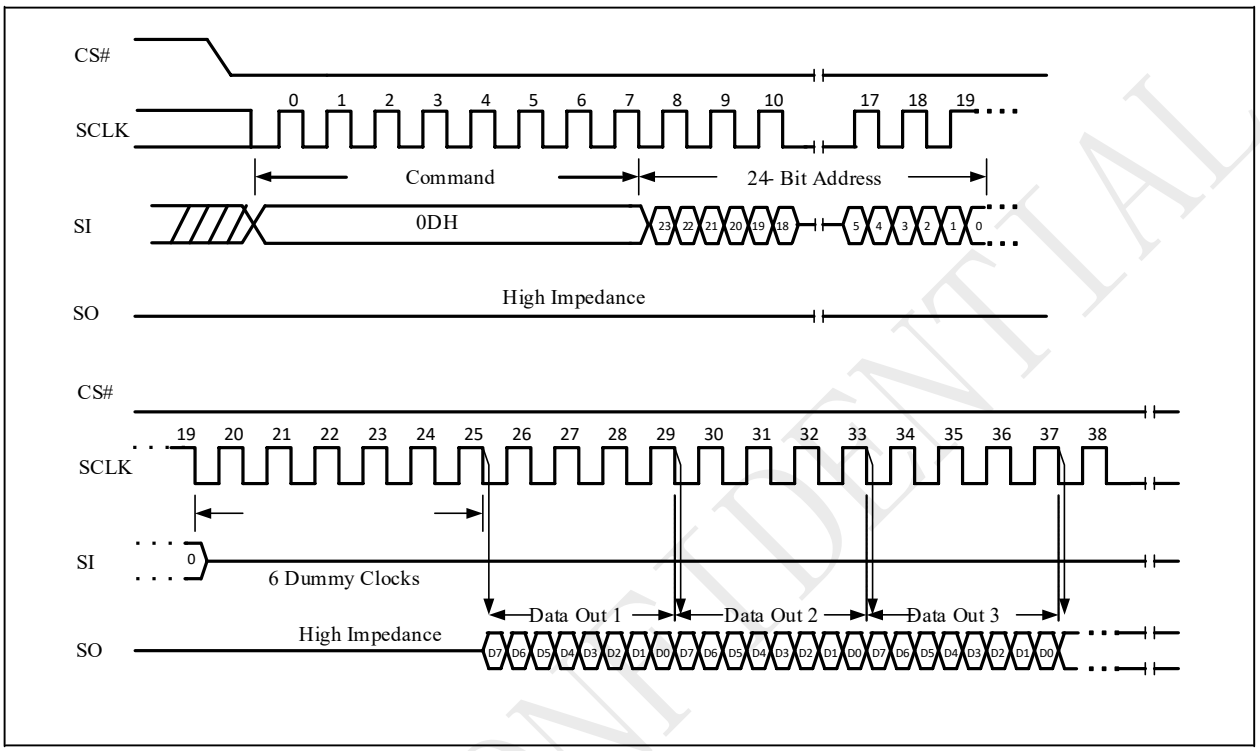


### DTR Fast Read in QPI Mode

The DTR Fast Read instruction is also supported in QPI mode.

**Figure 9-11a DTR Fast Read Sequence (QPI)**

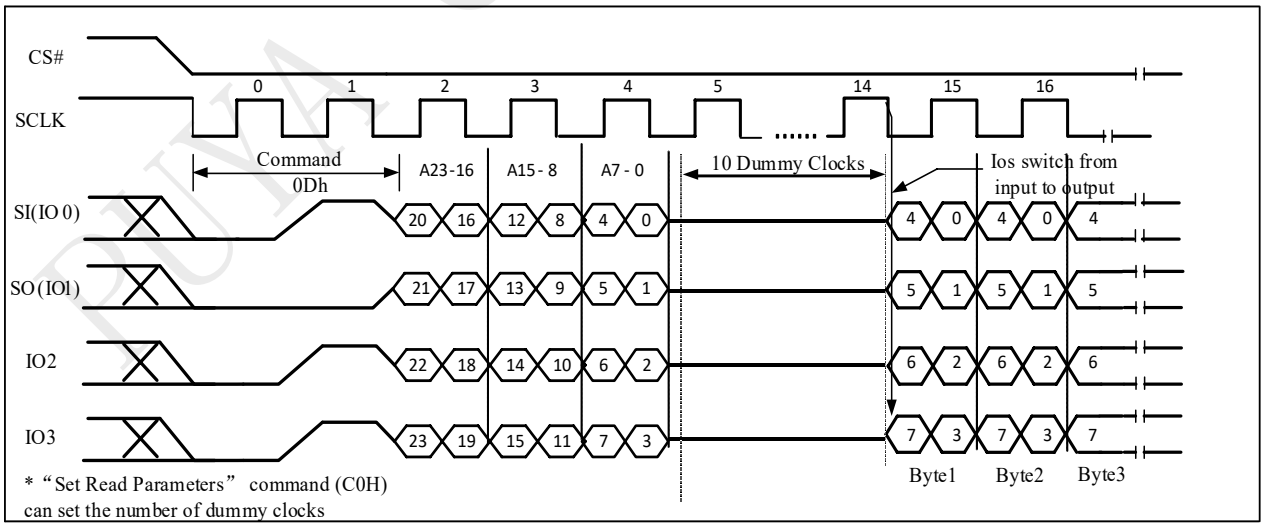


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com


## 9.12 Dual Read (DREAD) (3BH)

The DREAD instruction enables double throughput of Serial NOR Flash in read mode. The address is latched on rising edge of SCLK, and data of every two bits (interleave on 2 I/O pins) shift out on the falling edge of SCLK at a maximum frequency fT. The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single DREAD instruction. The address counter rolls over to 0 when the highest address has been reached. Once writing DREAD instruction, the following data out will perform as 2-bit instead of previous 1-bit.

The sequence of issuing DREAD instruction is: CS# goes low → sending DREAD instruction → 3-byte address on SI → 8-bit dummy cycle → data out interleave on SIO1 & SIO0 → to end DREAD operation can use CS# to high at any time during data out.

While Program/Erase/Write Status Register cycle is in progress, DREAD instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

**Figure 9-12 Dual Read Mode Sequence (Command 3Bh)**

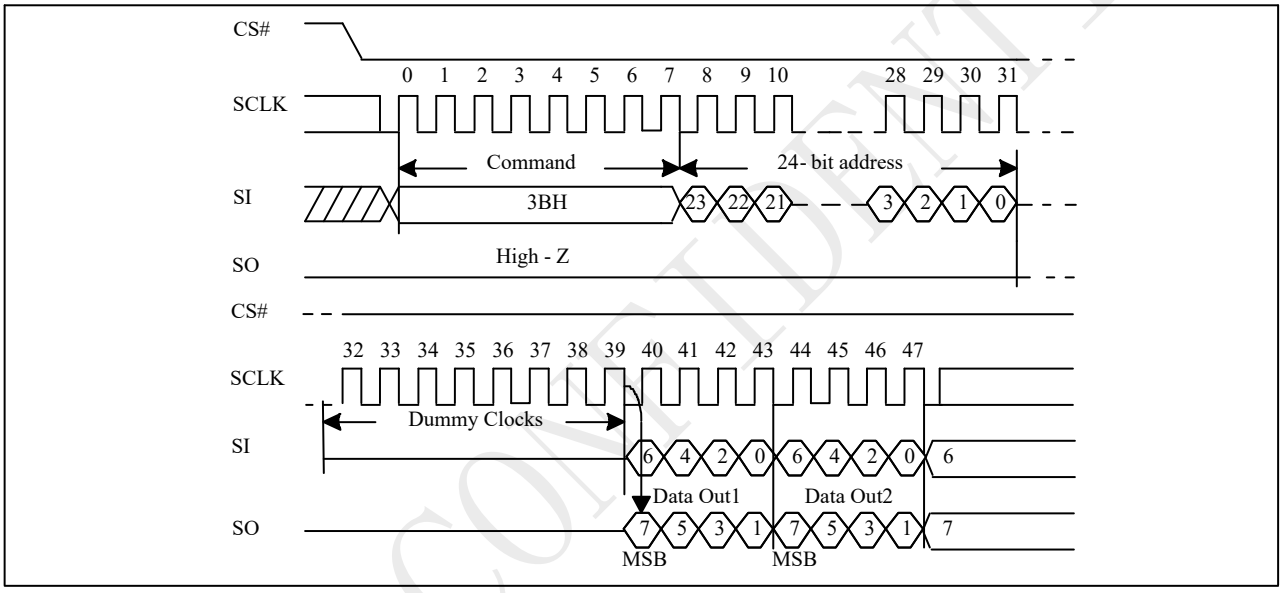


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 9.13 2IO Read (2READ) (BBH)


The 2READ instruction enables Double Transfer Rate of Serial NOR Flash in read mode. The address is latched on rising edge of SCLK, and data of every two bits (interleave on 2 I/O pins) shift out on the falling edge of SCLK at a maximum frequency fT. The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single 2READ instruction. The address counter rolls over to 0 when the highest address has been reached.

Once writing 2READ instruction, the following address/dummy/data out will perform as 2-bit instead of previous 1-bit.

The sequence of issuing 2READ instruction is: CS# goes low→ sending 2READ instruction→ 24-bit address interleave on SIO1 & SIO0→ 8-bit dummy cycle on SIO1 & SIO0→ data out interleave on SIO1 & SIO0→ to end 2READ operation can use CS# to high at any time during data out.

While Program/Erase/Write Status Register cycle is in progress, 2READ instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

**Figure 9-13 2IO Read Sequence (Command BBh M5-4 ≠ (1,0))**

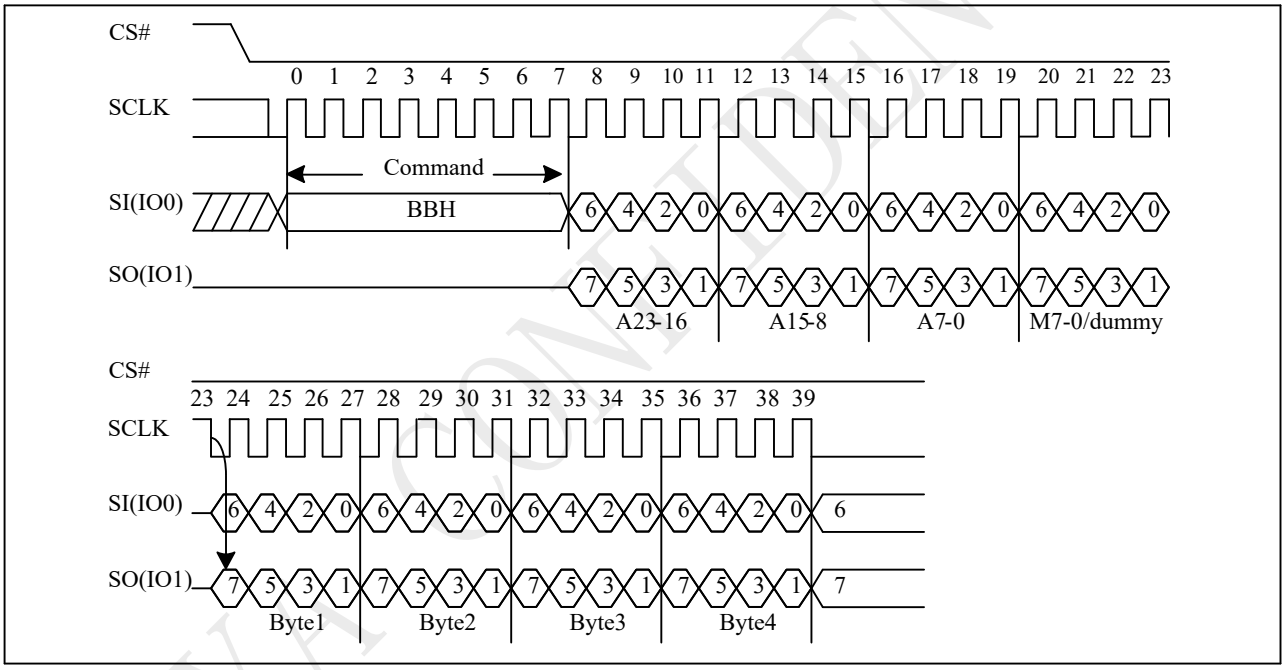


Notes:
1. M [5-4] = (1,0) is inhibited.
2. DC bit can set the number of dummy clocks.

### 2IO Continuous Read


"BBh" command supports 2IO Continuous Read which can further reduce command overhead through setting the "Continuous Read Mode" bits (M7-0) after the input 3-byte address (A23-A0). If the "Continuous Read Mode" bits (M5-4) = (1, 0), then the next 2IO Read command (after CS# is raised and then lowered) does not require the BBH command code.

If the "Continuous Read Mode" bits (M5-4) do not equal (1, 0), the next command requires the first BBH command code, thus returning to normal operation. A "Continuous Read Mode" Reset command can be used to reset (M5-4) before issuing normal command.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

**Figure 9-13a 2IO Continue Read (M5-4 = (1,0))**

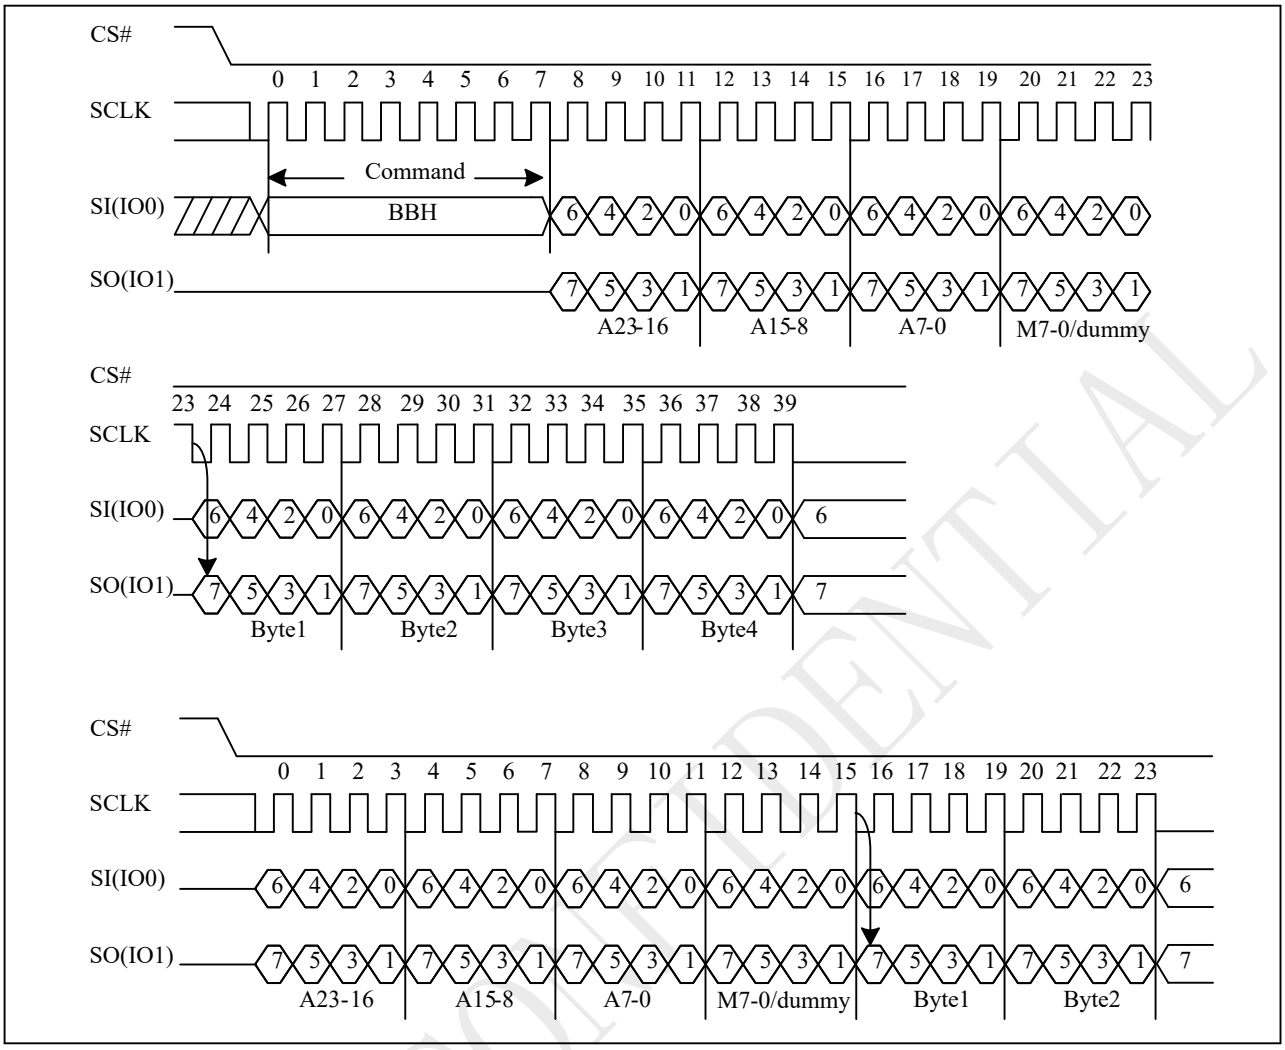


Notes:

1. 2IO Continue Read, if M5-4 = 1, 0. If not using Continue Read recommend to set M5-4 ≠ 1, 0.
2. DC bit can set the number of dummy clocks.


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 9.14 DTR 2IO Read (DTR_2READ) (BDH)

The DTR 2IO Read (BDh) instruction allows for improved random access while maintaining two IO pins, IO0 and IO1. It is similar to the DREAD (3Bh) instruction but with the capability to input the Address bits (A23-0) two bits per clock. This reduced instruction overhead may allow for code execution (XIP) directly from the Dual SPI in some applications.

**Figure 9-14 DTR 2IO Read Sequence (Command BDh M5-4 ≠ (1,0))**

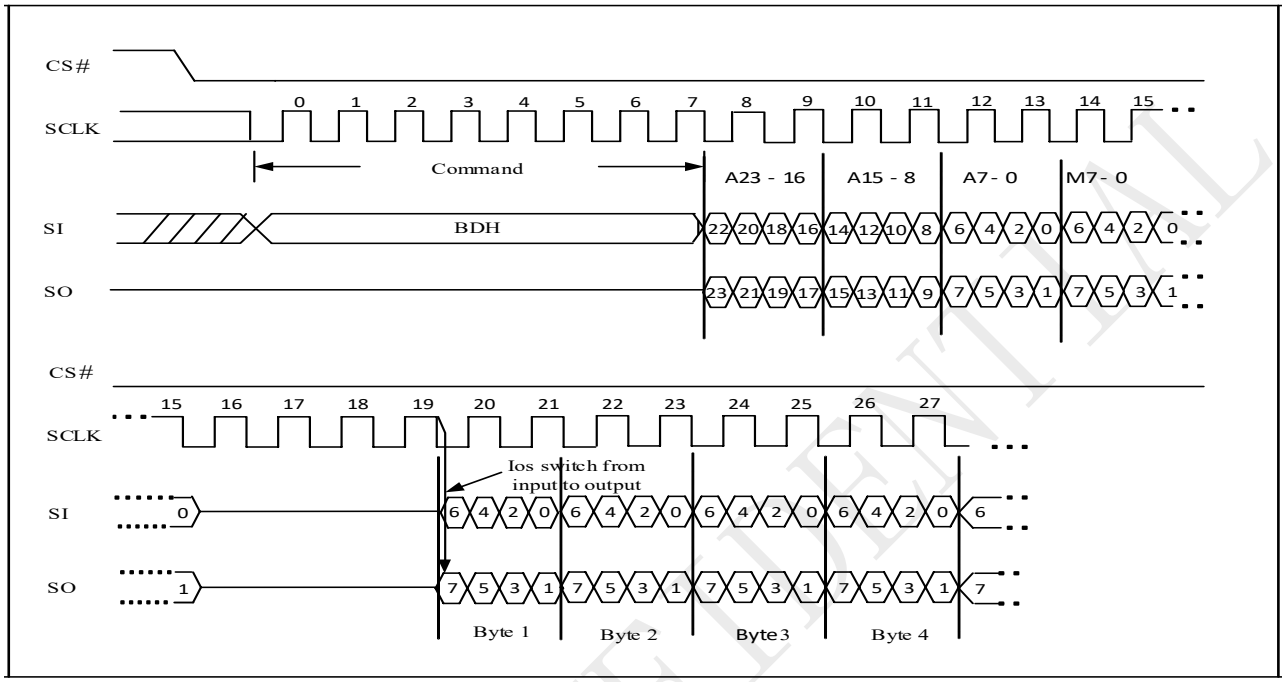



### DTR 2IO Continuous Read

The BDh instruction supports Continuous Read Mode which can further reduce overhead through setting the "continuous Read Mode" bits(M7-0) after the input 3-byte address (A23-A0). If the “Continuous Read Mode” bits (M5-4) = (1, 0), then the next Read command (after CS# is raised and then lowered) does not require the BDH command code.

If the “Continuous Read Mode” bits (M5-4) do not equal (1, 0), the next command requires the first BDH command code, thus returning to normal operation. It is recommended to input FFFFh on IO0 for the next instruction (16 clocks), to ensure M4 = 1 and return the device to normal operation.

**Figure 9-14a DTR 2IO Continuous Read Sequence (Command BD M5-4 = (1,0))**

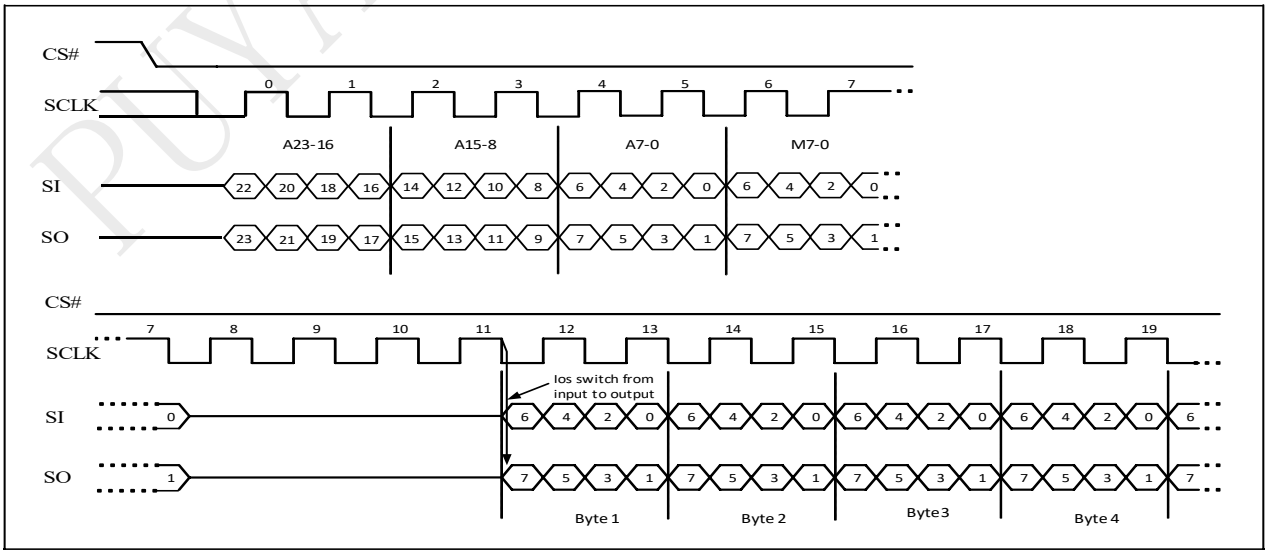


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com


## 9.15 Quad Read (QREAD) (6BH)

The QREAD instruction enable quad throughput of Serial NOR Flash in read mode. A Quad Enable (QE) bit of status Register must be set to "1" before sending the QREAD instruction. The address is latched on rising edge of SCLK, and data of every four bits (interleave on 4 I/O pins) shift out on the falling edge of SCLK at a maximum frequency fQ. The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single QREAD instruction. The address counter rolls over to 0 when the highest address has been reached. Once writing QREAD instruction, the following data out will perform as 4-bit instead of previous 1-bit.

The sequence of issuing QREAD instruction is: CS# goes low→ sending QREAD instruction → 3-byte address on SI → 8-bit dummy cycle → data out interleave on SIO3, SIO2, SIO1 & SIO0→ to end QREAD operation can use CS# to high at any time during data out.

While Program/Erase/Write Status Register cycle is in progress, QREAD instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

**Figure 9-15 Quad Read Sequence (Command 6Bh)**

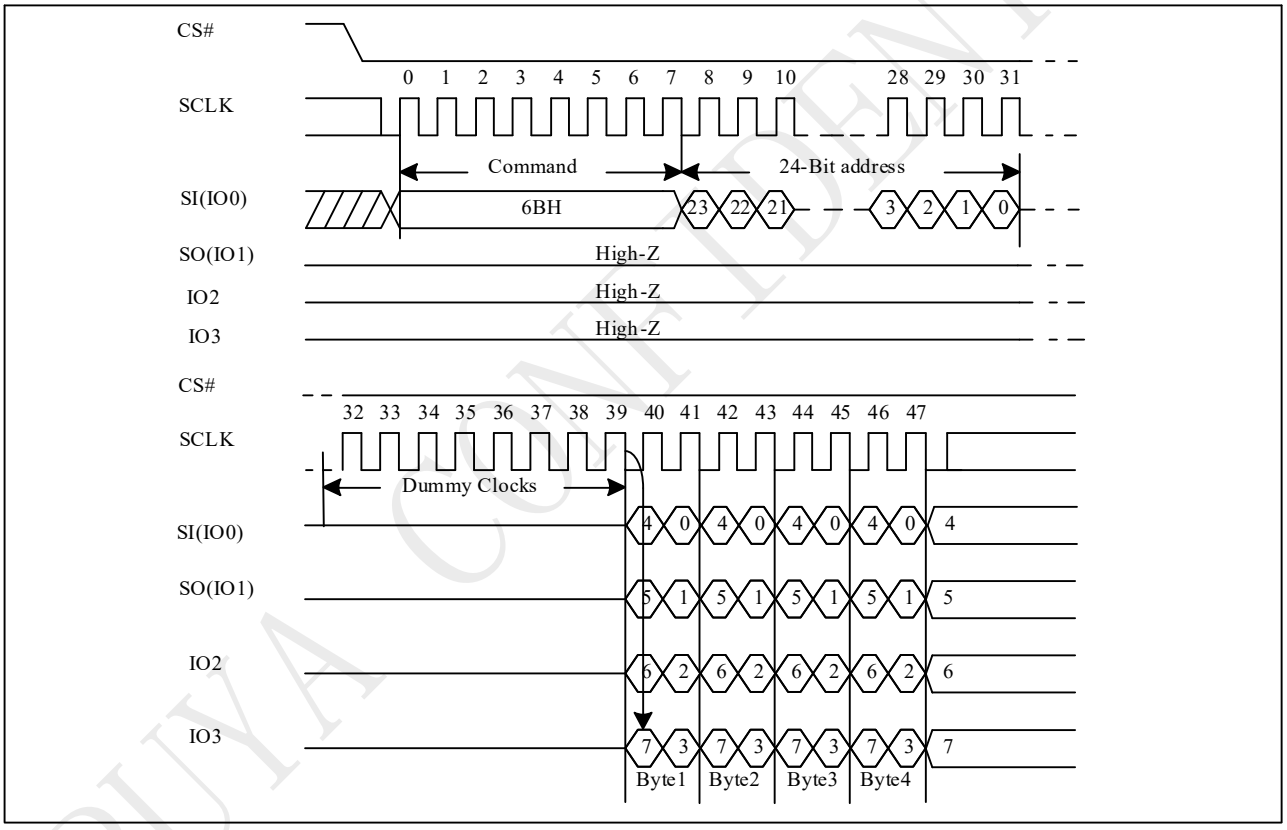


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com


## 9.16 4IO Read (4READ) (EBH)

The 4READ instruction enable quad throughput of Serial NOR Flash in read mode. A Quad Enable (QE) bit of status Register must be set to "1" before sending the 4READ instruction. The address is latched on rising edge of SCLK, and data of every four bits (interleave on 4 I/O pins) shift out on the falling edge of SCLK at a maximum frequency fQ. The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single 4READ instruction. The address counter rolls over to 0 when the highest address has been reached. Once writing 4READ instruction, the following address/dummy/data out will perform as 4-bit instead of previous 1-bit.

The sequence of issuing 4READ instruction is: CS# goes low→ sending 4READ instruction→ 24-bit address interleave on SIO3, SIO2, SIO1 & SIO0→2+4 dummy cycles→data out interleave on SIO3, SIO2, SIO1 & SIO0→ to end 4READ operation can use CS# to high at any time during data out.

While Program/Erase/Write Status Register cycle is in progress, 4READ instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

**Figure 9-16 4IO Read Sequence (Command EBh M5-4 ≠ (1,0))**

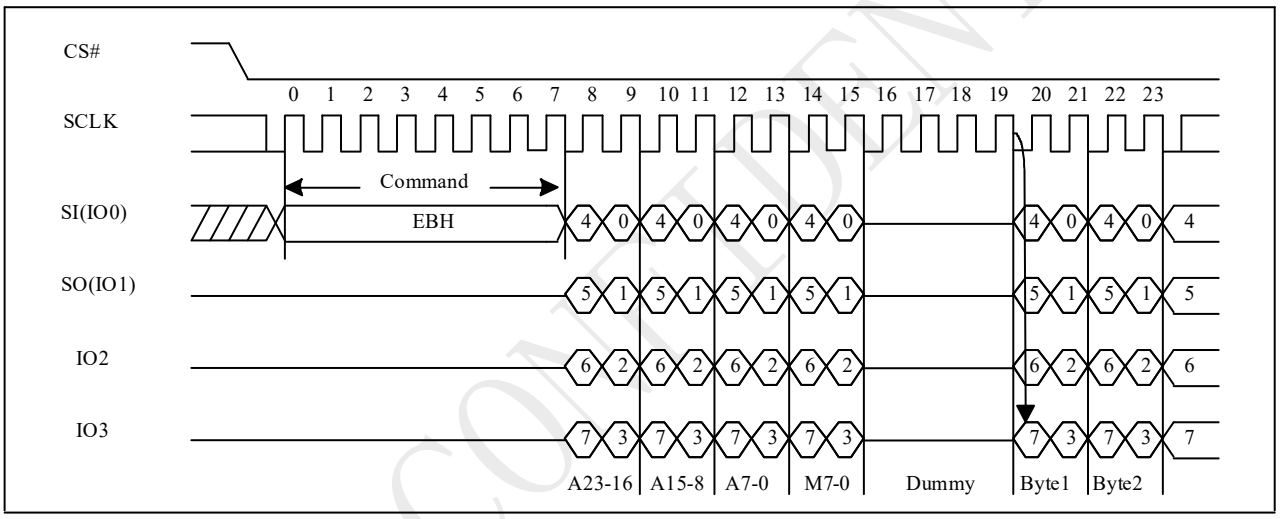


Notes:
1. Hi-impedance is inhibited for the two clock cycles.
2. M [5-4] = (1,0) is inhibited.
3. DC bit can set the number of dummy clocks.

### 4IO Read in QPI mode

The 4READ instruction is also supported in QPI mode. When QPI mode is enabled, the number of dummy clocks is configured by the “Set Read Parameters (C0h)” instruction to accommodate a wide range of applications with different needs for either maximum Fast Read frequency or minimum data access latency. Depending on the Read Parameter Bits P [5:4] setting, the number of dummy clocks can be configured. In QPI mode, the “Continuous Read Mode” bits M7- 0 are also considered as dummy clocks. In the default setting, the data output will follow the Continuous Read Mode bits immediately.


“Continuous Read Mode” feature is also available in QPI mode for 4IO Read instruction. Please refer to the description on next pages.

“Wrap Around” feature is not available in QPI mode for 4IO Read instruction. To perform a read operation with fixed data length wrap around in QPI mode, a dedicated “Burst Read with Wrap” (0Ch) instruction must be used.

**Figure 9-16a 4IO Read in QPI mode Sequence (QPI M5-4 ≠ (1,0))**

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

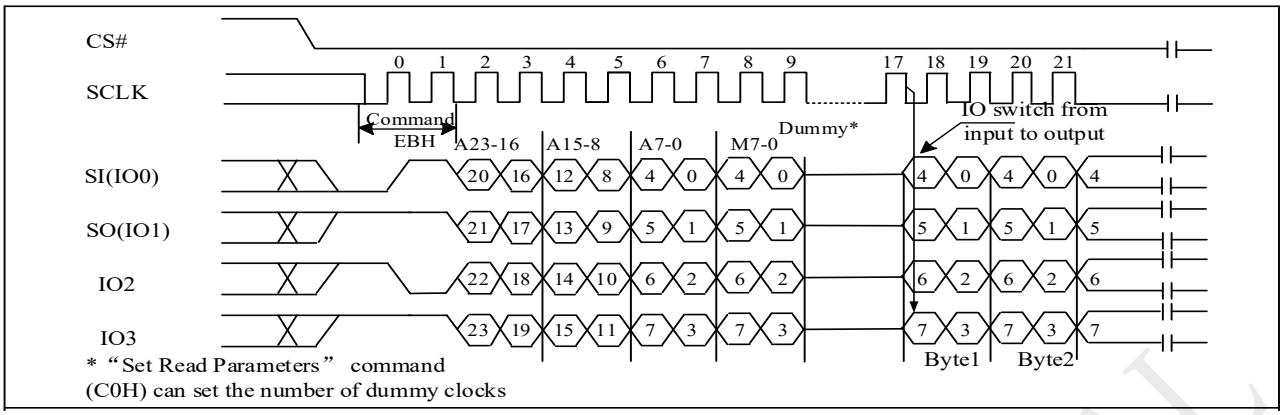


Note:


1. Hi-impedance is inhibited for the two clock cycles.
2. M [5-4] = (1,0) is inhibited.

### 4IO Continuous Read

"EBh" command supports 4IO Continuous Read which can further reduce command overhead through setting the "Continuous Read Mode" bits (M7-0) after the input 3-byte address (A23-A0). If the "Continuous Read Mode" bits (M5-4) = (1, 0), then the next 4IO Read command (after CS# is raised and then lowered) does not require the EBH command code.

If the "Continuous Read Mode" bits (M5-4) do not equal (1, 0), the next command requires the first EBH command code, thus returning to normal operation. A "Continuous Read Mode" Reset command can be used to reset (M5-4) before issuing normal command.

**Figure 9-16b 4IO Continuous Read Sequence (M5-4 = (1,0))**

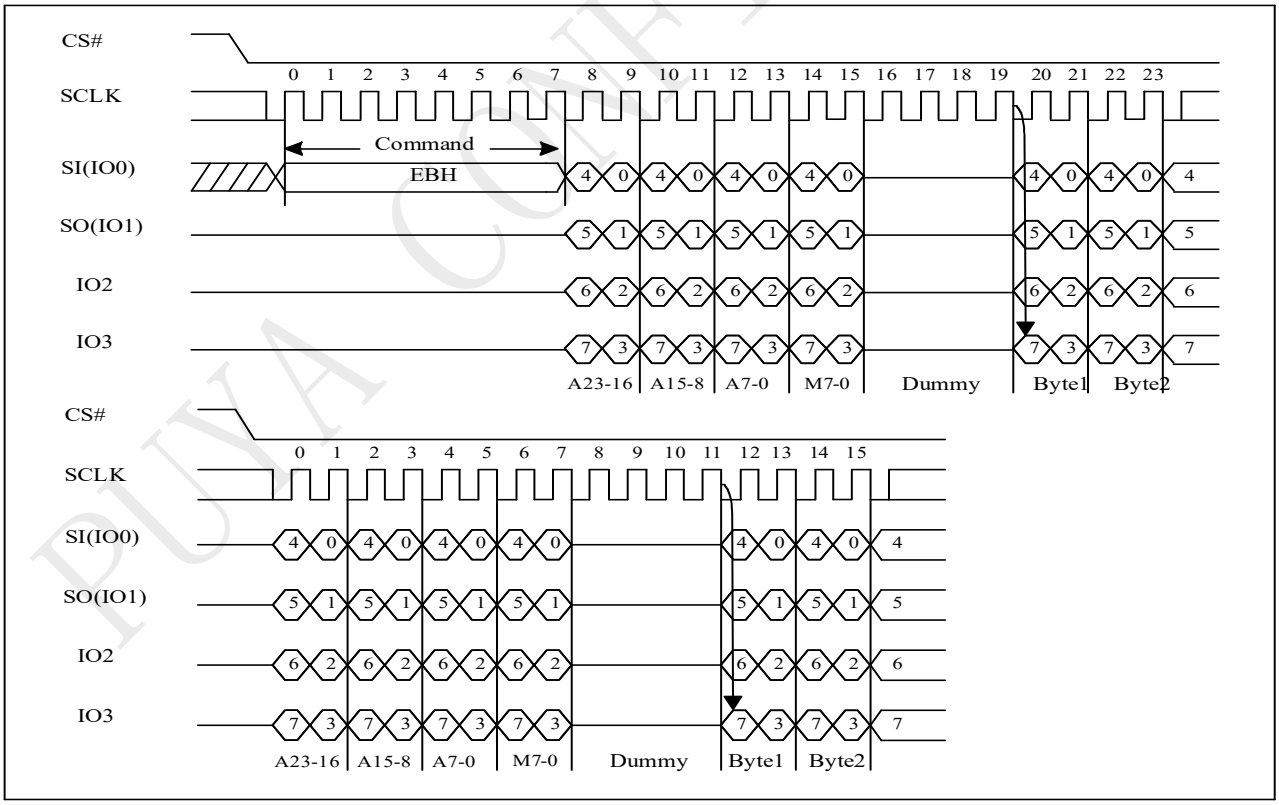


Note:

1. 4IO Continuous Read Mode, if M5-4 = 1, 0. If not using Continuous Read recommend to set M5-4 ≠ 1, 0.
2. DC bit can set the number of dummy clocks.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 9.17 Set Burst Read(77H)


The Set Burst with Wrap command is used in conjunction with “4IO Read (EBH)”, “DTR 4IO Read (EDH)”, “4IO Word Read (E7H)” commands to access a fixed length of 8/16/32/64-byte section within a 256-byte page, in standard SPI mode.

The Set Burst with Wrap command sequence: CS# goes low → Send Set Burst with Wrap command → Send 24 dummy bits→ Send 8 bits “Wrap bits” → CS# goes high.

| W6, W5 | W4=0 | | W4=1 (default) | |
|---|---|---|---|---|
| | Wrap Around | Wrap Length | Wrap Around | Wrap Length |
| 0,0 | Yes | 8-byte | No | N/A |
| 0,1 | Yes | 16-byte | No | N/A |
| 1,0 | Yes | 32-byte | No | N/A |
| 1,1 | Yes | 64-byte | No | N/A |

If the W6-W4 bits are set by the Set Burst with Wrap command, all the following “4IO Read (EBH)”, “DTR 4IO Read (EDH)”, “4IO Word Read (E7H)” commands will use the W6-W4 setting to access the 8/16/32/64-byte section within any page. To exit the “Wrap Around” function and return to normal read operation, another Set Burst with Wrap command should be issued to set W4=1.

**Figure 9-17 Set Burst Read (SBL) Sequence (Command 77h)**

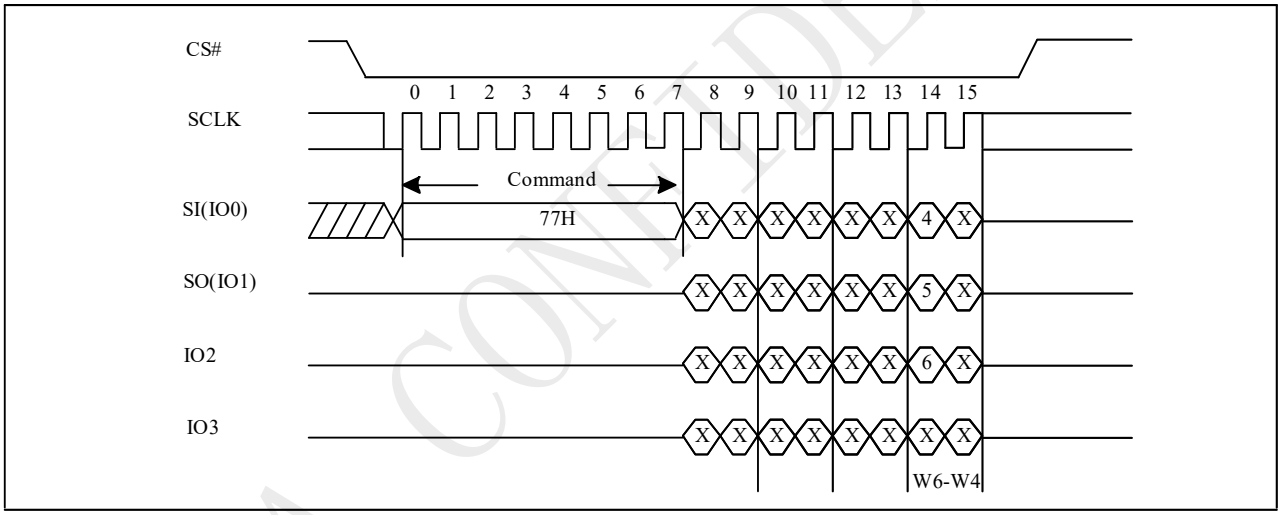



PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 9.18 DTR 4IO Read (DTR_4READ) (EDH)

The DTR 4IO Read (EDh) instruction is similar to the DTR 2IO Read (BDh) instruction, except that address and data bits are input and output through four pins IO0, IO1, IO2 and IO3 and1 byte “Continuous Read Mode” data(M7-0) and 7 Dummy clocks are required in SPI mode prior to the data output. The Quad I/O dramatically reduces instruction overhead allowing faster random access for code execution (XIP) directly from the Quad SPI. The Quad Enable bit (QE) of Status Register-2 must be set to enable the DTR 4IO Read Instruction.

**Figure 9-18 DTR 4IO Read Mode Sequence (Command EDh M5-4 ≠ (1,0))**

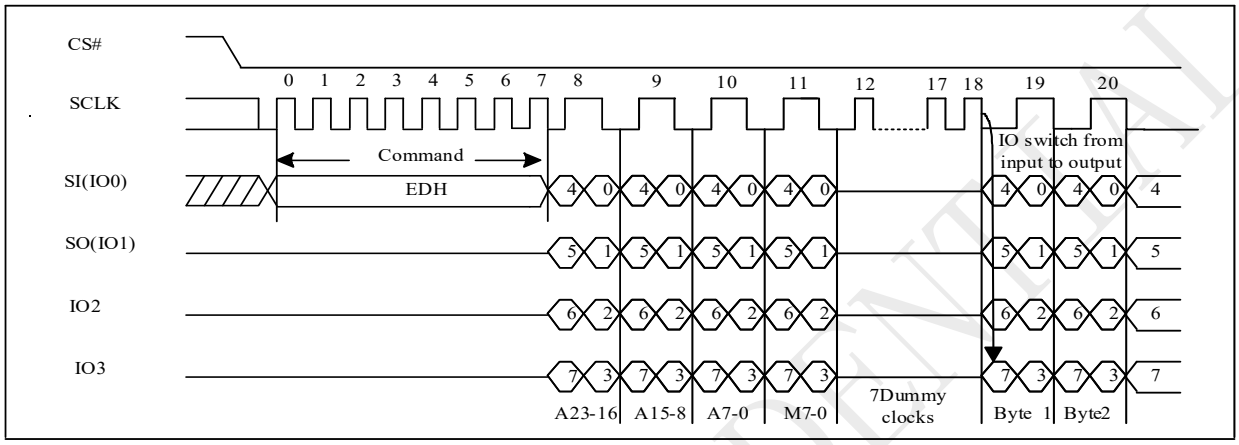



Notes:
1. Hi-impedance is inhibited for the mode clock cycles.
2. M [5-4] = (1,0) is inhibited.

### DTR 4IO Continuous Read

The DTR 4IO Read instruction can further reduce instruction overhead through setting the “Continuous Read Mode” bits (M7-0) after the input Address bits (A23-0). The upper nibble of the (M7-4) controls the length of the next DTR 4IO Read instruction through the inclusion or exclusion of the first byte instruction code. The lower nibble bits of the (M3-0) are don’t care (“x”). However, the IO pins should be high-impedance prior to the falling edge of the first data out clock.

If the “Continuous Read Mode” bits M5-4 = (1,0), then the next DTR 4IO Read instruction (after /CS is raised and then lowered) does not require the EDh instruction code. This reduces the instruction sequence by eight clocks and allows the Read address to be immediately entered after /CS is asserted low. If the “Continuous Read Mode” bits M5-4 do not equal to (1,0), the next instruction (after /CS is raised and then lowered) requires the first byte instruction code, thus returning to normal operation. It is recommended to input FFh/3FFh on IO0 for the next instruction (8/10 clocks), to ensure M4 = 1 and return the device to normal operation.

**Figure 9-18a DTR 4IO Continuous Read Mode Sequence (Command EDh M5-4 = (1,0))**

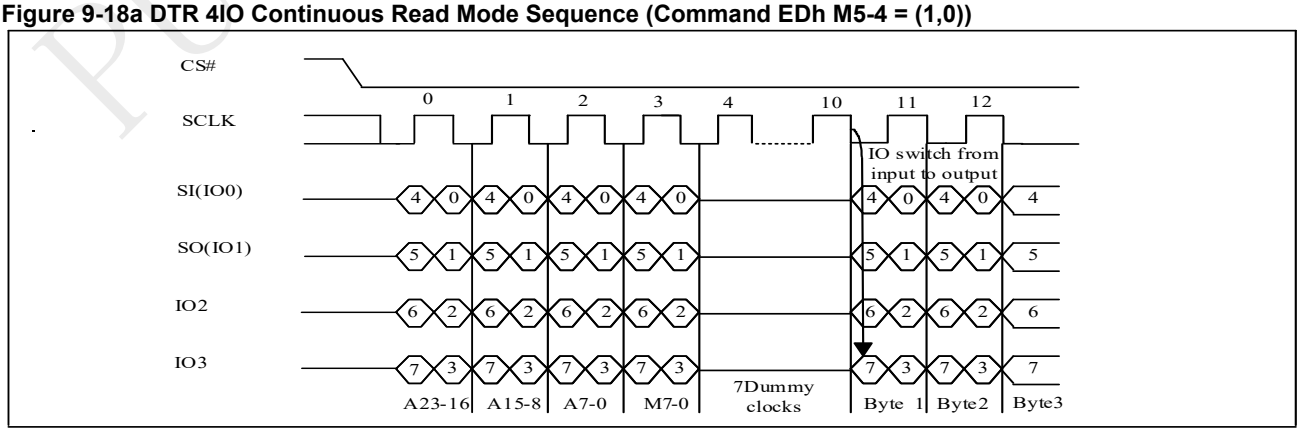


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Notes:
1. Hi-impedance is inhibited for the mode clock cycles.
2. DTR 4IO Continuous Read Mode, if M5-4 = 1, 0. If not using Continuous Read recommend to set M5-4 ≠ 1, 0.

### DTR 4IO Read with "8/16/32/64-Byte Wrap Around" in Standard SPI mode

The DTR 4IO Read instruction can also be used to access a specific portion within a page by issuing a "Set Burst Read" (77h) command prior to EDh. The "Set Burst Read" (77h) command can either enable or disable the "Wrap Around" feature for the following EDh commands. When "Wrap Around" is enabled, the data being accessed can be limited to either an 8, 16, 32 or 64-byte section of a 256-byte page. The output data starts at the initial address specified in the instruction, once it reaches the ending boundary of the 8/16/32/64-byte section, the output will wrap around to the beginning boundary automatically until /CS is pulled high to terminate the command.


The Burst with Wrap feature allows applications that use cache to quickly fetch a critical address and then fill the cache afterwards within a fixed length (8/16/32/64-byte) of data without issuing multiple read commands. The "Set Burst Read" instruction allows three "Wrap Bits", W6-4 to be set. The W4 bit is used to enable or disable the "Wrap Around" operation while W6-5 are used to specify the length of the wrap around section within a page.

### DTR 4IO Read (EDh) in QPI Mode

The DTR 4IO Read instruction is also supported in QPI mode. In QPI mode, the "Continuous Read Mode" bits M7-0 are also considered as dummy clocks. In the default setting, the data output will follow the Continuous Read Mode bits immediately.
"Continuous Read Mode" feature is also available in QPI mode for Fast Read Quad I/O instruction.

"Wrap Around" feature is not available in QPI mode for DTR 4IO Read instruction. To perform a read operation with fixed data length wrap around in QPI mode, a dedicated "Burst Read with Wrap" (0Ch) instruction must be used.

**Figure 9-18b DTR 4IO Read Mode Sequence (QPI EDh M5-4 ≠ (1,0))**

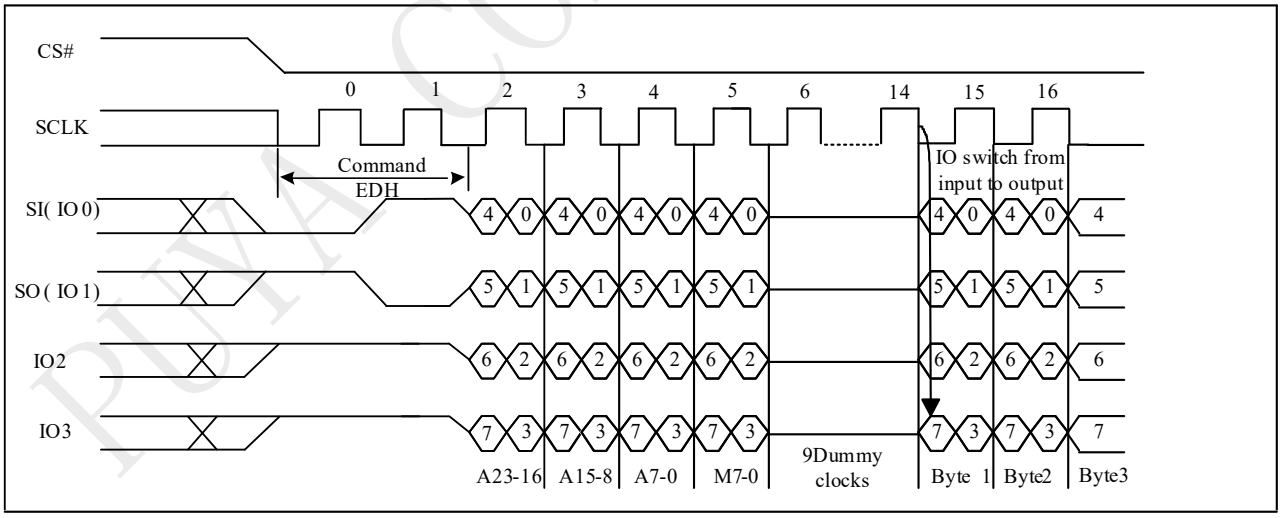


Notes:
1. Hi-impedance is inhibited for the two clock cycles.
2. M [5-4] = (1,0) is inhibited.


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 9.19 4IO Word Read(E7H)

The 4IO Word Read command is similar to the 4 IO Read command except that the lowest address bit (A0) must equal 0 and only 2-dummy clock. The first byte addressed can be at any location. The address is automatically incremented to the next higher address after each byte of data is shifted out. The Quad Enable bit (QE) of Status Register (S9) must be set to enable for the 4IO Word read command.

**Figure 9-19 4IO Word Read Sequence (M5-4 ≠ (1,0))**

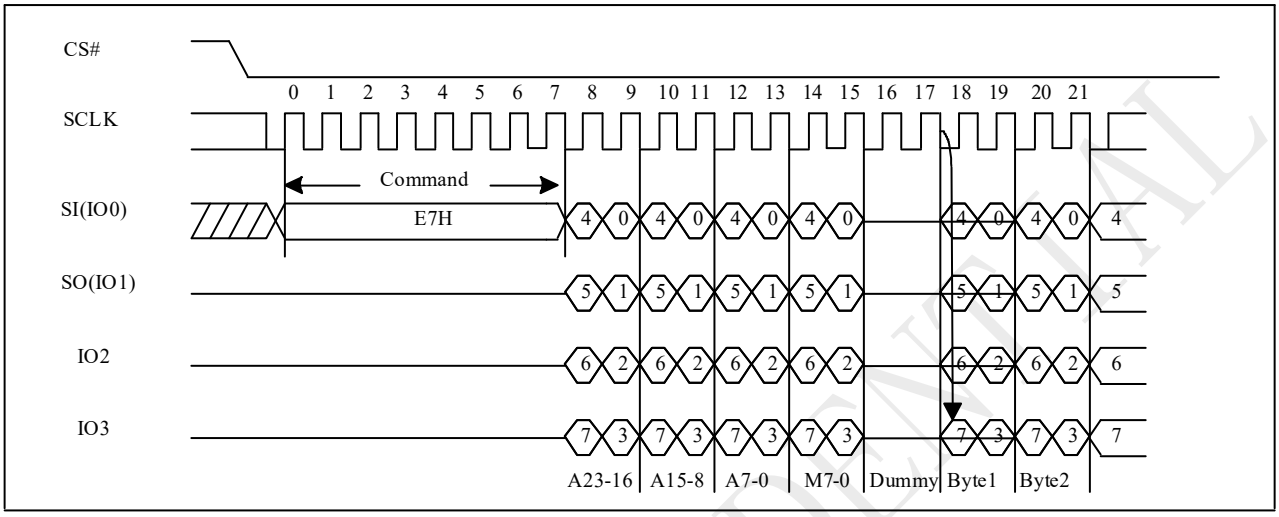



**4IO Word Read with "Continuous Read Mode"**

The 4IO Word Read command can further reduce command overhead through setting the "Continuous Read Mode" bits (M7-0) after the input 3-byte address (A23-A0). If the "Continuous Read Mode" bits (M5-4) = (1, 0), then the next 4IO Word Read command (after CS# is raised and then lowered) does not require the E7H command code. If the "Continuous Read Mode" bits (M5-4) do not equal to (1, 0), the next command requires the first E7H command code, thus returning to normal operation. A "Continuous Read Mode" Reset command can be used to reset (M5-4) before issuing normal command.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

**Figure 9-19a 4IO Word Read Sequence (M5-4 = (1,0))**

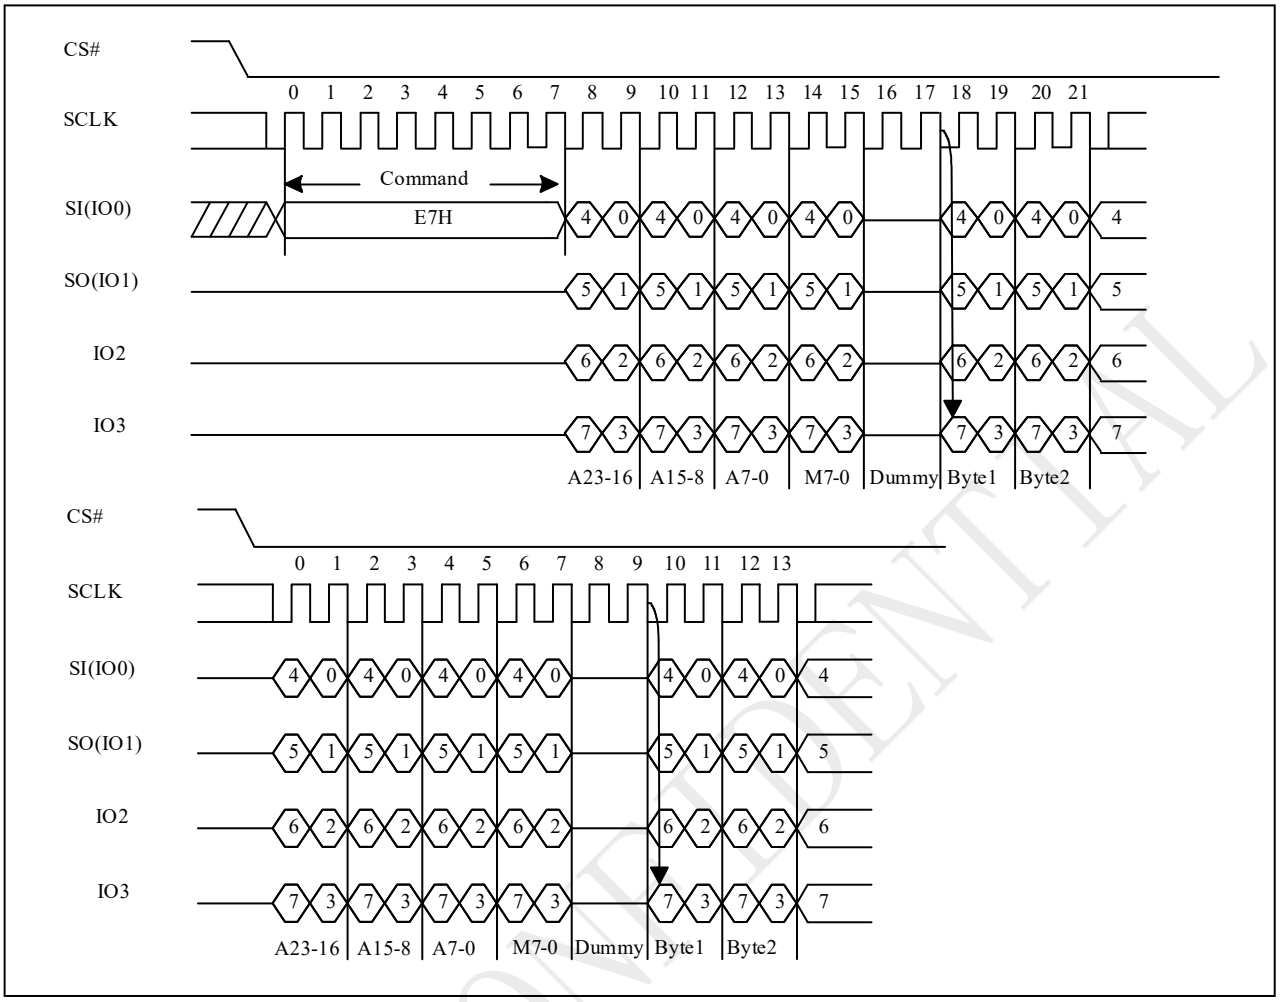


## 4IO Word Read with "8/16/32/64-Byte Wrap Around "in Standard SPI mode

The 4IO Word Read command can be used to access a specific portion within a page by issuing "Set Burst with Wrap" (77H) commands prior to E7H. The "Set Burst with Wrap" (77H) command can either enable or disable the "Wrap Around "feature for the following E7H commands. When "Wrap Around "is enabled, the data being accessed can be limited to either an8/16/32/64-byte section of a 256-byte page. The output data starts at the initial address specified in the command, once it reaches the ending boundary of the 8/16/32/64-byte section, the output will wrap around the beginning boundary automatically until CS# is pulled high to terminate the command.

The Burst with Wrap feature allows applications that use cache to quickly fetch a critical address and then fill the cache afterwards within a fixed length (8/16/32/64-byte) of data without issuing multiple read commands. The "Set Burst with Wrap "command allows three "Wrap Bits" W6-W4 to be set. The W4 bit is used to enable or disable the "Wrap Around "operation while W6-W5 issued to specify the length of the wrap around section within a page.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 9.20 Set Read Parameters(C0H)


In QPI mode, to accommodate a wide range of applications with different needs for either maximum read frequency or minimum data access latency, “Set Read Parameters (C0h)” instruction can be used to configure the number of dummy clocks for “Fast Read (0Bh)”, “4IO Read (EBh)”, “Burst Read with Wrap (0Ch)”, “Read SFDP Mode (5Ah)” instructions, and to configure the number of bytes of “Wrap Length” for the “Burst Read with Wrap (0Ch)”, “DTR Burst Read with Wrap (0EH)” instruction.

In Standard SPI mode, the “Set Read Parameters (C0h)” instruction is not accepted. The dummy clocks for various Fast Read instructions in Standard/Dual/Quad SPI mode are configured by DC bit. The “Wrap Length” is set by W5-4 bit in the “Set Burst with Wrap (77h)” instruction. This setting will remain unchanged when the device is switched from Standard SPI mode to QPI mode.

The default “Wrap Length” after a power up or a Reset instruction and the default number of dummy clocks can refer to the following table. The number of dummy clocks is only programmable for “Fast Read (0Bh)”, “4IO Read (EBh)” & “Burst Read with Wrap (0Ch)” instructions in the QPI mode. Whenever the device is switched from SPI mode to QPI mode, the number of dummy clocks should be set again, prior to any 0Bh, EBh or 0Ch instructions.

| P5-P4 | Dummy Clocks | P1-P0 | Wrap Length |
|---|---|---|---|
| 0,0 | 10 | 0,0 | 8-byte |
| 0,1 | 4 | 0,1 | 16-byte |
| 1,0 | 6 | 1,0 | 32-byte |
| 1,1 | 8 | 1,1 | 64-byte |

**Figure 9-20 Set Read Parameters Sequence (QPI)**

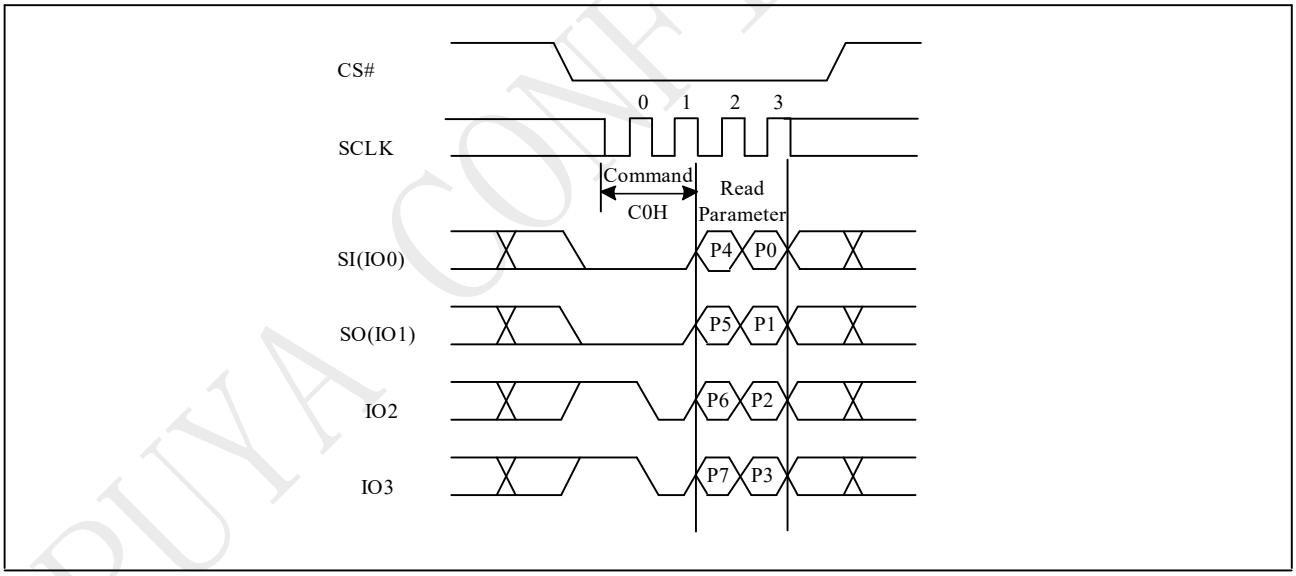



PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 9.21 Burst Read with Wrap (0CH)

The “Burst Read with Wrap (0CH)” command provides an alternative way to perform the read operation with “Wrap Around” in QPI mode. This command is similar to the “Fast Read (0BH)” command in QPI mode, except the addressing of the read operation will “Wrap Around” to the beginning boundary of the “Wrap Around” once the ending boundary is reached. The “Wrap Length” and the number of dummy clocks can be configured by the “Set Read Parameters (C0H)” command.


**Figure 9-21 Burst Read with Wrap Sequence (QPI)**

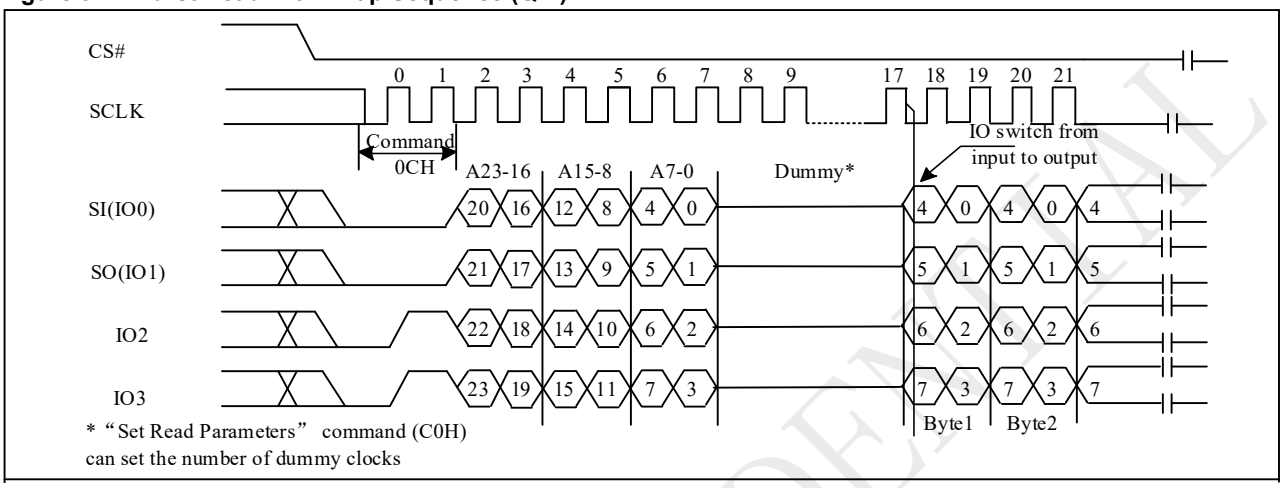


## 9.22 DTR Burst Read with Wrap (0EH)

The “DTR Burst Read with Wrap (0EH)” command provides an alternative way to perform the read operation with “Wrap Around” in QPI mode. This command is similar to the “Fast Read (0BH)” command in QPI mode, except the addressing of the read operation will “Wrap Around” to the beginning boundary of the “Wrap Around” once the ending boundary is reached. The “Wrap Length” can be configured by the “Set Read Parameters (C0H)” command.

**Figure 9-22 Burst Read with Wrap Sequence (QPI)**

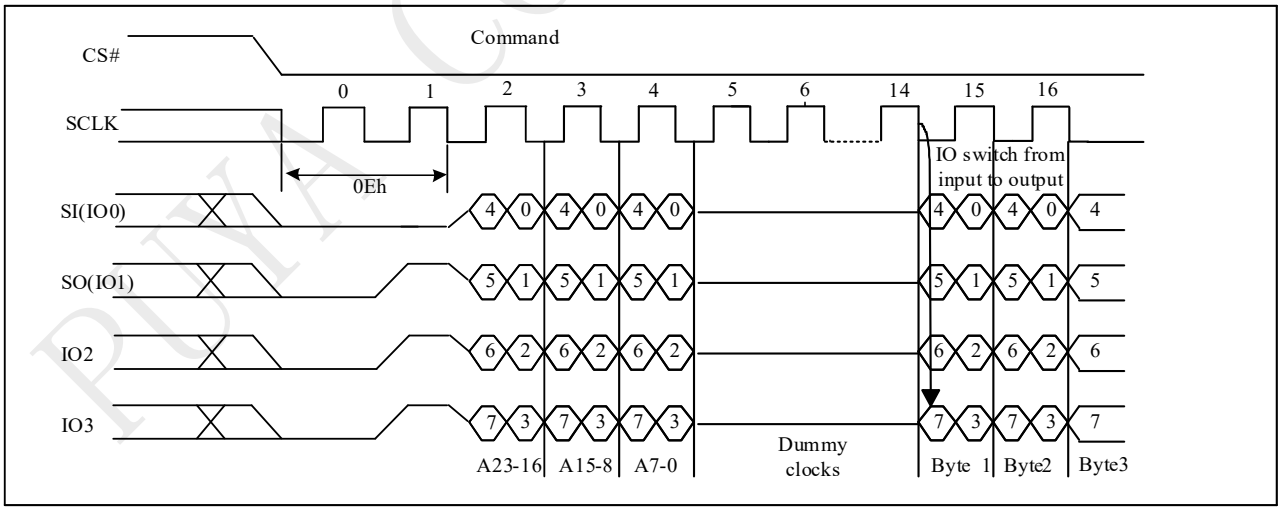


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 9.23 Data Learning Pattern

The data learning pattern supports system/memory controller determine valid window of data output more easily and improve data capture reliability while the flash memory is running in high frequency.

Data learning pattern can be enabled or disabled by setting the bit0 of Configure Register (data learning pattern enable bit). Once the DLP bit is set, the data learning pattern is inputted into dummy cycles.

Enabling data learning pattern bit (DLP bit) will not affect the function of continue read mode bit. In dummy cycles, continuous mode bit still operates with the same function. Data learning pattern will output after continuous mode bit.

The data learning pattern is a fixed 8-bit data pattern (00110100). For STR (single transfer rate) 1 x I/O and Dual Read (3BH) instructions, the complete 8 bits will start to output right after the last address bit. For DTR (double transfer rate) 1 x I/O instructions, the complete 8 bits will start to output right after 2 dummy cycles. For STR/DTR (double transfer rate)2x I/O instructions, the complete 8 bits will start to output right after 4 dummy/M7-0 cycles. For STR/DTR (double transfer rate)4x I/O instructions, the complete 8 bits will start to output right after 2 dummy/M7-0 cycles. While dummy cycle is not sufficient of 8 cycles, the rest of the DLP bits will be cut.

**Figure 9-23 Fast Read with DLP bits output Sequence**


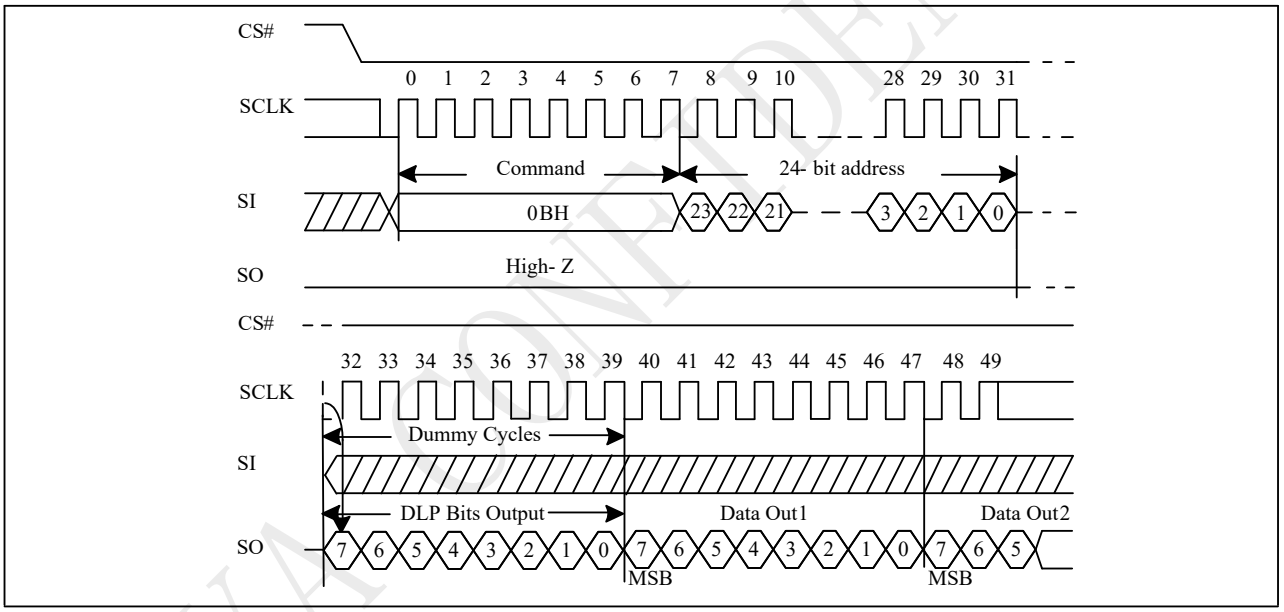



**Figure 9-23a Fast Read with DLP bits output Sequence in QPI mode**

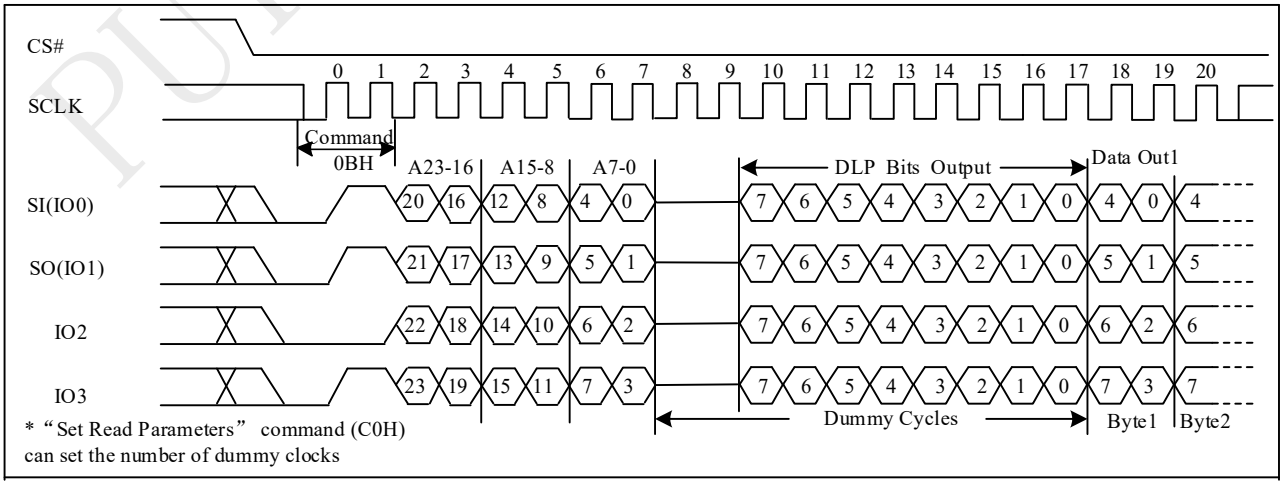


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

**Figure 9-23b Dual Read with DLP bits output Sequence**


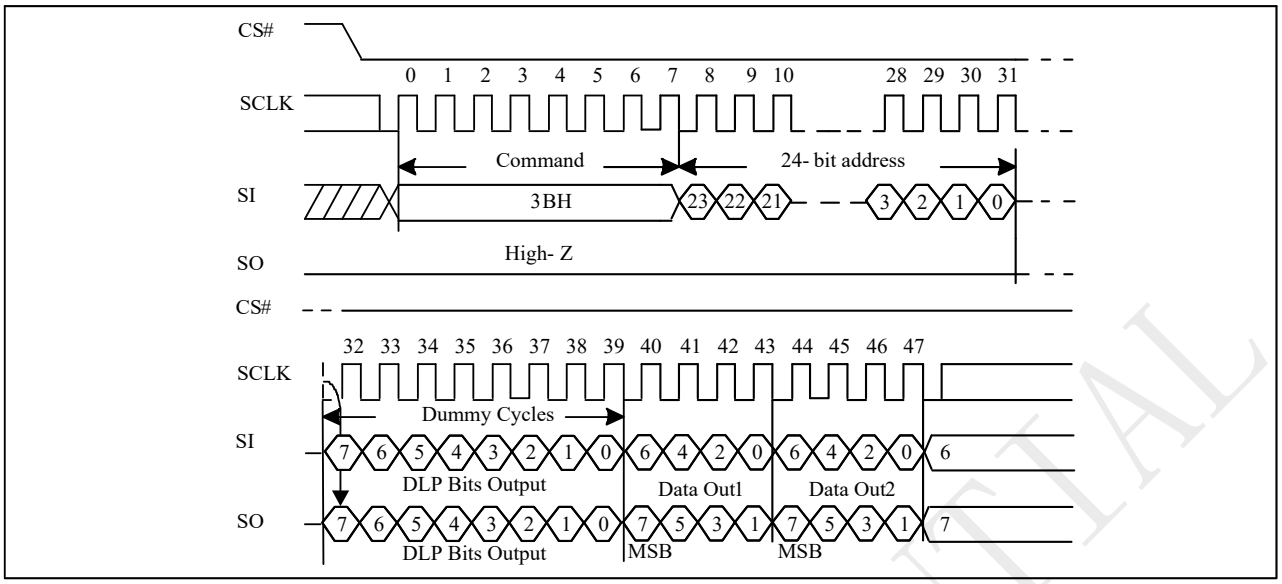



**Figure 9-23c 2IO Read with DLP bits output Sequence**

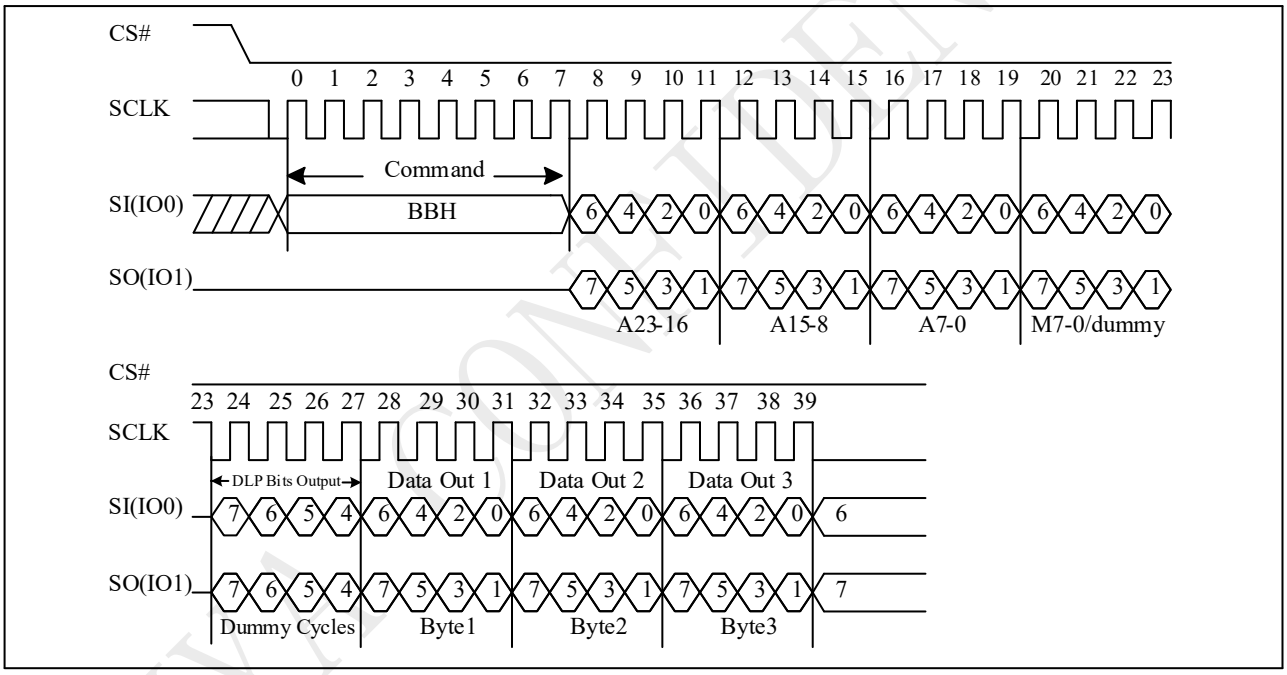


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

**Figure 9-23d Quad Read with DLP bits output Sequence**


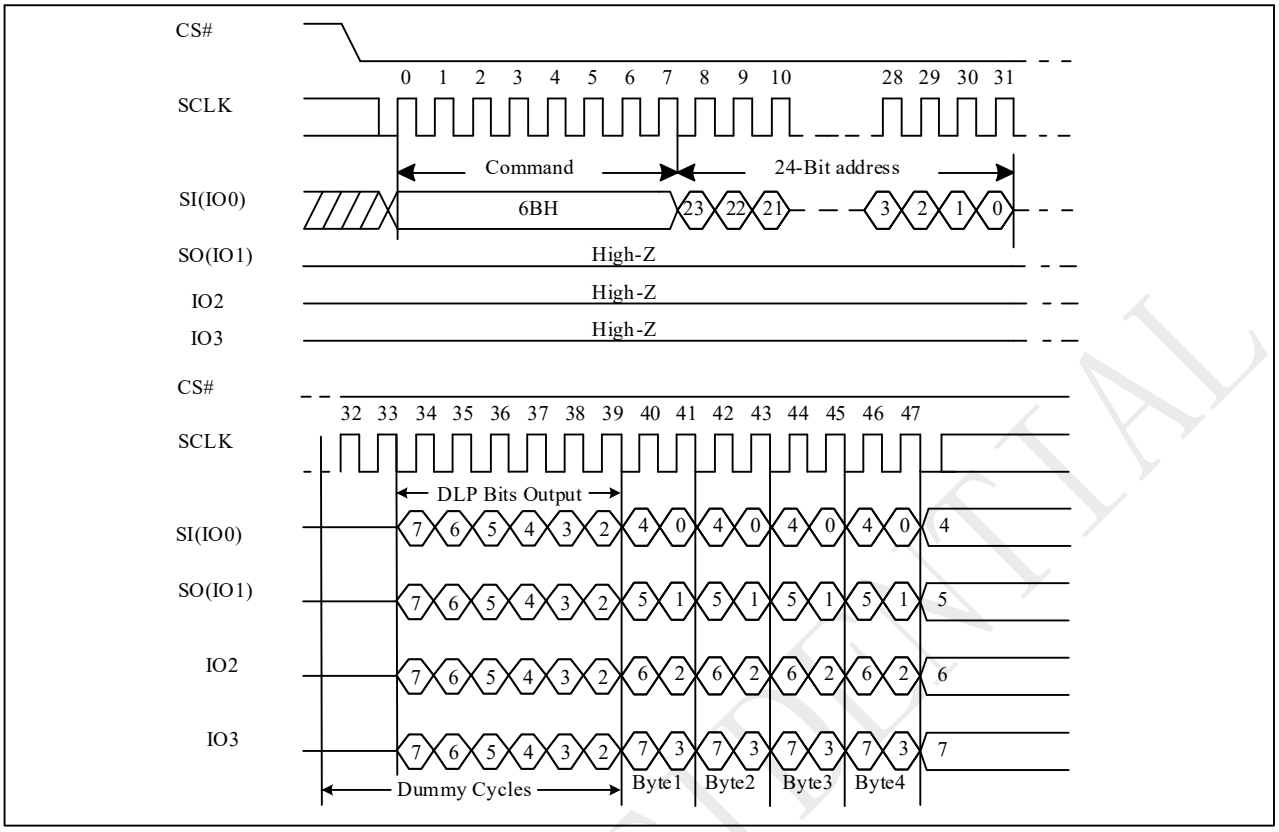



**Figure 9-23e 4IO Read with DLP bits output Sequence**

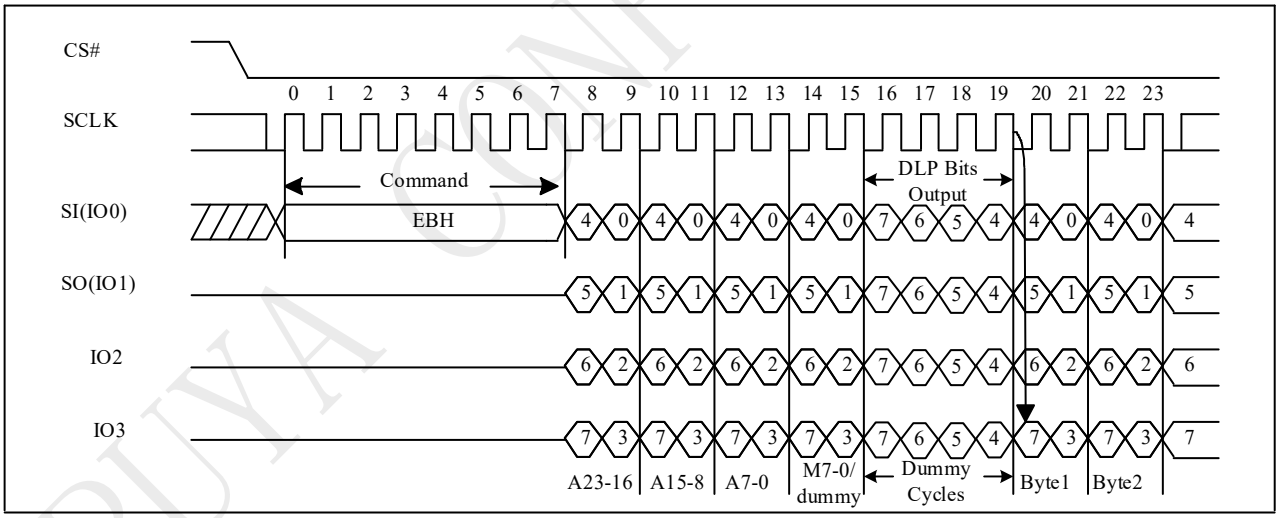


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

**Figure 9-23f 4IO Read with DLP bits output Sequence in QPI mode**

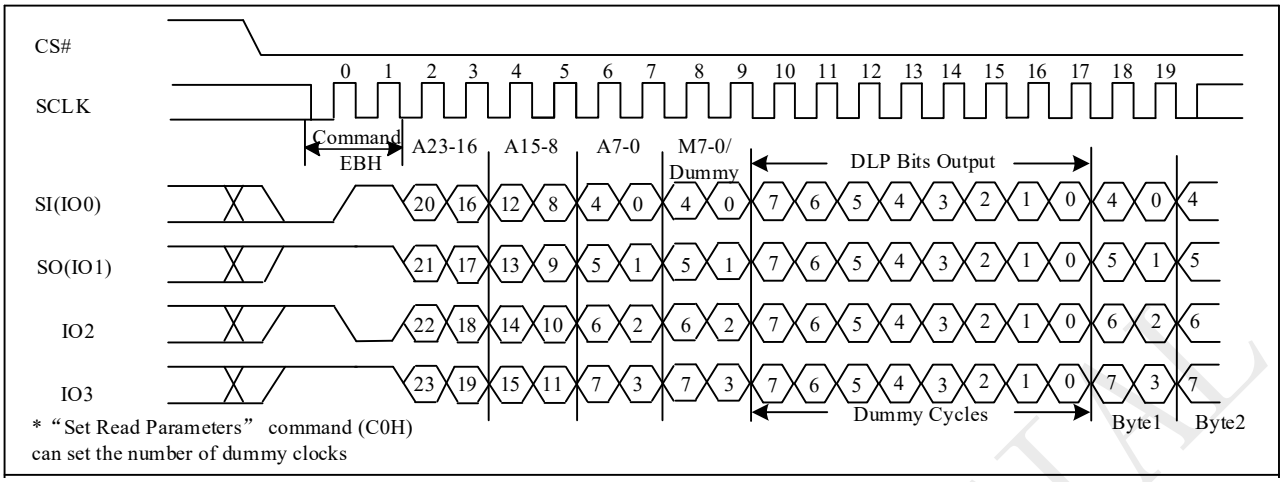



**Figure 9-23g 4IO Word Read with DLP bits output Sequence**


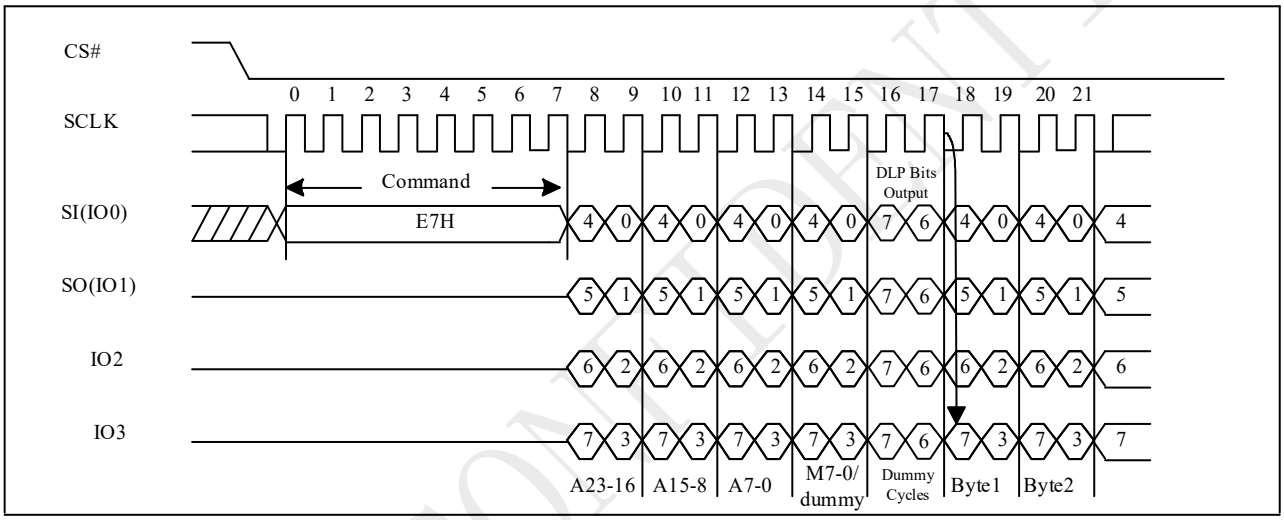



**Figure 9-23h Burst Read with Wrap with DLP bits output Sequence**

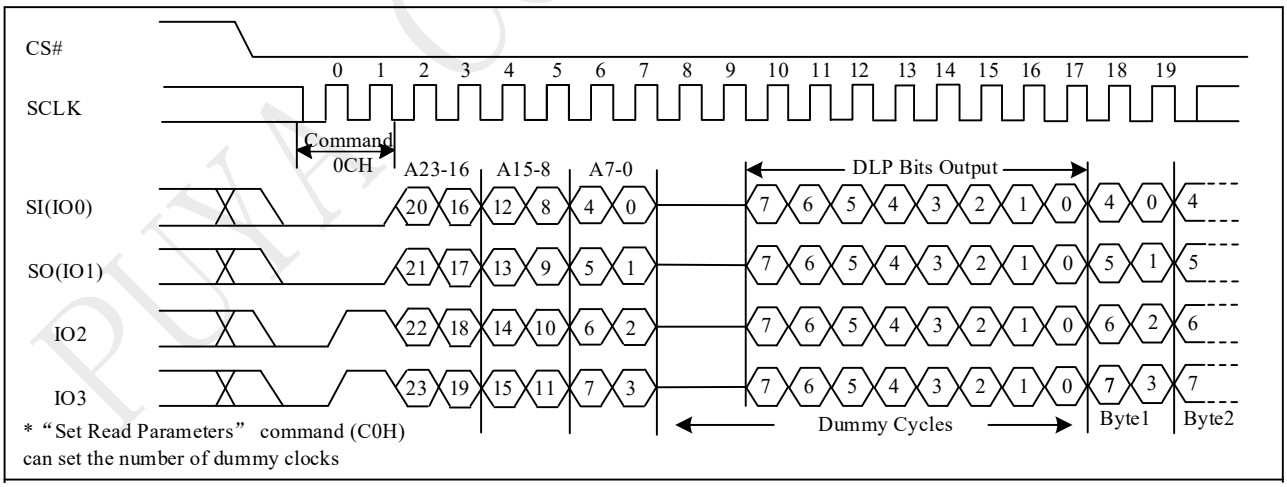


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

**Figure 9-23i DTR Fast Read with DLP bits output Sequence**


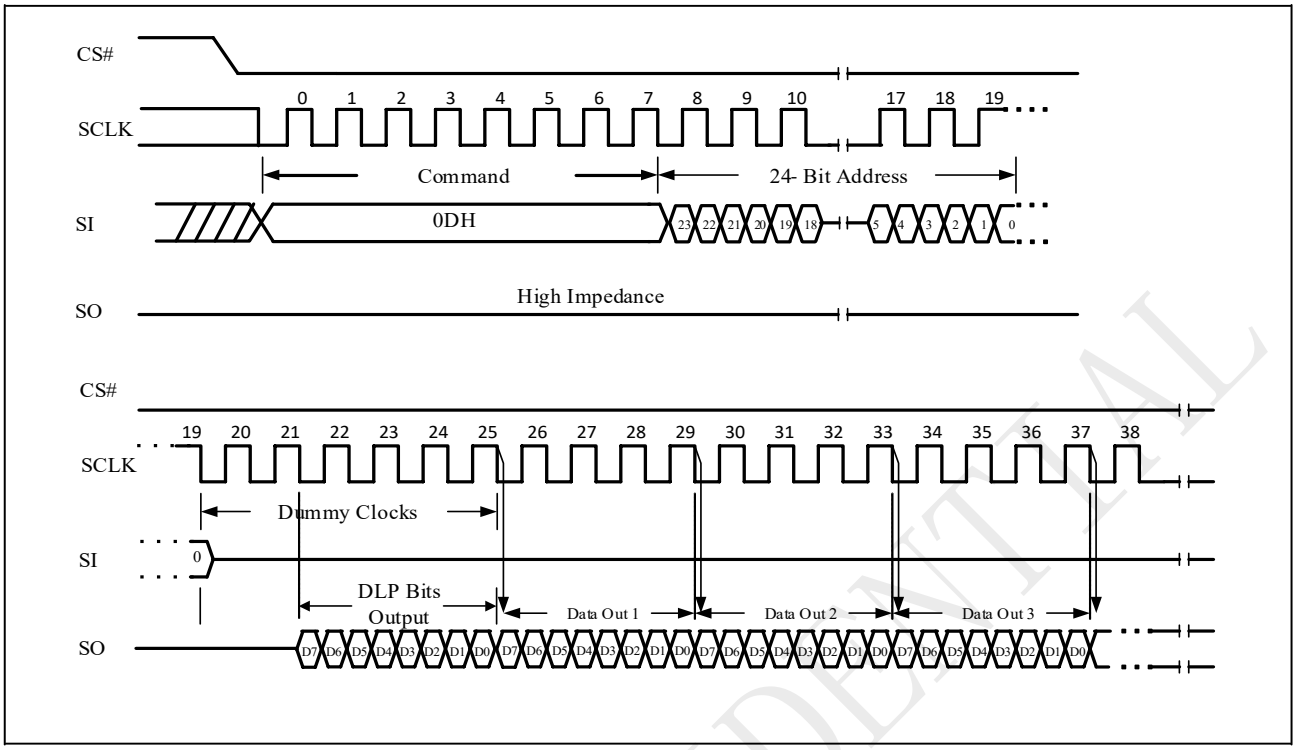



**Figure 9-23j DTR Fast Read with DLP bits output Sequence in QPI mode**

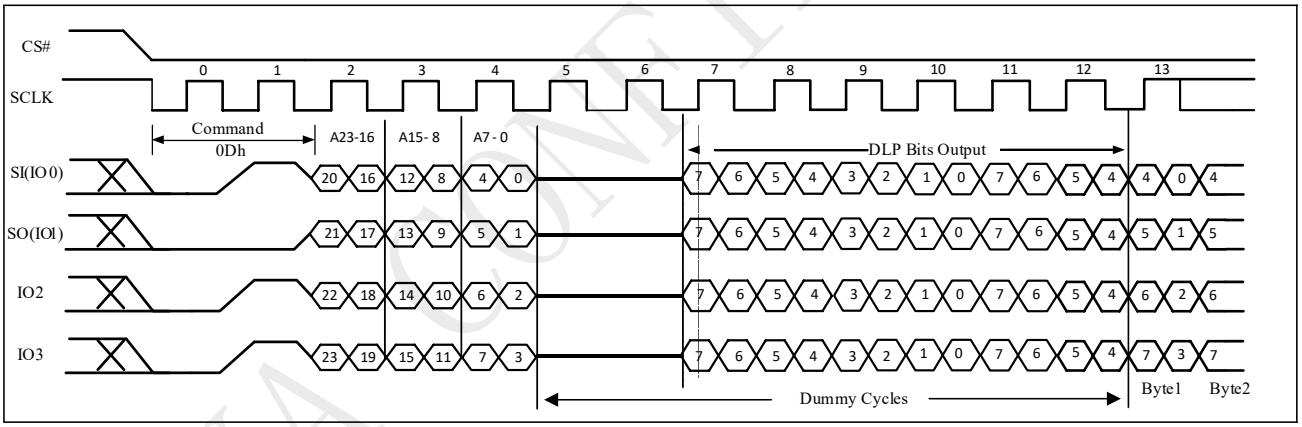


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

**Figure 9-23k DTR 2IO Read with DLP bits output Sequence**


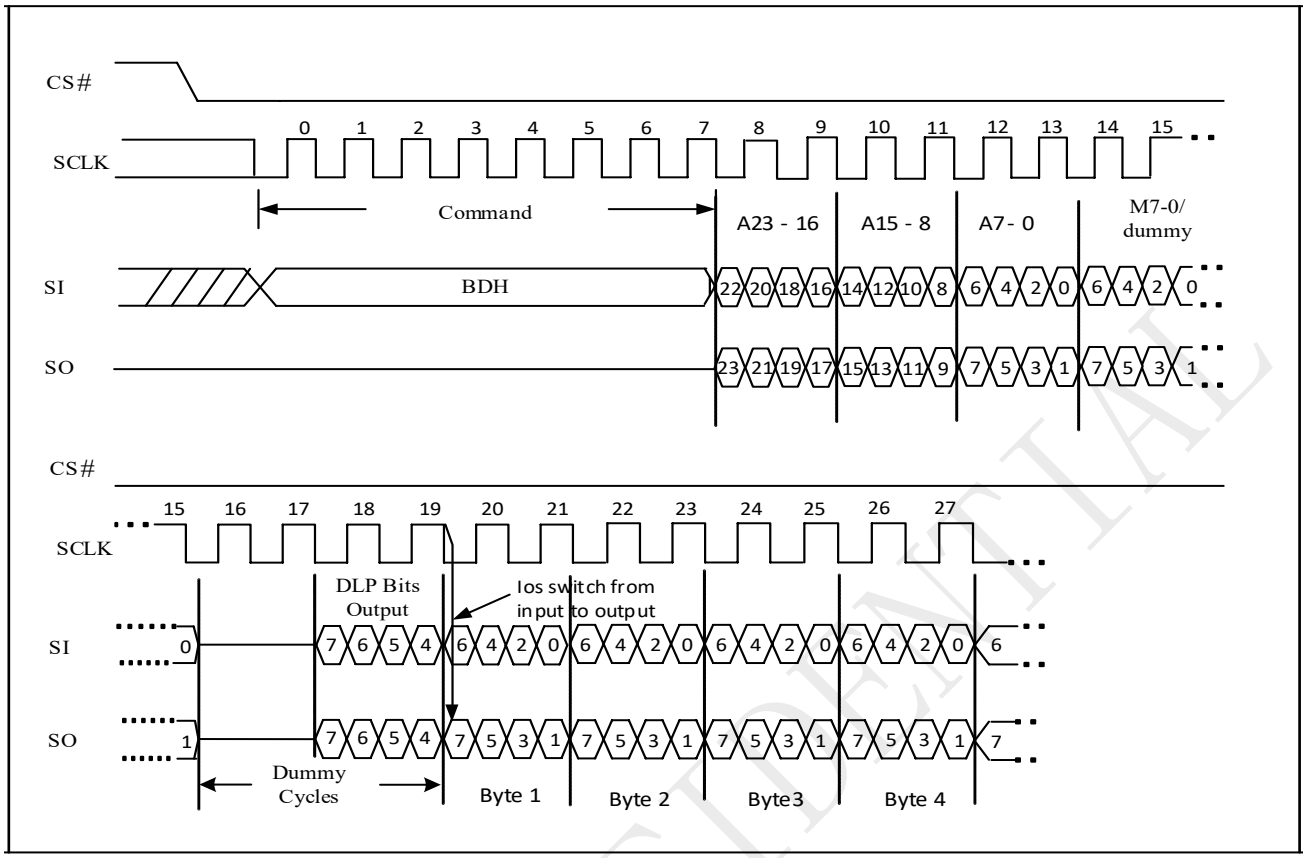



**Figure 9-23l DTR 4IO Read with DLP bits output Sequence**

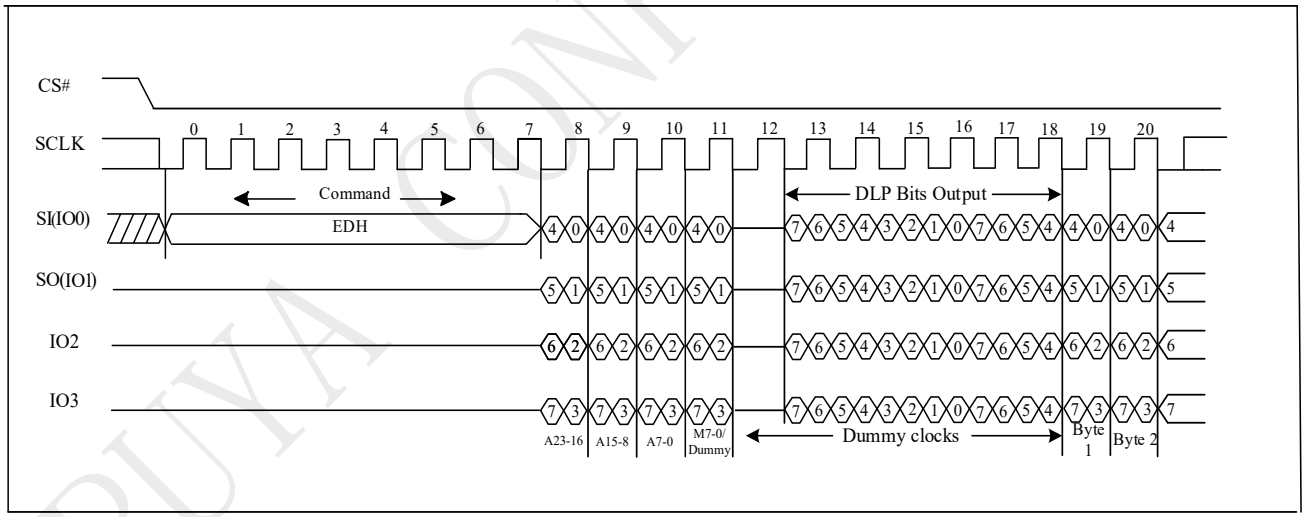


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

**Figure 9-23m DTR 4IO Read with DLP bits output Sequence in QPI mode**

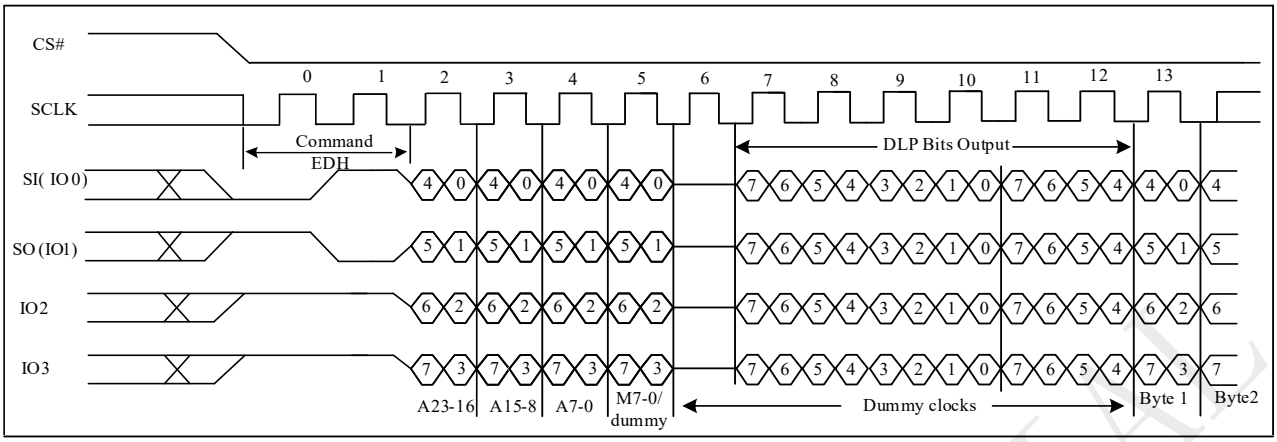



**Figure 9-23n DTR Burst Read with Wrap with DLP bits output Sequence**


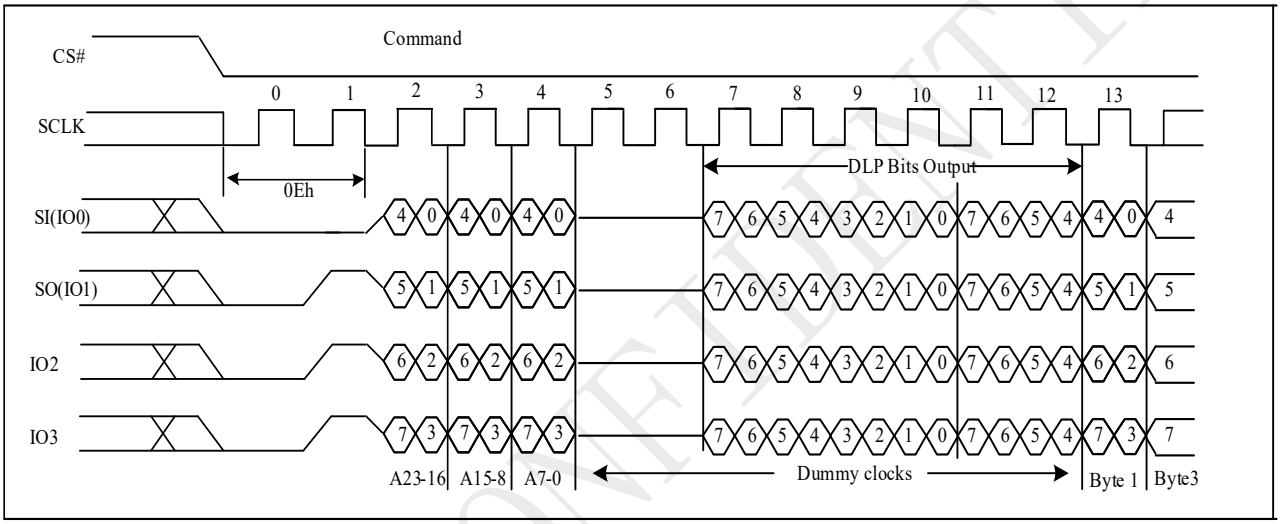



**Figure 9-23o Read Security Registers with DLP bits output Sequence**

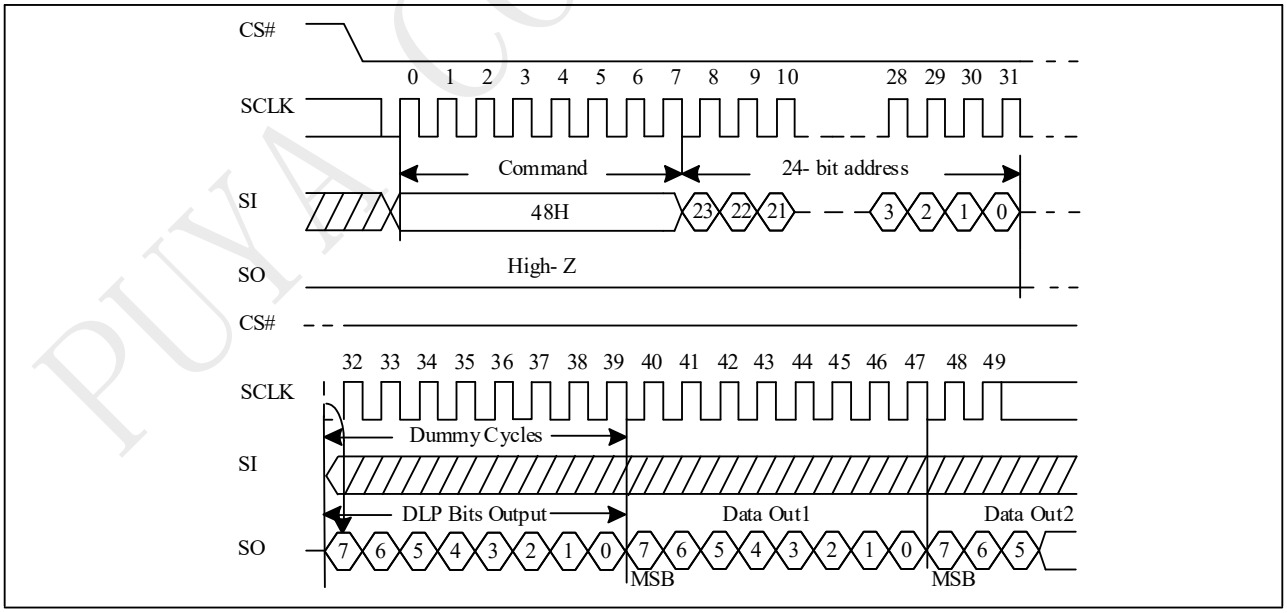


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

**Figure 9-23p Read Unique ID with DLP bits output Sequence**

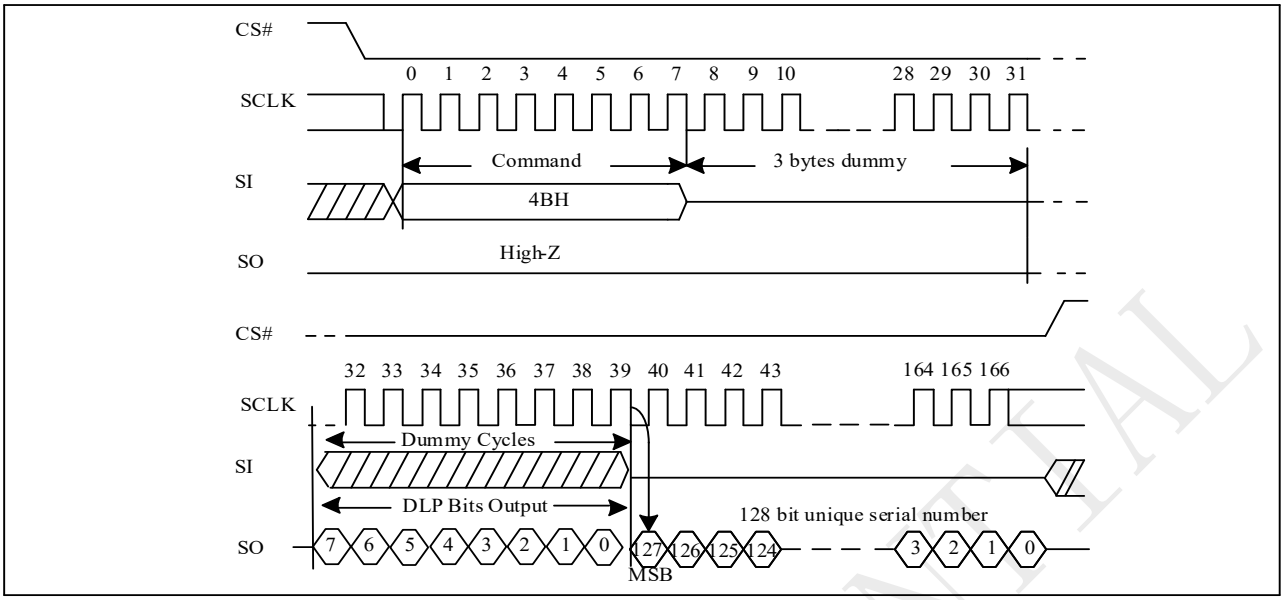



**Figure 9-23q Read Serial Flash Discoverable Parameter with DLP bits output Sequence**


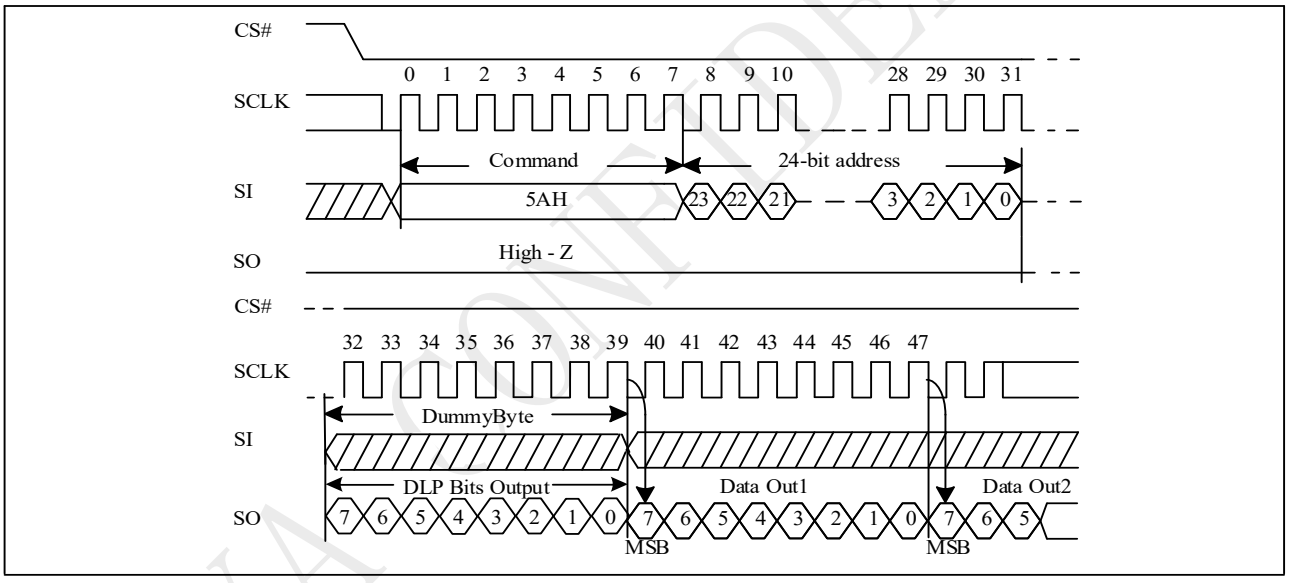



**Figure 9-23r Read Serial Flash Discoverable Parameter with DLP bits output Sequence in QPI mode**

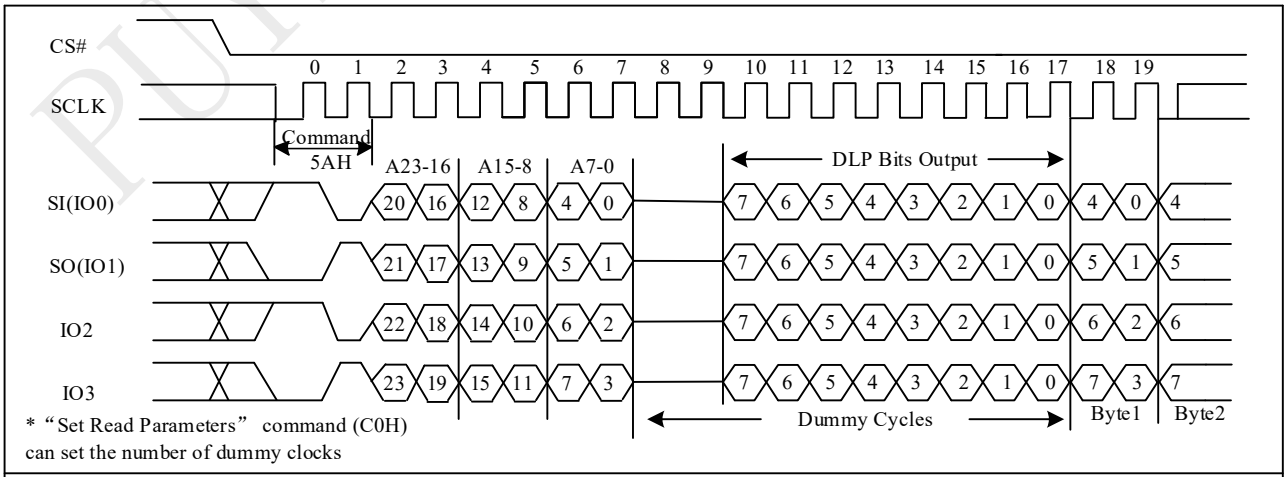



PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 9.24 Enable QPI (38H)

The device support both Standard/Dual/Quad SPI and QPI mode. The “Enable QPI (38H)” command can switch the device from SPI mode to QPI mode. See the command Table 2a for all support QPI commands. In order to switch the device to QPI mode, the Quad Enable (QE) bit in Status Register-1 must be set to 1 first, and “Enable QPI (38H)” command must be issued. If the QE bit is 0, the “Enable QPI (38H)” command will be ignored and the device will remain in SPI mode. When the device is switched from SPI mode to QPI mode, the existing Write Enable Latch and Program/Erase Suspend status, and the Wrap Length setting will remain unchanged.


**Figure 9-24 Enable QPI Sequence (38h)**

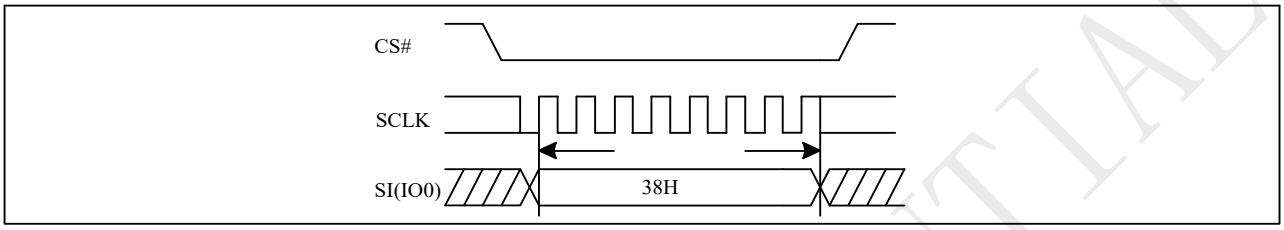


## 9.25 Disable QPI (FFH)

To exit the QPI mode and return to Standard/Dual/Quad SPI mode, the “Disable QPI (FFH)” command must be issued. When the device is switched from QPI mode to SPI mode, the existing Write Enable Latch and Program/Erase Suspend status, and the Wrap Length setting will remain unchanged.

**Figure 9-25 Disable QPI Sequence (QPI)**

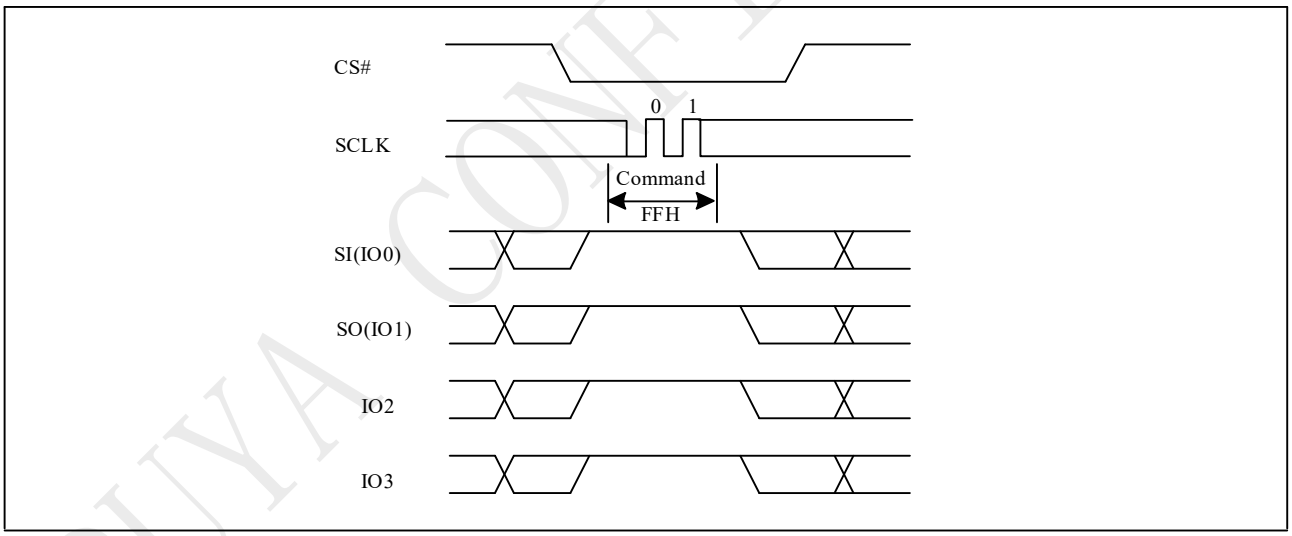


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 9.26 Sector Erase (SE) (20H)

The Sector Erase (SE) instruction is for erasing the data of the chosen sector to be "1". A Write Enable (WREN) Instruction must execute to set the Write Enable Latch (WEL) bit before sending the Sector Erase (SE). Any address of the sector is a valid address for Sector Erase (SE) instruction. The CS# must go high exactly at the byte boundary (the latest eighth of address byte been latched-in); otherwise, the instruction will be rejected and not executed.

Address bits [Am-A12] (Am is the most significant address) select the sector address.

The sequence of issuing SE instruction is: CS# goes low→ sending SE instruction code→ 3-byte address on SI→ CS# goes high. The SIO [3:1] are don't care.

**Figure 9-26 Sector Erase (SE) Sequence (Command 20h)**


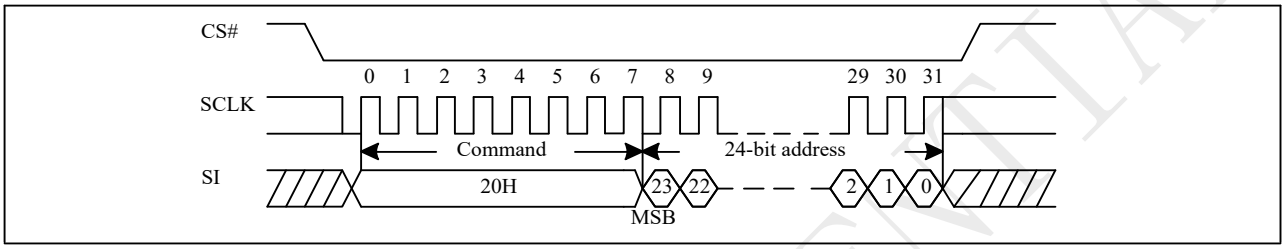



**Figure 9-26a Sector Erase (SE) Sequence (QPI)**

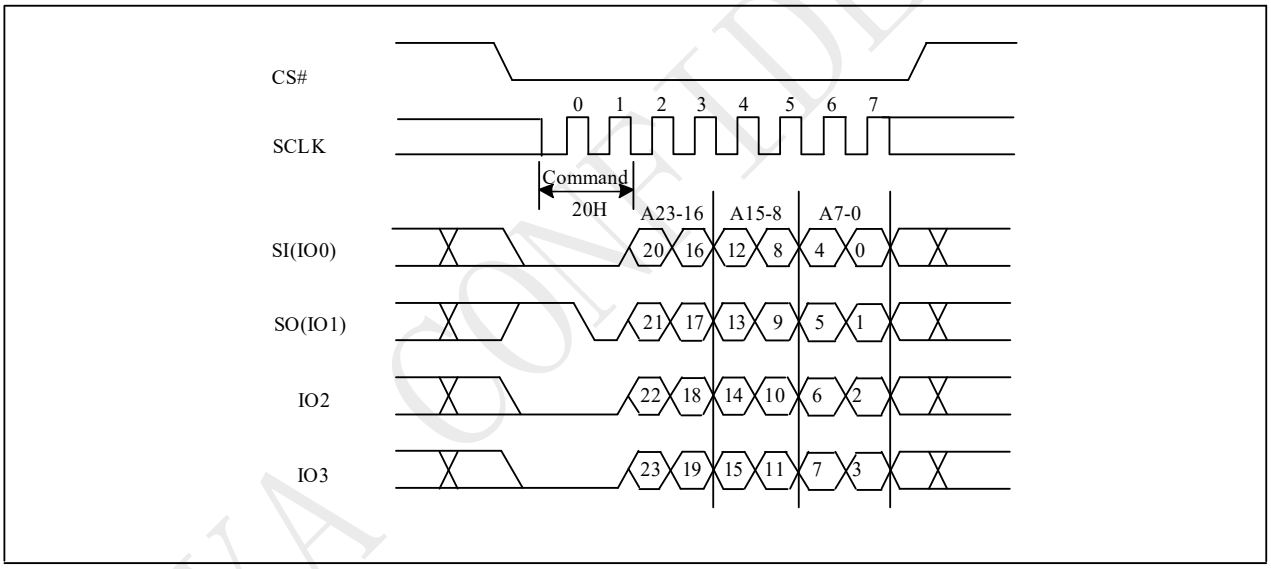


The self-timed Sector Erase Cycle time(tSE) is initiated as soon as Chip Select (CS#) goes high. The Write in progress (WIP) bit still can be check out during the Sector Erase cycle is in progress. The WIP sets 1 during the tSE timing, and sets0 when Sector Erase Cycle is completed, and the Write Enable Latch (WEL) bit is reset. If the sector is protected by BP4, BP3, BP2, BP1, BP0 bits, the Sector Erase (SE) instruction will not be executed on the sector.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 9.27 Block Erase (BE32K) (52H)

The Block Erase (BE32K) instruction is for erasing the data of the chosen block to be "1". The instruction is used for 32K-byte block erase operation. A Write Enable (WREN) instruction must be executed to set the Write Enable Latch (WEL) bit before sending the Block Erase (BE32K). Any address of the block is a valid address for Block Erase (BE32K) instruction. The CS# must go high exactly at the byte boundary (the least significant bit of address byte has been latched-in); otherwise, the instruction will be rejected and not executed.

The sequence of issuing BE32K instruction is: CS# goes low → sending BE32K instruction code → 3-byte address on SI → CS# goes high. The SIO [3:1] are don't care.

The self-timed Block Erase Cycle time (tBE1) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked while the Block Erase cycle is in progress. The WIP sets during the tBE1 timing, and clears when Block Erase Cycle is completed, and the Write Enable Latch (WEL) bit is cleared. If the block is protected by BP4, BP3, BP2, BP1, BP0 bits, the array data will be protected (no change) and the WEL bit still be reset.

**Figure 9-27 Block Erase 32K(BE32K) Sequence (Command 52h)**


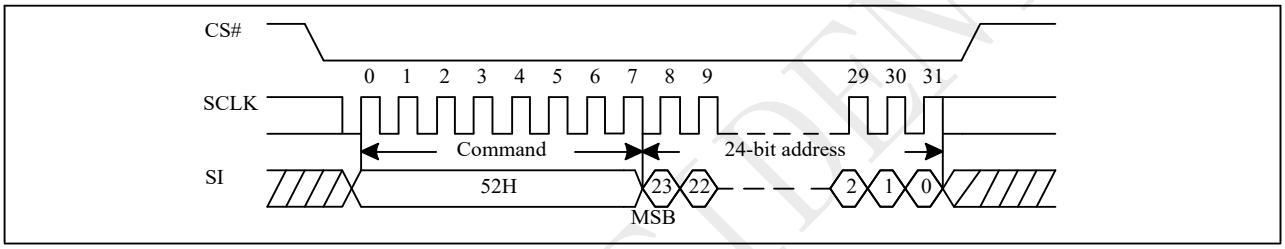



**Figure 9-27a Block Erase 32K(BE32K) Sequence (QPI)**

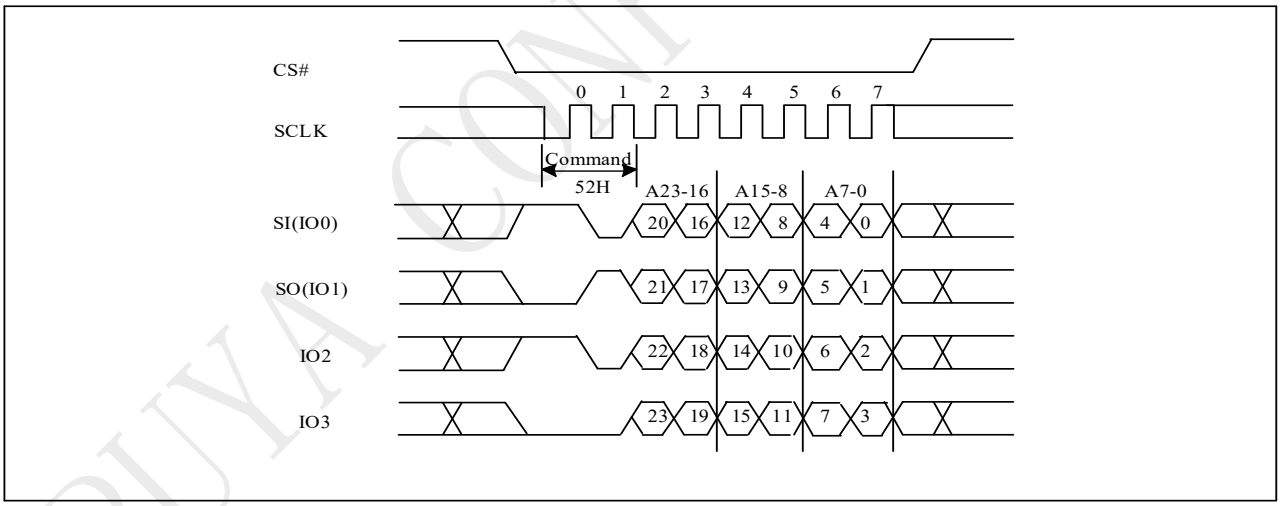


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 9.28 Block Erase (BE) (D8H)

The Block Erase (BE) instruction is for erasing the data of the chosen block to be "1". The instruction is used for 64K-byte block erase operation. A Write Enable (WREN) instruction must execute to set the Write Enable Latch (WEL) bit before sending the Block Erase (BE). Any address of the block is a valid address for Block Erase (BE) instruction. The CS# must go high exactly at the byte boundary (the latest eighth of address byte been latched-in); otherwise, the instruction will be rejected and not executed.

The sequence of issuing BE instruction is: CS# goes low→ sending BE instruction code→ 3-byte address on SI→CS# goes high. The SIO [3:1] are "don't care".

The self-timed Block Erase Cycle time (tBE2) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked during the Block Erase cycle is in progress. The WIP sets 1 during the tBE2 timing, and sets 0 when Block Erase Cycle is completed, and the Write Enable Latch (WEL) bit is reset. If the block is protected by BP4, BP3, BP2, BP1, BP0 bits, the Block Erase (BE) instruction will not be executed on the block.

**Figure 9-28 Block Erase (BE) Sequence (Command D8h)**


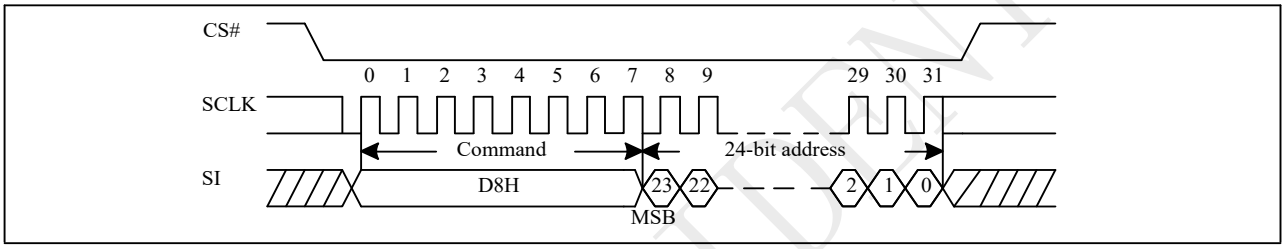



**Figure 9-28a Block Erase (BE) Sequence (QPI)**

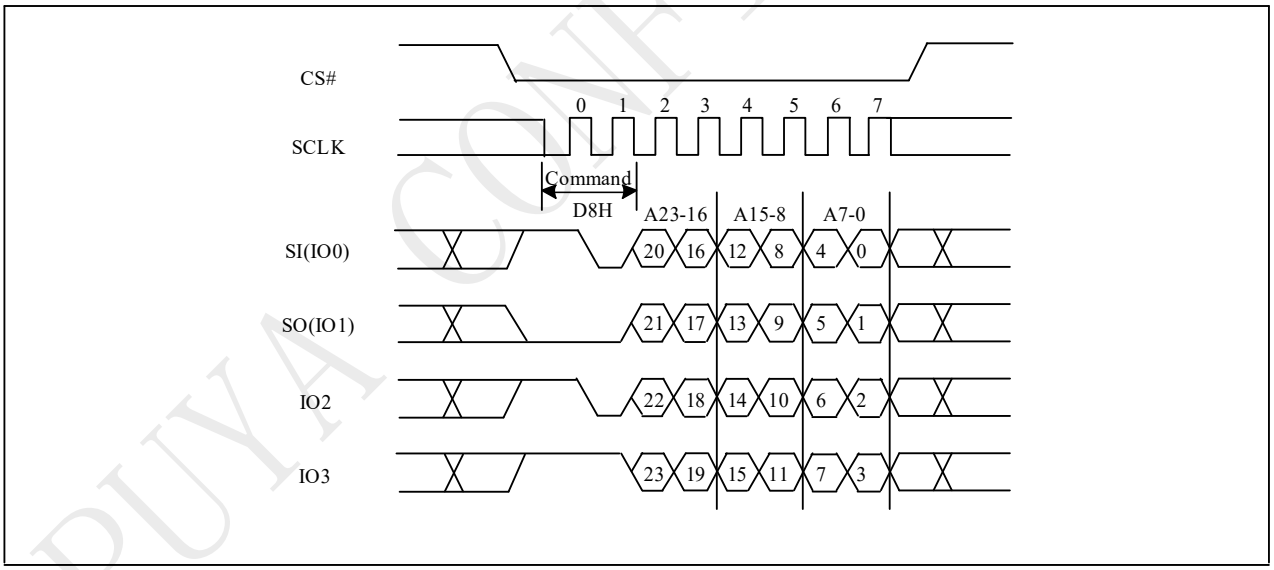


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 9.29 Chip Erase (CE) (60H/C7H)

The Chip Erase (CE) instruction is for erasing the data of the whole chip to be "1". A Write Enable (WREN) instruction must execute to set the Write Enable Latch (WEL) bit before sending the Chip Erase (CE). The CS# must go high exactly at the byte boundary (the latest eighth of address byte been latched-in); otherwise, the instruction will be rejected and not executed.

The sequence of issuing CE instruction is: CS# goes low → sending CE instruction code → CS# goes high. The SIO [3:1] are "don't care".

The self-timed Chip Erase Cycle time (tCE) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked during the Chip Erase cycle is in progress. The WIP sets 1 during the tCE timing, and sets 0 when Chip Erase Cycle is completed, and the Write Enable Latch (WEL) bit is reset. If the chip is protected by BP4, BP3, BP2, BP1, BP0 bits, the Chip Erase (CE) instruction will not be executed. It will be only executed when all Block Protect (BP4, BP3, BP2, BP1, BP0) are set to “None protected”.

**Figure 9-29 Chip Erase (CE) Sequence (Command 60h or C7h)**


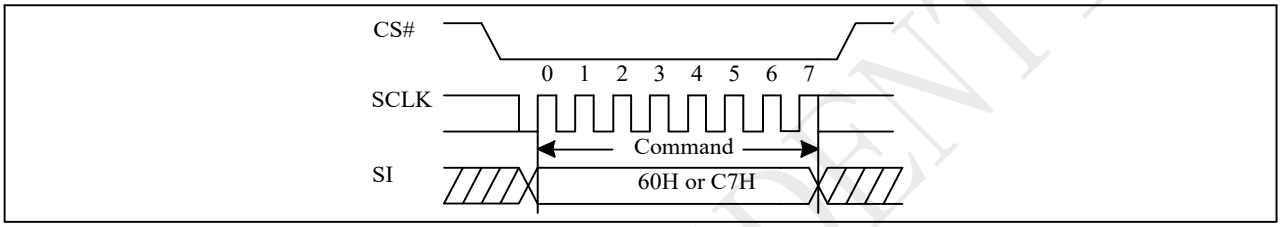



**Figure 9-29a Chip Erase (CE) Sequence (QPI)**

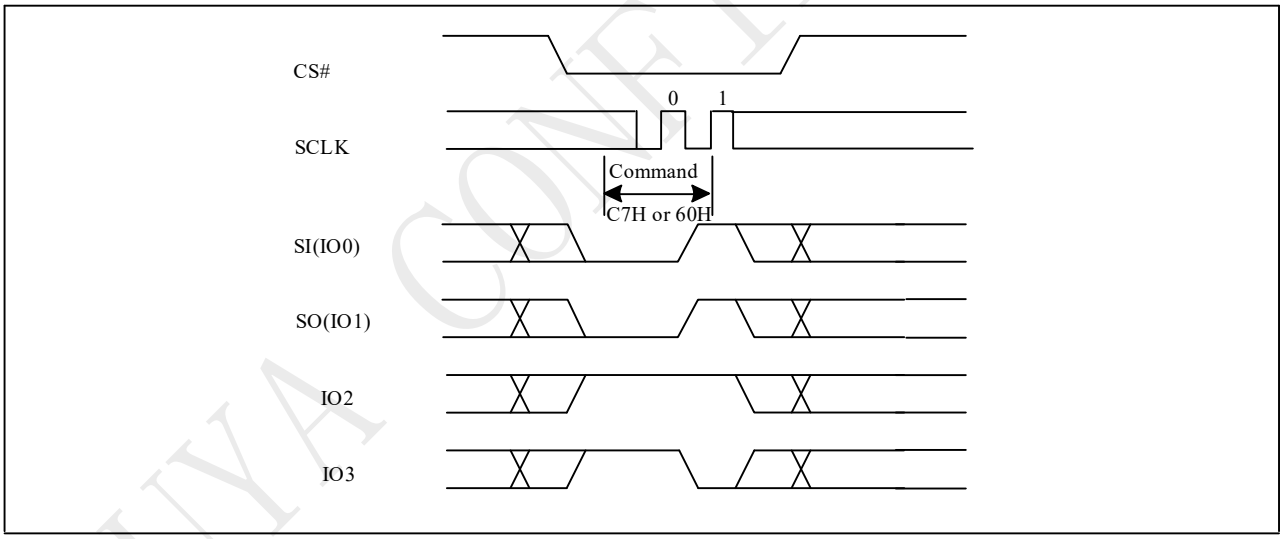


## 9.30 Page Program (PP) (02H)

The Page Program (PP) instruction is for programming the memory to be "0". A Write Enable (WREN) instruction must execute to set the Write Enable Latch (WEL) bit before sending the Page Program (PP). The device programs only the last 256 data bytes sent to the device. If the entire 256 data bytes are going to be programmed, A7-A0(The eight least significant address bits) should be set to 0. If the eight least significant address bits(A7-A0) are not all 0, all transmitted data going beyond the end of the current page are programmed from the start address of the same page (from the address A7-A0 are all 0). If more than 256 bytes are sent to the device, the data of the last 256-byte is programmed at the request page and previous data will be disregarded. If less than 256 bytes are sent to the device, the data is programmed at the requested address of the page.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

For the very best performance, programming should be done in full pages of 256 bytes aligned on 256-byte boundaries with each Page being programmed only once. Using the Page Program (PP) command to load an entire page, within the page boundary, will save overall programming time versus loading less than a page into the program buffer.

It is possible to program from one byte up to a page size in each Page programming operation. Please refer to the PY25Q serial flash application note for multiple byte program operation within one page.

The sequence of issuing PP instruction is: CS# goes low→ sending PP instruction code→3-byte address on SI→ at least 1-byte on data on SI→ CS# goes high.

The CS# must be kept low during the whole Page Program cycle; The CS# must go high exactly at the byte boundary (the latest eighth bit of data being latched in), otherwise the instruction will be rejected and will not be executed.

The self-timed Page Program Cycle time (tPP) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked during the Page Program cycle is in progress. The WIP sets 1 during the tPP timing, and sets 0 when Page Program Cycle is completed, and the Write Enable Latch (WEL) bit is reset. If the page is protected by BP4, BP3, BP2, BP1, BP0 bits, the Page Program (PP) instruction will not be executed. The SIO [3:1] are "don't care".

**Figure 9-30 Page Program (PP) Sequence (Command 02h)**


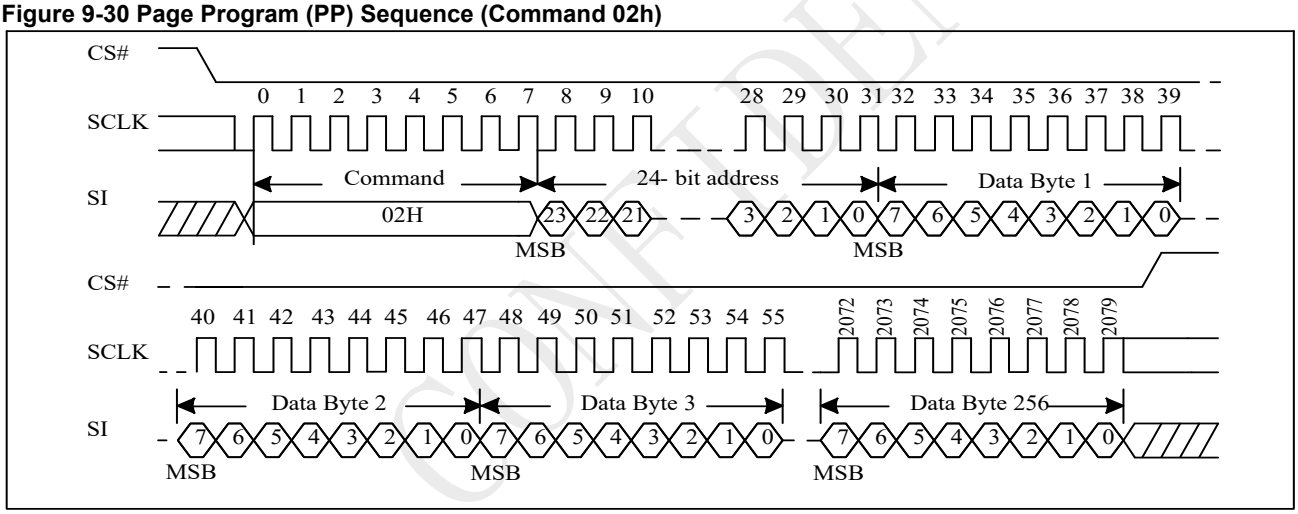



**Figure 9-30a Page Program (PP) Sequence (QPI)**



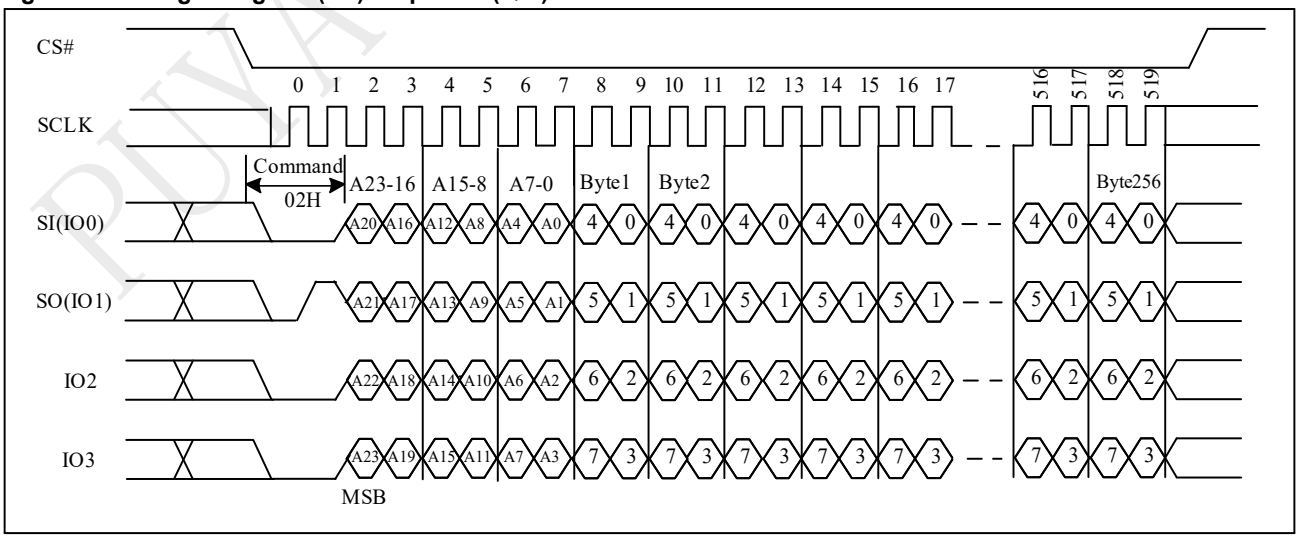


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 9.31 Quad Page Program (QPP) (32H)

The Quad Page Program (QPP) instruction is for programming the memory to be "0". A Write Enable (WREN)instruction must execute to set the Write Enable Latch (WEL) bit and Quad Enable (QE) bit must be set to "1" before sending the Quad Page Program (QPP). The Quad Page Programming takes four pins: SIO0, SIO1, SIO2, and SIO3 as data input, which can improve programmer performance and the effectiveness of application. The QPP operation frequency supports as fast as fQPP. The other function descriptions are as same as standard page program.

The sequence of issuing QPP instruction is: CS# goes low→ sending QPP instruction code→ 3-byte address on SIO0 → at least 1-byte on data on SIO [3:0] →CS# goes high.

**Figure 9-31 Quad Page Program (QPP) Sequence (Command 32h)**

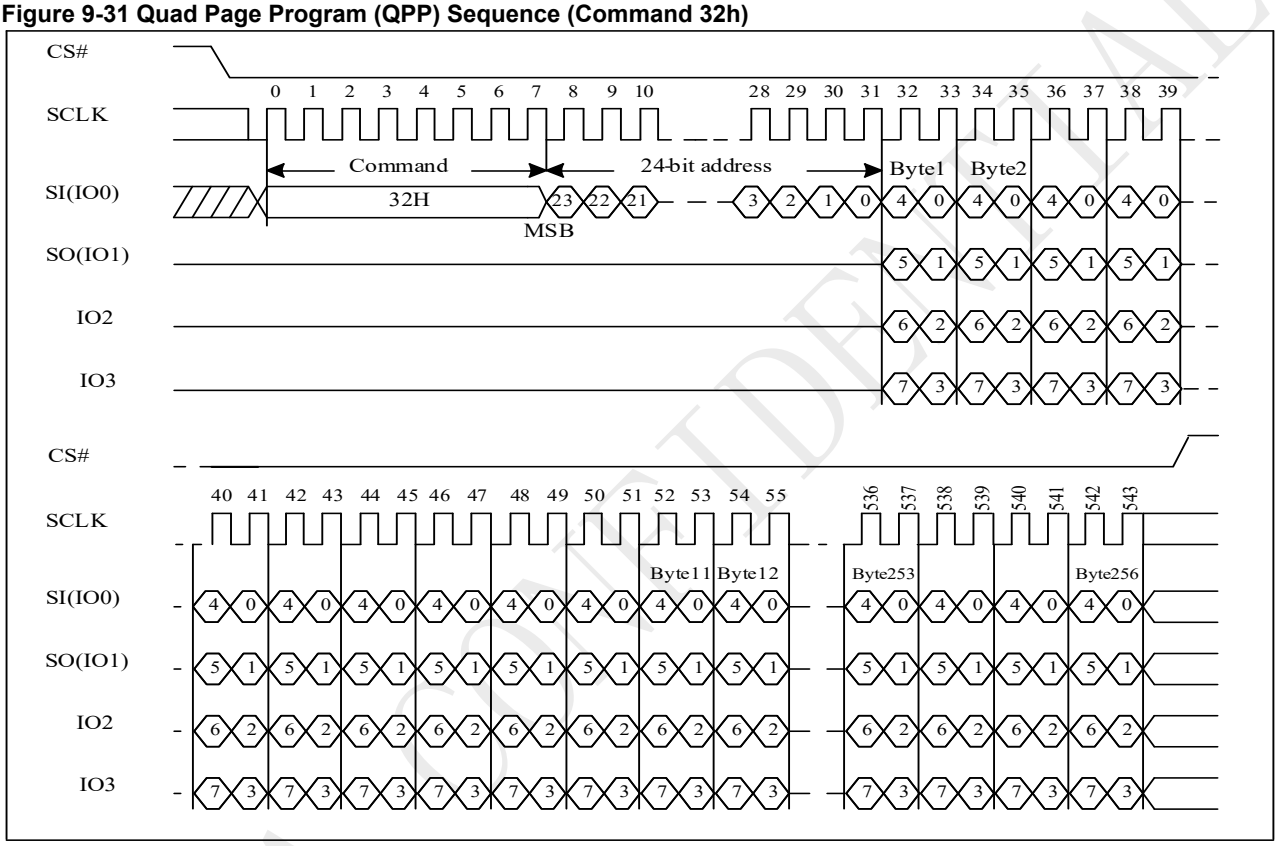


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 9.32 Erase Security Registers (ERSCUR) (44H)

The product provides three 1024-byte Security Registers which can be erased and programmed individually. These registers may be used by the system manufacturers to store security and other important information separately from the main memory array.

The Erase Security Registers command is similar to Sector/Block Erase command. A Write Enable (WREN) command must previously have been executed to set the Write Enable Latch (WEL) bit.


The Erase Security Registers command sequence: CS# goes low → sending ERSCUR instruction →□sending 24-bit address → CS# goes high.

CS# must be driven high after the eighth bit of the command code has been latched in; otherwise the Erase Security Registers command is not executed. As soon as CS# is driven high, the self-timed Erase Security Registers cycle (whose duration is tSE) is initiated. While the Erase Security Registers cycle is in progress, the Status Register may be read to check the value of the Write in Progress (WIP) bit. The Write in Progress (WIP) bit is 1 during the self-timed Erase Security Registers cycle, and is 0 when it is completed. The Security Registers Lock Bit (LB3-1) in the Status Register can be used to OTP protect the security registers.

Once the LB bit is set to 1, the Security Registers will be permanently locked; the Erase Security Registers command will be ignored.

| Address | A23-16 | A15-12 | A11-10 | A9-0 |
|---|---|---|---|---|
| Security Register #1 | 00H | 0001 | 00 | Don't care |
| Security Register #2 | 00H | 0010 | 00 | Don't care |
| Security Register #3 | 00H | 0011 | 00 | Don't care |

**Figure 9-32 Erase Security Registers (ERSCUR) Sequence (Command 44h)**

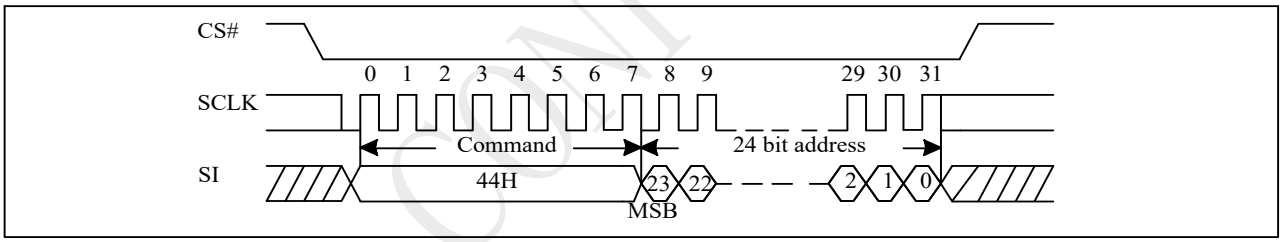


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 9.33 Program Security Registers (PRSCUR) (42H)

The Program Security Registers command is similar to the Page Program command. It allows from 1 to 256bytes Security Registers data to be programmed. A Write Enable (WREN) command must previously have been executed to set the Write Enable Latch (WEL) bit before sending the Program Security Registers command.


The Program Security Registers command sequence: CS# goes low → sending PRSCUR instruction →□sending 24-bit address → sending at least one-byte data → CS# goes high.

As soon as CS# is driven high, the self-timed Program Security Registers cycle (whose duration is tPP) is initiated. While the Program Security Registers cycle is in progress, the Status Register may be read to check the value of the Write in Progress (WIP) bit. The Write in Progress (WIP) bit is 1 during the self-timed Program Security Registers cycle, and is 0 when it is completed.

If the Security Registers Lock Bit (LB3-1) is set to 1, the Security Registers will be permanently locked. Program Security Registers command will be ignored.

| Address | A23-16 | A15-12 | A11-10 | A9-0 |
|---|---|---|---|---|
| Security Register #1 | 00H | 0001 | 00 | Byte Address |
| Security Register #2 | 00H | 0010 | 00 | Byte Address |
| Security Register #3 | 00H | 0011 | 00 | Byte Address |

**Figure 9-33 Program Security Registers (PRSCUR) Sequence (Command 42h)**

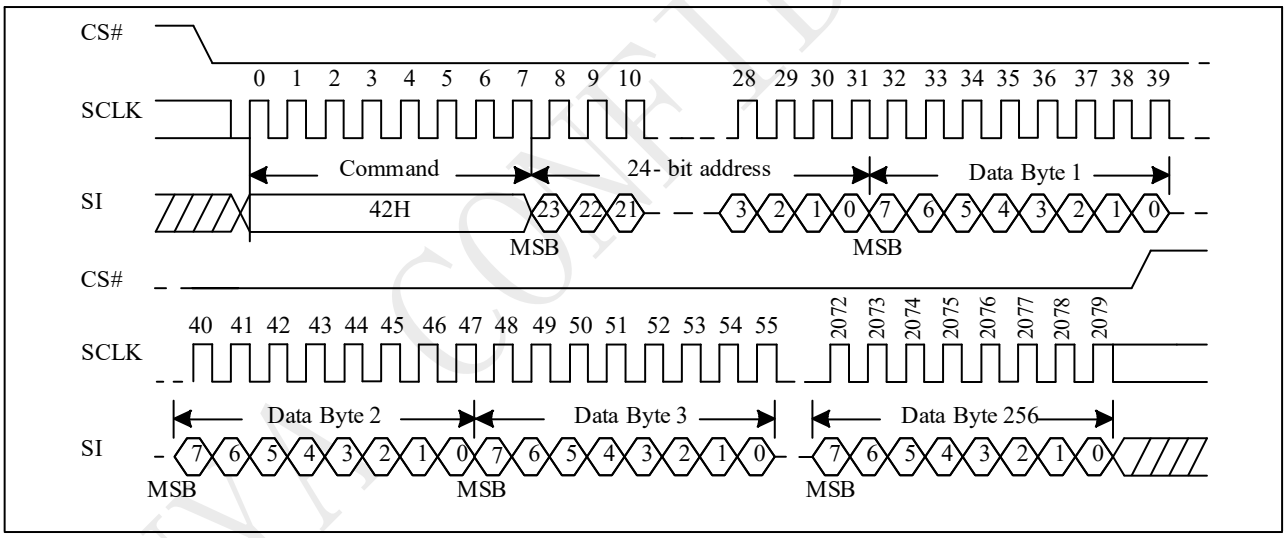


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com


## 9.34 Read Security Registers (RDSCUR) (48H)

The Read Security Registers command is similar to Fast Read command. The command is followed by a 3-byte address (A23-A0) and a dummy byte, each bit being latched-in during the rising edge of SCLK. Then the memory content, at that address, is shifted out on SO, each bit being shifted out, at a Max frequency fC, during the falling edge of SCLK. The first byte addressed can be at any location. The address is automatically incremented to the next higher address after each byte of data is shifted out. Once the A9-A0 address reaches the last byte of the register (Byte 3FFH), it will reset to 000H, the command is completed by driving CS# high.

The sequence of issuing RDSCUR instruction is: CS# goes low → sending RDSCUR instruction → sending 24-bit address → 8-bit dummy byte → Security Register data out on SO → CS# goes high.

| Address | A23-16 | A15-12 | A11-10 | A9-0 |
|---|---|---|---|---|
| Security Register #1 | 00H | 0001 | 00 | Byte Address |
| Security Register #2 | 00H | 0010 | 00 | Byte Address |
| Security Register #3 | 00H | 0011 | 00 | Byte Address |

**Figure 9-34 Read Security Registers (RDSCUR) Sequence (Command 48h)**

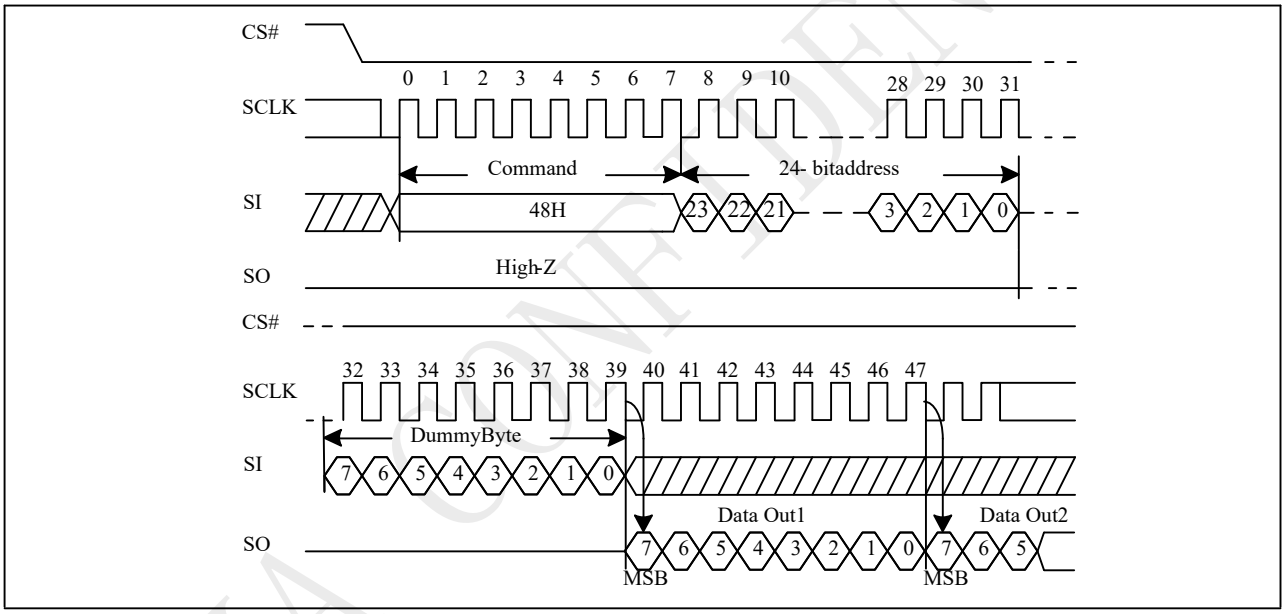


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 9.35 Deep Power-down (DP) (B9H)

The Deep Power-down (DP) instruction is for setting the device on the minimizing the power consumption (to entering the Deep Power-down mode), the standby current is reduced from ISB1 to ISB2). The Deep Power-down mode requires the Deep Power-down (DP) instruction to enter, during the Deep Power-down mode, the device is not active and all Write/Program/Erase instruction are ignored. When CS# goes high, it's only in standby mode not deep power-down mode. It's different from Standby mode.

The sequence of issuing DP instruction is: CS# goes low→ sending DP instruction code→ CS# goes high.

Once the DP instruction is set, all instruction will be ignored except the Release from Deep Power-down mode (RDP), Read Electronic Signature (RES) instruction, and soft reset instruction (66H, 99H). (RES instruction to allow the ID been read out). When Power- down, the deep power-down mode automatically stops, and when power-up, the device automatically is in standby mode. For RDP instruction the CS# must go high exactly at the byte boundary (the latest eighth bit of instruction code been latched-in); otherwise, the instruction will not be executed. As soon as Chip Select (CS#) goes high, a delay of tDP is required before entering the Deep Power-down mode and reducing the current to ISB2.

**Figure 9-35 Deep Power-down (DP) Sequence (Command B9h)**


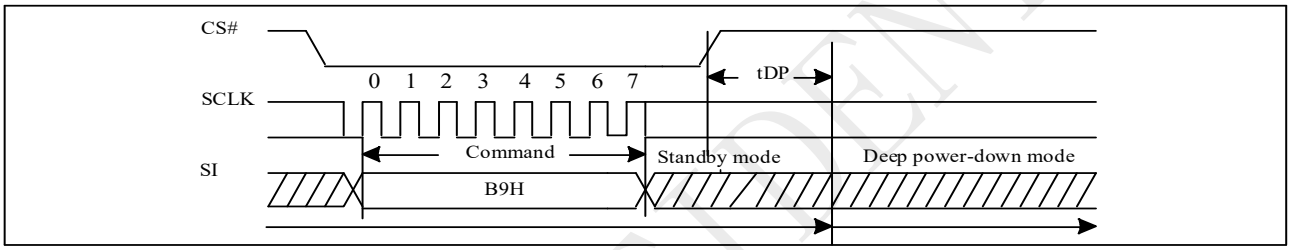



**Figure 9-35a Deep Power-down (DP) Sequence (QPI)**

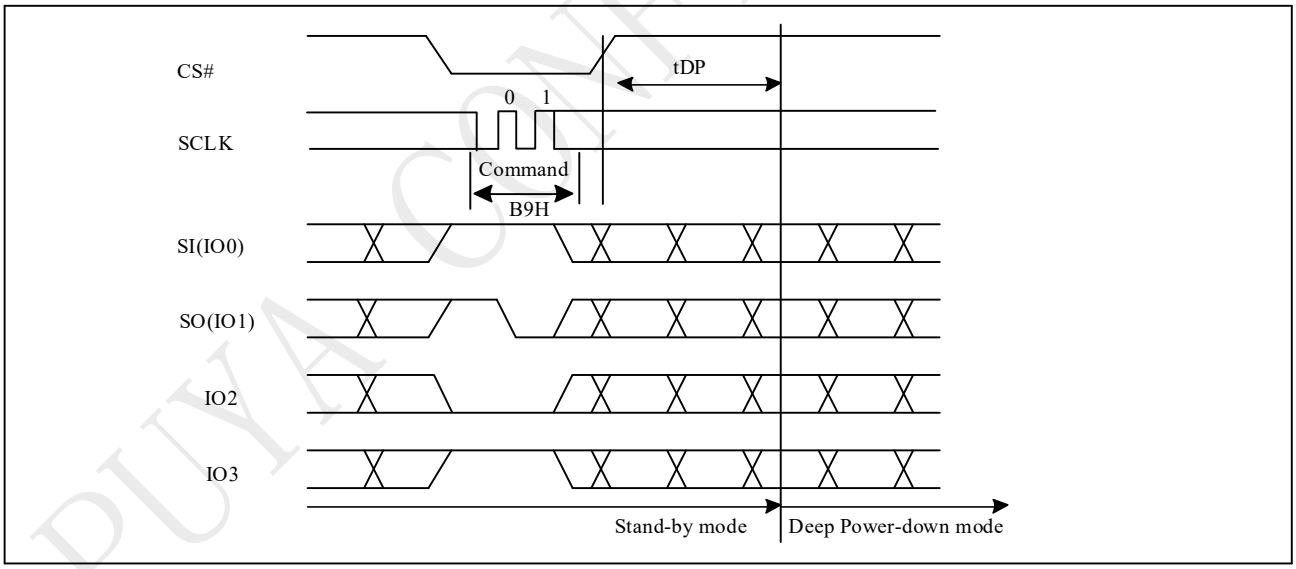


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 9.36 Release from Deep Power-Down (RDP), Read Electronic Signature (RES) (ABH)

The Release from Deep Power-down (RDP) instruction is terminated by driving Chip Select (CS#) High. When Chip Select (CS#) is driven high, the device is put in the Stand-by Power mode. If the device was not previously in the Deep Power-down mode, the transition to the Stand-by Power mode is immediate. If the device was previously in the Deep Power-down mode, though, the transition to the Stand-by Power mode is delayed by tRES2, and Chip Select (CS#) must remain High for at least tRES2(max). Once in the Stand-by Power mode, the device waits to be selected, so that it can receive, decode and execute instructions.

RES instruction is for reading out the old style of 8-bit Electronic Signature, whose values are shown as table of ID Definitions. This is not the same as RDID instruction. It is not recommended to use for new design. For new design, please use RDID instruction. Even in Deep power-down mode, the RDP and RES are also allowed to be executed, and even the device is in progress of program/erase/write cycle; there's no effect on the current program/erase/ write cycle in progress.

The RES instruction is ended by CS# goes high after the ID been read out at least once. The ID outputs repeatedly if continuously send the additional clock cycles on SCLK while CS# is at low. If the device was not previously in Deep Power-down mode, the device transition to standby mode is immediate. If the device was previously in Deep Power-down mode, there's a delay of tRES2 to transit to standby mode, and CS# must remain to high at least tRES2 (max). Once in the standby mode, the device waits to be selected, so it can be received code, and execute instruction.

The RDP instruction is for releasing from Deep Power-Down Mode.

**Figure 9-36 Read Electronic Signature (RES) Sequence (Command ABh)**


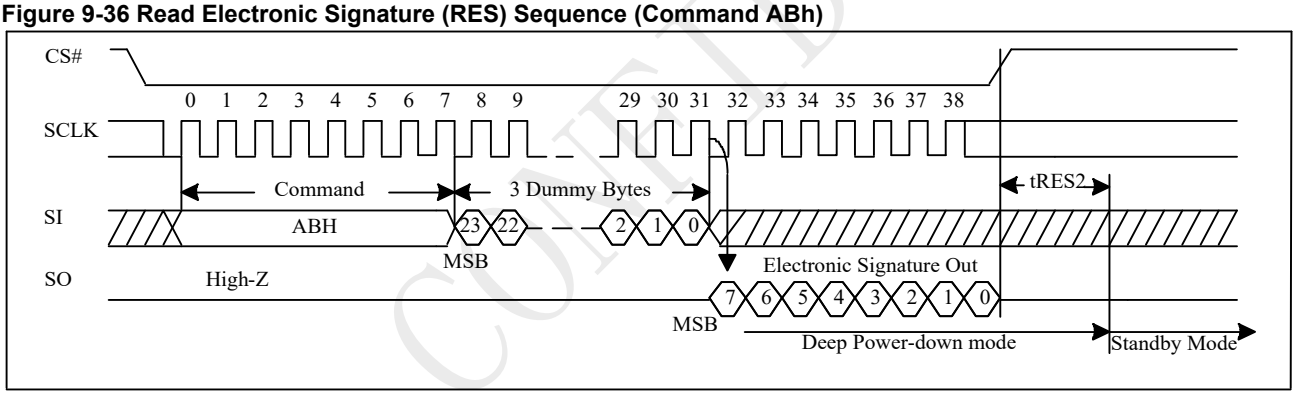



**Figure 9-36a Read Electronic Signature (RES) Sequence (QPI)**



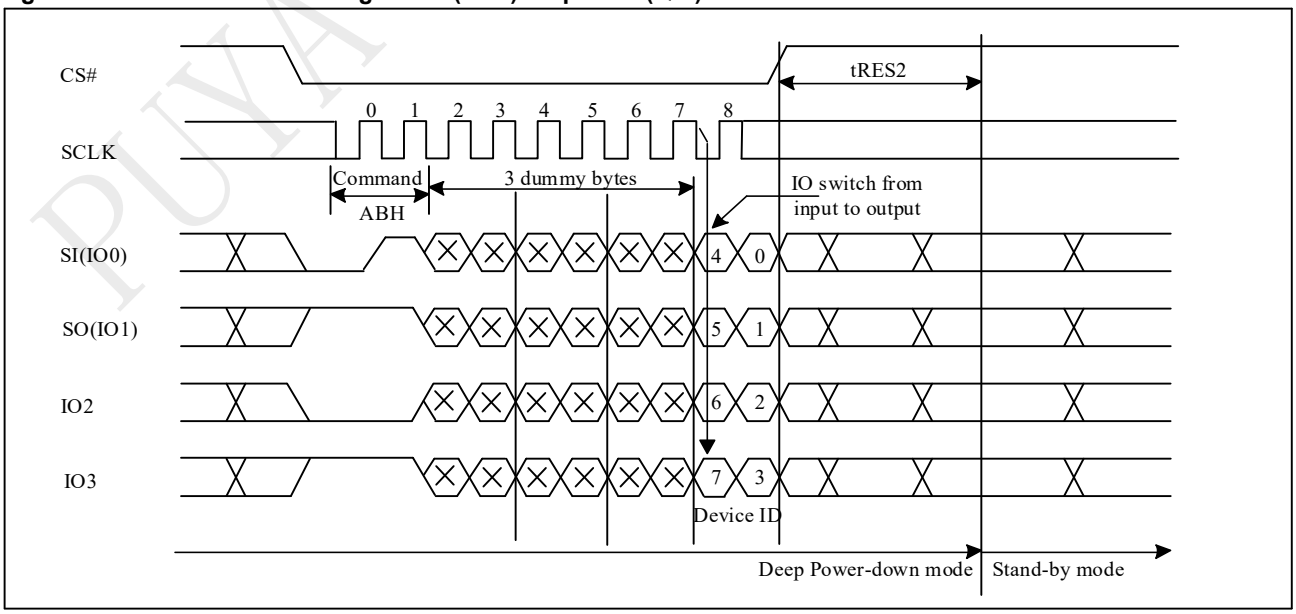

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

**Figure 9-36b Release from Deep Power-down (RDP) Sequence (Command ABh)**


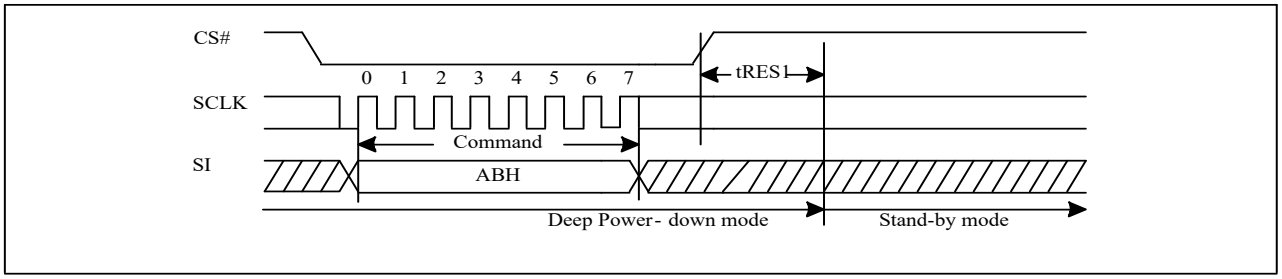



**Figure 9-36c Release from Deep Power-down (RDP) Sequence (QPI)**

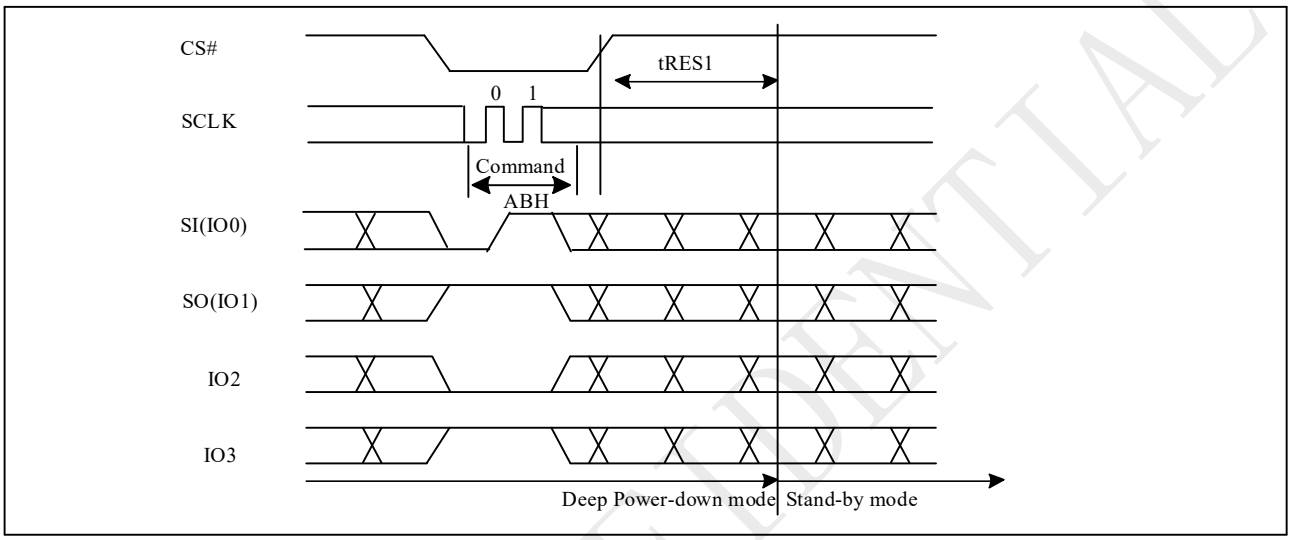


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 9.37 Read Electronic Manufacturer ID & Device ID (REMS) (90H)

The REMS instruction returns both the JEDEC assigned manufacturer ID and the device ID. The Device ID values are listed in "Table ID Definitions".

The REMS instruction is initiated by driving the CS# pin low and sending the instruction code "90h" followed by two dummy bytes and one address byte (A7~A0). After which the manufacturer ID for PUYA (85h) and the device ID are shifted out on the falling edge of SCLK with the most significant bit (MSB) first. If the address byte is 00h, the manufacturer ID will be output first, followed by the device ID. If the address byte is 01h, then the device ID will be output first, followed by the manufacturer ID. While CS# is low, the manufacturer and device IDs can be read continuously, alternating from one to the other. The instruction is completed by driving CS# high.

**Figure 9-37 Read Electronic Manufacturer & Device ID (REMS) Sequence (Command 90h)**


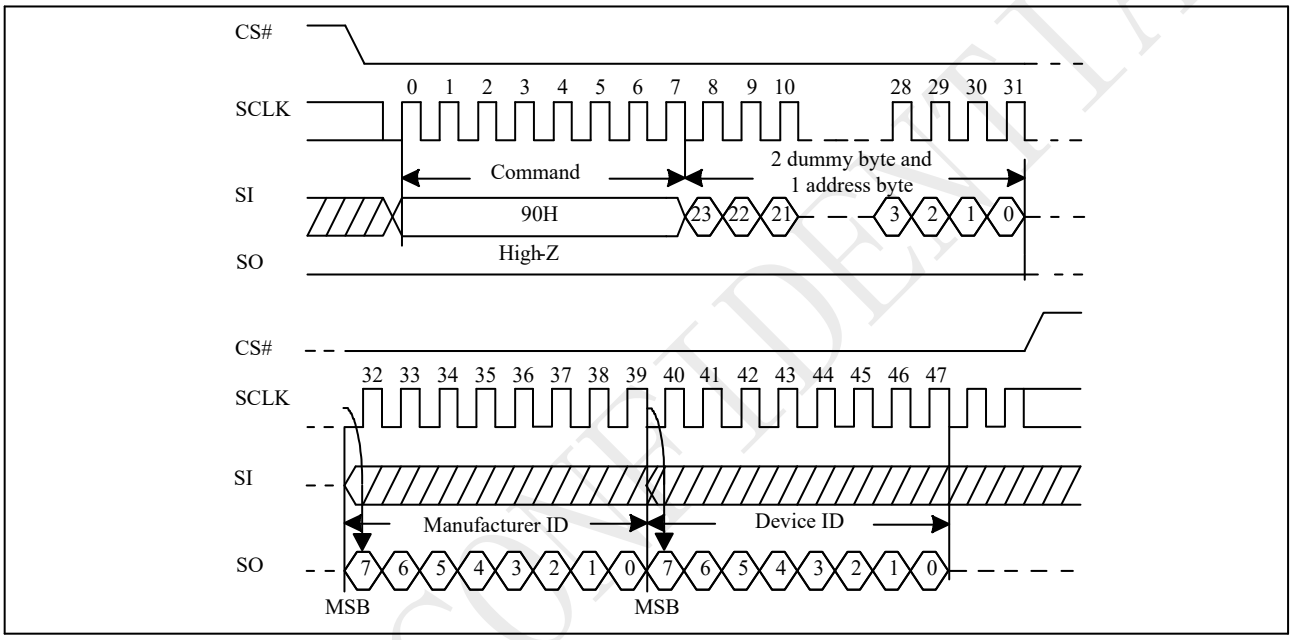



**Figure 9-37a Read Electronic Manufacturer & Device ID (REMS) Sequence (QPI)**

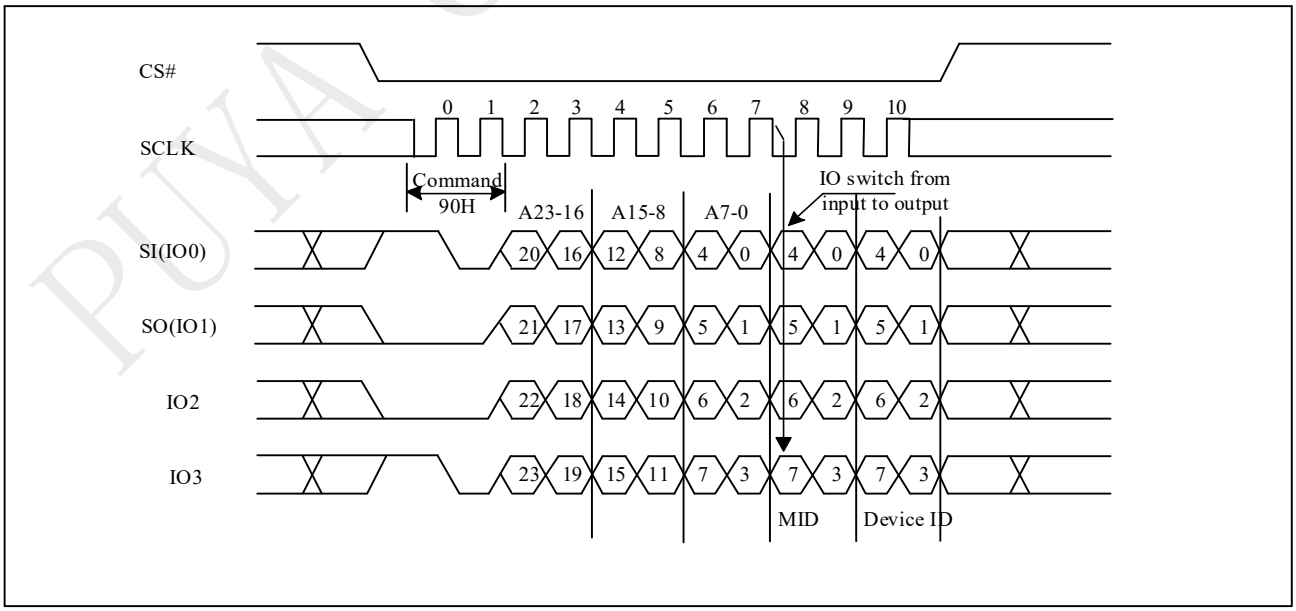


PUYA CONFIDENTIAL



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 9.38 Dual I/O Read Electronic Manufacturer ID & Device ID (DREMS) (92H)

The DREMS instruction is similar to the REMS command and returns the JEDEC assigned manufacturer ID which takes two pins: SIO0, SIO1 as address input and ID output I/O

The instruction is initiated by driving the CS# pin low and shift the instruction code "92h" followed by two dummy bytes and one-byte address (A7~A0). After which, the Manufacturer ID for PUYA (85h) and the Device ID are shifted out on the falling edge of SCLK with most significant bit (MSB) first. If the one-byte address is initially set to 01h, then the device ID will be read first and then followed by the Manufacturer ID. The Manufacturer and Device ID scan be read continuously, alternating from one to the other. The instruction is completed by driving CS# high.

**Figure 9-38 DUAL I/O Read Electronic Manufacturer & Device ID (DREMS) Sequence (Command 92h)**

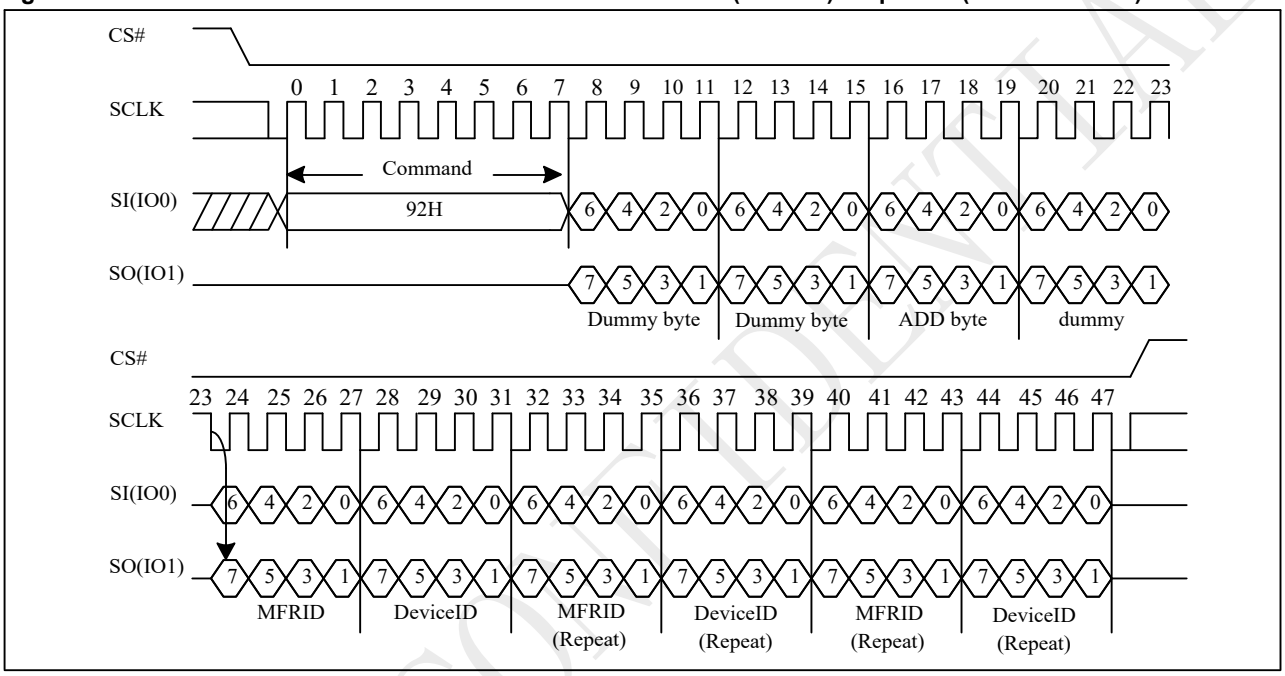


PUYA CONFIDENTIAL



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 9.39 Quad I/O Read Electronic Manufacturer ID & Device ID (QREMS) (94H)

The QREMS instruction is similar to the REMS command and returns the JEDEC assigned manufacturer ID which takes four pins: SIO0, SIO1, SIO2, SIO3 as address input and ID output I/O.

The instruction is initiated by driving the CS# pin low and shift the instruction code "94h" followed by two dummy bytes and one-byte address (A7~A0). After which, the Manufacturer ID for PUYA (85h) and the Device ID are shifted out on the falling edge of SCLK with most significant bit (MSB)first. If the one-byte address is initially set to01h, then the device ID will be read first and then followed by the Manufacturer ID. The Manufacturer and Device ID scan be read continuously, alternating from one to the other. The instruction is completed by driving CS# high.

**Figure 9-39 QUAD I/O Read Electronic Manufacturer & Device ID (QREMS) Sequence (Command 94h)**

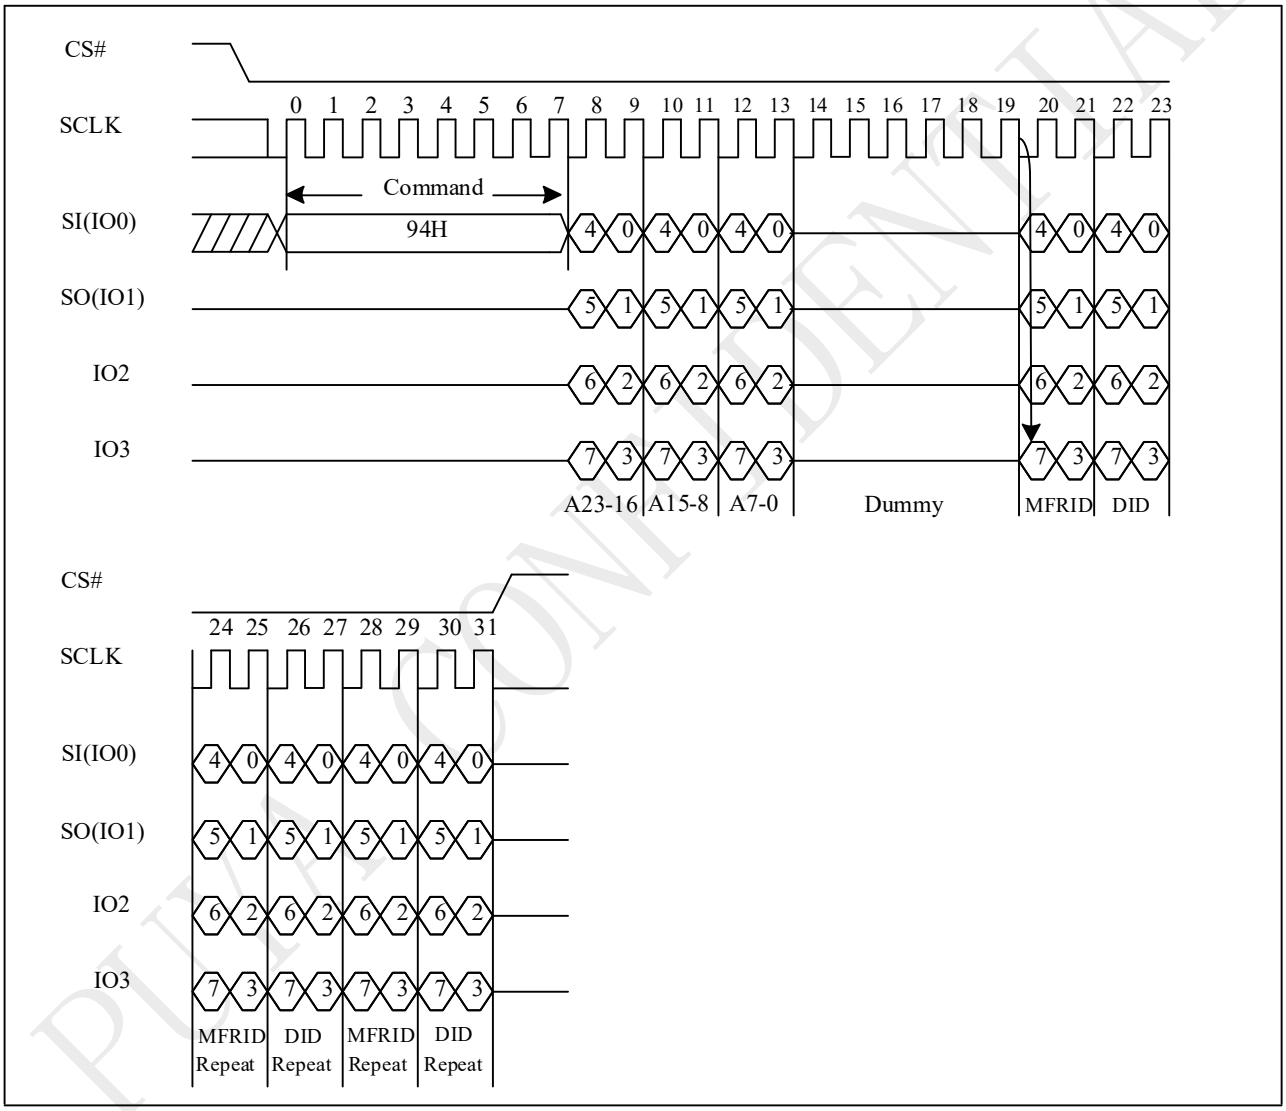


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 9.40 Read Identification (RDID) (9FH)

The RDID instruction is for reading the manufacturer ID of 1-byte and followed by Device ID of 2-byte. The PUYA Manufacturer ID and Device ID are list as "Table ID Definitions".

The sequence of issuing RDID instruction is: CS# goes low→ sending RDID instruction code → 24-bits ID data out on SO→ to end RDID operation can use CS# to high at any time during data out. While Program/Erase operation is in progress, it will not decode the RDID instruction, so there's no effect on the cycle of program/erase operation which is currently in progress. When CS# goes high, the device is at standby stage.

**Figure 9-40 Read Identification (RDID) Sequence (Command 9Fh)**

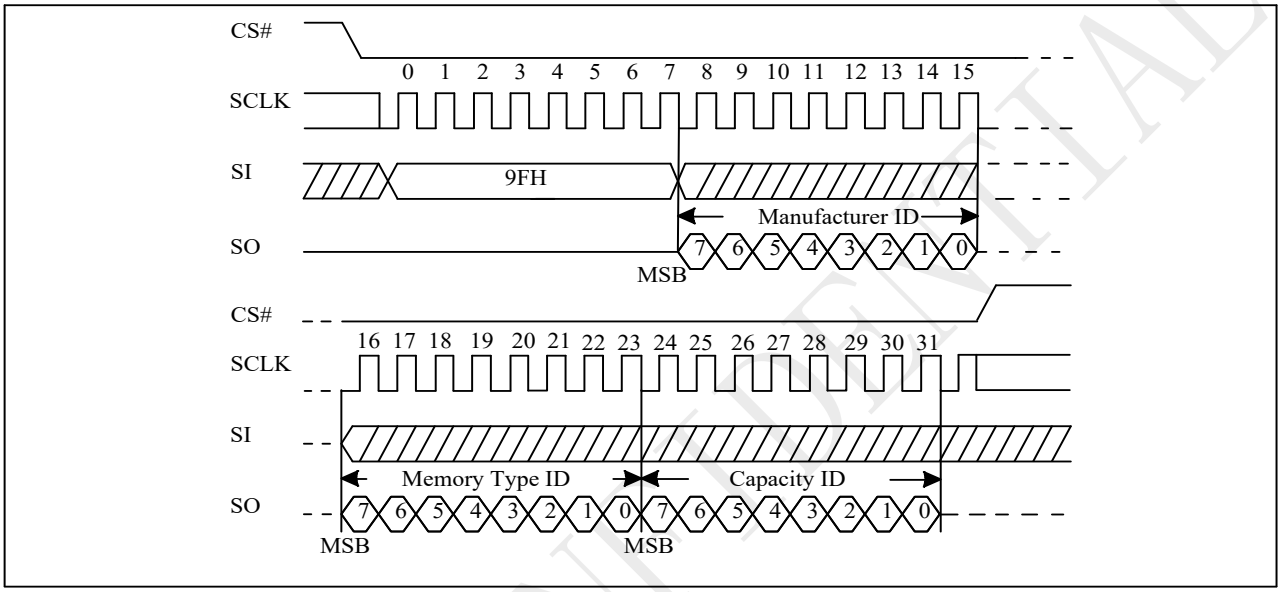



**Figure 9-40a Read Identification (RDID) Sequence (QPI)**

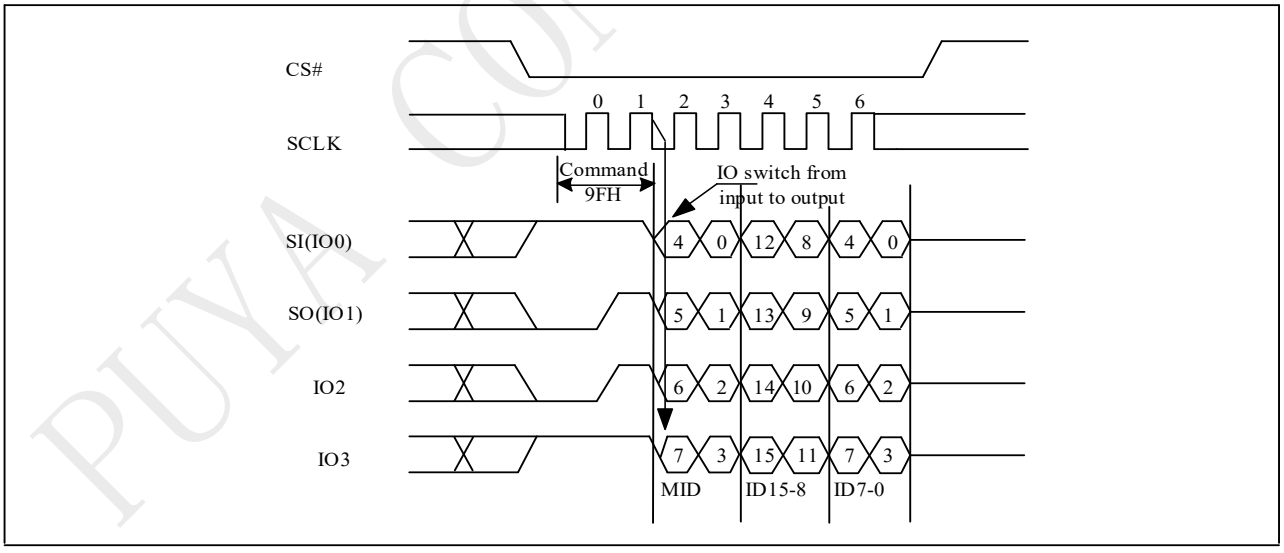



**Table ID Definitions**

| | | | | |
|---|---|---|---|---|
| PY25F128LA | RDID command | manufacturer ID | memory type | memory density |
| | | 85 | 63 | 18 |
| | RES command | electronic ID | | |
| | | 17 | | |
| | REMS command | manufacturer ID | | device ID |
| | | 85 | | 17 |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com
PUYA CONFIDENTIAL

## 9.41 Program/Erase Suspend/Resume

The Suspend instruction interrupts a Page Program, Sector Erase, or Block Erase operation to allow access to the memory array. After the program or erase operation has entered the suspended state, the memory array can be read except for the page being programmed or the sector or block being erased.

**Readable Area of Memory While a Program or Erase Operation is Suspended**

| Suspended Operation | Readable Region of Memory Array |
|---|---|
| Page Program | All but the Page being programmed |
| Sector Erase(4KB) | All but the 4KB Sector being erased |
| Block Erase(32KB) | All but the 32KB Block being erased |
| Block Erase(64KB) | All but the 64KB Block being erased |

When the Serial NOR Flash receives the Suspend instruction, there is a latency of tPSL or tESL before the Write Enable Latch (WEL) bit clears to “0” and the SUS sets to “1”, after which the device is ready to accept one of the commands listed in "Table Acceptable Commands During Program/Erase Suspend after tPSL/tESL" (e.g. FAST READ). Refer to " AC Characteristics" for tPSL and tESL timings. "Table Acceptable Commands During Suspend (tPSL/tESL not required)" lists the commands for which the tPSL and tESL latencies do not apply. For example, RDSR, RDSCUR, RSTEN, and RST can be issued at any time after the Suspend instruction.

Status Register bit 15 (SUS) can be read to check the suspend status. The SUS (Program/Erase Suspend Bit) sets to “1” when a program or erase operation is suspended. The SUS clears to “0” when the program or erase operation is resumed

**Acceptable Commands During Program/Erase Suspend after tPSL/tESL**

| Command name | Command Code | Suspend Type | |
|---|---|---|---|
| | | Program Suspend | Erase Suspend |
| READ | 03H | • | • |
| FAST READ | 0BH | • | • |
| DTRFRD | 0DH | • | • |
| DREAD | 3BH | • | • |
| QREAD | 6BH | • | • |
| 2READ | BBH | • | • |
| 2DTRD | BDH | • | • |
| 4READ | EBH | • | • |
| Word read | E7H | • | • |
| 4DTRD | EDH | • | • |
| Burst Read with Wrap | 0CH | • | • |
| DTR Burst Read with Wrap | 0EH | • | • |
| QPIEN | 38H | • | • |
| Disable QPI | FFH | • | • |
| RDSFDP | 5AH | • | • |
| RDID | 9FH | • | • |
| REMS | 90H | • | • |
| DREMS | 92H | • | • |
| QREMS | 94H | • | • |
| SBL | 77H | • | • |
| Set Read Parameter | C0H | • | • |
| WREN | 06H | | • |

CONFIDENTIAL



深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

| Command name | Command Code | Suspend Type | |
|---|---|---|---|
| | | Program Suspend | Erase Suspend |
| RESUME | 7AH | • | • |
| PP | 02H | | • |
| QPP | 32H | | • |
| Erase Security Registers | 44H | | |
| Program Security Registers | 42H | | • |
| read Security Registers | 48H | • | • |
| Individual Block Lock | 36H | | |
| Individual Block Unlock | 39H | | • |
| Read Block Lock Status | 3DH | • | • |
| Global Block Lock | 7EH | | |
| Global Block Unlock | 98H | | • |
| WRDI | 04H | • | • |

**Acceptable Commands During Suspend（tPSL/tESL not required）**

| Command name | Command Code | Suspend Type | |
|---|---|---|---|
| | | Program Suspend | Erase Suspend |
| RDSR | 05H | • | • |
| RDSR1 | 35H | • | • |
| RDCR | 15H | • | • |
| RES | ABH | • | • |
| RSTEN | 66H | • | • |
| RST | 99H | • | • |
| NOP | 00H | • | • |

**Figure 9-41 Resume to Suspend Latency**

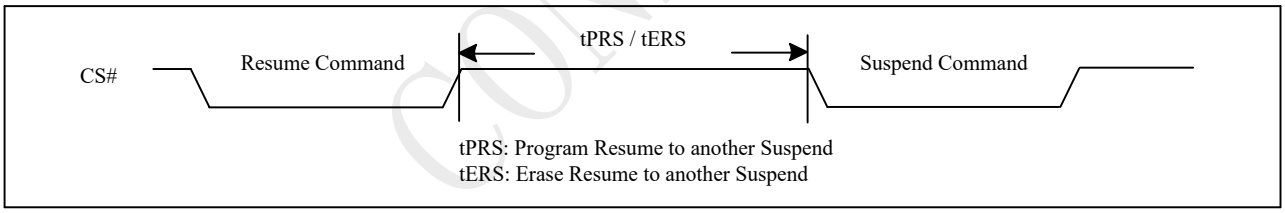


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 9.42 Erase Suspend to Program(75H)

The “Erase Suspend to Program” feature allows Page Programming while an erase operation is suspended. Page Programming is permitted in any unprotected memory except within the sector of a suspended Sector Erase operation or within the block of a suspended Block Erase operation. The Write Enable (WREN) instruction must be issued before any Page Program instruction.

A Page Program operation initiated within a suspended erase cannot itself be suspended and must be allowed to finish before the suspended erase can be resumed. The Status Register can be polled to determine the status of the Page Program operation. The WEL and WIP bits of the Status Register will remain “1” while the Page Program operation is in progress and will both clear to “0” when the Page Program operation completes.

**Figure 9-42 Suspend to Read/Program Latency**


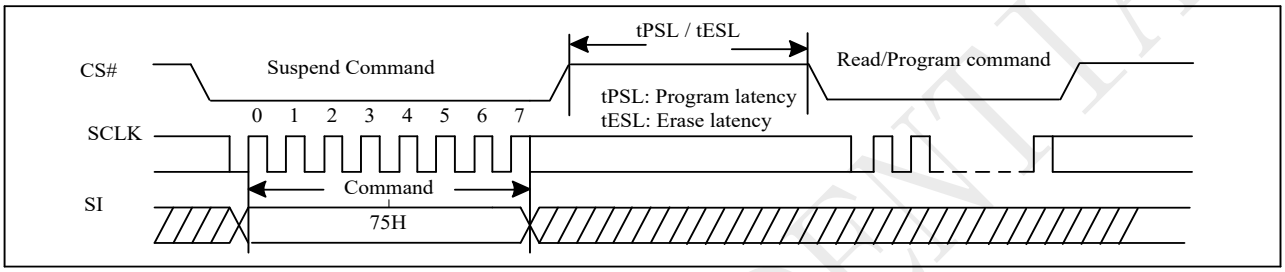



**Figure 9-42a Suspend to Read/Program Latency (QPI)**

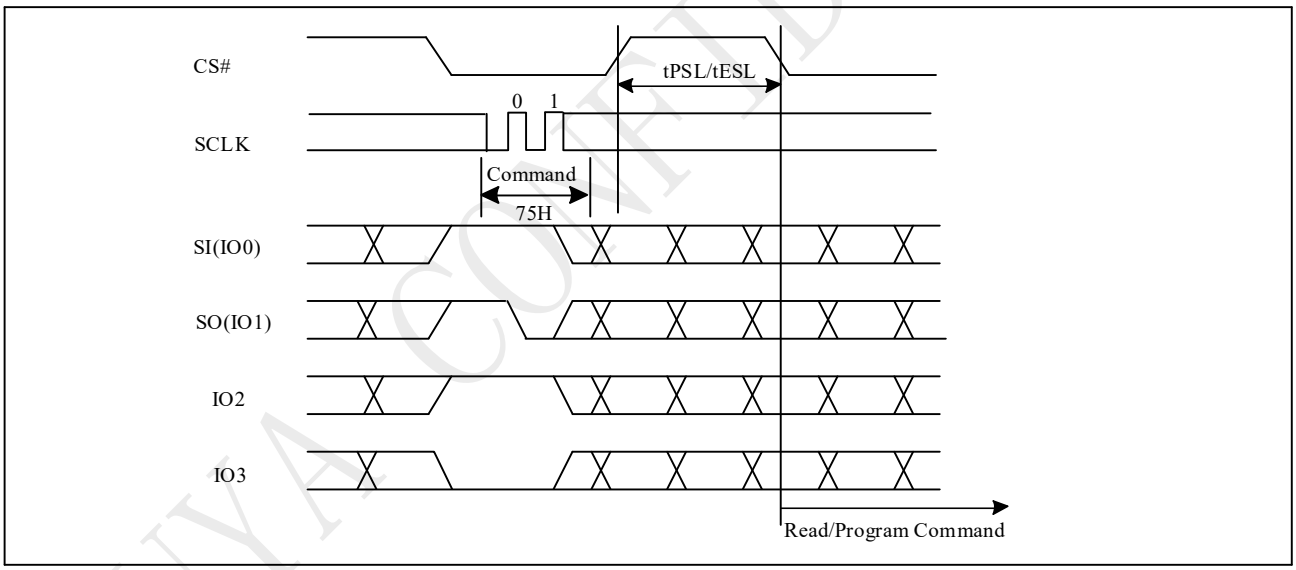


Notes:
1. Please note that Program only available after the Erase-Suspend operation
2. To check suspend ready information, please read status register bit15 (SUS).

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 9.43 Program Resume and Erase Resume(7AH)

The Resume instruction resumes a suspended Page Program, Sector Erase, or Block Erase operation. Before issuing the Resume instruction to restart a suspended erase operation, make sure that there is no Page Program operation in progress.

Immediately after the Serial NOR Flash receives the Resume instruction, the WEL and WIP bits are set to “1” and the SUS is cleared to “0”. The program or erase operation will continue until finished ("Resume to Read Latency") or until another Suspend instruction is received. A resume-to-suspend latency of tPRS or tERS must be observed before issuing another Suspend instruction ("Resume to Suspend Latency").

**Figure 9-43 Resume to Read Latency**


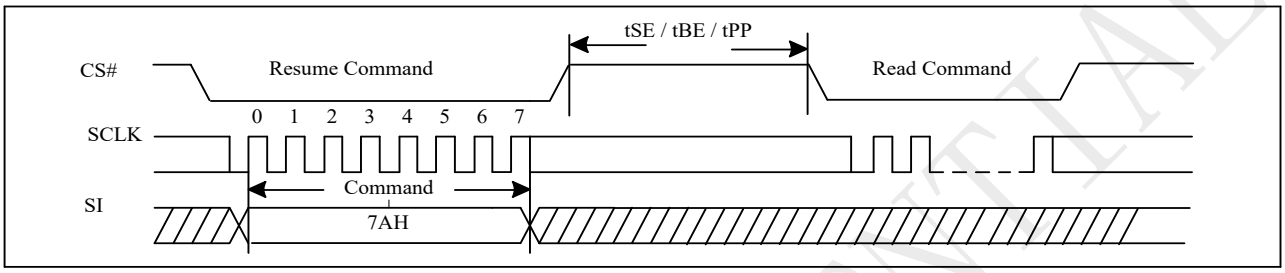



**Figure 9-43a Resume to Read Latency (QPI)**

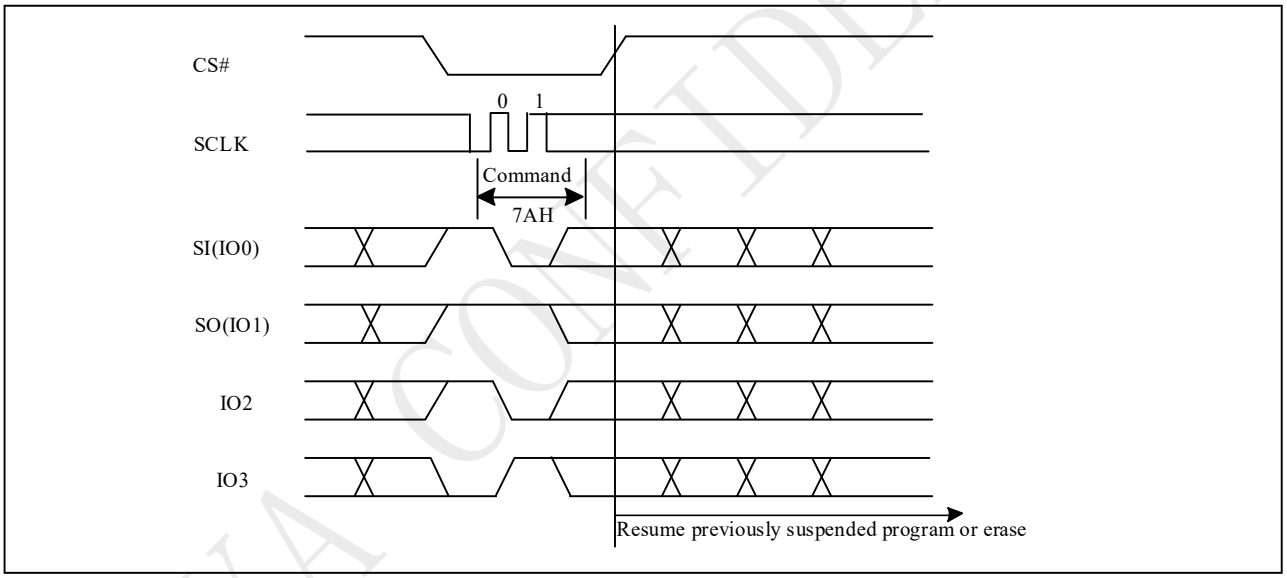


## 9.44 No Operation (NOP)

The "No Operation" command is only able to terminate the Reset Enable (RSTEN) command and will not affect any other command.

The SIO [3:1] are don't care.

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 9.45 Individual Block Lock (SBLK) (36H)

The Individual Block Lock provides an alternative way to protect the memory array from adverse Erase/Program. In order to use the Individual Block Locks, the WPS bit in Configure Register must be set to 1. If WPS=0, the write protection will be determined by the combination of CMP, BP [4:0] bits in the Status Registers. The Individual Block Lock bits are volatile bits. The default values after device power up or after a Reset are 1, so the entire memory array is being protected.

The SBLK instruction is for write protection a specified block (or sector) of memory, using AMAX-A16 or (AMAX-A12) address bits to assign a 64Kbyte block (or 4K bytes sector) to be protected as read only.

The WREN (Write Enable) instruction is required before issuing SBLK instruction.

The sequence of issuing SBLK instruction is: CS# goes low → send SBLK (36h) instruction →send 3-byte address assign one block (or sector) to be protected on SI pin → CS# goes high. The CS# must go high exactly at the byte boundary, otherwise the instruction will be rejected and not be executed.

**Figure 9-45 Individual Block Lock (Command 36H)**


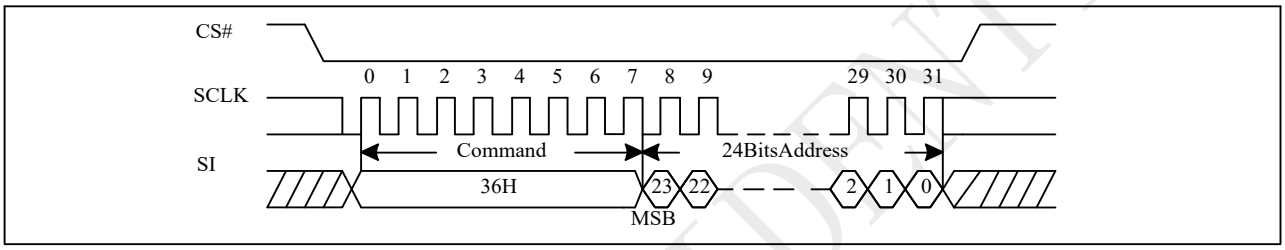



**Figure 9-45a Individual Block Lock (QPI)**

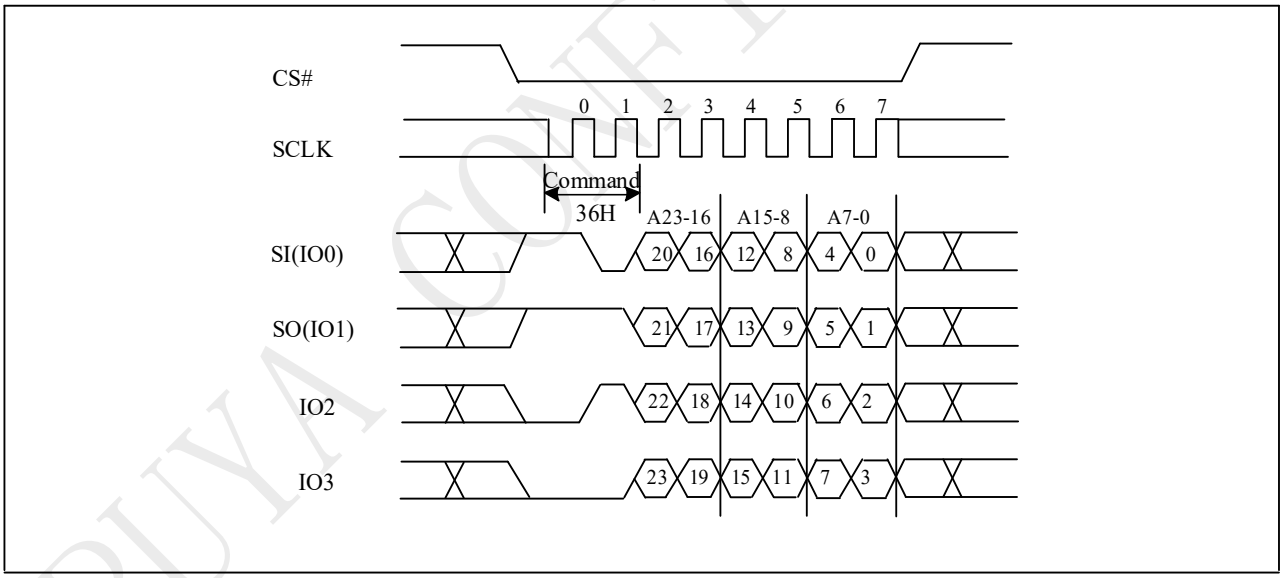


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 9.46 Individual Block Unlock (SBULK) (39H)

The Individual Block Lock provides an alternative way to protect the memory array from adverse Erase/Program. In order to use the Individual Block Locks, the WPS bit in Configure Register must be set to 1. If WPS=0, the write protection will be determined by the combination of CMP, BP [4:0] bits in the Status Registers. The Individual Block Lock bits are volatile bits. The default values after device power up or after a Reset are 1, so the entire memory array is being protected.

The SBULK instruction will cancel the block (or sector) write protection state using AMAX-A16 or (AMAX-A12) address bits to assign a 64Kbyte block (or 4K bytes sector) to be unprotected.

The WREN (Write Enable) instruction is required before issuing SBULK instruction.

The sequence of issuing SBULK instruction is: CS# goes low → send SBULK (39h) instruction →send 3-byte address assign one block (or sector) to be protected on SI pin → CS# goes high. The CS# must go high exactly at the byte boundary, otherwise the instruction will be rejected and not be executed.

**Figure 9-46 Individual Block Unlock (Command 39H)**


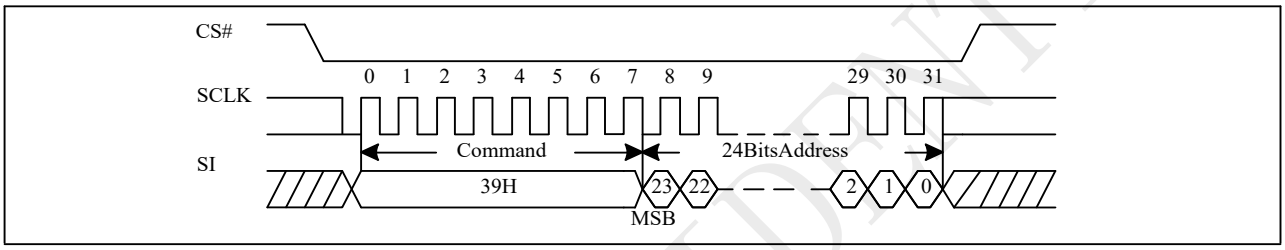



**Figure 9-46a Individual Block Unlock (QPI)**

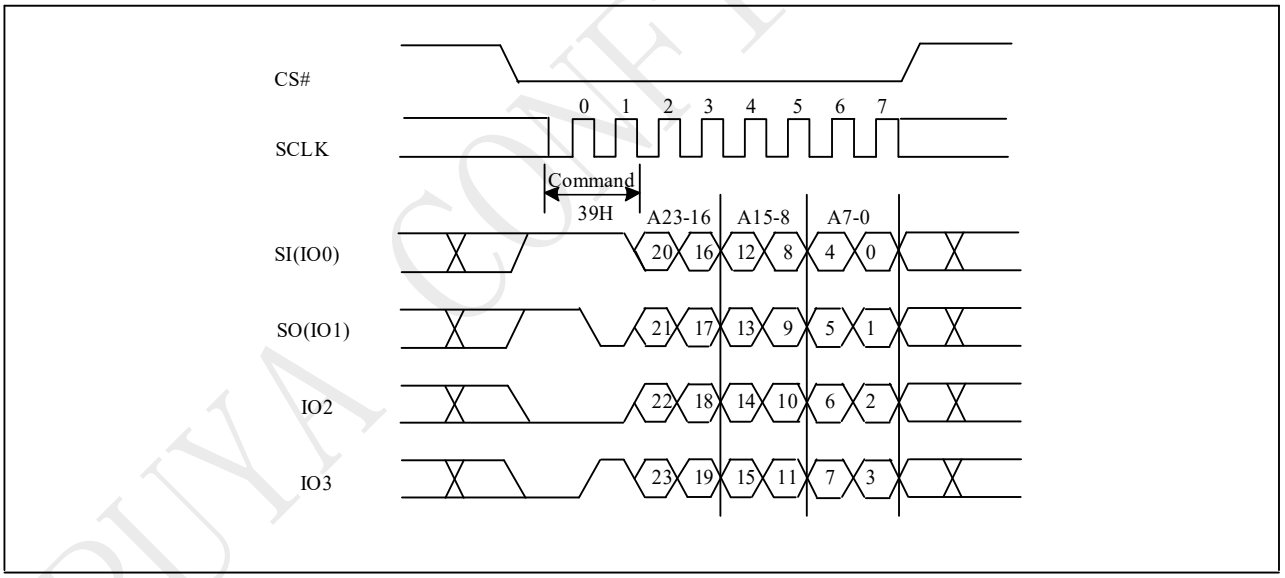


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 9.47 Read Block Lock Status (RDBLK) (3DH)

The Individual Block Lock provides an alternative way to protect the memory array from adverse Erase/Program. In order to use the Individual Block Locks, the WPS bit in Configure Register must be set to 1. If WPS=0, the write protection will be determined by the combination of CMP, BP [4:0] bits in the Status Registers. The Individual Block Lock bits are volatile bits. The default values after device power up or after a Reset are 1, so the entire memory array is being protected.

The RDBLOCK instruction is for reading the status of protection lock of a specified block (or sector), using AMAX-A16 (or AMAX-A12) address bits to assign a 64K bytes block (4K bytes sector) and read protection lock status bit which the first byte of Read-out cycle. The status bit is"1" to indicate that this block has be protected, that user can read only but cannot write/program /erase this block. The status bit is "0" to indicate that this block hasn't be protected, and user can read and write this block.

The sequence of issuing RDBLOCK instruction is: CS# goes low → send RDBLOCK (3Dh) instruction → send 3-byte address to assign one block on SI pin → read block's protection lock status bit on SO pin → CS# goes high.

Both SPI (8 clocks) and QPI (2 clocks) command cycle can accept by this instruction.

**Figure 9-47 Read Block Lock Status (Command 3DH)**


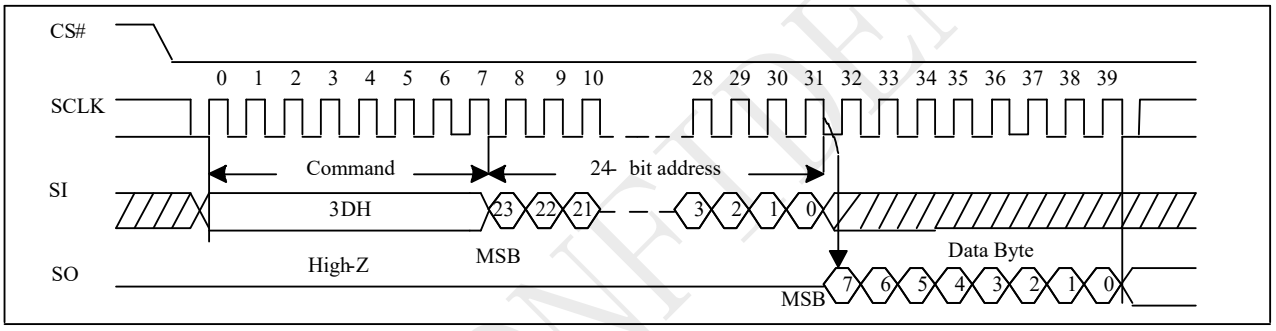



**Figure 9-47a Read Block Lock Status (QPI)**

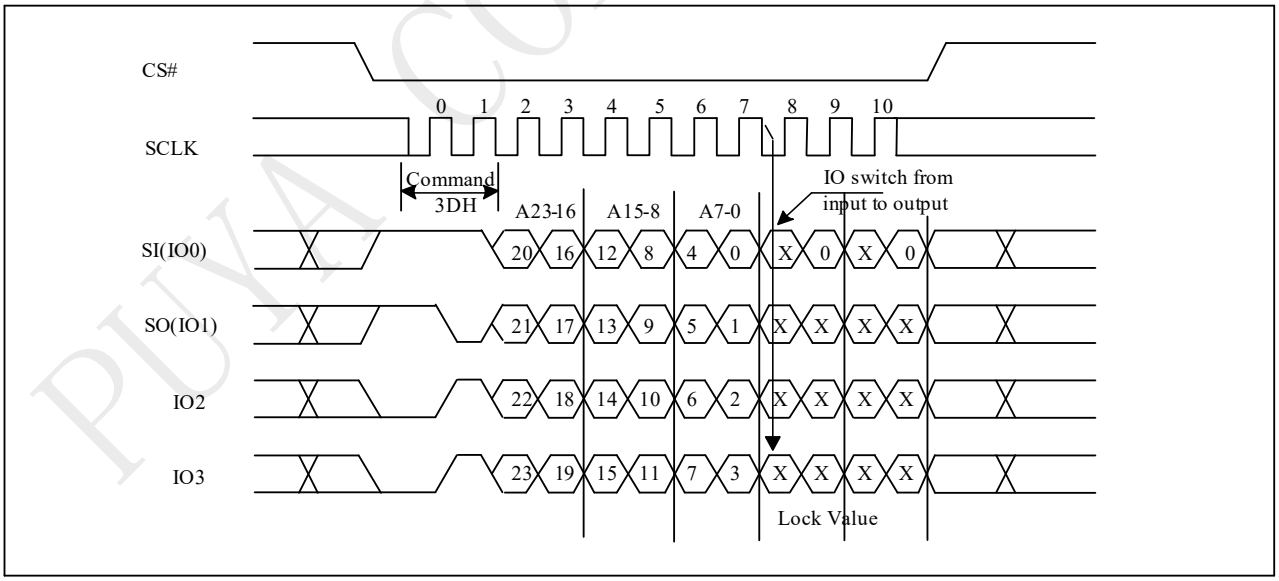


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 9.48 Global Block Lock (GBLK) (7EH)

The GBLK instruction is for enable the lock protection block of the whole chip. The WREN (Write Enable) instruction is required before issuing GBLK instruction.

The sequence of issuing GBLK instruction is: CS# goes low → send GBLK (7Eh) instruction →CS# goes high.

Both SPI (8 clocks) and QPI (2 clocks) command cycle can accept by this instruction. The SIO [3:1] are "don't care" in SPI mode.

The CS# must go high exactly at the byte boundary, otherwise, the instruction will be rejected and not be executed.

**Figure 9-48 Global Block Lock (Command 7EH)**


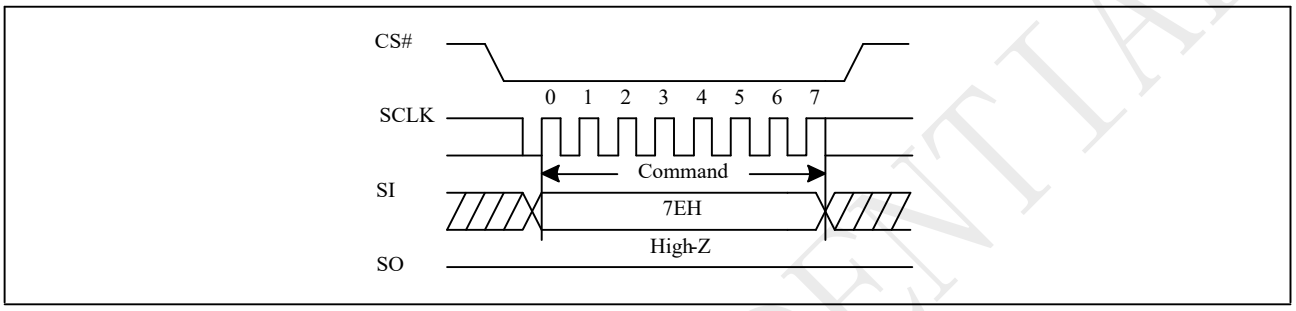



**Figure 9-48a Global Block Lock (QPI)**

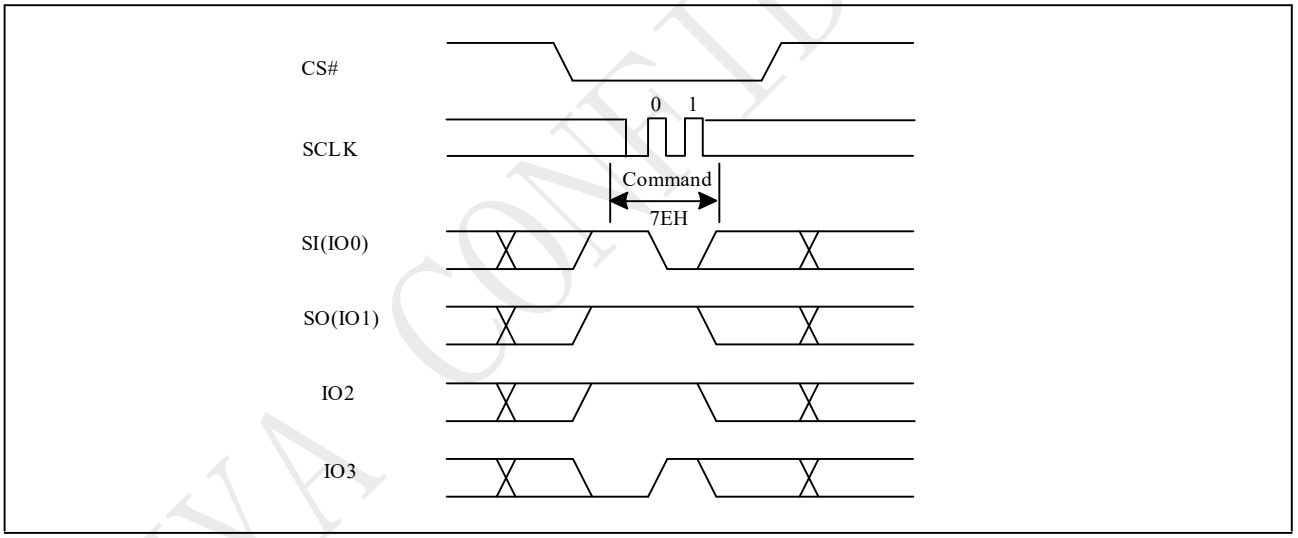


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 9.49 Global Block Unlock (GBULK) (98H)

The GBULK instruction is for disable the lock protection block of the whole chip. The WREN (Write Enable) instruction is required before issuing GBULK instruction.

The sequence of issuing GBULK instruction is: CS# goes low → send GBULK (98h) instruction →CS# goes high.

Both SPI (8 clocks) and QPI (2 clocks) command cycle can accept by this instruction. The SIO [3:1] are "don't care" in SPI mode.

The CS# must go high exactly at the byte boundary, otherwise, the instruction will be rejected and not be executed.

**Figure 9-49 Global Block Unlock (Command 98H)**


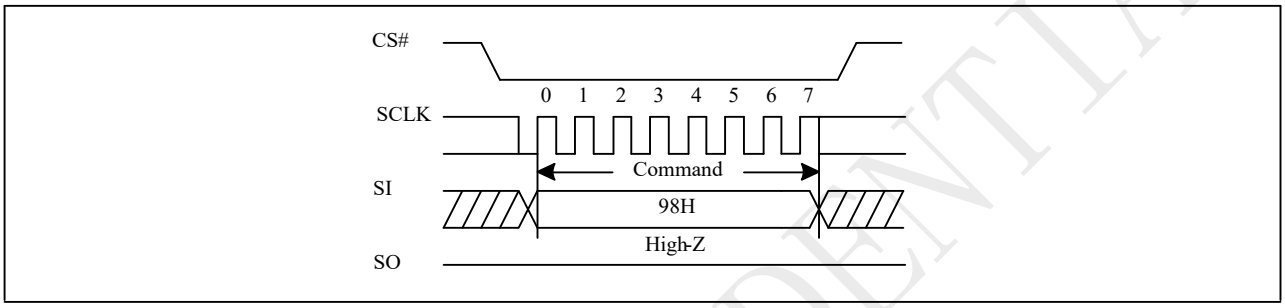



**Figure 9-49a Global Block Unlock (QPI)**

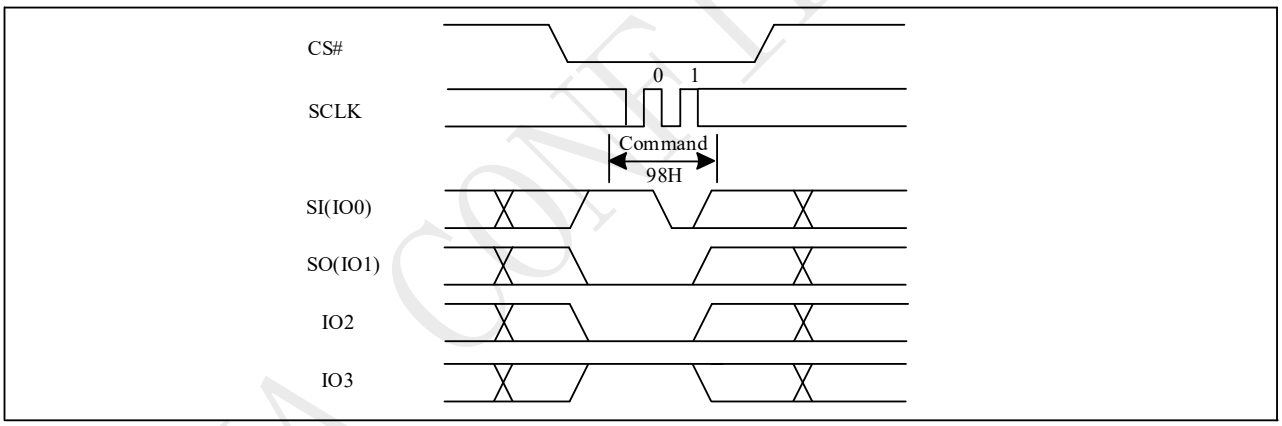


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

## 9.50 Software Reset (RSTEN/RST) (66H/99H)

The Software Reset operation combines two instructions: Reset-Enable (RSTEN) command and Reset (RST) command. It returns the device to a standby mode. All the volatile bits and settings will be cleared then, which makes the device return to the default status as power on, except the EP_FAIL bit.

To execute Reset command (RST), the Reset-Enable (RSTEN) command must be executed first to perform the Reset operation. If there is any other command to interrupt after the Reset-Enable command, the Reset-Enable will be invalid.

The SIO [3:1] are "don't care".

If the Reset command is executed during program or erase operation, the operation will be disabled, the data under processing could be damaged or lost.

**Figure 9-50 Software Reset Recovery**

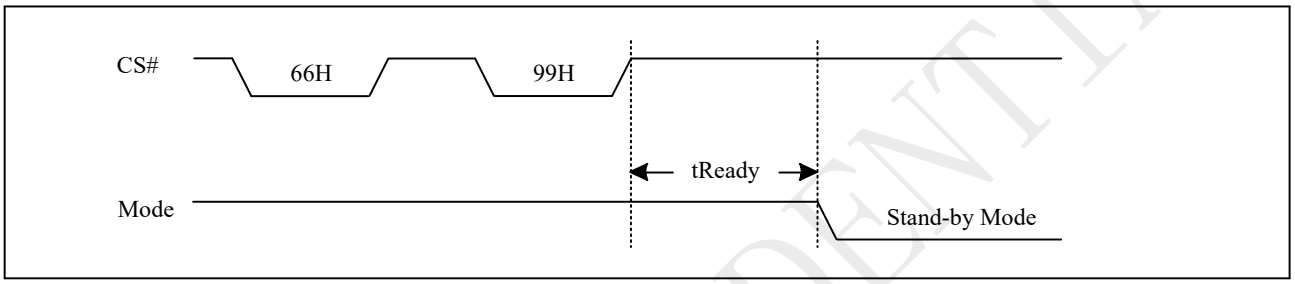



**Figure 9-50a Reset Sequence**


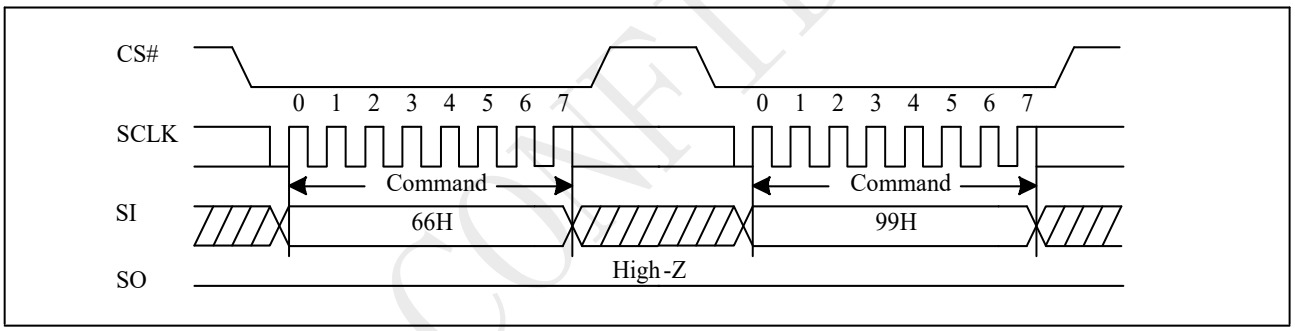



**Figure 9-50b Reset Sequence (QPI)**

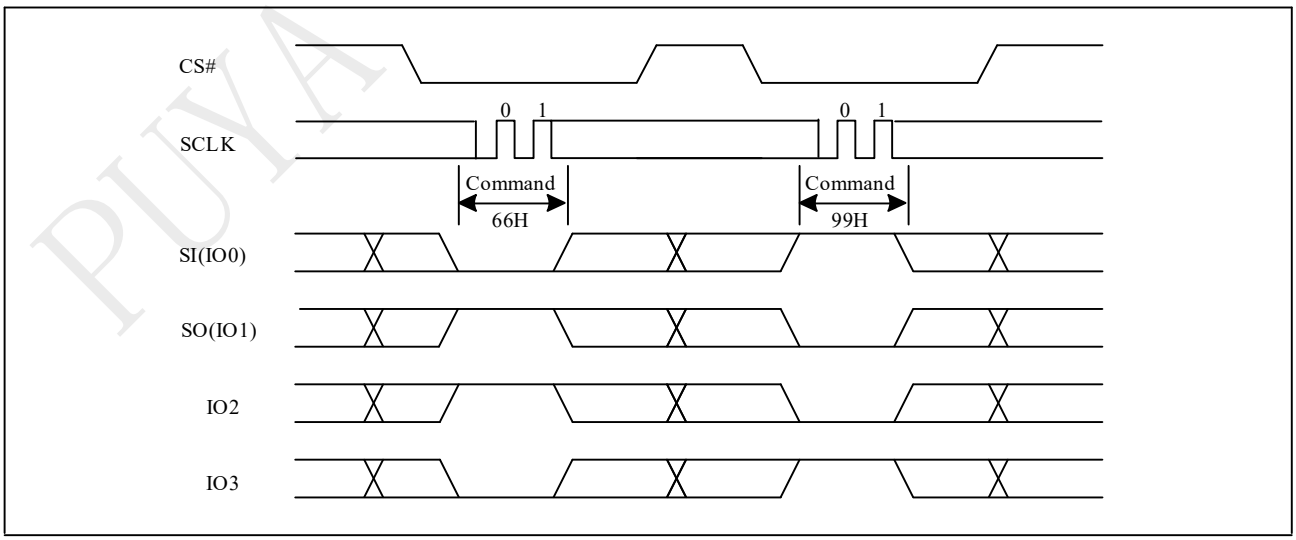


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com


## 9.51 RESET

Driving the RESET# pin low for a period of tRLRH or longer will reset the device. After reset cycle, the device is at the following states:

- Standby mode
- All the volatile bits such as WEL/WIP/SRAM lock bit will return to the default status as power on.

If the device is under programming or erasing, driving the RESET# pin low will also terminate the operation and data could be lost. During the resetting cycle, the SO data becomes high impedance and the current will be reduced to minimum.

**Figure 9-51 RESET Timing**

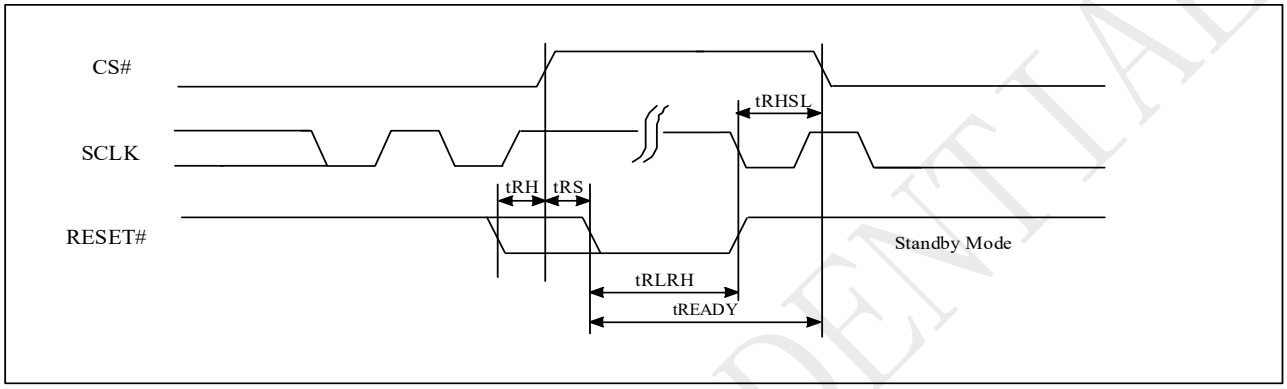


**RESET Timing**

| Symbol | Parameter | Min | Typ | Max | Units |
|---|---|---|---|---|---|
| tRHSL | Reset# high before CS# low | 1 | | | us |
| tRS | Reset# setup time | 15 | | | ns |
| tRH | Reset# hold time | 15 | | | ns |
| tRLRH | Reset# low pulse width | 1 | | | us |
| tREADY | Reset Recovery time (except Erase/WRSR/ WRSR1/WRCR) | | | 30 | us |
| | Reset Recovery time (for Erase) | | 8 | 12 | ms |
| | Reset Recovery time (for WRSR/ WRSR1/WRCR) | | 2 | 12 | ms |

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com


## 9.52 Read Unique ID(RUID) (4BH)

The Read Unique ID command accesses a factory-set read-only 128bit number that is unique to each PY25Qxx device. The Unique ID can be used in conjunction with user software methods to help prevent copying or cloning of a system.

The Read Unique ID command sequence: CS# goes low →sending Read Unique ID command →Dummy Byte1 →Dummy Byte2 →Dummy Byte3 →Dummy Byte4→128bit Unique ID Out →CS# goes high.

The command sequence is show below.

**Figure 9-52 Read Unique ID (RUID) Sequence (Command 4Bh)**

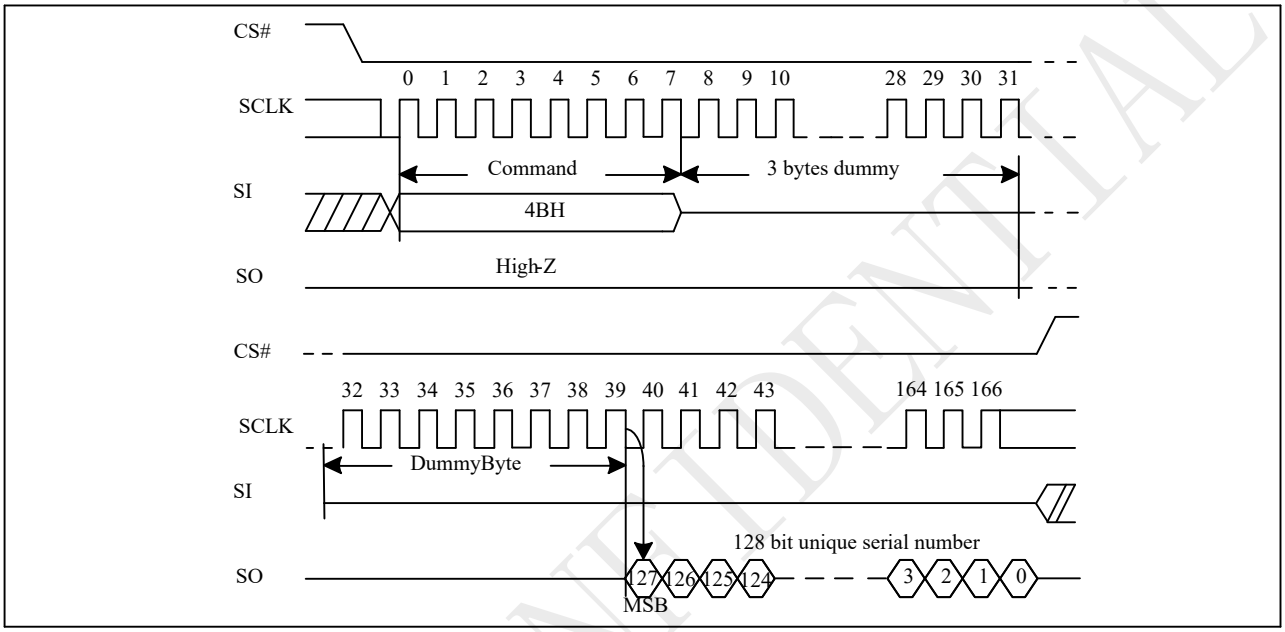


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Tel:150-1290-5940
Web:www.manduic.com
Email:sales@manduic.com

## 9.53 Read SFDP Mode (RDSFDP) (5AH)

The Serial Flash Discoverable Parameter (SFDP) standard provides a consistent method of describing the functional and feature capabilities of serial flash devices in a standard set of internal parameter tables. These parameter tables can be interrogated by host system software to enable adjustments needed to accommodate divergent features from multiple vendors. The concept is similar to the one found in the Introduction of JEDEC Standard, JESD68 on CFI.

The sequence of issuing RDSFDP instruction is same as FREAD: CS# goes low→ send RDSFDP instruction (5Ah) →send 3 address bytes on SI pin→ send 1 dummy byte on SI pin→ read SFDP code on SO→ to end RDSFDP operation can use CS# to high at any time during data out.

Detail SFDP data please contact Puya.

**Figure 9-53 Read Serial Flash Discoverable Parameter (RDSFDP) Sequence**


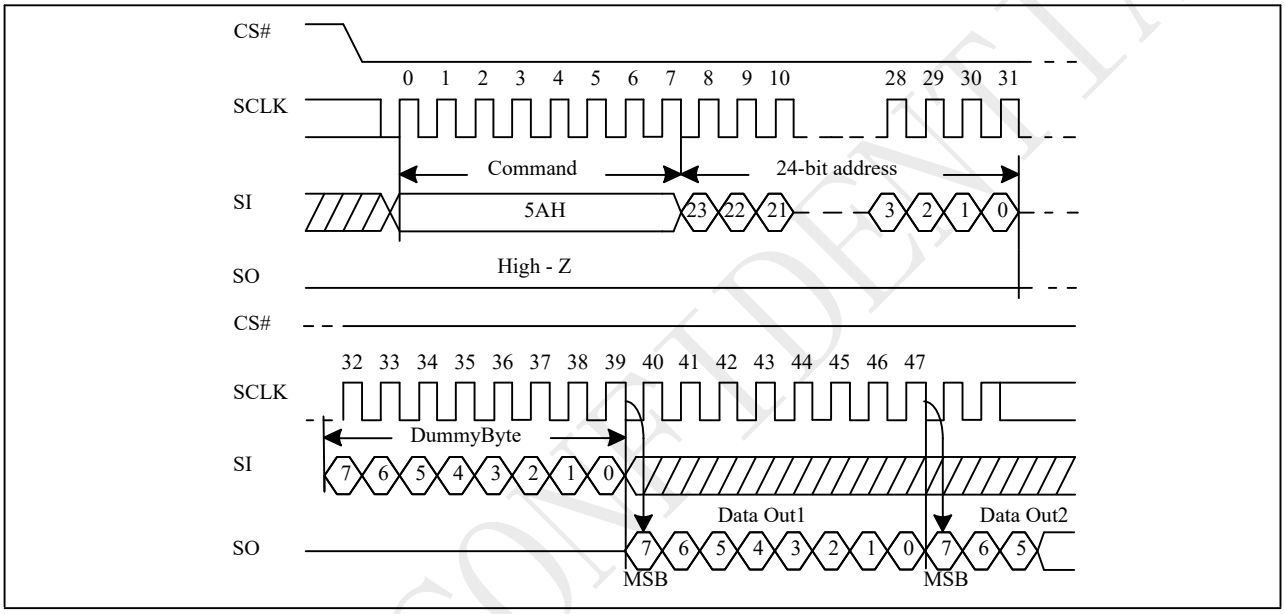




**Figure 9-53a Read Serial Flash Discoverable Parameter (RDSFDP) Sequence (QPI)**

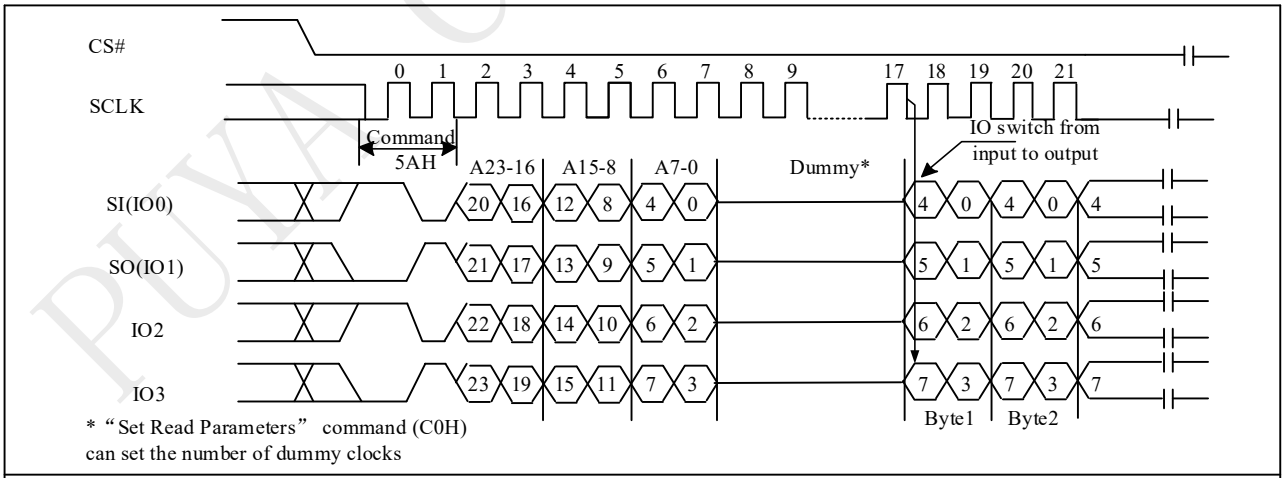


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

# 10 Ordering Information

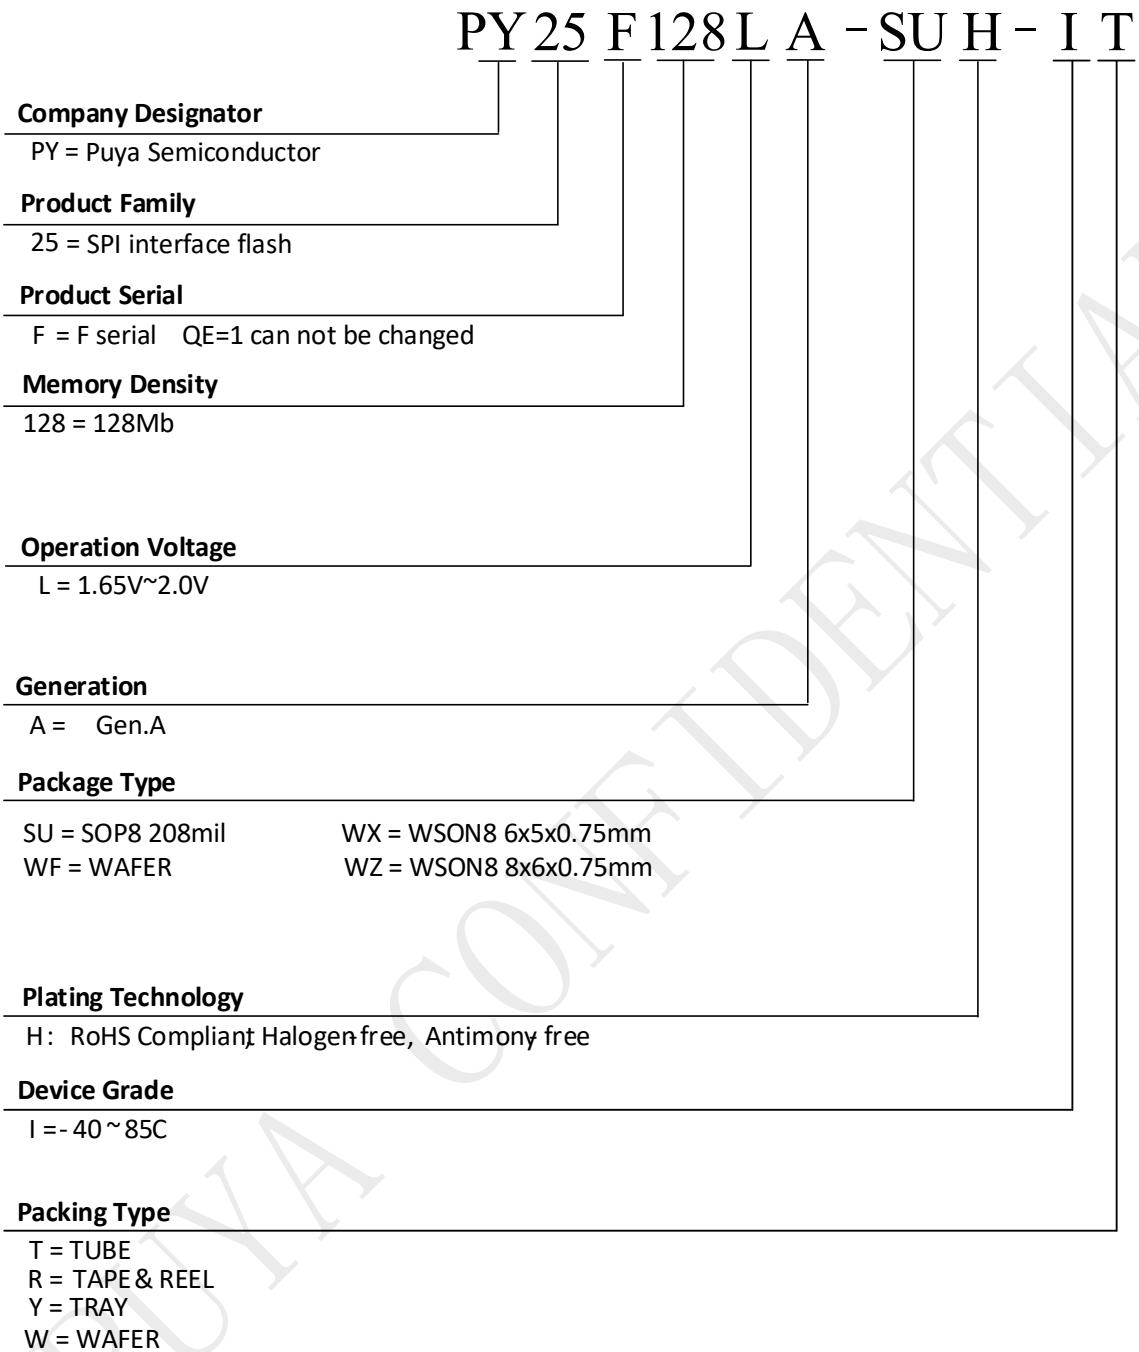


PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

# 11 Valid Part Numbers and Top Marking

The following table provides the valid part numbers for the PY25F128LA Flash Memory. Please contact PUYA for specific availability by density and package type. PUYA Flash memories use a 17-digit Product Number for ordering.

| Package Type | Product Number | Density | Top Side Marking | Temp. | Packing Type |
|---|---|---|---|---|---|
| SU<br>SOP8 208mil | PY25F128LA-SUH-IT | 128M-bit | PY25F128LA<br>xxxxxxx | 85C | Tube |
| SU<br>SOP8 208mil | PY25F128LA-SUH-IR | 128M-bit | PY25F128LA<br>xxxxxxx | 85C | Reel |
| WX<br>WSON8 6x5mm | PY25F128LA-WXH-IR | 128M-bit | PY25F128LA<br>xxxxxxx | 85C | Reel |
| WZ<br>WSON8 8x6mm | PY25F128LA-WZH-IR | 128M-bit | PY25F128LA<br>xxxxxxx | 85C | Reel |


Note: The package marked with "*", if necessary, please contact Puya sales.


PUYA CONFIDENTIAL



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

# 12 Package Information

## 12.1 8-Lead SOP (208mil)

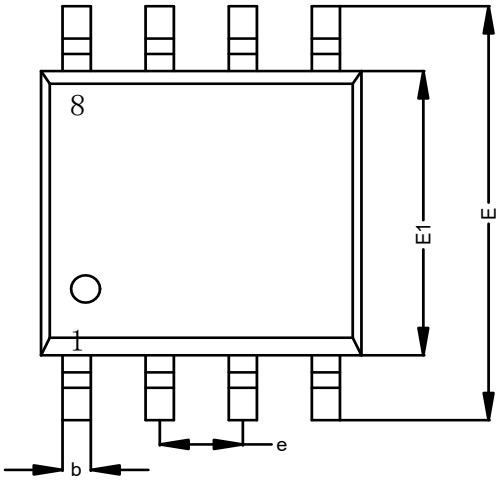

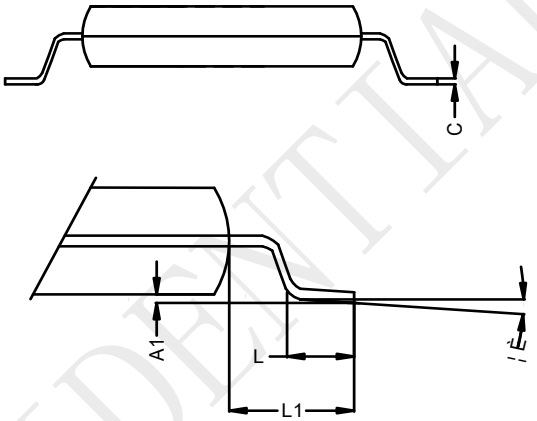
Common Dimensions
(Unit of Measure=millimeters)
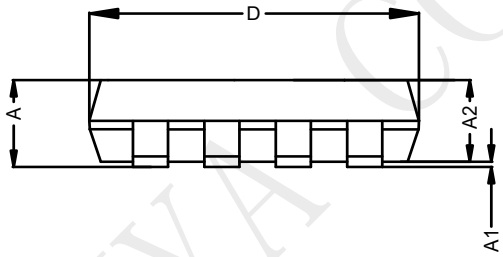
| Symbol | Min | Typ | Max |
|---|---|---|---|
| A | - | - | 2.150 |
| A1 | 0.050 | - | 0.250 |
| A2 | 1.700 | - | 1.900 |
| b | 0.310 | - | 0.510 |
| c | 0.150 | - | 0.250 |
| D | 5.130 | 5.230 | 5.330 |
| E | 7.800 | 7.900 | 8.000 |
| E1 | 5.180 | 5.280 | 5.380 |
| e | - | 1.270 | - |
| L | 0.500 | - | 0.800 |
| L1 | - | 1.310 | - |
| ¦È | 0 | - | 8¡ã |

Note：1. Dimensions are not to scale


| | | | |
|---|---|---|---|
| PUYA | TITLE<br>Puya SOP8(208MIL) POD | DRAWING NO.<br>QRPD-0005 | REV<br>1.0 |

PUYA CONFIDENTIAL



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com


## 12.2 8-Pad WSON(6x5x0.75mm)

TOP VIEW

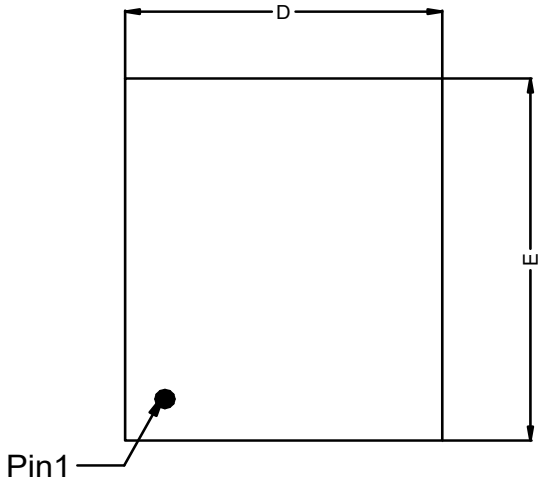



BOTTOM VIEW

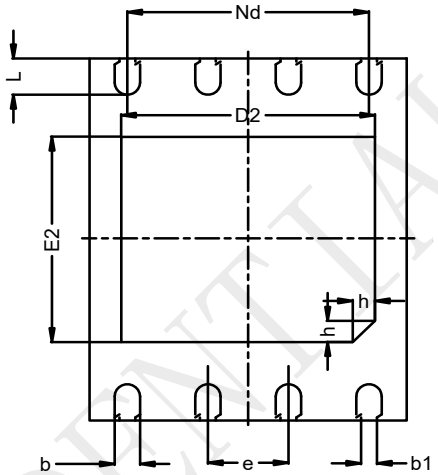


SIDE VIEW



Common Dimensions
(Unit of Measure=millimeters)

| Symbol | Min | Typ | Max |
|---|---|---|---|
| A | 0.700 | 0.750 | 0.800 |
| A1 | 0.000 | 0.020 | 0.050 |
| b | 0.350 | 0.400 | 0.450 |
| D | 4.900 | 5.000 | 5.100 |
| D2 | 3.900 | 4.000 | 4.100 |
| E | 5.900 | 6.000 | 6.100 |
| E2 | 3.300 | 3.400 | 3.500 |
| e | - | 1.27BSC | - |
| L | 0.550 | 0.600 | 0.650 |
| c | 0.180 | 0.203 | 0.250 |
| Nd | - | 3.81BSC | - |
| b1 | 0.250REF | | |
| h | 0.300 | 0.350 | 0.400 |

Note：1. Dimensions are not to scale


| | TITLE | DRAWING NO. | REV |
|---|---|---|---|
| PUYA | Puya WSON8L 6x5X0.75-1.27PITCH POD | QRPD-0015 | 1.0 |

PUYA CONFIDENTIAL



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com


## 12.3 8-Pad WSON(8x6x0.75mm)

TOP VIEW

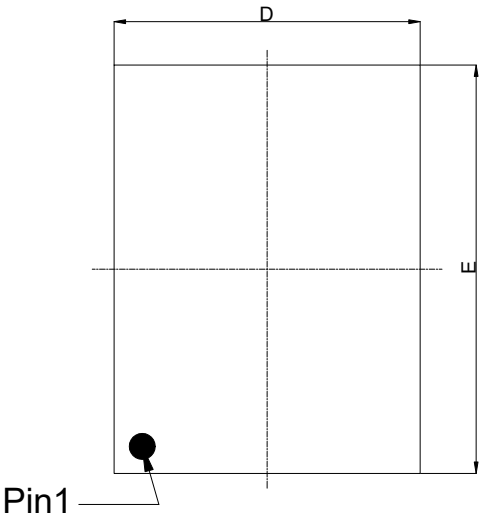


BOTTOM VIEW

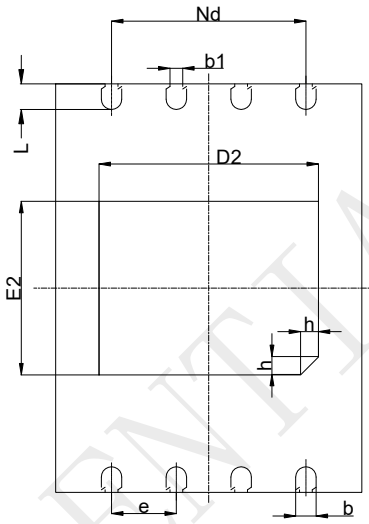

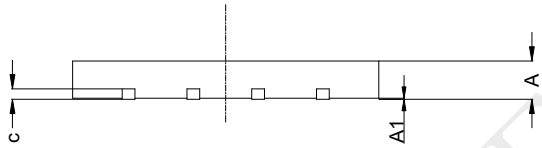
SIDE VIEW



Common Dimensions
(Unit of Measure=millimeters)

| Symbol | Min | Typ | Max |
|---|---|---|---|
| A | 0.700 | 0.750 | 0.800 |
| A1 | 0.000 | 0.020 | 0.050 |
| b | 0.350 | 0.400 | 0.450 |
| D | 5.900 | 6.000 | 6.100 |
| D2 | 4.200 | 4.300 | 4.400 |
| E | 7.900 | 8.000 | 8.100 |
| E2 | 3.300 | 3.400 | 3.500 |
| e | - | 1.27BSC | - |
| L | 0.450 | 0.500 | 0.550 |
| c | 0.180 | 0.203 | 0.250 |
| Nd | - | 3.81BSC | - |
| b1 | 0.250REF | | |
| h | 0.300 | 0.350 | 0.400 |

Note：1. Dimensions are not to scale

| | TITLE | DRAWING NO. | REV |
|---|---|---|---|
| PUYA | Puya WSON8L 8X6X0.75-1.27PITCH POD | QRPD-0017 | 1.1 |

PUYA CONFIDENTIAL


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

# 13 Revision History

| Rev. | Date | Description | Note |
|---|---|---|---|
| 1.0 | 2023-02-10 | Initial release | - |
| 1.1 | 2023-10-31 | Add WZ(WSON 8x6x0.75mm) package type | - |
| 1.2 | 2024-11-04 | 1.Correct timing chart typo<br>2.Update Pin Description<br>3.Delete duplicate description for Max Read Freq<br>4.Add D.C for min clock frequency<br>5.Correct S9 default status<br>6.Update format: delete date at the homepage; delete directory; update IMPORTANT NOTICE at last page | - |

PUYA CONFIDENTIAL

**IMPORTANT NOTICE**

Puya reserve the right to make changes,corrections,enhancements,modifications to Puya products and/or to this document at any time with -out notice.Purchasers should obtain the latest relevant information of Puya products before placing orders.

Puya products are sold pursuant to terms and conditions of sale in place at the time of order acknowedgement.

Purchasers are solely responsible for the choice and use of Puya products.Puya does not provide service support and assumes no responsi-bility when products that are used on its own or designated third party products.

Puya hereby disclaims any license to any intellectual property rights,express or implied.

Resale of Puya products with provisions inconsistent with the information set forth herein shal void any warranty granted by Puya.

Any with Puya or Puya logo are trademarks of Puya.All other product or service names are the property of their respective owners.

The information in this document supersedes and replaces the information in the previous version.

Puva Semiconductor Co..Ltd.-All rights reserved


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com